Algorithms From the Ground Up

A Deep, Conversational Reader Before CLRS

From Curiosity to Rigorous Algorithmics

June 2026

Preface

Welcome. If you are holding this book, you are probably about to study algorithms seriously for the first time — maybe for a course, maybe for an interview, maybe just because something in you wants to know how computers actually *think* their way through a problem. Whatever brought you here, I am glad you came, and I want to make you a promise on the very first page: I am going to slow down.

Most algorithms books are written by experts, for people who are on their way to becoming experts. They are precise, they are correct, and they are often genuinely beautiful. But they move fast. They state a theorem, prove it in five tight lines, and trust you to fill in the ten lines of intuition that the author worked out years ago and no longer remembers needing. If you already see it, the brevity is a gift. If you do not yet see it, the same brevity feels like a wall.

This book is the conversation that happens *before* that wall. It is the patient friend who sits next to you, draws the picture on a napkin, walks you through a tiny numeric example by hand, points out the exact place where everyone gets confused, and only *then* writes down the formal statement — at which point the formal statement feels obvious, almost inevitable, because you already understand the thing it is describing.

Who this book is for

You should read this book if any of the following sound like you.

- You are about to take an algorithms course, or you are in one right now and the textbook feels like it is written in a language you almost speak.
- You have done some programming — you can write a loop, you know what an array is, you have used a list or a dictionary — but nobody ever sat you down and explained *why* one way of solving a problem is a thousand times faster than another.
- You have heard words like "$O(n \log n)$", "recursion", "dynamic programming", and "NP-complete" and you can repeat them, but you could not yet derive them, defend them, or teach them to someone else.
- You tried to read CLRS — *Introduction to Algorithms* by Cormen, Leiserson, Rivest, and Stein — and you bounced off it. That is not a verdict on you. CLRS is a magnificent reference and a demanding first read. This book exists to make your *second* encounter with it feel like a homecoming.

You do *not* need to be a strong mathematician. You need to be comfortable with high-school algebra, willing to count things carefully, and patient enough to trace an example by hand even when you "sort of" see the answer. Every more advanced tool we need — summations, logarithms, a little probability, proof by induction — is built up gently right where we use it, and collected in the appendices for reference.

Why this matters


Why does any of this matter once you leave the classroom? Because the difference between a good algorithm and a careless one is the difference between a search that returns in 50 milliseconds and one that times out; between a map app that routes you across a country instantly and one that spins forever; between a system that scales to a billion users and one that falls over at a thousand. Algorithms are where good intentions meet the cold arithmetic of *how many steps*. Learning to count those steps — and to bring the count down — is one of the most durable, transferable skills in all of computing. Hardware gets faster every year; a better algorithm can make something possible that no amount of hardware ever would.

The one idea behind the whole book: intuition, then rigor

Here is the single principle that shapes every chapter. **First we build a mental picture you can trust. Then we make it precise.** In that order, never the reverse.

Why that order? Because precision without a picture is memorization, and memorization evaporates. If I hand you the recurrence $T(n) = 2T(n/2) + \Theta(n)$ and tell you it solves to $\Theta(n \log n)$, you can nod and copy it down, and forget it by Thursday. But if you have *seen* a list of eight numbers split into two halves, then four, then eight singletons, and you have counted with your own finger that the splitting takes about $\log_2 8 = 3$ levels and each level does about n units of work — then the recurrence is no longer a spell to memorize. It is a sentence describing a picture you already hold. The formula becomes a souvenir of understanding rather than a substitute for it.

We will draw exactly this kind of picture — a *recursion tree* — many times in the book. It is worth seeing once, now, even before you can read every symbol on it. Each node is a piece of the problem; an arrow splits a piece into the two smaller pieces it asks for help with; the number inside a node is how big that piece is.

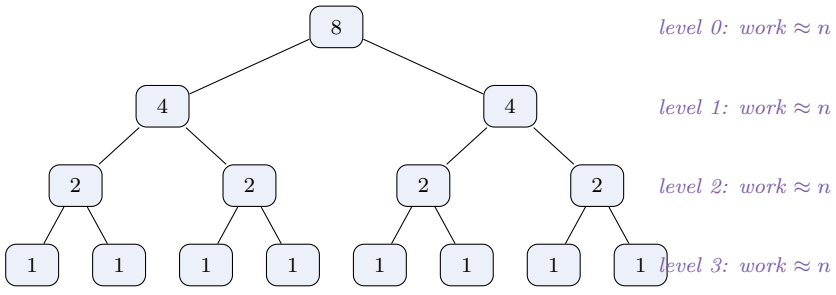

The tree has $\log_2 8 = 3$ levels of splitting beneath the root, so four rows in all. Look across any single row and add up the piece sizes: 8 on top; $4 + 4 = 8$ next; $2 + 2 + 2 + 2 = 8$; finally eight 1s. Every row sums to $n = 8$, which is why each level does about n units of work. Four levels, each costing

about n, gives a total of about $n \cdot \log_2 n$ — and there, drawn rather than asserted, is the $\Theta(n \log n)$ the recurrence promised.

Intuition

Think of every algorithm in this book as a *story with a shape*. A loop is a story where the same small thing happens again and again until a finish line is crossed. Recursion is a story where a big problem politely asks two smaller copies of itself for help. A greedy algorithm is a story where you grab the best thing in front of you and never look back. Before we ever count operations or prove a bound, we will get the *shape of the story* clear in your head. The math is what we use to check that the story actually ends well, and to find out how long it takes.

So a typical section moves through four gears:

1. **A picture.** The core mental image, in plain language, often with a diagram. "Imagine the cards in your left hand are already sorted…"
2. **A tiny worked example.** Real numbers, traced step by step, so you can watch the idea move.
3. **The pseudocode.** Now that you know what it *does*, here is exactly *how* it does it, written carefully.
4. **The rigor.** A loop invariant or an induction that proves it is correct, and an analysis that derives — not asserts — how fast it is.

We will not skip the fourth gear. This is a book that respects proofs; "it seems to work" is never the end of a discussion here. But we earn the proof by understanding first, so that when the formal statement arrives it reads as a confirmation of something you already believe, not as a hurdle.

The colored boxes: a visual language

Throughout the book you will meet recurring colored boxes. They are not decoration; each one is a *type of thinking*, and learning to recognize them on sight will make your reading faster and your studying sharper. Here is the full vocabulary, with one live example of each so you know exactly what to expect.

Focus

A **Focus** box holds the one or two things you must carry out of a section. If you remember nothing else, remember what is in here. Example: *Insertion sort is fast when the data is nearly sorted and slow when it is reversed — its cost is governed by the number of out-of-order pairs, not just the length.*

Intuition

An **Intuition** box is the napkin drawing — the mental model in everyday words, before any formality. This is where I try to make you *see* the idea. If a chapter is a journey, the intuition box is the photo on the postcard.

Formal

A **Formal** box states something precisely: a definition, an invariant, a theorem. After the intuition has done its job, this is the version you could quote on an exam or cite in a proof. Example: *A sorting algorithm is stable if, whenever two elements have equal keys, their relative order in the output matches their relative order in the input.*

Common trap

A **Common trap** box names a mistake that almost everyone makes, so that you can make it on purpose, here, safely — instead of by accident on a test or in production. Example: *Off-by-one errors love loop bounds. Writing $i < n$ when you meant $i \leq n$ is the single most common bug in all of the pseudocode you will write this year.*

Walking question

A **Walking question** is a prompt to close the book and think. Genuinely — go for a walk, do the dishes, let it simmer. The best learning happens slightly after you stop reading. Example: *If you could only sort by repeatedly swapping adjacent elements, what arrangement of n numbers would be the most expensive to sort, and exactly how many swaps would it take?*

History and connection

A **History and connection** box tells you where an idea came from — and, crucially, *points to the matching place in CLRS* so you always know how this book maps onto the standard reference. Example: *Quicksort was invented by Tony Hoare in 1959 while he was a visiting student in Moscow, trying to sort words for machine translation. We treat it in Chapter 7, exactly mirroring CLRS Chapter 7.*

Why this matters

A **Why this matters** box connects the idea to the real world — to the systems, products, and problems where it earns its keep. Algorithms are not a museum; they run underneath nearly everything you touch.

Cost summary

A **Cost summary** box collects the running times and space usage in one tidy place after we have derived them, so you can find them again at a glance. Example: *Best case* $\Theta(n)$; *average and worst case* $\Theta(n^2)$; *extra space* $\Theta(1)$.

Algorithm lab

An **Algorithm lab** is a hands-on "trace it yourself" exercise embedded in the text. You are handed a concrete input and asked to run the algorithm by hand, writing down the state at each step. There is no substitute for this. Reading an algorithm and running an algorithm are as different as reading sheet music and playing it.

Formal

There are a few more boxes you will meet occasionally. A **Reading note** gives advice on *how* to read a tricky passage. A **Pause** box is a gentle checkpoint inviting you to make sure the last idea landed before moving on. They work just as their names suggest.

Focus

You do not need to memorize this list. After two or three chapters the colors will do the work for you: green means "here is the picture," grey means "here is the precise truth," red means "careful here," orange means "go think," and so on. The boxes are a rhythm. Let them set your pace.

How the parts map onto CLRS

This book deliberately follows the structure of CLRS so that the two can be read side by side. You can use this book as a standalone first course, or you can read each chapter here and then immediately read the corresponding CLRS chapter to see the same material at full speed and full rigor. The correspondence is close to one-to-one. Here is the map.

Ch.	Topic in this book	Matches CLRS
1	What is an algorithm?	Ch. 1 (the role of algorithms)
2	Getting started: insertion sort	Ch. 2
3	Asymptotic notation	Ch. 3
4	Divide and conquer	Ch. 4
5	Probability and randomized algorithms	Ch. 5
6	Heapsort	Ch. 6
7	Quicksort	Ch. 7
8	Sorting in linear time	Ch. 8
9	Medians and order statistics	Ch. 9
10	Elementary data structures	Ch. 10
11	Hash tables	Ch. 11
12	Binary search trees	Ch. 12
13	Red-black trees	Ch. 13
14	Augmenting data structures	Ch. 14
15	Dynamic programming	Ch. 15 (Ch. 14 in 4th ed.)
16	Greedy algorithms	Ch. 16 (Ch. 15 in 4th ed.)
17	Amortized analysis	Ch. 17 (Ch. 16 in 4th ed.)
18	B-trees	Ch. 18
19	Disjoint sets (union-find)	Ch. 19 / 21
20	Fibonacci heaps	Ch. 19 (3rd ed.)
21	van Emde Boas trees	Ch. 20
22	Elementary graph algorithms	Ch. 20 / 22
23	Minimum spanning trees	Ch. 21 / 23
24	Single-source shortest paths	Ch. 22 / 24
25	All-pairs shortest paths	Ch. 23 / 25

Ch.	Topic in this book	Matches CLRS
26	Maximum flow	Ch. 24 / 26
27	Matrix operations	Ch. 28
28	Linear programming	Ch. 29
29	Polynomials and the FFT	Ch. 30
30	Number-theoretic algorithms	Ch. 31
31	String matching	Ch. 32
32	Computational geometry	Ch. 33
33	NP-completeness	Ch. 34
34	Approximation algorithms	Ch. 35
35	Parallel algorithms	Ch. 26 (4th ed., multithreading)
36	Machine-learning algorithms	Ch. 20 (4th ed.) and beyond

A note on the slashes: CLRS has gone through four editions, and the chapter numbers have drifted between them as topics were added, split, and reordered. Where a topic sits at different numbers in the third and fourth editions, the table shows both. Do not let the renumbering rattle you — the *ideas* are stable, and a **History and connection** box at the start of each chapter pins down exactly where to look in whichever edition you own. Chapters 35 and 36 reach slightly past the classic CLRS core into material that the fourth edition expands on; they are included because they are where a great deal of modern practice now lives.

Reading note

You will notice the early chapters are densely interlinked: insertion sort (Ch. 2) sets up asymptotic notation (Ch. 3), which is the language used for everything afterward. If you are reading selectively, treat Chapters 1–4 as the non-negotiable foundation. After that, the sorting chapters (5–9), the data-structure chapters (10–14), and the graph chapters (22–26) each form a fairly self-contained arc you can take in whatever order your course demands.

How to actually use this book

Reading an algorithms book passively is like watching someone else exercise. You will enjoy it and learn nothing. Here is how to read this one so that it sticks.

Run the worked examples with a pencil

Every algorithm comes with at least one fully traced numeric example. *Do not just read it.* Cover the worked trace with your hand, predict the next step, then uncover it and check. When you are wrong — and you will be, that is the point — stop and figure out exactly which assumption in your head was off. That moment of being wrong and finding out why is where almost all the learning actually happens.

Do the labs

The **Algorithm lab** boxes hand you a fresh input and ask you to be the computer. Get an index card or a sheet of scratch paper and genuinely write down the state of the array, the tree, or the queue at each step. It feels slow. It is slow. It is also the single highest-return activity in the whole book, because it forces you to hold the precise meaning of every variable in your head at once — which is exactly the skill that lets you later *design* algorithms instead of merely recognizing them.

Algorithm lab

Here is your very first lab, and it needs no algorithm at all. Take the seven numbers

$$5, \quad 2, \quad 9, \quad 1, \quad 5, \quad 6, \quad 3.$$

By hand, sort them into increasing order *using only swaps of adjacent elements* — you may only ever exchange two neighbors. Write down each swap you perform. Count them. Then ask yourself: did you find the smallest possible number of swaps? How could you be sure? Keep your answer; we will return to exactly this quantity (it is called the number of *inversions*) when we analyze insertion sort in Chapter 2.

Take the walking questions seriously

When you hit a **Walking question**, the best thing you can do is close the book. The orange boxes are placed at moments where a little independent struggle will pay off enormously. Your brain keeps working on a good question after you stop staring at it; some of your best insights will arrive in the shower, on a walk, or just before sleep. Give them the chance to.

Walking question

To break it in right now: you have a phone book with a million names in alphabetical order, and you want to find "Ramirez." One approach is to read from the first page until you hit it. Another is to flip to the middle, see whether "Ramirez" comes before or after, throw away half the book, and repeat. Roughly how many flips does the second method need in the worst case? Try to get an actual number before you read Chapter 1. The gap between "a million" and your answer is the entire reason this field exists.

Read the proofs, but read them gently

When you reach a loop invariant or an induction, do not brace yourself as if a storm is coming. A correctness proof in this book is just a careful retelling of the story you already understand, structured so that no case can sneak through unhandled. Read it once for the shape of the argument — "establish it is true at the start, show each step preserves it, conclude it holds at the end" — and then once more for the details. If a proof ever feels like it fell from the sky, that is a bug in my writing, not a deficiency in you; the intuition box right before it is where I owed you the picture.

A note on pseudocode

Throughout the book, algorithms are written in pseudocode — not in any real programming language. This is on purpose. Pseudocode lets us express *the idea* without the clutter of semicolons, type declarations, and library calls that differ from language to language. Our conventions are deliberately close to those of CLRS, so that moving between the two books costs you nothing. Here they are, all in one place.

- **Indentation shows block structure.** The body of a loop or an `if` is the indented text beneath it. There are no curly braces and no `end` keywords cluttering the page.
- **Assignment uses "←"** (or sometimes "=" inside the algorithm environments). The statement $x \leftarrow y$ means "copy the value of y into x." It is not a claim that x and y are equal; it is an action. Equality testing, when we need it, is written "=" inside a condition, and we will always make clear from context which we mean.
- **Arrays are indexed from** 1, the way CLRS does it, unless a chapter explicitly says otherwise. So $A[1]$ is the first element and $A[n]$ is the last, where $n = A.length$. (If you program in a language that counts from 0, just remember to shift by one when you translate; we will flag the places where this bites.)
- $A[i \,..\, j]$ **denotes a slice** — the elements $A[i], A[i+1], \ldots, A[j]$. If $i > j$, the slice is empty.
- **Objects have attributes accessed with a dot**, as in $A.length$ or $x.key$ or $node.left$. You can read $x.key$ as "the key field of x."
- **Variables are local** to the procedure they appear in unless we say otherwise. Parameters are passed by reference for arrays and objects (so a procedure can rearrange an array in place) and by value for plain numbers.
- **We freely use plain English** for steps whose detail would only distract — "*let q be the index of the median element*" — and then, if that step is the interesting part, we expand it into its own procedure.

Every algorithm appears inside a numbered, ruled box like the one below, with its inputs and outputs stated explicitly at the top. Read the **Input** and **Output** lines first — they are the contract. They tell you what you are allowed to assume on the way in and what you are promised on the way out, before you read a single line of the body.

Algorithm 1: A first taste of pseudocode: linear search


Input: An array $A[1 \,..\, n]$ and a target value v.
Output: An index i with $A[i] = v$, or the special value NIL if no such index exists.

```
1 for i ← 1 to n do
2 |   if A[i] = v then
3 |   |   return i ;                          // found it; stop early
4 return NIL ;                                // checked everything, v is absent
```

Take a moment with that little procedure — it is the simplest interesting algorithm there is, and it already shows the whole rhythm of the book. The **Input** and **Output** lines state the contract. The loop walks through the array one slot at a time. The `if` checks the current slot. The early `return`

is an honest shortcut: the instant we find v there is no reason to keep looking. And the final `return` NIL handles the case everyone forgets — what happens when the thing simply is not there.

We can picture the search as a single pointer sliding rightward along the array, pausing at each box just long enough to ask "are you the one?"



The pointer i begins at index 1 and steps right — past 4, past 8, past 15 — until at index 4 it finds 16 and stops. It never even looks at 23 or 42. If instead we had searched for a value that is not present, the pointer would have walked all the way off the right end and the final line would have returned NIL.

Common trap

The most common bug in a search like this is not in the loop at all; it is forgetting the *last* line. If you only return inside the `if`, then a search for an absent value falls off the bottom of the procedure and returns garbage (or crashes). Always ask of any algorithm: *what does it do when it finds nothing?* The empty case, the absent case, the zero-length case — these are where correctness goes to die, and we will hunt them deliberately in every chapter.

To see why we will spend a whole book worrying about *how* we search and sort, look at the shape of even this trivial example. In the worst case — v is absent, or sits in the last slot — linear search inspects all n elements. The walking question above hinted that a cleverer search on *sorted* data can find the same value by inspecting only about $\log_2 n$ elements. For a million elements that is the difference between a million checks and about twenty. That gap, multiplied across every operation a real system performs, is the whole game.

Cost summary

Linear search (Algorithm 1) inspects at most n elements, so its worst-case running time is $\Theta(n)$, and it uses only $\Theta(1)$ extra space. We will make the symbols Θ, O, and Ω fully precise in Chapter 3; for now, read $\Theta(n)$ as "grows in step with n" and $\Theta(1)$ as "a fixed amount, no matter how big the input."

To make that promised gap concrete — and to give you a second worked example before you have even reached Chapter 1 — let us actually run the "flip to the middle" idea on a small sorted array, by hand, the way every section of this book will ask you to. This is the method the phone-book walking question was circling. It has a name, *binary search*, and we will meet it properly in Chapter 2; here we only want to *see* it move.

Algorithm lab

Take the sorted array


$$A = [\,2,\ 5,\ 8,\ 12,\ 16,\ 23,\ 38,\ 56,\ 72,\ 91\,],$$

ten elements, indexed 1 through 10, and search for $v = 23$. Keep two bookmarks, *lo* and *hi*, marking the part of the array that could still contain v; they start at 1 and 10. Repeat: look at the middle element $A[\,\lfloor (lo + hi)/2 \rfloor\,]$, and if it is too small move *lo* just past it, if too big move *hi* just before it, and if it is exactly v stop. Before reading the trace below, run those three steps yourself on paper and count how many middles you inspect.

Here is the trace. At each step the live range $[lo, hi]$ is the only part still in play; everything outside it has already been ruled out by a single comparison.

Step	*lo*	*hi*	**mid**	A[mid]	**action**
1	1	10	5	16	$16 < 23$, so search the right half: $lo \leftarrow 6$
2	6	10	8	56	$56 > 23$, so search the left half: $hi \leftarrow 7$
3	6	7	6	23	$23 = 23$, found at index 6; stop

Three comparisons, and we are done — against the ten that linear search would need in the worst case on this same array. The reason is visible in the *lo*/*hi* columns: each comparison throws away *half* of whatever remained. Ten candidates become five, then roughly two, then one. The number of halvings needed to grind a range of n down to a single element is exactly the quantity $\log_2 n$ that keeps reappearing.

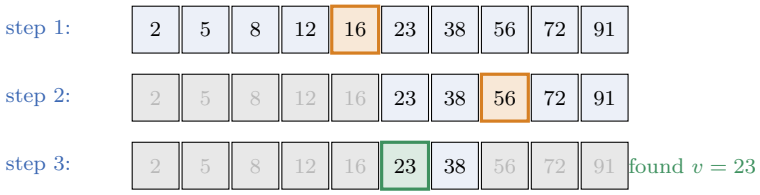

The orange cell is the middle we test on each step; the grey cells have been discarded, never to be looked at again; the blue cells are still in play. Watch the blue region collapse from ten cells to five to two to the single green hit. That collapse *is* the algorithm.

Intuition

This is the whole reason the book exists, in miniature. Linear search and binary search solve the *identical* problem — find v in an array — and a beginner might call them "basically the same, just two loops." But one inspects n cells and the other inspects $\log_2 n$, and on a billion-element array that is the difference between a billion steps and about thirty. Same problem, same hardware, a thousand-million-fold difference in work — bought entirely by a better *shape of story*. Learning to see and create those shapes is the skill this entire book is here to build.

Cost summary

On a sorted array of n elements, binary search halves the live range each comparison, so it finishes after at most $\lfloor \log_2 n \rfloor + 1$ comparisons: worst-case time $\Theta(\log n)$, extra space $\Theta(1)$. Linear search, by contrast, costs $\Theta(n)$ time on the same data and does *not* require the array to be sorted. Sortedness is the price of admission for the logarithmic speed — a recurring bargain we will weigh again and again: pay once to organize the data, then query it cheaply forever after.

A few words of encouragement

Algorithms have a reputation for being hard, and parts of this subject genuinely are. But a great deal of the difficulty that students experience is not in the ideas themselves — it is in the *pace* at which the ideas are usually delivered. An algorithm that takes an expert thirty seconds to read took that expert, years ago, an afternoon of confusion to understand for the first time. Standard textbooks show you the thirty-second version. This book tries to give you back the afternoon.

So go slowly. Be willing to be confused for a while; confusion is not failure, it is the feeling of your understanding being under construction. Trace the examples. Do the labs. Take the walks. Argue with the proofs until they stop feeling like magic. If you do those things, then by the time you open CLRS for real, you will not be meeting these ideas — you will be greeting old friends, and reading at the speed the experts do, because by then you will be one.

Let us begin.

Focus

The contract of this book. You bring patience, a pencil, and a willingness to be temporarily confused. I bring the picture before the proof, a worked example for everything, and an honest pointer to CLRS at every turn. Together we get you ready to read the standard reference not with dread, but with recognition.

Exercises

These warm-ups ask for nothing but careful counting and clear thinking — no machinery from later chapters. They exist to get you in the habit of *doing* rather than only reading.

Exercise 0.1. Go back and finish the first **Algorithm lab**: sort $5, 2, 9, 1, 5, 6, 3$ into increasing order using only swaps of adjacent elements, writing down every swap. Count your swaps. Now try to find an ordering of these same seven numbers that requires *more* adjacent swaps to sort, and one that requires *fewer*. What does the hardest such ordering look like in general?

Exercise 0.2. Answer the phone-book **Walking question**: for a sorted list of one million names, how many times can you halve the search range before only one name remains? Give an exact bound, and explain in one sentence why the answer is roughly $\log_2 n$ rather than n.

Exercise 0.3. Trace linear search (Algorithm 1) by hand on the array $A = [4, 8, 15, 16, 23, 42]$ with target $v = 16$. Write down the value of i and the result of the comparison $A[i] = v$ at every iteration, and state what the procedure returns.

Exercise 0.4. Run the same trace with $v = 17$ on the same array. How many comparisons does the procedure perform, and what does it return? Which line of the pseudocode is responsible for producing a sensible answer in this case?

Exercise 0.5. Suppose someone hands you a version of linear search that has its final `return` NIL line deleted. Describe precisely what goes wrong, and give a concrete input on which the buggy version behaves differently from the correct one.

Exercise 0.6. In your own words, and without looking back, explain the difference between an **Intuition** box and a **Formal** box, and why this book always presents them in that order. Then invent a one-sentence intuition and a one-sentence formal statement for the everyday task of "looking up a word in a dictionary."

Exercise 0.7. Pick any everyday process you do without thinking — making tea, getting dressed, finding your keys — and write it as pseudocode using the conventions from the "note on pseudocode" section: an explicit **Input** line, an explicit **Output** line, at least one loop or `if`, and a comment on at least one line. Then identify one **Common trap**: an input on which your pseudocode would misbehave.

Exercise 0.8. Run the binary-search trace from the **Algorithm lab** again on the same array $A = [\,2, 5, 8, 12, 16, 23, 38, 56, 72, 91\,]$, but this time search for $v = 12$ and for $v = 40$. For each, write down the (lo, hi, mid) triple at every step, the number of comparisons, and what the search concludes. Which search ends by reporting "absent," and how does the range tell you so?

Exercise 0.9. On the same ten-element array, what is the largest number of comparisons binary search could ever need, over all possible targets? Find a target that achieves it. Then check your count against the bound $\lfloor \log_2 n \rfloor + 1$ from the **Cost summary**.

Exercise 0.10 (Challenge)**.** Linear search inspects up to n elements; the phone-book method inspects about $\log_2 n$. Make a small table of $n = 10,\ 100,\ 1000,\ 10^6,\ 10^9$ and, for each, write down both n and $\lceil \log_2 n \rceil$. Looking at your table, write one sentence explaining why a programmer might reasonably treat $\log_2 n$ as "practically constant" for any input that fits on a real computer.

Contents

Preface iii

I Foundations 1

1 What an Algorithm Really Is 3

1.1 Recipes, and why precision matters . . . 3
1.2 Problems versus instances . . . 4
1.3 What "correct" actually means . . . 6
1.4 A first algorithm, written out properly . . . 6
1.4.1 Pseudocode conventions . . . 7
1.4.2 Tracing it on an instance . . . 7
1.5 Why correctness needs an argument, not a vibe . . . 8
1.6 Efficiency, and why it matters . . . 9
1.6.1 Counting steps, not seconds . . . 10
1.6.2 The shape of growth is what matters . . . 10
1.7 Comparing two approaches to one task . . . 11
1.7.1 Approach one: linear search . . . 11
1.7.2 Approach two: binary search . . . 12
1.7.3 Counting the halvings . . . 13
1.8 Algorithms as a technology . . . 14
1.9 What to carry forward . . . 15
Exercises . . . 15

2 Getting Started: Insertion Sort and Loop Invariants 17

2.1 The problem we are solving . . . 17

2.2 The card-player's idea . . . 18
2.3 Insertion sort, written down . . . 19
2.4 A full numeric trace . . . 20
2.5 Loop invariants: how we *know* it works . . . 21
2.5.1 The invariant for insertion sort . . . 21
2.6 How long does it take? . . . 23
2.6.1 Best case: already sorted . . . 23
2.6.2 Worst case: reverse-sorted . . . 24
2.6.3 Average case . . . 25
2.7 Order of growth . . . 25
2.8 Designing algorithms: two stances . . . 26
2.9 A first taste of merge sort . . . 26
2.10 What to carry forward . . . 29
2.11 Exercises . . . 29

3 The Growth of Functions: Asymptotic Notation 31
3.1 Why we throw away the constants . . . 31
3.2 The mental picture before the symbols . . . 33
3.3 Big-O: the upper bound . . . 33
3.3.1 Proving a Big-O bound: find c and n_0 . . . 34
3.4 Big-Omega: the lower bound . . . 35
3.5 Big-Theta: the tight bound . . . 36
3.5.1 A theorem you will reuse: polynomials are Theta of their top term . . . 37
3.6 The little ones: little-o and little-omega . . . 37
3.7 An analogy: comparing functions is comparing numbers . . . 38
3.8 A field guide to common growth rates . . . 39
3.9 Manipulating asymptotics: the algebra of growth . . . 40
3.10 Putting it to work: bounding an algorithm directly . . . 42
3.11 Exercises . . . 43

4 Divide and Conquer, Recurrences, and the Master Theorem 45
4.1 The shape of a divide-and-conquer algorithm . . . 45
4.1.1 A first, familiar example: binary search . . . 46

4.2 Merge sort, revisited slowly . . . 47
4.2.1 The idea . . . 47
4.2.2 A full numeric trace . . . 48
4.2.3 Why it is correct . . . 49
4.3 Counting the work: recurrences . . . 49
4.4 Method 1: the recursion tree (see the work) . . . 50
4.4.1 Merge sort's tree . . . 50
4.4.2 An unbalanced tree, to build instinct . . . 51
4.5 Method 2: substitution (guess, then prove) . . . 51
4.5.1 Proving an upper bound for merge sort . . . 52
4.5.2 The danger of a sloppy guess . . . 52
4.6 Method 3: the master theorem (the lookup table) . . . 53
4.6.1 The one number that decides everything . . . 53
4.6.2 The statement . . . 53
4.6.3 Why each case is true, in pictures . . . 54
4.7 Worked examples with the master theorem . . . 55
4.8 Two motivating algorithms beyond sorting . . . 55
4.8.1 Maximum subarray . . . 56
4.8.2 Strassen's matrix multiplication . . . 57
4.9 When the master theorem is not enough: Akra–Bazzi . . . 58
4.10 Cost summary . . . 59
4.11 Exercises . . . 59

5 Probability and Randomized Algorithms 61
5.1 Two Different Kinds of "Average" . . . 61
5.2 The Hiring Problem . . . 62
5.3 Random Variables and Expectation . . . 63
5.4 Indicator Random Variables: The Master Trick . . . 64
5.5 Solving the Hiring Problem with Indicators . . . 65
5.6 Randomly Permuting an Array . . . 67
5.7 A Recursion-Tree-Free Look at the Numbers . . . 69
5.8 A Second Helping: Expected Number of Inversions . . . 70
5.9 Las Vegas vs. Monte Carlo: Two Flavors of Randomized Algorithm . . . 71

5.10 What "Expected Running Time" Really Means . . . 72
5.11 Putting It Together: a Tiny End-to-End Example . . . 72
5.12 Summary . . . 74
5.13 Exercises . . . 74

II Sorting and Order Statistics 77

6 Heaps and Heapsort 79

6.1 The shape of a heap . . . 79
6.1.1 A tree hiding in an array . . . 79
6.1.2 The heap property: the ordering rule . . . 81
6.1.3 How tall is a heap? . . . 81
6.2 Max-heapify: repairing one broken spot . . . 82
6.2.1 A full numeric trace . . . 83
6.2.2 Why it is correct . . . 84
6.2.3 Cost of MAX-HEAPIFY . . . 85
6.3 Build-Max-Heap: a heap from chaos . . . 85
6.3.1 A full numeric trace . . . 86
6.3.2 Why it is correct: a loop invariant . . . 86
6.3.3 The surprising linear-time analysis . . . 87
6.4 Heapsort . . . 88
6.4.1 Watching it run . . . 89
6.4.2 Correctness via a loop invariant . . . 90
6.4.3 Cost of heapsort . . . 90
6.5 Priority queues . . . 91
6.5.1 Maximum and Extract-Max . . . 92
6.5.2 Increase-Key and Insert . . . 92
6.6 Putting it together . . . 94
6.7 Exercises . . . 95

7 Quicksort 97

7.1 The shape of the idea . . . 97
7.2 Lomuto partitioning, built by hand . . . 98

7.2.1 A complete numeric trace . . . 99
7.2.2 Why it is correct: a loop invariant . . . 100
7.3 The two recursion patterns: best and worst case . . . 101
7.3.1 The worst case: maximally lopsided splits . . . 101
7.3.2 The best case: perfectly even splits . . . 102
7.3.3 The reassuring middle: even bad balance is fine . . . 103
7.4 The villain in the input, and how to remove it . . . 103
7.5 The heart of the matter: expected running time . . . 104
7.5.1 The key realization: each pair is compared at most once . . . 105
7.5.2 Indicator variables and the count . . . 106
7.5.3 Summing the series . . . 107
7.6 Hoare partitioning: the original, faster scheme . . . 107
7.7 Engineering the real thing . . . 109
7.8 Putting it all together . . . 110
7.9 Exercises . . . 110

8 Sorting in Linear Time **113**

8.1 Comparisons Are a Kind of Currency . . . 113
8.1.1 The Decision Tree: Drawing the Argument . . . 114
8.1.2 The Lower Bound, Stated and Proved . . . 115
8.2 Counting Sort: Sorting Without Comparing . . . 116
8.2.1 The Setup . . . 116
8.2.2 A Full Numeric Trace . . . 117
8.2.3 Stability, and Why We Care . . . 118
8.2.4 Cost, and the Catch . . . 119
8.3 Radix Sort: Many Small Sorts Make One Big Sort . . . 119
8.3.1 Least Significant Digit First – and Why That Order . . . 119
8.3.2 A Full Numeric Trace . . . 120
8.3.3 Cost . . . 121
8.4 Bucket Sort: Betting on the Distribution . . . 122
8.4.1 A Numeric Trace . . . 123
8.4.2 Why It Is Linear on Average . . . 124
8.5 So When Can You Actually Beat $n \log n$? . . . 125

Summary . . . 125
8.6 Exercises . . . 126

9 Medians and Order Statistics 129
9.1 The selection problem . . . 129
9.1.1 The easy cases warm us up: minimum and maximum . . . 130
9.2 Selection by sorting: the baseline to beat . . . 131
9.3 Quickselect: partition, then recurse on one side . . . 132
9.3.1 Recalling PARTITION . . . 132
9.3.2 Randomized quickselect . . . 133
9.3.3 A full numeric trace . . . 134
9.3.4 Why quickselect is correct . . . 135
9.4 How fast is quickselect? . . . 135
9.4.1 The worst case is bad . . . 136
9.4.2 Expected linear time: the intuition first . . . 136
9.4.3 Expected linear time: the sharper analysis . . . 137
9.5 Median of medians: worst-case linear selection . . . 138
9.5.1 The five steps . . . 139
9.5.2 Why the pivot is guaranteed good . . . 140
9.5.3 The recurrence, and why 5 is magic . . . 141
9.5.4 Two algorithms, two temperaments . . . 142
9.6 Exercises . . . 143

III Data Structures 145

10 Elementary Data Structures 147
10.1 Memory, Addresses, and the Array . . . 147
10.1.1 The price of insertion and deletion . . . 149
10.2 Matrices: arrays in two dimensions . . . 149
10.3 Stacks: last in, first out . . . 150
10.4 Queues: first in, first out . . . 152
10.5 Deques: open at both ends . . . 154
10.6 Pointers and objects: escaping contiguity . . . 154

10.7 Linked lists . . . 155
10.7.1 Searching a list . . . 155
10.7.2 Inserting into a list . . . 156
10.7.3 Deleting from a list . . . 156
10.7.4 The sentinel trick . . . 157
10.8 Representing rooted trees . . . 158
10.8.1 Binary trees . . . 158
10.8.2 When the number of children is unbounded . . . 159
10.8.3 Other tree representations . . . 160
10.9 Putting it together . . . 160
Exercises . . . 161

11 Hash Tables **163**
11.1 The dictionary problem . . . 163
11.2 Direct-address tables: the honest, wasteful idea . . . 164
11.3 From direct addressing to hashing . . . 165
11.4 Collision resolution by chaining . . . 165
11.4.1 The load factor . . . 166
11.5 Analyzing chaining: simple uniform hashing . . . 167
11.5.1 Unsuccessful search . . . 167
11.5.2 Successful search . . . 167
11.6 Hash functions: turning keys into slots . . . 168
11.6.1 The division method . . . 169
11.6.2 The multiplication method . . . 169
11.7 Open addressing: no lists at all . . . 170
11.7.1 Linear probing . . . 171
11.7.2 Quadratic probing . . . 172
11.7.3 Double hashing . . . 172
11.7.4 Cost of open addressing . . . 173
11.8 Universal hashing: removing the leap of faith . . . 174
11.8.1 A concrete universal family . . . 175
11.9 Perfect hashing: $O(1)$ worst case for static sets . . . 175
11.10Choosing a scheme: a practical recap . . . 177

11.11Exercises . . . 178

12 Binary Search Trees **181**

12.1 The shape of the idea . . . 181

12.1.1 From sorted arrays to branching decisions . . . 181

12.1.2 The magic of the in-order walk . . . 183

12.2 Searching, minimum, maximum . . . 184

12.2.1 Searching for a key . . . 184

12.2.2 Minimum and maximum . . . 185

12.3 The successor: finding the next key . . . 185

12.4 Insertion . . . 187

12.5 Deletion . . . 189

12.6 BSTs and quicksort are the same algorithm . . . 191

12.6.1 The first surprise . . . 191

12.6.2 Why we randomize . . . 192

12.7 The expected height of a random BST . . . 193

12.7.1 Why depth is just counting ancestors . . . 193

12.7.2 Counting with an indicator variable . . . 193

12.7.3 The harmonic numbers appear . . . 193

12.8 Putting it together: a worked lab . . . 195

12.9 Exercises . . . 196

13 Red-Black Trees **199**

13.1 Why Balance Matters . . . 199

13.2 The Red-Black Properties . . . 201

13.3 The Height Bound . . . 203

13.4 Rotations . . . 204

13.5 Insertion . . . 206

13.5.1 A fully worked insertion . . . 209

13.6 Deletion . . . 210

13.7 Putting It All Together . . . 214

Exercises . . . 215

14 Augmenting Data Structures **217**

14.1 Warming Up: What Question Are We Even Asking? . . . 217
14.2 Order-Statistic Trees: The Idea . . . 218
14.2.1 `SELECT`: finding the ith smallest . . . 219
14.2.2 `RANK`: where does this node sit? . . . 220
14.3 Keeping `size` Honest Through Insert and Delete . . . 221
14.3.1 Insertion and deletion: the downward pass . . . 222
14.3.2 Rotations: the local fix-up . . . 222
14.4 The General Recipe: A Theorem for Augmenting . . . 223
14.5 Interval Trees: Augmenting for Overlap . . . 225
14.5.1 `INTERVAL-SEARCH`: the one clever step . . . 227
14.5.2 Why the periscope never lies . . . 228
14.6 A Field Guide to Augmentation . . . 230
14.7 Exercises . . . 231

IV Advanced Design and Analysis 233

15 Dynamic Programming 235

15.1 A First Problem: Cutting a Rod . . . 235
15.1.1 Finding the recursive structure . . . 236
15.1.2 The naive recursion and why it explodes . . . 236
15.1.3 Memoization: the notebook fix . . . 237
15.1.4 Tabulation: filling the table bottom-up . . . 238
15.1.5 Reconstructing the actual cuts . . . 239
15.2 The Elements of Dynamic Programming . . . 240
15.2.1 Optimal substructure . . . 241
15.2.2 Overlapping subproblems . . . 241
15.2.3 Memoization versus tabulation . . . 242
15.3 Matrix-Chain Multiplication . . . 242
15.3.1 The recurrence . . . 243
15.3.2 Filling the table by chain length . . . 243
15.3.3 Reconstructing the parenthesization . . . 245
15.4 Longest Common Subsequence . . . 246

15.4.1 The recurrence . . . 246
15.4.2 Filling the table and tracking arrows . . . 247
15.4.3 Reading the subsequence backward . . . 248
15.5 Optimal Binary Search Trees . . . 249
15.5.1 The recurrence . . . 249
15.5.2 The algorithm . . . 250
15.6 Stepping Back: The Shape of a DP . . . 252
Exercises . . . 252

16 Greedy Algorithms **255**
16.1 A first taste: choosing activities . . . 255
16.1.1 The greedy guess . . . 256
16.1.2 The algorithm . . . 257
16.1.3 Why is it correct? The exchange argument . . . 257
16.1.4 Breaking the wrong rules . . . 258
16.2 Greedy versus dynamic programming . . . 259
16.2.1 Two coins, one lesson . . . 259
16.2.2 A recipe for designing greedy algorithms . . . 260
16.3 Huffman codes: compression by greed . . . 261
16.3.1 Why variable-length codes . . . 261
16.3.2 Codes as binary trees . . . 262
16.3.3 Huffman's greedy idea . . . 262
16.3.4 A full build, traced . . . 263
16.3.5 Complexity . . . 264
16.3.6 Why Huffman is optimal . . . 265
16.4 Why does greed work? A glimpse of matroids . . . 266
16.4.1 The pattern behind the proofs . . . 266
16.4.2 The theorem that earns greed . . . 267
16.5 Summary . . . 268
Exercises . . . 268

17 Amortized Analysis **271**
17.1 Worst case per operation versus worst case per sequence . . . 271

17.2 The aggregate method: just add it all up . . . 272
17.2.1 Example: the stack with MULTIPOP . . . 273
17.2.2 Example: the binary counter . . . 274
17.3 The accounting method: prepay and bank the credit . . . 276
17.3.1 Accounting for the stack . . . 277
17.3.2 Accounting for the binary counter . . . 277
17.4 The potential method: bottle the credit into a single number . . . 278
17.4.1 Potential for the stack . . . 279
17.4.2 Potential for the binary counter . . . 279
17.5 The headline example: dynamic tables . . . 280
17.5.1 The setup and the naive disaster . . . 281
17.5.2 Aggregate analysis of doubling . . . 281
17.5.3 Potential analysis of doubling: choosing Φ . . . 282
17.5.4 Why constant-factor growth, and not additive . . . 284
17.5.5 A word on deletion and shrinking . . . 285
17.6 Choosing the right method . . . 286
17.7 Exercises . . . 286

V Advanced Data Structures 289

18 B-Trees 291

18.1 Why Disks Change Everything . . . 291
18.2 What a B-Tree Is . . . 293
18.3 How Tall Can a B-Tree Get? . . . 295
18.4 Searching a B-Tree . . . 297
18.5 Splitting a Full Node . . . 298
18.6 Insertion in a Single Downward Pass . . . 299
18.6.1 A Fully Traced Insertion . . . 301
18.7 Why Insertion Is Correct . . . 303
18.8 Deletion . . . 303
18.9 Stepping Back . . . 306
Exercises . . . 306

19 Disjoint Sets and Union-Find **309**

19.1 What We Are Actually Building . . . 309

19.1.1 A motivating use: connected components . . . 310

19.2 First Try: a Linked-List Representation . . . 311

19.2.1 How bad can it get? A worst-case sequence . . . 312

19.2.2 The weighted-union heuristic . . . 312

19.3 The Forest Representation . . . 313

19.4 Trick One: Union by Rank . . . 314

19.4.1 Why rank controls height . . . 315

19.5 Trick Two: Path Compression . . . 316

19.6 Putting It Together, and the Near-Constant Result . . . 318

19.6.1 Where does inverse Ackermann come from? . . . 318

19.6.2 A gentle sketch of why we win . . . 319

19.6.3 What each variant costs . . . 320

19.7 A Complete Worked Example . . . 320

19.8 Implementation Notes . . . 321

19.9 Summary . . . 322

19.10Exercises . . . 323

20 Fibonacci Heaps **325**

20.1 What problem are we actually solving? . . . 325

20.2 The idea: lazy bags of trees . . . 326

20.2.1 From one tree to a forest . . . 326

20.2.2 What each node carries . . . 327

20.3 The easy operations: make, insert, minimum, union . . . 328

20.3.1 Make-heap and minimum . . . 328

20.3.2 Insert: just drop it on the table . . . 328

20.3.3 Union: splice two circles together . . . 328

20.4 Extract-min: the one place we clean up . . . 329

20.4.1 The two-step plan . . . 329

20.4.2 Linking two trees . . . 330

20.4.3 The consolidation procedure . . . 330

20.4.4 A fully traced example . . . 331

20.5 Decrease-key: the operation we built all this for . . . 332
20.5.1 The naive idea, and why it is not enough . . . 333
20.5.2 The mark bit and cascading cuts . . . 333
20.5.3 A traced decrease-key . . . 334
20.6 The amortized analysis . . . 335
20.6.1 Choosing the potential . . . 335
20.6.2 Insert, minimum, union . . . 336
20.6.3 Extract-min . . . 336
20.6.4 Decrease-key . . . 337
20.6.5 Delete . . . 337
20.7 Why "Fibonacci"? The degree bound . . . 338
20.7.1 What the mark rule guarantees . . . 338
20.7.2 Fibonacci numbers fall out . . . 338
20.8 Putting it back in context: Dijkstra and Prim . . . 340
20.9 Summary . . . 340
Exercises . . . 341

21 van Emde Boas Trees 343

21.1 The problem, stated carefully . . . 343
21.2 Idea zero: the bit vector . . . 344
21.3 Idea one: a tree of summaries (the layered approach) . . . 345
21.4 Idea two: split the key, build proto-vEB . . . 346
21.4.1 How tall is this recursion? . . . 347
21.5 Proto-vEB operations, and why they are not yet fast enough . . . 347
21.5.1 Member . . . 348
21.5.2 Minimum and Maximum – the slow ones . . . 348
21.5.3 Successor – so close . . . 349
21.6 The two ideas that fix everything . . . 350
21.7 The fast operations . . . 351
21.7.1 Minimum, Maximum, Member . . . 351
21.7.2 Successor: the centerpiece . . . 352
21.7.3 A complete numeric trace of Successor . . . 352
21.7.4 Insert: one recursion via the doorman . . . 354

21.7.5 Delete: the bookkeeping is heavier but the bound holds . . . 354
21.8 Solving the recurrence, once and for all . . . 355
21.9 The cost of all this: space . . . 356
21.10Recap: the chain of ideas . . . 357
21.11Exercises . . . 357

VI Graph Algorithms 359

22 Elementary Graph Algorithms 361

22.1 What a Graph Is . . . 361
22.2 Storing a Graph: Lists versus Matrices . . . 362
22.2.1 The adjacency matrix . . . 362
22.2.2 The adjacency list . . . 363
22.3 Breadth-First Search: Exploring in Rings . . . 364
22.3.1 A full numeric trace . . . 366
22.3.2 Why BFS finds shortest paths . . . 367
22.3.3 The running time of BFS . . . 368
22.4 Depth-First Search: Plunge and Backtrack . . . 368
22.4.1 A full numeric trace . . . 370
22.4.2 The parenthesis structure . . . 371
22.4.3 Classifying the edges . . . 371
22.4.4 The running time of DFS . . . 372
22.5 Topological Sort: Untangling Dependencies . . . 373
22.5.1 A worked topological sort . . . 374
22.6 Strongly Connected Components . . . 375
22.6.1 Why the trick works . . . 376
22.6.2 A worked example . . . 376
22.7 Stepping Back . . . 378
22.8 Exercises . . . 378

23 Minimum Spanning Trees 381

23.1 What exactly are we looking for? . . . 381
23.2 A picture to anchor everything . . . 382

23.3 The cut property: the heart of the matter . . . 383
23.3.1 Proof of the cut property, slowly . . . 384
23.4 The generic MST algorithm . . . 385
23.5 Kruskal's algorithm . . . 386
23.5.1 The idea . . . 387
23.5.2 The mechanism: union-find . . . 387
23.5.3 The algorithm . . . 388
23.5.4 A full trace on our graph . . . 388
23.5.5 Why Kruskal is correct . . . 389
23.5.6 Running time of Kruskal . . . 389
23.6 Prim's algorithm . . . 390
23.6.1 The idea . . . 390
23.6.2 The mechanism: a priority queue . . . 390
23.6.3 A full trace on our graph . . . 391
23.6.4 Why Prim is correct . . . 392
23.6.5 Running time of Prim . . . 392
23.7 Kruskal vs. Prim: which, and why . . . 394
23.8 A few honest subtleties . . . 394
23.9 Exercises . . . 395

24 Single-Source Shortest Paths **397**

24.1 What is a shortest path, exactly? . . . 397
24.1.1 Why negative edges, and why negative cycles are poison . . . 398
24.2 The two structural facts everything rests on . . . 398
24.2.1 Optimal substructure: shortest paths contain shortest paths . . . 399
24.2.2 The triangle inequality . . . 399
24.3 Relaxation: the one move to rule them all . . . 400
24.4 Bellman–Ford: relax everything, repeatedly . . . 401
24.4.1 The negative-cycle detector, explained . . . 402
24.4.2 A complete numeric trace . . . 402
24.5 Shortest paths in a DAG: order is free . . . 404
24.6 Dijkstra's algorithm: greedy on nonnegative weights . . . 406
24.6.1 A complete numeric trace . . . 407

24.6.2 Why Dijkstra is correct . . . 408
24.6.3 The role of the priority queue . . . 409
24.6.4 The predecessor graph: reconstructing the actual path . . . 410
24.7 Putting the three together . . . 410
24.8 Exercises . . . 411

25 All-Pairs Shortest Paths **413**
25.1 Setting Up: Inputs, Outputs, and Conventions . . . 414
25.2 First Idea: Shortest Paths as Matrix "Multiplication" . . . 414
25.2.1 The subproblem: shortest paths with a bounded number of edges . . . 415
25.2.2 When do we stop? . . . 416
25.2.3 Pseudocode and a first cost . . . 417
25.2.4 Repeated squaring: $\Theta(n^3 \log n)$ . . . 417
25.3 Floyd–Warshall: A Smarter Dynamic Program . . . 418
25.3.1 The new subproblem: allowed intermediate vertices . . . 418
25.3.2 The recurrence: "do I route through vertex k or not?" . . . 418
25.3.3 We only need two layers... actually one . . . 419
25.3.4 A full worked trace . . . 421
25.3.5 Why it is correct . . . 423
25.4 Transitive Closure: Reachability for the Price of Booleans . . . 423
25.5 Johnson's Algorithm: Fast on Sparse Graphs, Even with Negative Edges . . . 424
25.5.1 The reweighting trick . . . 425
25.5.2 Choosing h so every $\hat{w} \geq 0$ . . . 426
25.5.3 The full algorithm . . . 427
25.5.4 A worked example of the reweighting . . . 427
25.5.5 Why it is correct, and what it costs . . . 428
25.6 Choosing an Algorithm . . . 428
25.7 Summary . . . 429
Exercises . . . 430

26 Maximum Flow **431**
26.1 Flow Networks . . . 431
26.1.1 A network to keep on the table . . . 432

26.2 The Ford–Fulkerson Method . . . 433
26.2.1 Why naive greedy is not enough . . . 433
26.2.2 Residual networks . . . 434
26.2.3 Augmenting along a path . . . 435
26.2.4 A full numeric trace . . . 436
26.3 Cuts and the Max-Flow Min-Cut Theorem . . . 437
26.3.1 Why "method" and not "algorithm": termination . . . 439
26.4 Edmonds–Karp: Choosing Good Paths . . . 440
26.5 Application: Maximum Bipartite Matching . . . 441
26.5.1 The reduction . . . 442
26.5.2 Tracing the matching . . . 443
26.6 What to Carry Forward . . . 444
Exercises . . . 444

VII Selected Topics **447**

27 Matrix Operations **449**

27.1 Matrices from the ground up . . . 449
27.1.1 Why multiplication is defined the way it is . . . 450
27.1.2 The cost of the schoolbook product . . . 451
27.2 Strassen's algorithm, revisited . . . 452
27.2.1 A first, honest attempt: blocking . . . 452
27.2.2 Seven products instead of eight . . . 453
27.2.3 Why seven beats eight: the recurrence . . . 453
27.3 Solving linear systems: $Ax = b$ . . . 454
27.3.1 Triangular systems are easy . . . 455
27.3.2 LU and LUP decomposition . . . 455
27.3.3 Why we never compute A^{-1} to solve $Ax = b$ . . . 458
27.4 Matrix inversion and its equivalence to multiplication . . . 458
27.4.1 Computing the inverse with LUP . . . 458
27.4.2 The equivalence, both directions . . . 458
27.5 Least squares: solving systems that have no solution . . . 459

27.5.1 The picture: a best-fit line . . . 460
27.5.2 The normal equations . . . 460
27.6 Pulling it together . . . 461
Exercises . . . 462

28 Linear Programming **465**
28.1 Modeling: From Words to Algebra . . . 466
28.1.1 A second model: shortest paths as an LP . . . 467
28.2 Standard and Slack Forms . . . 467
28.2.1 Standard form . . . 468
28.2.2 Slack form . . . 468
28.3 The Geometry of an LP . . . 469
28.4 The Simplex Method, by Example . . . 471
28.4.1 The idea in one paragraph . . . 471
28.4.2 Iteration 0: the starting dictionary . . . 472
28.4.3 Iteration 1: the pivot . . . 472
28.4.4 Iteration 2: the second pivot . . . 473
28.4.5 Simplex as pseudocode . . . 474
28.4.6 Two loose ends: starting and cycling . . . 474
28.5 Duality: Every LP Has a Shadow . . . 475
28.5.1 Where does the dual come from? . . . 475
28.5.2 Weak and strong duality . . . 476
28.5.3 What the dual variables mean: shadow prices . . . 478
28.6 LP Relaxation as a Design Tool . . . 478
28.7 Summary . . . 480
Exercises . . . 481

29 Polynomials and the FFT **483**
29.1 Two ways to describe a polynomial . . . 483
29.1.1 Point-value form . . . 484
29.1.2 A small worked conversion . . . 485
29.2 The operation we actually care about: multiplication . . . 485
29.3 Choosing the points: roots of unity . . . 486

29.3.1 Complex roots of unity . . . 487
29.3.2 Three facts that make everything work . . . 487
29.4 The Discrete Fourier Transform . . . 488
29.5 The FFT: divide and conquer on the coefficients . . . 489
29.5.1 The combine step, made explicit . . . 490
29.5.2 The algorithm . . . 491
29.5.3 Correctness, gently . . . 491
29.5.4 Running time . . . 492
29.6 Coming back: the inverse FFT . . . 492
29.7 The whole pipeline: fast polynomial multiplication . . . 493
29.7.1 A complete numerical trace . . . 494
29.8 Why the same code runs forward and backward . . . 495
29.9 A note on making it iterative and fast in practice . . . 496
29.10Exercises . . . 497

30 Number-Theoretic Algorithms 499

30.1 Divisibility, GCD, and the Idea of a Remainder . . . 499
30.1.1 The greatest common divisor . . . 500
30.1.2 How fast is it? Enter Fibonacci . . . 502
30.2 The Extended Euclidean Algorithm . . . 503
30.3 Modular Arithmetic: Computing on a Clock . . . 504
30.3.1 Units and inverses . . . 505
30.4 Solving Modular Linear Equations . . . 506
30.5 The Chinese Remainder Theorem . . . 507
30.5.1 Constructing the solution . . . 508
30.6 Modular Exponentiation . . . 509
30.6.1 Two theorems that power everything . . . 511
30.7 The RSA Public-Key Cryptosystem . . . 511
30.7.1 Setting up the keys . . . 511
30.7.2 Encrypting and decrypting . . . 512
30.8 Primality Testing . . . 513
30.8.1 The Fermat test and its flaw . . . 513
30.8.2 Miller–Rabin: a better witness . . . 513

30.9 Putting It Together . . . 516
Exercises . . . 516

31 String Matching **519**

31.1 Setting the stage . . . 519
31.2 The naive matcher: just try every shift . . . 520
31.2.1 How slow can the naive matcher be? . . . 521
31.3 Rabin–Karp: matching by fingerprint . . . 522
31.3.1 Treating a string as a number . . . 522
31.3.2 Modular arithmetic and the spurious-hit check . . . 523
31.3.3 Why it is usually fast, and why it can be slow . . . 524
31.4 String matching with finite automata . . . 525
31.4.1 What a string-matching automaton is . . . 525
31.4.2 A worked machine . . . 527
31.4.3 Cost, and the one catch . . . 528
31.5 The Knuth–Morris–Pratt algorithm . . . 528
31.5.1 The insight: a mismatch already tells you a lot . . . 529
31.5.2 Computing the prefix function by hand . . . 529
31.5.3 Computing the prefix function cleverly . . . 530
31.5.4 KMP itself . . . 531
31.5.5 Why KMP is linear: an amortized argument . . . 532
31.6 Putting the four side by side . . . 534
31.7 Exercises . . . 534

32 Computational Geometry **537**

32.1 The cross product: the only tool you really need . . . 538
32.1.1 The ORIENTATION primitive . . . 539
32.2 Do two segments intersect? . . . 540
32.3 The convex hull . . . 542
32.3.1 Graham's scan . . . 543
32.3.2 Jarvis's march (gift wrapping) . . . 544
32.4 The closest pair of points . . . 546
32.4.1 The setup and the strip . . . 546

32.4.2 The seven-neighbors miracle . . . 547
32.4.3 The algorithm and its recurrence . . . 548
32.5 Looking back . . . 549
Exercises . . . 550

33 NP-Completeness **553**
33.1 Decision problems: shrinking the question . . . 554
33.2 The class P: problems you can actually solve . . . 554
33.3 The class NP: problems you can check . . . 555
33.3.1 The million-dollar question . . . 556
33.4 Reductions: "no harder than" . . . 557
33.5 NP-completeness: the hardest problems in NP . . . 558
33.5.1 The first domino: Cook–Levin . . . 559
33.5.2 The chain reaction: how to prove a problem NP-complete . . . 559
33.6 From SAT to 3-SAT: taming the formula . . . 560
33.7 Clique: hardness becomes a graph . . . 561
33.8 Vertex Cover: the same coin, flipped . . . 563
33.9 Hamiltonian Cycle and the Traveling Salesman . . . 563
33.9.1 TSP: putting numbers on the edges . . . 564
33.10Subset-Sum: when small numbers hide big inputs . . . 565
33.11A worked reduction, end to end . . . 566
33.12What to do when your problem is NP-complete . . . 567
33.13Exercises . . . 569

34 Approximation Algorithms **571**
34.1 The one number that matters: the approximation ratio . . . 571
34.2 Vertex cover: a 2-approximation from a silly idea . . . 573
34.3 The traveling salesman with a triangle inequality . . . 575
34.3.1 Christofides: squeezing the ratio down to 1.5 . . . 577
34.4 Set cover: when the best you can do is logarithmic . . . 578
34.5 MAX-3-CNF: how a coin flip guarantees 7/8 . . . 580
34.6 Subset-sum: an FPTAS, the gold standard . . . 581
34.7 Stepping back: a field of guarantees . . . 583

34.8 Exercises . . . 584

35 Parallel and Multithreaded Algorithms 587

35.1 Two ways for work to happen at once . . . 588
35.2 The fork-join model . . . 588
35.2.1 The computation as a graph . . . 589
35.3 Work and span: the two numbers that matter . . . 590
35.3.1 The two laws . . . 590
35.3.2 Speedup and parallelism . . . 591
35.3.3 Worked example: the work and span of P-Fib . . . 592
35.4 Scheduling: turning the two numbers into a real running time . . . 592
35.5 Analyzing parallel loops . . . 594
35.6 A new hazard: races . . . 595
35.7 Parallel matrix multiplication . . . 596
35.7.1 The straightforward version . . . 596
35.7.2 Divide-and-conquer multiply, for a shorter span . . . 597
35.8 Parallel merge sort . . . 598
35.8.1 The naive parallelization, and its disappointing span . . . 598
35.8.2 Merging two sorted arrays in parallel . . . 599
35.8.3 Putting it together: a genuinely parallel merge sort . . . 600
35.9 Brent's theorem, and the right way to think about it . . . 601
35.10 The whole chapter in one breath . . . 603
35.11 Exercises . . . 603

36 Machine-Learning Algorithms 605

36.1 Learning as optimization: the one idea . . . 606
36.2 Clustering with k-means . . . 606
36.2.1 The cost that k-means minimizes . . . 607
36.2.2 Lloyd's algorithm . . . 608
36.2.3 A fully worked numeric run . . . 608
36.2.4 Why does it stop? (Correctness as a decreasing potential) . . . 609
36.3 Gradient descent: walking downhill on purpose . . . 611
36.3.1 The gradient is the uphill arrow . . . 611

36.3.2 The update rule and the learning rate . . . 611
36.3.3 A fully worked one-variable run . . . 612
36.3.4 Convexity: when downhill is enough . . . 613
36.3.5 Batch vs. stochastic: the great speedup . . . 614
36.4 The perceptron: learning a straight-line boundary . . . 615
36.4.1 The setup: a linear classifier . . . 615
36.4.2 The learning rule . . . 615
36.4.3 A fully worked trace . . . 616
36.4.4 Why it works: the perceptron convergence theorem . . . 617
36.4.5 The perceptron as gradient descent . . . 618
36.5 Connections to the rest of the book . . . 619
36.6 Exercises . . . 619

VIII Mathematical Background 621

37 Appendix: Summations 623

37.1 Notation: what $\sum$ actually says . . . 623
37.1.1 Two properties you will use constantly . . . 624
37.2 The arithmetic series . . . 624
37.2.1 Sums of squares and higher powers . . . 626
37.3 The geometric series . . . 626
37.3.1 The two regimes: shrinking vs. growing . . . 627
37.4 The harmonic series . . . 628
37.5 Bounding a sum by an integral . . . 629
37.6 Telescoping: when the middle cancels . . . 630
37.7 A field guide to the recurrences in this book . . . 631
37.7.1 Subtract-a-constant recurrences $\to$ arithmetic sums . . . 631
37.7.2 Halve-the-input recurrences $\to$ geometric sums . . . 632
37.7.3 Random-pivot and tree-build recurrences $\to$ harmonic sums . . . 632
37.8 Putting it together: a fully worked analysis . . . 633
37.9 Exercises . . . 634

38 Appendix: Sets, Counting, and Probability 637

38.1 Sets: the language everything is written in . . . 637
38.1.1 Size, subsets, and the empty set . . . 638
38.1.2 Operations on sets . . . 638
38.1.3 Ordered pairs, tuples, and the Cartesian product . . . 639
38.2 Relations and functions . . . 639
38.2.1 Relations . . . 639
38.2.2 Functions . . . 640
38.3 Counting: the art of the answer without enumeration . . . 641
38.3.1 Permutations: counting orderings . . . 641
38.3.2 Combinations: counting selections . . . 642
38.3.3 Identities you should feel, not memorize . . . 643
38.3.4 The binomial theorem . . . 643
38.4 Probability: reasoning about chance . . . 644
38.4.1 Sample spaces and events . . . 644
38.4.2 Conditional probability . . . 645
38.4.3 Independence . . . 646
38.5 Random variables and expectation . . . 646
38.5.1 What a random variable is . . . 646
38.5.2 Expectation: the average value . . . 647
38.5.3 Linearity of expectation: the workhorse . . . 647
38.5.4 Variance, briefly . . . 648
38.6 Useful inequalities . . . 648
38.6.1 Markov's inequality . . . 649
38.6.2 Chebyshev's inequality . . . 649
38.6.3 The union bound . . . 650
38.7 Exercises . . . 651

39 Appendix: Matrices and Discrete Math 653

39.1 Matrices: grids of numbers that *do* something . . . 653
39.1.1 What a matrix is . . . 653
39.1.2 Adding matrices and scaling them . . . 654
39.1.3 The product: where matrices start pulling their weight . . . 654
39.1.4 A picture of the handshake . . . 655

39.1.5 The identity matrix and the transpose . . . 656
39.1.6 The algebra rules, stated honestly . . . 656
39.1.7 The cost of multiplying matrices . . . 657
39.2 A pinch of linear algebra . . . 658
39.2.1 Vectors, linear combinations, and independence . . . 658
39.2.2 Determinant and inverse, briefly . . . 658
39.3 Graphs as formal objects . . . 659
39.3.1 The definition . . . 659
39.3.2 The vocabulary you actually need . . . 660
39.3.3 Two ways to store a graph . . . 660
39.4 Logarithms, factorials, and identities you will reuse . . . 662
39.4.1 What a logarithm really is . . . 662
39.4.2 The identities, with quick justifications . . . 663
39.4.3 Factorials and how fast they explode . . . 664
39.4.4 Two summation identities worth memorizing . . . 664
39.5 Putting the toolbox together . . . 666
Exercises . . . 667

Part I

Foundations

Chapter 1

What an Algorithm Really Is

You already know more algorithms than you think. When you sort a hand of playing cards, you are running one. When you look up a word in a dictionary by flipping to the middle and then deciding "earlier" or "later," you are running another – and a surprisingly good one. When you give a friend turn-by-turn directions to your house, you are writing one down. The word *algorithm* sounds technical and cold, but the thing it names is something you have been doing since childhood: a finite recipe of unambiguous steps that turns a question into an answer.

This chapter is about taking that everyday notion and sharpening it until it is precise enough to reason about. We are going to ask, slowly and carefully: what exactly *is* an algorithm? What does it mean for one to be *correct*? Why do we care how *fast* it is, when computers keep getting faster anyway? And how do we write algorithms down so that another human – or our future self – can understand them without drowning in the fiddly details of any one programming language?

We will not prove deep theorems yet. The goal is to build the vocabulary and the habits of mind that the rest of the book leans on. By the end you will be able to read a piece of pseudocode, say precisely what problem it solves, argue that it solves that problem, and estimate how its running time grows as the input grows. Those four skills – read, specify, justify, estimate – are the spine of everything that follows.

1.1 Recipes, and why precision matters

Let us begin with the friendliest possible analogy and then watch it break, because watching it break is where the real ideas live.

Intuition

An algorithm is a recipe. It takes some *ingredients* (the input), follows a fixed sequence of *steps*, and produces a *dish* (the output). The two demands we place on a recipe are the two demands we place on an algorithm: every step must be something you can actually do, and the whole thing must eventually finish.

Suppose I hand you this "recipe" for finding the largest number in a list:

> *Look at all the numbers and write down the biggest one.*

Is that an algorithm? It has an input (a list of numbers) and an output (the biggest one), and a human can "run" it. But look closer. "Look at all the numbers" – in what order? All at once? A computer cannot glance at a thousand numbers simultaneously the way your eye sweeps a page. "Write down the biggest one" – how did you decide which is biggest? The instruction quietly assumes you already know how to do the very thing we are trying to describe. It is a wish, not a recipe.

Compare it with this:

> *Set a variable* `best` *to the first number. Then, going left to right through the rest of the numbers one at a time, whenever you meet a number larger than* `best`*, replace* `best` *with that number. When you reach the end,* `best` *holds the answer.*

This version never asks you to do anything you do not already know how to do: read a number, compare two numbers, copy a value. There is no hidden magic step. And it tells you the order. That is the difference between a vague instruction and an algorithm. The whole discipline of this subject is, in a sense, the relentless removal of hidden magic steps.

Focus

An algorithm is a **finite**, **unambiguous**, **effective** sequence of steps that transforms an input into the desired output. *Finite*: it stops. *Unambiguous*: at every moment it is clear exactly what to do next. *Effective*: each step is a genuinely doable operation, not a restatement of the problem.

History and connection

The word *algorithm* comes from the name of the 9th-century Persian mathematician Muhammad ibn Musa al-Khwarizmi, whose book on calculation gave Europe its methods for arithmetic with Hindu-Arabic numerals. (His other great book, *al-jabr*, gave us the word *algebra*.) The modern, mathematically precise notion of "a step a machine can carry out" was pinned down in the 1930s by Alan Turing and Alonzo Church. This chapter parallels **CLRS Chapter 1, "The Role of Algorithms in Computing"**; the deeper theory of what is and is not computable is hinted at there and developed elsewhere.

1.2 Problems versus instances

Here is a distinction that beginners blur and experts never do, so let us nail it down early. There is a difference between a *problem* and an *instance* of that problem.

A **problem** is the general task, described in terms of *any* possible input. An **instance** is one specific input you might be handed.

Definition 1.1 (ch01:problem-instance)**.** A *computational problem* is specified by describing (i) the set of allowed *inputs*, often called *instances*, and (ii) for each input, what counts as a correct *output*. An *instance* of the problem is a single concrete input drawn from that set.

Take the sorting problem. As a *problem* it reads:

Formal

The Sorting Problem.
Input: a sequence of n numbers $\langle a_1, a_2, \ldots, a_n \rangle$.
Output: a reordering $\langle a'_1, a'_2, \ldots, a'_n \rangle$ of the input sequence such that $a'_1 \leq a'_2 \leq \cdots \leq a'_n$.

That definition does not mention any particular list. It speaks of *every* list at once. An *instance* of the sorting problem is something concrete, like $\langle 31, 41, 59, 26, 41, 58 \rangle$, whose correct output is the single sequence $\langle 26, 31, 41, 41, 58, 59 \rangle$.

Intuition

Think of a problem as a giant lookup table you can never finish writing: down the left column is every conceivable input, and in the right column is the correct answer for that input. An *instance* is one row. An *algorithm* is a finite machine that, given any row's left entry, computes its right entry – without ever storing the impossible infinite table.

Figure 1.1 draws that mental picture for the sorting problem.

input (instance)	correct output
$\langle 3, 1, 2 \rangle$	$\langle 1, 2, 3 \rangle$
$\langle 31, 41, 59, 26 \rangle$	$\langle 26, 31, 41, 59 \rangle$
$\langle 5 \rangle$	$\langle 5 \rangle$
$\langle 31, 41, 59, 26, 41, 58 \rangle$	$\langle 26, 31, 41, 41, 58, 59 \rangle$
$\vdots$	$\vdots$

algorithm

← one instance (one row)

Figure 1.1: The sorting problem as an infinite lookup table: every possible input on the left, its unique correct output on the right. The highlighted row is one *instance*. An *algorithm* is a finite machine that computes the right entry from the left entry for *any* row, without ever storing the table.

Why does this distinction earn its own section? Because almost every confusion later in the book dissolves once you ask, "Wait, am I talking about the problem or about one instance?" When we say an algorithm is *correct*, we mean it works on *every* instance, not just the one we tried. When we say an algorithm is *slow*, we usually mean there exists some family of instances on which it bogs down. And when we compare two algorithms, we compare them as solvers of the same *problem*, even though they may behave very differently on a given *instance*.

Common trap

"I ran it on $\langle 3, 1, 2 \rangle$ and it gave $\langle 1, 2, 3 \rangle$, so my sorting algorithm is correct." No – that shows it is correct on *one instance*. Correctness is a claim about *all* instances. A single successful example can never establish it; a single failing example can demolish it. Testing finds bugs; it does not prove their absence.

1.3 What "correct" actually means

We have been using the word *correct* freely. Let us make it sharp.

Definition 1.2 (ch01:correctness)**.** An algorithm is *correct* for a problem if, for *every* instance of that problem, it halts and returns a correct output for that instance. An algorithm that halts with a correct answer on some inputs but on others either halts with a wrong answer or never halts at all is *incorrect*.

Two words in there deserve a spotlight: *every* and *halts*.

Every we have already met – correctness quantifies over all instances. The new word is *halts*. An algorithm that runs forever has not solved your problem, no matter how clever it looks, because you never get an answer. So correctness bundles two promises together: the algorithm *terminates*, and when it terminates the answer is *right*. We will return to both promises again and again, usually proving them with a tool called a *loop invariant*, which we preview at the end of this chapter and use in earnest from the next one onward.

Remark 1.1 (ch01:approximation). For some hard problems we deliberately relax "returns a correct output" to "returns an output provably close to correct." Those are *approximation algorithms*, a whole subject of their own. And some algorithms flip a coin internally and are only correct *with high probability*; those are *randomized algorithms*. Both are honest and useful – but in each case the relaxation is stated openly and precisely. Vagueness is never the relaxation.

Why this matters

Why be so fussy about "every instance"? Because software runs on inputs nobody imagined. A date library that is correct on every day you tested but loops forever on the 29th of February in a leap year is not "almost correct" – it is the bug that takes down an airline at 2 a.m. The habit of asking "for which inputs might this fail?" is the single most valuable reflex this book can give you. Correctness is not academic pedantry; it is the difference between code that works and code that works *until it doesn't*.

1.4 A first algorithm, written out properly

Let us turn the "find the maximum" recipe from earlier into something we can analyze. Along the way we will introduce the way this book writes algorithms down – *pseudocode* – and explain the conventions as we go.

Algorithm 2: FIND-MAX: largest element of a list

Input: An array $A[1..n]$ of n numbers, with $n \geq 1$.
Output: The value of the largest element of A.

```
1 best ← A[1];
2 for i ← 2 to n do
3     if A[i] > best then
4         best ← A[i];
5 return best;
```

Read it slowly. The first line copies the first element into a variable named *best*, our running champion. The loop then walks the index i from 2 up to n, inspecting each remaining element exactly once. Whenever the current element beats the champion, it becomes the new champion. After the loop, *best* holds the answer, and we return it.

1.4.1 Pseudocode conventions

Pseudocode is not a programming language. It is a controlled form of English-plus-math whose only goal is to be unambiguous to a human reader. We strip away everything that does not matter to the *algorithm* – semicolons, type declarations, memory management – and keep everything that does. Here are the conventions this book uses; they match CLRS closely.

- **Assignment** is written $x \leftarrow v$, read "x gets v." It copies the value v into the variable x. We avoid the symbol $=$ for assignment so that $=$ can mean honest mathematical equality.
- **Arrays** are written $A[1\,..\,n]$ and indexed from 1, so $A[1]$ is the first element and $A[n]$ the last. (Many real languages index from 0; the ideas are identical, the arithmetic shifts by one.) The notation $A[i\,..\,j]$ means the slice from index i through j inclusive.
- **Blocks** are shown by indentation, not braces. The body of the **for** loop is everything indented beneath it.
- **Loops** come in **for** (a known number of repetitions) and **while** (repeat as long as a condition holds) flavors. After a **for** loop ends, the loop variable is considered to hold the value that first failed the test – a small convention worth remembering.
- **Conditionals** are **if** / **else**. **Return** immediately stops the algorithm and hands back a value.
- We freely use ordinary math – $\leq$, $\lfloor n/2 \rfloor$, "swap x and y" – whenever it is clearer than spelling out machine steps.

Focus

The point of pseudocode is communication, not execution. If a human reader could follow your steps and get the right answer by hand, your pseudocode is good – even if no compiler would accept it. Aim for the clarity of a well-written proof, not the syntax of a particular language.

1.4.2 Tracing it on an instance

Abstract steps come alive when you run them by hand. Let us trace FIND-MAX on the instance $A = \langle 4, 9, 3, 9, 7 \rangle$, with $n = 5$. The table records the state *after* each iteration of the loop.

Step	i	$A[i]$	*best* after this step
initialize	–	–	4
loop	2	9	9 (since $9 > 4$)
loop	3	3	9 (since $3 \not> 9$)
loop	4	9	9 (since $9 \not> 9$)
loop	5	7	9 (since $7 \not> 9$)

We return 9, which is indeed the largest element. Notice the tie at $i = 4$: the test is strictly $>$, so an equal value does not displace the champion. That choice does not matter for the maximum, but in other algorithms the difference between $>$ and $\geq$ decides whether a sort is *stable* or whether a loop terminates, so train yourself to notice it.

Algorithm lab

Trace FIND-MAX yourself on $A = \langle 5, 5, 5 \rangle$ and on $A = \langle 8, 1, 6, 9, 2 \rangle$. For each, write the four-column table above. Then answer: on an array where the maximum sits at the very first position, how many times does the body of the **if** (the assignment $best \leftarrow A[i]$) actually execute? On an array sorted strictly increasing, how many times? This gap between "never" and "every time" is your first encounter with *best case* versus *worst case*.

1.5 Why correctness needs an argument, not a vibe

FIND-MAX is simple enough that it "obviously" works. But "obviously" is exactly the feeling that hides bugs, so let us practice arguing correctness properly on an easy example, where the machinery is visible and the stakes are low.

The key idea is a *loop invariant*: a statement that is true every time we are about to test the loop condition, and that, once the loop ends, hands us the result we want. Think of it as a promise the loop keeps to itself at the top of every pass.

Focus

Loop invariant for Find-Max. Just before the loop runs with a given value of i, the variable $best$ equals the maximum of the first $i-1$ elements, that is, $best = \max\{A[1], A[2], \ldots, A[i-1]\}$.

Figure 1.2 pictures the promise. At the top of the pass for a given i, the array is split into a settled prefix $A[1\,..\,i-1]$ – already scanned, with its maximum captured in $best$ – and an unexamined suffix $A[i\,..\,n]$. The whole job of one pass is to fold $A[i]$ into the settled region and slide the boundary one step to the right.




Figure 1.2: The loop invariant of FIND-MAX as a picture. Green: the settled prefix, whose maximum already lives in $best$. Orange: the current element $A[i]$, about to be compared against $best$ and absorbed. Gray: the suffix not yet looked at. Each pass moves the green/orange boundary one cell right; when green covers the whole array, $best$ is the answer.

To use an invariant we check three things – the same three every time, so they will soon feel routine.

- **Initialization.** The invariant holds before the first iteration. Here, before the loop, $best = A[1]$ and $i = 2$, so $i - 1 = 1$ and indeed $best = \max\{A[1]\}$. True.

- **Maintenance.** If the invariant holds before an iteration, it still holds before the next one. Suppose $best = \max\{A[1], \ldots, A[i-1]\}$ as we enter the body. The body compares $A[i]$ to $best$ and keeps the larger. So afterwards $best = \max\{A[1], \ldots, A[i-1], A[i]\} = \max\{A[1], \ldots, A[i]\}$. Then i increases by 1, restoring the invariant's form with the new i. True.
- **Termination.** When the loop ends, the invariant plus the reason the loop stopped give the answer. The loop stops when $i = n + 1$. The invariant then says $best = \max\{A[1], \ldots, A[n]\}$ – exactly the maximum of the whole array, which is what we return. Done.

Formal

Claim. For every array $A[1\,..\,n]$ with $n \geq 1$, FIND-MAX halts and returns $\max\{A[1], \ldots, A[n]\}$.
Why it halts: the loop variable i starts at 2, rises by exactly 1 each pass, and the loop runs only while $i \leq n$; after at most $n - 1$ passes the condition fails.
Why it is right: the three invariant checks above.

Notice the shape of the argument. *Initialization* is like the base case of an induction; *maintenance* is like the inductive step; *termination* cashes the invariant in for the final claim. If that smells like proof by induction, your nose is excellent – a loop invariant is induction wearing work clothes. We will lean on this trio relentlessly, and after a few chapters you will run the three checks almost without thinking.

Walking question

On your next walk, pick a kitchen task you do without thinking – making tea, folding laundry, washing a stack of dishes – and try to write it as honest pseudocode. Where are the loops? What is the invariant ("after washing k dishes, the first k are clean and stacked")? Where did you smuggle in a hidden magic step that assumes a human's judgment? The discomfort you feel is exactly the gap between a wish and an algorithm.

1.6 Efficiency, and why it matters

Now for the question that animates most of this book. We have an algorithm that is correct. Why isn't that the end of the story?

Because correct is not the same as *usable*. Two algorithms can both be flawlessly correct, return identical answers on every instance, and yet one finishes in a blink while the other would still be running when the sun burns out. The resource we care about most is *time*: how many basic steps the algorithm performs before it stops. (We sometimes also care about *space* – how much memory it uses – but time leads the way.)

Why this matters

You might think: computers double in speed every couple of years, so won't slow algorithms simply become fast ones if we wait? No – and this is the central surprise of the subject. Hardware speed multiplies your throughput by a *constant* factor. A better algorithm can multiply it by a factor that *grows with the input size*. On a million-element problem, the right

algorithm can beat the wrong one by a factor of fifty thousand on the very same machine. No amount of waiting for faster chips closes a gap like that. Algorithms are a technology, and often the cheapest, most decisive technology in the whole system.

1.6.1 Counting steps, not seconds

We deliberately do *not* measure efficiency in seconds. Seconds depend on the machine, the language, the compiler, the weather inside the chip. Instead we count *basic operations* – comparisons, additions, assignments, array accesses – as a function of the input size n. This abstracts away the machine and lets us compare algorithms on their merits.

For FIND-MAX, count the comparisons $A[i] > best$. The loop runs for $i = 2, 3, \ldots, n$, which is $n - 1$ iterations, doing one comparison each. So FIND-MAX uses exactly $n - 1$ comparisons, on *every* instance of size n. The work grows in step with the input – double the array, roughly double the work. We call that *linear* growth, and it is about as good as you can hope for on a problem that must, at minimum, look at every element at least once.

1.6.2 The shape of growth is what matters

Here is the deep move. When we judge efficiency, we do not fuss over whether an algorithm does $n - 1$ steps or $n + 3$ or $2n$. We care about the *shape* of the growth – linear versus quadratic versus exponential – because for large inputs the shape swamps every constant.

The table below shows how different growth shapes balloon as n climbs. Imagine a machine doing a billion (10^9) basic steps per second.

n	$\log_2 n$	n	n^2	2^n
10	≈ 3	10	100	1024
100	≈ 7	100	10,000	$\approx 10^{30}$
1,000	≈ 10	1,000	1,000,000	astronomically huge
10^6	≈ 20	10^6	10^{12}	beyond comprehension

Read the bottom row as elapsed time on our billion-steps-per-second machine. A $\log_2 n$ algorithm finishes in about 20 steps – instant. A linear one does 10^6 steps – a millisecond. A quadratic one does 10^{12} steps – about 17 minutes. And a 2^n algorithm on $n = 10^6$? The number of steps has more digits than there are atoms in the observable universe; it will never finish, on any machine, ever. The shape of the curve, not the constant out front, decides whether your program returns before lunch or never.

Intuition

A constant factor is a one-time discount – "half off, forever." A better growth shape is a discount that gets *deeper the bigger your order*. For a small input the discount barely shows; for a large one it is the whole game. That is why, when we compare algorithms, we squint past the constants and stare hard at the shape. This squinting has a precise name – *asymptotic analysis*, written with the O, Θ, Ω notation – and it gets its own chapter. For now, just feel

the difference between linear and quadratic in your bones.

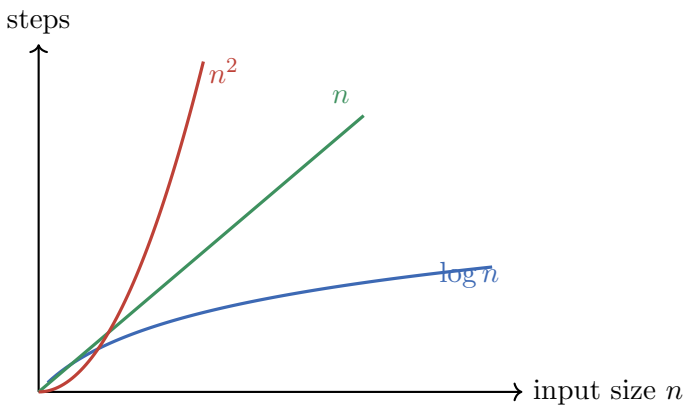


Figure 1.3: The same axes, three growth shapes. For small n the curves are tangled and the constants matter; as n grows the curves fan apart and the *shape* takes over completely. This fanning is why we judge algorithms by growth, not by a stopwatch on one input.

1.7 Comparing two approaches to one task

Talk of growth shapes stays abstract until you watch two honest algorithms solve the *same* problem with wildly different efficiency. So let us do that. The problem: search a list for a target value.

Formal

The Searching Problem.
Input: an array $A[1\,..\,n]$ and a value v.
Output: an index i with $A[i] = v$, or the special value NIL if v does not appear in A.

1.7.1 Approach one: linear search

The obvious method: walk through the array from left to right, and stop the moment you find v.

Algorithm 3: LINEAR-SEARCH

Input: An array $A[1\,..\,n]$ and a value v.
Output: An index i with $A[i] = v$, or NIL.

```
1 for i ← 1 to n do
2     if A[i] = v then
3         return i;
4 return NIL;
```

This is correct on any array – sorted or not – and uses at most n comparisons. If v is the first element we stop after one comparison (best case); if v is absent or last we make all n (worst case). Worst-case work is linear in n. Nothing wrong with that. But watch what happens when we are allowed to assume the array is *already sorted*.

1.7.2 Approach two: binary search

Suppose A is sorted in increasing order. Now we can be cleverer. Look at the *middle* element. If it equals v, done. If it is *larger* than v, then v – if present at all – must lie in the left half, so we throw away the entire right half and repeat. If it is *smaller*, we throw away the left half. Each comparison cuts the region still worth searching in half.

Algorithm 4: BINARY-SEARCH (on a sorted array)

Input: A sorted array $A[1\,..\,n]$ with $A[1] \le \cdots \le A[n]$, and a value v.
Output: An index i with $A[i] = v$, or NIL.

```
1  lo ← 1;
2  hi ← n;
3  while lo ≤ hi do
4  |   mid ← ⌊(lo + hi)/2⌋;
5  |   if A[mid] = v then
6  |   |   return mid;
7  |   else if A[mid] < v then
8  |   |   lo ← mid + 1;
9  |   else
10 |   |   hi ← mid − 1;
11 return NIL;
```

The variables lo and hi fence off the slice $A[lo\,..\,hi]$ that could still contain v. Each pass examines its midpoint and discards half the slice. The loop ends either by finding v or by squeezing the slice empty ($lo > hi$), which proves v is absent.

Intuition

This is the dictionary trick, made exact. To find "algorithm" you do not read from "aardvark" onward; you flip to the middle, see you have overshot or undershot, and flip again into the surviving half. Each flip halves what remains. That halving is the whole secret, and it is enormously powerful.

Tracing binary search

Let $A = \langle 2, 5, 8, 12, 16, 23, 38, 56, 72, 91\rangle$ (so $n = 10$, sorted), and search for $v = 23$. The state is $(lo, hi, mid, A[mid])$ at the top of each pass.

Pass	lo	hi	mid	$A[mid]$	Decision
1	1	10	5	16	$16 < 23$, so go right: $lo \leftarrow 6$
2	6	10	8	56	$56 > 23$, so go left: $hi \leftarrow 7$
3	6	7	6	23	found it, **return** 6

Three comparisons to find 23 in a ten-element array. Linear search, looking for the same value, would have made six. The gap looks modest here – but it widens explosively, because of how the halving compounds.

Figure 1.4 shows the same three passes as shrinking slices. Each shaded band is the live region $A[lo\,..\,hi]$ still worth searching; the boxed cell is the midpoint just examined. Watch the live region collapse by roughly half each time until it lands on the target.

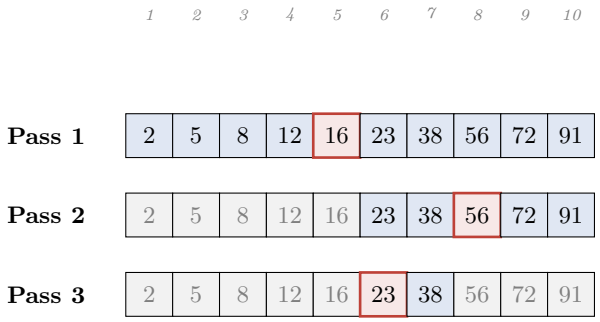


Figure 1.4: Binary search for $v = 23$ in a sorted array of 10 elements. Shaded cells are the live slice $A[lo\,..\,hi]$; the red-outlined cell is the midpoint probed that pass; gray cells have been discarded. Pass 1 probes $A[5] = 16 < 23$ and throws away the left half; pass 2 probes $A[8] = 56 > 23$ and throws away the right; pass 3 probes $A[6] = 23$ and returns. Three probes, not six.

1.7.3 Counting the halvings

How many passes can binary search make in the worst case? Each pass at least halves the size of the live slice. Start with n candidates; after one pass at most $n/2$ remain; after two, at most $n/4$; after k passes, at most $n/2^k$. The loop must stop once fewer than one candidate remains, i.e. once $n/2^k < 1$, which is $2^k > n$, which is $k > \log_2 n$. So the number of passes is at most about $\log_2 n + 1$.

Cost summary

Searching a sorted array of size n.

	worst-case comparisons	growth shape
LINEAR-SEARCH	n	linear
BINARY-SEARCH	$\approx \log_2 n + 1$	logarithmic

Binary search needs a *precondition* – the array must be sorted – that linear search does not. That precondition is the price of the speedup, and remembering it is part of using the algorithm correctly.

Let those numbers sink in. For $n = 1{,}000{,}000$, linear search may need a million comparisons; binary search needs about $\log_2(10^6) \approx 20$. Twenty versus a million, for the identical answer, on the identical machine. That is not a constant factor you could buy back with faster hardware – it is a different *shape* of growth, and it is the kind of win that good algorithm design hands you over and over.

Common trap

Binary search is famous for being easy to get *almost* right and maddening to get *exactly* right. The classic bugs: writing $lo < hi$ when you meant $lo \le hi$ (so you miss a one-element slice and report a present value as absent), or updating $lo \leftarrow mid$ instead of $lo \leftarrow mid + 1$ (so the

slice never shrinks when $mid = lo$, and the loop spins forever). The loop's job is to *strictly shrink* $hi - lo$ every pass; if a bug lets the slice stand still, termination dies with it. When you write a loop, always ask: "what quantity must strictly decrease to guarantee I stop?"

Walking question

Here is a puzzle to carry on a walk. Binary search is gloriously fast *but only on a sorted array.* Sorting an array, as you will see in the next chapters, costs roughly $n \log n$ work. So: if you are going to search the array just once, is it worth sorting it first? What if you will search it a thousand times? Ten thousand? Try to find the rough break-even point where "sort once, then binary-search many times" beats "linear-search every time." You have just stumbled onto the idea of *amortizing* a one-time setup cost across many later operations – a theme that runs through the whole field.

1.8 Algorithms as a technology

Step back and take in what these two searches taught us. Both were correct. Both ran on the same hardware. The difference between barely-usable and effortless was not the machine, not the language, not the programmer's typing speed – it was the *idea*: halving instead of scanning. That is what we mean when we say algorithms are a *technology*, every bit as real as faster processors or bigger memory, and frequently more decisive.

Why this matters

This is not a toy point about search. The same lesson reappears at the heart of nearly everything computers do well: the route your map app finds across a continent in a heartbeat; the way a search engine ranks billions of pages faster than you can blink; the cryptography that keeps a payment secret; the compression that fits a movie down a thin wire; the model that recognizes a face. In each, a clever algorithm turns "impossible" into "instant." When a system is too slow, the seasoned engineer's first question is rarely "can we buy a faster machine?" It is "are we running the right algorithm?" More often than newcomers expect, the answer is no – and fixing it is cheaper, and wins bigger, than any hardware upgrade.

History and connection

The framing of algorithms as a technology, on equal footing with hardware, opens **CLRS Chapter 1**. The companion idea – that we measure an algorithm's quality by how its resource use *grows* with input size, not by stopwatch readings on one machine – is developed in **CLRS Chapter 2 ("Getting Started")** and made rigorous with O, Θ, Ω in **CLRS Chapter 3 ("Characterizing Running Times")**. When you reach CLRS, you will find those chapters move fast; the slow, intuition-first version you are reading now is meant to make that speed feel comfortable rather than punishing.

1.9 What to carry forward

We covered a lot of ground at a gentle pace. Before the exercises, here is the compressed version – the handful of ideas worth keeping in active memory as you read on.

Focus

The chapter in seven sentences.

1. An algorithm is a finite, unambiguous, effective sequence of steps from input to output – a recipe with every hidden magic step removed.
2. A *problem* describes the task for all inputs; an *instance* is one concrete input. Correctness, efficiency, and comparison all live at the level of the *problem*.
3. An algorithm is *correct* only if it *halts* with a *right* answer on *every* instance; one good test proves nothing, one bad test proves it broken.
4. We argue correctness with a loop invariant via three checks – initialization, maintenance, termination – which is induction in disguise.
5. We measure efficiency by counting basic operations as a function of input size n, not by timing seconds on one machine.
6. What matters is the *growth shape* – logarithmic, linear, quadratic, exponential – because for large n the shape overwhelms every constant factor.
7. A better algorithm can beat a worse one by a margin that grows with n, which no faster hardware can match: algorithms are a technology.

Everything ahead – sorting, data structures, graph algorithms, dynamic programming – is variations and deepenings of this one melody: specify the problem precisely, design a method, prove it correct, and analyze how its cost grows. You now have the vocabulary. Let us go use it.

Exercises

Exercise 1.1 (Wish or algorithm?)**.** For each "recipe" below, decide whether it is a genuine algorithm or a vague wish, and if it is a wish, name the hidden magic step. (a) "To sort the list, put the numbers in increasing order." (b) "To sort the list, repeatedly find the smallest remaining number and move it to the end of a growing output list, until none remain." (c) "To find a friend in a crowd, look for them." (d) "Start at the left wall; walk forward scanning faces; stop when you see your friend or reach the right wall."

Exercise 1.2 (Problem versus instance)**.** Write down, in the formal Input/Output style of this chapter, the problem "find the *second*-largest element of an array of distinct numbers." Then give two specific instances of size 5 together with their correct outputs.

Exercise 1.3 (Trace it)**.** Trace Binary-Search on $A = \langle 2, 5, 8, 12, 16, 23, 38, 56, 72, 91 \rangle$ searching for $v = 12$, and again for the absent value $v = 40$. Produce the full $(lo, hi, mid, A[mid])$ table for each, and report how many passes each search takes.

Exercise 1.4 (Off-by-one autopsy)**.** Someone writes binary search with the loop condition `while`

$lo < hi$ (strict) instead of $lo \le hi$. Find a concrete sorted array and a target v *present* in it for which this buggy version returns NIL. Explain in one sentence which slice the bug fails to inspect.

Exercise 1.5 (Counting comparisons)**.** Exactly how many comparisons $A[i] = v$ does LINEAR-SEARCH perform, in the worst case, on an array of size n? In the best case? Describe an instance achieving each.

Exercise 1.6 (An invariant of your own)**.** Consider FIND-MIN, the obvious twin of FIND-MAX that returns the *smallest* element. Write its pseudocode, state a loop invariant for it, and carry out all three checks (initialization, maintenance, termination).

Exercise 1.7 (Sum of an array)**.** Write pseudocode for ARRAY-SUM($A[1\,..\,n]$) returning $A[1]+A[2]+\cdots+A[n]$. State a loop invariant about the running total, prove correctness with the three checks, and give the exact number of additions performed as a function of n.

Exercise 1.8 (Growth-shape intuition)**.** A quadratic algorithm does n^2 steps; a linear one does $100n$ steps – a hundred times more work *per element*. For which values of n is the linear algorithm actually faster? Solve $100n < n^2$ for n. What does your answer say about trusting small-input benchmarks when choosing between algorithms of different growth shapes?

Exercise 1.9 (Sort-then-search break-even)**.** Pursue the walking question from the chapter. Suppose sorting an n-element array costs about $6\,n\log_2 n$ basic operations, one linear search costs about n, and one binary search costs about $\log_2 n$. You will perform k searches on the same array. Write an inequality, in terms of n and k, for when "sort once, then do k binary searches" beats "do k linear searches." For $n = 1{,}000{,}000$, roughly how large must k be? (An estimate is fine.)

Exercise 1.10 (Halving, generalized – challenge)**.** Binary search throws away *half* the candidates per probe. Imagine a "ternary" variant that uses two probes per pass to throw away *two thirds* of the candidates. After k passes, at most how many candidates remain, as a function of n and k? How many passes until fewer than one remains? Compare the pass count to binary search's $\log_2 n$, and explain why doing more comparisons *per pass* does not necessarily mean fewer comparisons *overall*.

Exercise 1.11 (Find the missing number – challenge)**.** You are given an array containing $n-1$ distinct numbers, which are some $n-1$ of the n integers $\{1, 2, \ldots, n\}$ in arbitrary order; exactly one integer from that range is missing. Design an algorithm that finds the missing integer using a number of basic operations that grows only *linearly* in n, *without* sorting the array. (Hint: what is $1+2+\cdots+n$, and can you compute it with a formula?) Write the pseudocode and justify why it is correct.

Chapter 2

Getting Started: Insertion Sort and Loop Invariants

There is a reason almost every serious book on algorithms begins with sorting, and a reason this one begins with *insertion sort* in particular. Sorting is the cleanest possible playground. The problem is easy to state, the answer is easy to check, and yet the act of sorting forces us to confront, in miniature, almost every idea that will haunt us for the rest of the book: how to describe a process precisely, how to convince ourselves it is *correct*, and how to measure how *long* it takes without ever running it on a computer.

Insertion sort is the algorithm you already use, whether you know it or not, when you pick up a hand of playing cards and tidy them. That is not a coincidence. We are going to take that everyday motion, slow it down to a crawl, and turn it into something we can reason about with full mathematical confidence. By the end of this chapter you will have a tool — the *loop invariant* — that lets you prove a loop does what you claim, and a habit — counting *order of growth* — that lets you compare algorithms before you have written a single line of runnable code.

2.1 The problem we are solving

Let us be painfully precise about the goal, because precision here pays off everywhere later. We are given a list of numbers, and we want them rearranged into increasing order. "Increasing" will mean "non-decreasing": equal values are allowed to sit next to each other.

Formal

The sorting problem. *Input:* a sequence of n numbers $\langle a_1, a_2, \ldots, a_n \rangle$.
Output: a permutation (a reordering) $\langle a'_1, a'_2, \ldots, a'_n \rangle$ of the input such that

$$a'_1 \leq a'_2 \leq \cdots \leq a'_n.$$

Two words in that box are doing quiet but heavy lifting, and you should not let them slide past you.

Focus

A correct sorting algorithm must satisfy *two* conditions, not one.

1. **Ordered:** the output is sorted, $a'_1 \le \cdots \le a'_n$.
2. **Permutation:** the output contains exactly the same elements as the input, just possibly in a different order — nothing added, nothing lost, nothing duplicated.

An algorithm that returns $\langle 1, 2, 3, \ldots, n \rangle$ no matter what you feed it is perfectly ordered and completely wrong. Hold on to *both* conditions.

We will treat the numbers as living in an array, which is just a row of labeled boxes. We write $A[1 \,..\, n]$ for an array with n slots, and $A[i]$ for the value in slot i. Throughout this book array indices start at 1, matching the way you would count cards in your hand and matching CLRS; later chapters will note where real programming languages start at 0 instead.

History and connection

This chapter mirrors **CLRS, Chapter 2 ("Getting Started")**. CLRS opens with exactly insertion sort, the loop-invariant method, running-time analysis, and merge sort as the first taste of divide-and-conquer. We will cover the same ground but linger far longer on the *why*. Sorting itself is ancient as a human activity (librarians, clerks, and card-sorters did it for centuries); the formal study of sorting algorithms blossomed in the 1940s and 1950s alongside the first stored-program computers, and Donald Knuth's *The Art of Computer Programming, Volume 3* (1973) remains the encyclopedic reference.

2.2 The card-player's idea

Picture yourself dealt a hand of cards, face down, on the table. You pick them up one at a time with your right hand and slot each new card into its correct place among the cards already arranged in your left hand. At every moment, the cards in your left hand are sorted; the cards still on the table are not yet looked at.

Intuition

Here is the whole algorithm in one sentence: *keep a sorted region on the left, and repeatedly take the next unsorted item and slide it leftward, past everything bigger than it, until it lands in the right spot.*
The sorted region starts as just the first card (a single card is trivially sorted). Each step grows the sorted region by exactly one. After you have inserted the last card, the whole hand is sorted. That "grow the sorted region by one each time" is the heartbeat of the algorithm, and it is exactly what we will pin down with a loop invariant.

The only slightly clever part is *how* a card slides into place. You do not yank out a gap and drop it in. Instead you hold the new card (call it the *key*), compare it with the card to its left, and if that left card is bigger, you shove the left card one slot to the right to make room, then keep comparing with the next card further left. You stop when you meet a card that is not bigger than the key (or you run off the left end), and you drop the key into the gap you just opened.

Figure 2.1 shows the two regions at one frozen instant: a sorted left hand, an untouched pile on the right, and the single key being lifted across the boundary between them.




Figure 2.1: One frozen instant of insertion sort. The dashed line is the boundary; the key just left the unsorted pile and will slide left until it meets a card no bigger than itself.

2.3 Insertion sort, written down

Let us turn that motion into precise pseudocode. We process positions $j = 2, 3, \ldots, n$. At the start of step j, the subarray $A[1 \,..\, j-1]$ is already sorted (the cards in your left hand), and $A[j]$ is the new card we must insert.

Algorithm 5: INSERTION-SORT(A)

Input: An array $A[1 \,..\, n]$ of n numbers.
Output: The same array, rearranged so that $A[1] \le A[2] \le \cdots \le A[n]$.

```
1 for j ← 2 to n do
2     key ← A[j];
      // Insert A[j] into the sorted sequence A[1 .. j − 1].
3     i ← j − 1;
4     while i > 0 and A[i] > key do
5         A[i + 1] ← A[i];
6         i ← i − 1;
7     A[i + 1] ← key;
8 return A;
```

Read it slowly. The outer **for** loop walks the boundary of the sorted region rightward. Inside, *key* is the card we are placing. The **while** loop does the shoving: as long as we have not fallen off the left edge ($i > 0$) and the card at $A[i]$ is strictly bigger than the key, we copy $A[i]$ one slot to the right (opening room) and step i leftward. When the loop stops, slot $i + 1$ is the empty gap, and that is exactly where the key belongs, so we drop it there.

Common trap

Notice the comparison is $A[i] > key$, a *strict* inequality. This matters for two reasons. First, it makes the sort *stable*: when two values are equal, the one that started earlier stays earlier, because we stop shoving the moment we meet an equal value rather than sliding past it. Second, if you accidentally wrote $A[i] \ge key$, the sort would still be *correct* (still sorted, still a permutation) but no longer stable, and on a run of equal keys it would do needless extra work. Stability will matter a great deal in the later chapter on sorting in linear time, where

we lean on it to chain sorting passes together.

2.4 A full numeric trace

Abstractions feel weightless until you push real numbers through them, so let us sort

$$A = \langle 5,\ 2,\ 4,\ 6,\ 1,\ 3 \rangle.$$

We will show the array after each pass of the outer loop. The vertical bar "|" marks the boundary: everything to its left is the sorted region, everything to its right is untouched.

Algorithm lab

Trace of Insertion-Sort on $\langle 5, 2, 4, 6, 1, 3 \rangle$.

Start: $5 \mid 2\ \ 4\ \ 6\ \ 1\ \ 3$ (sorted region is just $A[1] = 5$)

$j = 2$**, key** $= 2$**.** Compare with 5: since $5 > 2$, shove 5 right. Now $i = 0$, run off the edge, drop 2 in slot 1.

$$2\ \ 5 \mid 4\ \ 6\ \ 1\ \ 3$$

$j = 3$**, key** $= 4$**.** Compare with 5: $5 > 4$, shove 5 right. Compare with 2: $2 \not> 4$, stop. Drop 4 after the 2.

$$2\ \ 4\ \ 5 \mid 6\ \ 1\ \ 3$$

$j = 4$**, key** $= 6$**.** Compare with 5: $5 \not> 6$, stop immediately. The key is already in place; drop it back where it was.

$$2\ \ 4\ \ 5\ \ 6 \mid 1\ \ 3$$

$j = 5$**, key** $= 1$**.** Compare with $6, 5, 4, 2$ in turn; each is bigger, so all four shove right. Run off the edge, drop 1 in slot 1.

$$1\ \ 2\ \ 4\ \ 5\ \ 6 \mid 3$$

$j = 6$**, key** $= 3$**.** Compare with $6, 5, 4$ (all bigger, shove right), then 2: $2 \not> 3$, stop. Drop 3 after the 2.

$$1\ \ 2\ \ 3\ \ 4\ \ 5\ \ 6 \mid$$

The sorted region grew by one on every pass — $1, 2, 3, 4, 5, 6$ elements — and after the last pass the whole array is sorted. Notice two passes worth contrasting: at $j = 4$ the key 6 caused *zero* shoves (it was already in place), while at $j = 5$ the key 1 caused *four* shoves (it had to travel all the way to the front). That gap between "barely any work" and "maximum work" is precisely what the running-time analysis later in the chapter will measure.

The hardest pass of this trace is $j = 5$, where the key 1 travels all the way to the front. Figure 2.2 captures that pass: the four boxed values $6, 5, 4, 2$ each get shoved one step right, and 1 drops into the slot that opens up at the front.

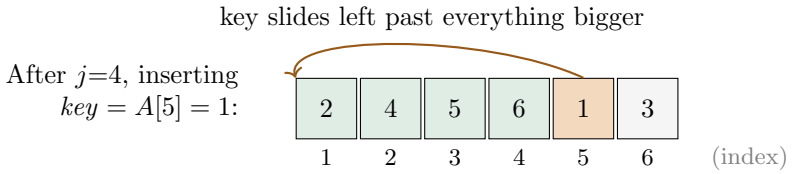


Figure 2.2: The $j = 5$ pass on $\langle 5, 2, 4, 6, 1, 3 \rangle$. The key 1 is smaller than all four sorted values, so each is shifted one slot right and 1 lands in slot 1 — four shoves, the most this pass can ever cost.

2.5 Loop invariants: how we *know* it works

Tracing one example builds confidence, but it does not build certainty. The array $\langle 5, 2, 4, 6, 1, 3 \rangle$ came out right — but what about the millions of arrays we did not try? We need an argument that covers *all* inputs at once. The standard tool for reasoning about loops is the *loop invariant*: a statement that is true every time the loop is about to start a new iteration, no matter what the input was.

Intuition

A loop invariant is like a promise you make about the state of the world at the top of the loop, and then keep, iteration after iteration. If the promise is true before the first iteration, and each iteration preserves it, then by the time the loop ends the promise still holds — and we engineer the promise so that, combined with the reason the loop stopped, it forces the answer we want. It is mathematical induction wearing work clothes.

To use a loop invariant we check three things. The names are worth memorizing because you will perform this ritual for every loop in the book.

Focus

The three obligations of a loop invariant.

- **Initialization.** It is true before the first iteration of the loop. (This is the base case of the induction.)
- **Maintenance.** If it is true before an iteration, it remains true before the next iteration. (This is the inductive step.)
- **Termination.** When the loop ends, the invariant — together with the condition that ended the loop — gives us a useful property that proves the algorithm correct.

The first two are exactly induction: a base case and a step. The third is the twist that distinguishes a loop invariant from plain induction — we deliberately choose the invariant so that its *ending* state tells us what we set out to prove. An ordinary induction proves a fact for all n; a loop invariant additionally cashes that fact out into a statement about the finished computation.

2.5.1 The invariant for insertion sort

Here is the invariant for the outer **for** loop of Insertion-Sort.

Formal

Outer-loop invariant. At the start of each iteration of the **for** loop (the one indexed by j), the subarray $A[1..j-1]$ consists of the elements originally in $A[1..j-1]$, but in sorted order.

Read it twice. It claims two things — sorted, *and* the same elements — which echoes our two correctness conditions from the very start. Now we discharge the three obligations.

Formal

Initialization. Before the first iteration we have $j = 2$, so the subarray in question is $A[1..1]$, a single element. A list of one element is trivially in sorted order, and it obviously contains the original element $A[1]$. The invariant holds.
Maintenance. Assume the invariant holds at the start of an iteration: $A[1..j-1]$ is a sorted rearrangement of the original $A[1..j-1]$. The body grabs $key = A[j]$ and runs the **while** loop. That inner loop slides each element of $A[1..j-1]$ that is strictly greater than key one position to the right, and then deposits key into the freed slot. Because every element moved was greater than key, and every element to the left of the landing slot was not greater than key, the result $A[1..j]$ is sorted; and since we only moved elements and re-inserted the very value we removed, it contains exactly the original elements of $A[1..j]$. Incrementing j for the next iteration restores the invariant's form "$A[1..j-1]$ is a sorted rearrangement" — now over a region one longer.
Termination. The loop ends when j exceeds n, i.e. when $j = n+1$. Substituting $j = n+1$ into the invariant, the subarray $A[1..n]$ is a sorted rearrangement of the original elements. But $A[1..n]$ is the entire array. So the whole array is sorted and is a permutation of the input — which is exactly the sorting problem. □

That is a complete correctness proof. Pause to appreciate what just happened: three short paragraphs covered every possible input array of every possible length. No amount of testing could ever do that.

Common trap

A subtlety swept under the rug above: maintenance leaned on the inner **while** loop "doing the right thing." To be fully rigorous you would give the **while** loop its *own* invariant — for example, "$A[i+1..j]$ all hold values $\geq key$, shifted from their original spots, and $A[1..i]$ is unchanged and still sorted." We will not write that one out in full here (it is an exercise), but you should notice that *nested* loops generally need *nested* invariants. Skipping the inner argument is a common way a "proof" quietly springs a leak.

Walking question

Take this on a walk. We claimed a single-element list is "trivially sorted." What about an *empty* list — is it sorted? Our loop never starts with an empty sorted region (it starts at $j = 2$ with one element). But many algorithms do. Convince yourself that the statement "$a'_1 \leq a'_2 \leq \cdots \leq a'_n$" is *vacuously true* when $n = 0$ or $n = 1$, because there are no adjacent pairs to violate it. Why is "vacuously true" the right default rather than a cop-out?

2.6 How long does it take?

We have an algorithm we trust. The next question is how *expensive* it is. We could time it on a laptop, but that answer would depend on the laptop, the programming language, the weather in the data center, and a hundred other things we do not care about. We want a measure of cost that depends only on the algorithm and the size of the input. The classic move is to count *primitive steps*: each line of pseudocode is assumed to take some constant amount of time per execution, and we add up how many times each line runs.

Let n be the array length. Let t_j be the number of times the **while**-loop test is evaluated for that value of j (this is where all the input-dependence hides — some keys slide far, some not at all). Annotating each line with a per-execution cost c_k and an execution count gives the following.

Line	**cost**	**times**
`for` $j \leftarrow 2$ `to` n	c_1	n
$\quad key \leftarrow A[j]$	c_2	$n-1$
$\quad i \leftarrow j-1$	c_3	$n-1$
$\quad$ `while` $i > 0$ `and` $A[i] > key$	c_4	$\sum_{j=2}^{n} t_j$
$\quad\quad A[i+1] \leftarrow A[i]$	c_5	$\sum_{j=2}^{n}(t_j-1)$
$\quad\quad i \leftarrow i-1$	c_6	$\sum_{j=2}^{n}(t_j-1)$
$\quad A[i+1] \leftarrow key$	c_7	$n-1$

The **for** test runs n times (the extra one is the final test that fails and exits). The body lines run $n-1$ times. The **while** test for a given j runs t_j times; the two lines *inside* the **while** run one fewer, $t_j - 1$ times, because the last test is the one that fails. Adding it all up, the total running time $T(n)$ is

$$T(n) = c_1 n + (c_2 + c_3 + c_7)(n-1) + c_4 \sum_{j=2}^{n} t_j + (c_5 + c_6) \sum_{j=2}^{n} (t_j - 1).$$

Everything except the t_j sums is fixed by n alone. The drama lives entirely in "how far did each key have to slide," i.e. in the t_j.

2.6.1 Best case: already sorted

If the input is already sorted, then for each j the key $A[j]$ is $\geq$ everything to its left, so the **while** test fails immediately: $A[i] = A[j-1] \not> A[j]$. That means $t_j = 1$ for every j. The two sliding lines never run. Substituting,

$$T(n) = c_1 n + (c_2 + c_3 + c_4 + c_7)(n-1) = an + b$$

for constants a, b. This is a *linear* function of n. The best case is fast: insertion sort barely glances at an already-sorted array.

2.6.2 Worst case: reverse-sorted

Now suppose the input is in strictly *decreasing* order. Every new key is smaller than everything to its left, so it must slide all the way to the front. For position j the **while** test runs $t_j = j$ times (it compares against all $j-1$ earlier elements and then once more to fall off the edge). We need two standard sums; the arithmetic series shows up constantly, so meet it now:

$$\sum_{j=2}^{n} j = \left(\sum_{j=1}^{n} j\right) - 1 = \frac{n(n+1)}{2} - 1, \qquad \sum_{j=2}^{n} (j-1) = \sum_{k=1}^{n-1} k = \frac{n(n-1)}{2}.$$

Plugging these in, every term that involved $\sum t_j$ now contributes something proportional to n^2, and after collecting constants we get

$$T(n) = an^2 + bn + c$$

for some constants $a > 0$, b, c. This is a *quadratic* function of n. The worst case is slow: doubling the input roughly *quadruples* the work.

Intuition

Why n^2, intuitively? In the worst case, inserting the j-th key costs about j comparisons, and we sum that over all j from 2 to n. Summing $1 + 2 + 3 + \cdots + n$ gives about $n^2/2$. The "triangle" of work — a little for the early keys, a lot for the late ones — has area proportional to n^2. Any algorithm whose k-th step costs about k will show this same triangular, quadratic behavior.

Figure 2.3 makes the triangle literal: bar j has height $t_j = j$, and the bars together fill a right triangle of area about $\frac{1}{2}n^2$.

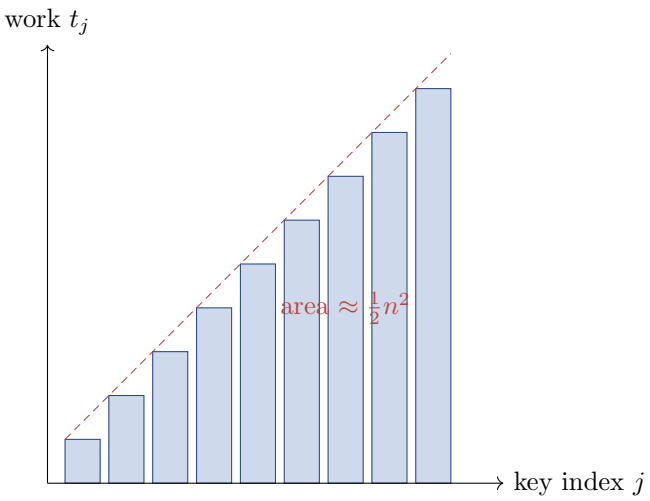


Figure 2.3: Worst-case work of insertion sort. The j-th key costs about j comparisons, so the bars climb linearly and their total area — the running time — grows like $\frac{1}{2}n^2$, hence $\Theta(n^2)$.

2.6.3 Average case

What about a "typical" random input? On average, when we insert $A[j]$ we expect it to land somewhere in the middle of the $j-1$ already-sorted elements, so we expect to shove about half of them: $t_j \approx j/2$. Halving the worst-case sum still leaves a sum proportional to n^2. So the average case is *also* quadratic — about half the worst-case constant, but the same shape. This is a recurring and slightly disheartening lesson:

Focus

For insertion sort, best case is linear ($\Theta(n)$) but *both* the worst case *and* the average case are quadratic ($\Theta(n^2)$). Being lucky with the average does not save you here — "half of a lot" is still a lot. To beat n^2 on typical input we will need a genuinely different idea, which is where merge sort comes in.

2.7 Order of growth

Look back at the best- and worst-case formulas: $an+b$ and an^2+bn+c. When n is large, the leading term swamps everything else. For $n = 1000$, the term $n^2 = 1{,}000{,}000$ dwarfs any reasonable bn or c; and the constant a in front, while it affects the stopwatch, does not change the fundamental *shape* of the growth. So we throw away the lower-order terms and the leading constant, and we keep only the shape. We say insertion sort's worst-case running time is *of order* n^2, and we will write this $\Theta(n^2)$ ("theta of n squared").

Intuition

Order of growth answers the only question that survives changing computers: "if I make the input twice as big, roughly how much more work is it?" For a $\Theta(n)$ algorithm, double the input means double the work. For $\Theta(n^2)$, double the input means *four times* the work. For $\Theta(\log n)$, double the input means just *one more* step. The constants and small terms decide whether you wait 2 seconds or 5; the order of growth decides whether the algorithm is usable at all when n gets large.

We will make Θ, O, and Ω fully precise in the next chapter, with definitions and proofs. For now, carry this loose-but-correct intuition:

- $\Theta(f(n))$ means "grows like $f(n)$" — a tight, two-sided bound.
- $O(f(n))$ means "grows no faster than $f(n)$" — an upper bound, a ceiling.
- $\Omega(f(n))$ means "grows at least as fast as $f(n)$" — a lower bound, a floor.

So we may also say: insertion sort runs in $O(n^2)$ on *every* input (it is never worse than quadratic), and in $\Omega(n)$ on every input (it must at least look at each element once).

Cost summary

Insertion sort.

- Best case (sorted input): $\Theta(n)$ time.

- Worst case (reverse-sorted): $\Theta(n^2)$ time.
- Average case (random input): $\Theta(n^2)$ time.
- Extra space: $\Theta(1)$ — it sorts *in place*, using only a couple of variables beyond the array itself.
- Stable: yes (equal keys keep their original relative order).

Why this matters

You might think a quadratic sort is a museum piece. It is not. Insertion sort is the fastest known method for *small* arrays — the constant factor a is tiny because each step is so cheap — so real industrial sorting libraries (the ones inside your phone, your browser, your database) use a fancy $\Theta(n \log n)$ method for big inputs but *switch to insertion sort* once the subproblems shrink below a threshold of maybe 10 to 30 elements. It is also the natural choice when data arrives a little at a time and is "almost sorted" already, since then it runs in nearly linear time. The humble card-player's trick is quietly inside almost every program you use.

2.8 Designing algorithms: two stances

Insertion sort is an example of the *incremental* design stance: having sorted $A[1..j-1]$, we insert one more element to extend the solution by a single step. We grow the answer outward, one item at a time. Many algorithms fit this mold, and the loop-invariant method is tailor-made for analyzing them.

But there is a second, often more powerful stance: *divide and conquer*. Instead of nibbling at the problem one element at a time, we split it into a few smaller subproblems of the same type, solve each (often recursively), and then stitch the sub-answers together. This stance frequently turns a $\Theta(n^2)$ algorithm into a $\Theta(n \log n)$ one — a colossal improvement at scale. Let us preview it with the crown jewel of this chapter's successor: *merge sort*.

2.9 A first taste of merge sort

Merge sort embodies divide and conquer in three crisp steps.

Intuition

Divide: split the n-element array into two halves of about $n/2$ each.
Conquer: sort each half — by calling merge sort on it recursively. A one-element array is already sorted, so the recursion bottoms out there.
Combine: *merge* the two sorted halves into one sorted whole.

The clever, load-bearing piece is the *merge*. Merging two already-sorted lists is easy and fast: look at the front of each list, take the smaller of the two, and repeat. Each comparison commits one element to the output, so merging two lists of total length n costs only about n comparisons — it is $\Theta(n)$, linear.

Algorithm lab

Merging $\langle 2, 4, 5, 6\rangle$ and $\langle 1, 3\rangle$. Two fingers, one on each list's front. Smaller finger's element goes to the output; advance that finger.

fronts $(1, 2)$	take 1	out: 1
fronts $(3, 2)$	take 2	out: $1, 2$
fronts $(3, 4)$	take 3	out: $1, 2, 3$
right list empty	take rest $4, 5, 6$	out: $1, 2, 3, 4, 5, 6$

Six output elements, and we never looked back. That "one comparison per output element" is why merging is linear.

Figure 2.4 draws the same merge as two fingers walking down their lists. At each step the smaller of the two pointed-at values is emitted and only that finger advances; when one list runs dry, the rest of the other is copied wholesale.

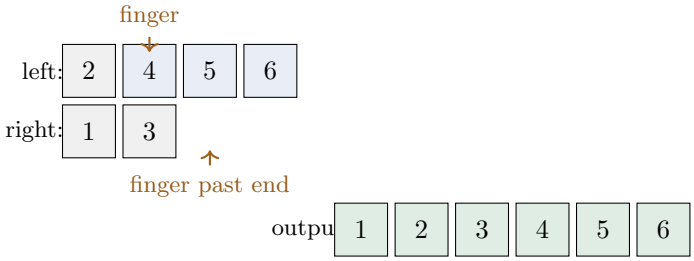


Figure 2.4: Merging $\langle 2, 4, 5, 6\rangle$ with $\langle 1, 3\rangle$. Greyed cells were already emitted; each comparison of the two finger cells sends one element to the output below. Once the right list is exhausted, its finger walks off the end and the remaining left cells $4, 5, 6$ are appended directly.

Now the cost. Let $T(n)$ be merge sort's running time on n elements. Dividing is cheap, $\Theta(1)$. Conquering is two recursive calls on inputs of size $n/2$, costing $2\,T(n/2)$. Combining (the merge) is $\Theta(n)$. Writing cn for the divide-plus-merge work, we get the *recurrence*

$$T(n) = 2\,T(n/2) + cn, \qquad T(1) = \Theta(1).$$

We will solve recurrences properly in the chapter on divide and conquer, but the recursion tree of Figure 2.5 already gives the answer. Picture the recursion as a tree: the root does cn work splitting and merging the whole array; its two children each do $c\,(n/2)$ work; their four children each do $c\,(n/4)$; and so on.

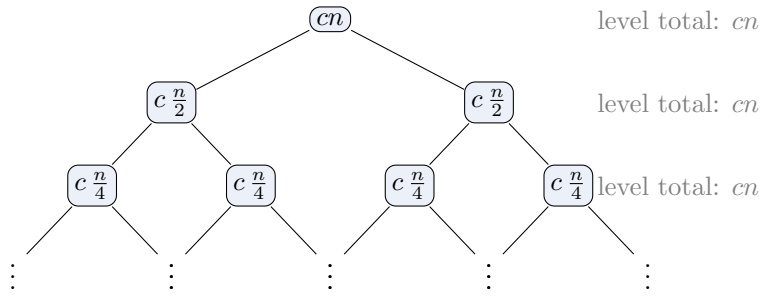


Figure 2.5: The merge-sort recursion tree for $T(n) = 2T(n/2) + cn$. The subproblem sizes on each level sum back to n, so every level costs cn. With about $\log_2 n$ levels, the total is $cn \log_2 n = \Theta(n \log n)$.

Here is the magic. *Each level of the tree does cn work in total*, because the subproblem sizes at any level add back up to n (the halves recombine). And there are about $\log_2 n$ levels, because you can only halve n down to 1 about $\log_2 n$ times. Multiply: (work per level) $\times$ (number of levels) $= cn \cdot \log_2 n$, giving

$$T(n) = \Theta(n \log n).$$

Focus

Compare the two algorithms on $n = 1{,}000{,}000$. Insertion sort's worst case does about $n^2 = 10^{12}$ operations. Merge sort does about $n \log_2 n \approx 10^6 \times 20 = 2 \times 10^7$. That is a factor of roughly *fifty thousand*. No constant factor, no faster laptop, ever closes a gap like that. This single comparison is why "order of growth" is the first idea we taught — it is the difference between an algorithm that finishes and one that does not.

History and connection

Merge sort dates to John von Neumann around 1945, making it one of the very first algorithms designed for a stored-program computer. We will develop it in loving detail in the chapter on divide and conquer, including a careful merge with sentinels, a full correctness proof by loop invariant, and a rigorous solution of the recurrence $T(n) = 2T(n/2) + \Theta(n)$. Here it is only a teaser — a promise that the quadratic wall is not the end of the story. In CLRS this material lives in Section 2.3.

Walking question

On your walk, weigh the trade. Merge sort is asymptotically far faster, but it needs $\Theta(n)$ *extra* memory to hold the merged output, whereas insertion sort sorts in place with $\Theta(1)$ extra space. And for tiny arrays, insertion sort's small constant actually wins. So "which sort is best?" has no single answer — it depends on n, on available memory, and on whether the data is nearly sorted already. When is each one the right tool? Good algorithm design is exactly this kind of judgment.

2.10 What to carry forward

Pause

Before the exercises, gather the threads.

- **The sorting problem** demands two things at once: a sorted output that is also a permutation of the input.
- **Insertion sort** grows a sorted region one element at a time, sliding each new key leftward into place — the incremental design stance.
- **Loop invariants** prove correctness via initialization, maintenance, and termination. It is induction, plus a deliberate payoff at the end.
- **Running time** is counted in primitive steps as a function of input size n; insertion sort is $\Theta(n)$ at best, $\Theta(n^2)$ on average and at worst.
- **Order of growth** discards constants and lower-order terms to expose how cost scales — the one feature that survives changing machines.
- **Divide and conquer**, previewed through merge sort, breaks $\Theta(n^2)$ down to $\Theta(n \log n)$, a difference that dwarfs any constant factor.

2.11 Exercises

Exercise 2.1 (Warm-up trace)**.** Trace Insertion-Sort on $A = \langle 31, 41, 59, 26, 41, 58 \rangle$, showing the array after each pass of the outer loop. There are two 41s; confirm from your trace that the original (earlier) 41 stays before the later one, illustrating stability.

Exercise 2.2 (Counting shoves)**.** For the array in the previous exercise, write down t_j (the number of **while** tests) for each j from 2 to 6, and use your table to state the total number of element shifts performed.

Exercise 2.3 (Best and worst by construction)**.** Give a 6-element array on which insertion sort performs the *fewest* possible shifts, and another on which it performs the *most*. State the shift count in each case, and connect them to the $\Theta(n)$ and $\Theta(n^2)$ analyses.

Exercise 2.4 (Descending order)**.** Modify the pseudocode of Insertion-Sort so that it sorts into *non-increasing* order ($A[1] \geq A[2] \geq \cdots \geq A[n]$). Change as little as possible, and state precisely which line(s) you changed and why.

Exercise 2.5 (Linear search invariant)**.** Consider searching an array $A[1 \,..\, n]$ for a value v, scanning left to right and returning the index of the first match (or Nil if absent). Write the pseudocode, then state a loop invariant and use it to argue correctness via initialization, maintenance, and termination.

Exercise 2.6 (The inner-loop invariant)**.** The maintenance step in this chapter waved its hand at the **while** loop. State a precise loop invariant for the inner **while** loop of Insertion-Sort and verify its initialization and maintenance. (Hint: describe what is true about $A[i+1 \,..\, j]$ and about the position of the gap.)

Exercise 2.7 (Why the strict inequality)**.** Suppose someone changes the while-test from $A[i] > key$ to $A[i] \geq key$. Argue that the algorithm is still correct (sorted + permutation), but exhibit a concrete input on which it does strictly more work, and explain why it is no longer stable.

Exercise 2.8 (Sum it carefully)**.** Prove by induction that $\sum_{k=1}^{n} k = \frac{n(n+1)}{2}$. Then use it to give the *exact* number of **while**-loop tests insertion sort performs on a strictly-decreasing array of length n (not just the order of growth).

Exercise 2.9 (Binary insertion)**.** In the inner loop we find the insertion point by scanning left one step at a time. Since $A[1\,..\,j-1]$ is already sorted, we could instead find the insertion point by *binary search* in $\Theta(\log j)$ comparisons. Explain why this reduces the number of *comparisons* to $\Theta(n \log n)$ but does *not* reduce the overall running time below $\Theta(n^2)$. (Hint: think about the cost of the shifting, not the comparing.)

Exercise 2.10 (Merge by hand)**.** Merge the sorted lists $\langle 1, 4, 7, 9\rangle$ and $\langle 2, 3, 5, 8, 10\rangle$ using the two-finger method, writing out the output after each step. Count the comparisons and confirm the count is at most (length of first + length of second) -1.

Exercise 2.11 (Recursion-tree counting)**.** Merge sort on $n = 8$ elements. Draw the recursion tree, label the work at each node $(cn, c\frac{n}{2}, \dots)$, and verify directly that the total over all nodes equals $c \cdot 8 \cdot \log_2 8$. How many levels does the tree have?

Exercise 2.12 (Crossover point, a challenge)**.** Suppose insertion sort costs exactly $\frac{1}{2}n^2$ "time units" in the worst case and merge sort costs exactly $50\, n \log_2 n$ time units (merge sort's larger constant reflects its overhead). For which values of n is insertion sort actually *faster*? Solve the inequality $\frac{1}{2}n^2 < 50\, n \log_2 n$ approximately, and explain how this justifies the "switch to insertion sort for small subarrays" trick used by real libraries.

Chapter 3

The Growth of Functions: Asymptotic Notation

In the last chapter you counted the work that insertion sort does. You found that, in the worst case, the number of basic steps came out to something like $\frac{1}{2}n^2 + \frac{5}{2}n - 3$. That is an honest, exact count. And yet, if you carry it around forever, it will weigh you down. The constant $\frac{1}{2}$ depends on how you decided to count comparisons. The $\frac{5}{2}n$ term depends on bookkeeping you might do differently tomorrow. The -3 is an accident of where the loops start. None of those details survive a change of computer, compiler, or mood.

What *does* survive is the shape of the function: it grows like n^2. Double the input and the running time roughly quadruples. *That* is the durable truth, and this chapter is about the language we use to state it precisely. The language is called **asymptotic notation**, and once it clicks you will read running times the way a musician reads a key signature: at a glance, without sounding out every note.

Focus

The single idea of this chapter: when comparing algorithms, we care about *how the running time grows as the input grows*, not about its exact value on small inputs. Asymptotic notation (O, Ω, Θ, and their little cousins) is the vocabulary for talking about growth rate while deliberately ignoring constant factors and low-order terms.

3.1 Why we throw away the constants

Suppose Algorithm A runs in exactly $100n$ steps and Algorithm B runs in exactly $2n^2$ steps. Which is faster? The honest answer is: *it depends on n.*

Let us actually compute. For tiny inputs, B wins because A pays a large fixed toll:

n	$100n$ (A)	$2n^2$ (B)
1	100	2
10	1,000	200
50	5,000	5,000
100	10,000	20,000
1000	100,000	2,000,000

Up to $n = 50$ they are neck and neck, and below that B is the better deal. But look what happens after the crossover. At $n = 1000$, A does 100,000 steps while B does two million. Push to $n = 10^6$ and A does 10^8 steps while B does 2×10^{12} — B is now twenty thousand times slower. The gap does nothing but widen, forever.

Figure 3.1 shows the shape of that story. The quadratic B starts below the linear A, but the two curves cross once and only once; past the crossover n^*, B is above A and pulls away with no hope of return.

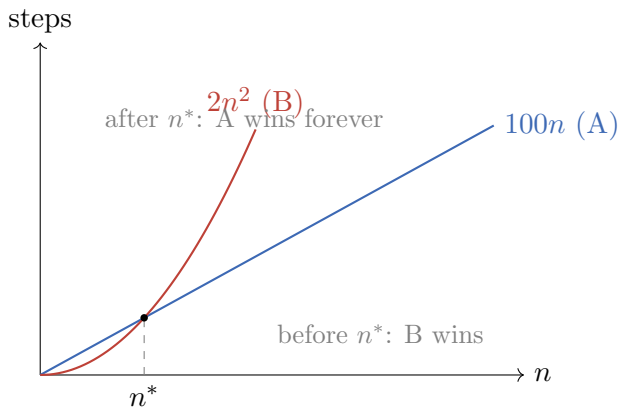


Figure 3.1: Linear A versus quadratic B. A pays a large constant toll and so loses for small n, but a single crossover at n^* flips the order permanently: the faster-growing curve eventually dominates regardless of the constants.

Intuition

The constant in front (100 versus 2) buys you an advantage on small inputs, but it is a *one-time* advantage that gets paid off. The exponent — linear versus quadratic — compounds. Asymptotic analysis is the decision to bet on the exponent, because for any fixed constant there is some input size past which the slower-growing function wins and never looks back. We care about "eventually and forever," not "on my laptop today with $n = 12$."

There is a second reason to drop constants, and it is humbler: *we usually do not know them.* The exact constant depends on the machine's clock, the cache, the compiler's cleverness, whether the data sits in registers. If we promised a precise step count we would be lying about precision we do not have. By contrast, the growth rate — n versus n^2 versus $\log n$ — is a property of the *algorithm*, not the machine. It is the part worth naming.

Why this matters

This is not academic hair-splitting; it is how working engineers triage. When a service slows to a crawl as data grows, the first question is never "what is the constant" but "what is the growth rate." An $O(n^2)$ routine that was invisible at a thousand records will melt the server at a million; an $O(n \log n)$ routine will shrug. Choosing the right growth class is the difference between a feature that scales and one that has to be rewritten at 2 a.m. The notation in this chapter is the shorthand every performance discussion is conducted in.

3.2 The mental picture before the symbols

Before any Greek letters, fix the picture. We are comparing two functions of n, say your running time $T(n)$ and some clean reference function $g(n)$ like n^2 or $n \log n$. We ask one of three questions:

- Does T grow *no faster than* g? (An **upper** bound: O.)
- Does T grow *no slower than* g? (A **lower** bound: Ω.)
- Does T grow *at the same rate* as g? (A **tight** bound: Θ.)

Two ideas make these precise, and they recur in every single definition below, so let me name them now.

Idea one: a fudge constant. Because we refuse to care about constant factors, we are allowed to multiply g by any positive constant we like to make it fit. So "T grows no faster than g" really means "$T(n) \leq c\,g(n)$ for some constant c we get to choose." The c absorbs all the machine-dependent grime.

Idea two: eventually. Because small inputs are noise, we only require the inequality to hold once n is large enough — past some threshold n_0. Below n_0 the functions can cross, wobble, do whatever they like. We care about the tail.

Focus

Every asymptotic statement is of the form: *"there exist constants (a fudge factor c and a threshold n_0) such that for all $n \geq n_0$, some inequality between $T(n)$ and $g(n)$ holds."* Memorize that skeleton. The five notations differ only in *which* inequality and whether the constant is "some" or "every."

3.3 Big-O: the upper bound

We start with the one you will use most. Informally, $T(n) = O(g(n))$ means g is a *ceiling* on T's growth: past some point, T never rises above a constant multiple of g.

Formal

Definition 3.1 (Big-O)**.** Let $g : \mathbb{N} \to \mathbb{R}_{\geq 0}$. We write


$$O\big(g(n)\big) = \big\{\, f(n) : \exists\, c > 0,\ n_0 > 0 \text{ such that } 0 \leq f(n) \leq c\, g(n) \text{ for all } n \geq n_0 \,\big\}.$$

We say "$f(n)$ is $O(g(n))$" or write $f(n) = O(g(n))$ to mean $f \in O(g(n))$.

Common trap

Strictly speaking $O(g(n))$ is a *set* of functions, so the cleanest reading of $f(n) = O(g(n))$ is "f is a member of the set $O(g(n))$." The equals sign here is a long-standing abuse of notation — it is *not* symmetric. You may write $2n^2 = O(n^2)$, but never $O(n^2) = 2n^2$. Read "=" in asymptotic statements as the word "is," and only ever from left to right. We follow CLRS's convention and keep the equals sign, but keep this one-way reading in your head.

Let us draw it. The claim "$f(n) = O(g(n))$" says that once we scale g up by the right constant c, the curve $c\,g(n)$ rises above $f(n)$ and stays there.

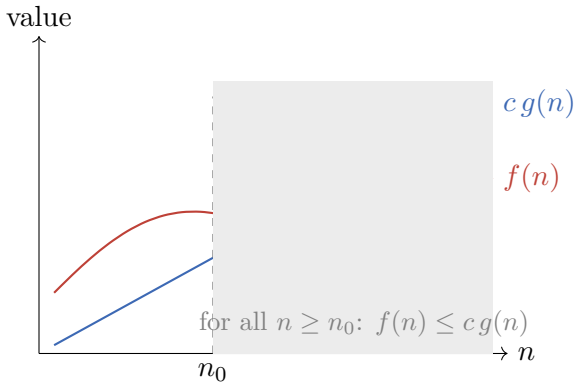

To the left of n_0, f is even allowed to poke above $c\,g$. We do not care. To the right — the shaded region, the tail that matters — f is trapped underneath.

3.3.1 Proving a Big-O bound: find c and n_0

A Big-O proof is a scavenger hunt for two numbers, c and n_0, that make the definition true. You do not need the *best* constants, just *some* that work.

Example 3.1. *Claim:* $\frac{1}{2}n^2 + \frac{5}{2}n - 3 = O(n^2)$ — our insertion-sort count is quadratic.

Find c and n_0. We want $\frac{1}{2}n^2 + \frac{5}{2}n - 3 \leq c\,n^2$ for all large n. A clean trick: when $n \geq 1$, every term is bounded by a multiple of the *largest* power, n^2, because $n \leq n^2$ and $1 \leq n^2$. So for $n \geq 1$,

$$\tfrac{1}{2}n^2 + \tfrac{5}{2}n - 3 \;\leq\; \tfrac{1}{2}n^2 + \tfrac{5}{2}n \;\leq\; \tfrac{1}{2}n^2 + \tfrac{5}{2}n^2 \;=\; 3n^2.$$

(We dropped the -3 because subtracting only helps an upper bound, then replaced $\frac{5}{2}n$ by the larger $\frac{5}{2}n^2$.) So $c = 3$ and $n_0 = 1$ work. Done. ■

Notice the strategy: *keep the dominant term, and bound every smaller term by it.* That single move proves almost every elementary Big-O bound you will ever need.

Example 3.2. *Claim:* $n^3 \neq O(n^2)$ — a cubic is genuinely not quadratic.

Why no constants can work. Suppose, for contradiction, that $n^3 \leq c\,n^2$ for all $n \geq n_0$. Divide both sides by n^2 (positive): $n \leq c$ for all $n \geq n_0$. But c is a fixed number and n marches to infinity, so as soon as $n > c$ the inequality breaks. No single c can cap n. Contradiction. ■

Walking question

Here is one to chew on while walking. Is $2^{n+1} = O(2^n)$? Is $2^{2n} = O(2^n)$? One of these is true and one is wildly false. Try to write each as a constant times 2^n and see which constant stays put and which one secretly depends on n. (Hint: $2^{n+1} = 2 \cdot 2^n$, but $2^{2n} = (2^n)^2$.)

3.4 Big-Omega: the lower bound

O gives a ceiling. **Big-Omega**, written Ω, gives a *floor*: it says T grows *at least* as fast as g. Flip the inequality in the definition of O and you have it.

Formal

Definition 3.2 (Big-Omega)**.**

$$\Omega\big(g(n)\big) = \big\{\, f(n) : \exists\, c > 0,\ n_0 > 0 \text{ such that } 0 \leq c\,g(n) \leq f(n) \text{ for all } n \geq n_0 \,\big\}.$$

Where O traps f *under* $c\,g$, Ω traps f *above* $c\,g$. O is for "no worse than"; Ω is for "no better than." A guarantee that an algorithm is *slow* (a lower bound on running time) is an Ω statement; a promise that it is *fast* (an upper bound) is an O statement.

Example 3.3. *Claim:* $\frac{1}{2}n^2 + \frac{5}{2}n - 3 = \Omega(n^2)$.

We need $c\,n^2 \leq \frac{1}{2}n^2 + \frac{5}{2}n - 3$ eventually. The $+\frac{5}{2}n$ only helps us (it makes the right side bigger), so it is enough to handle the $\frac{1}{2}n^2 - 3$ part. For $n \geq 4$ we have $\frac{1}{4}n^2 \geq \frac{1}{4} \cdot 16 = 4 \geq 3$, so $\frac{1}{4}n^2$ alone can soak up the -3. Thus for $n \geq 4$,

$$\tfrac{1}{2}n^2 + \tfrac{5}{2}n - 3 \;\geq\; \tfrac{1}{2}n^2 - 3 \;\geq\; \tfrac{1}{2}n^2 - \tfrac{1}{4}n^2 = \tfrac{1}{4}n^2.$$

Thus $c = \frac{1}{4}$, $n_0 = 4$ work. ■

The pattern mirrors Big-O: for a *lower* bound, *keep the dominant term and make sure the negative junk is small enough to be eaten by a fraction of it.*

Common trap

Ω does *not* mean "the worst case." People conflate them constantly. "Worst case" picks which *input* to analyze; Ω and O describe how a function *grows*. You can put an O bound on the worst case ("never slower than …") and an Ω bound on the best case ("never faster than …"). Input choice and bound direction are two independent knobs. Mixing them up produces sentences that sound rigorous and mean nothing.


3.5 Big-Theta: the tight bound

The crown jewel. $T(n) = \Theta(g(n))$ means T grows *exactly* like g — sandwiched between two constant multiples of g from both sides. It is O *and* Ω at once.

Formal

Definition 3.3 (Big-Theta)**.**

$$\Theta\big(g(n)\big) = \big\{\, f(n) : \exists\, c_1 > 0,\ c_2 > 0,\ n_0 > 0 \text{ s.t. } 0 \le c_1 g(n) \le f(n) \le c_2 g(n) \text{ for all } n \ge n_0 \,\big\}.$$

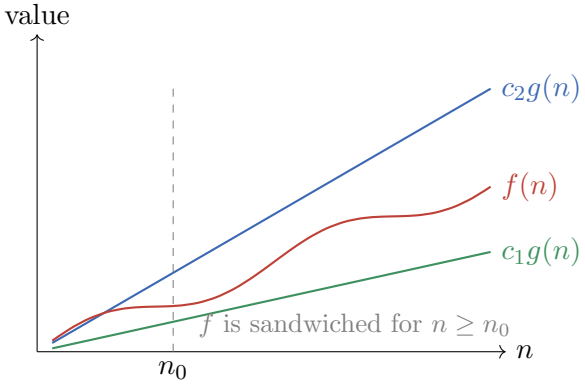

The picture is the whole story: past n_0, the curve $f(n)$ is pinned between the two straight lines $c_1 g(n)$ and $c_2 g(n)$. It cannot escape upward (that is the O half) and cannot escape downward (that is the Ω half). The following theorem makes the "$\Theta = O$ and Ω" slogan official.

Formal

Theorem 3.1 (Theta as the conjunction of O and Ω)**.** *For any functions f and g,*

$$f(n) = \Theta(g(n)) \quad \textit{if and only if} \quad f(n) = O(g(n)) \textit{ and } f(n) = \Omega(g(n)).$$

Formal

Proof. ($\Rightarrow$) If $f = \Theta(g)$ then there are c_1, c_2, n_0 with $c_1 g(n) \le f(n) \le c_2 g(n)$ for $n \ge n_0$. The right inequality alone, with $c = c_2$, witnesses $f = O(g)$; the left inequality alone, with $c = c_1$, witnesses $f = \Omega(g)$.
($\Leftarrow$) Suppose $f = O(g)$ via (c_2, n_2) and $f = \Omega(g)$ via (c_1, n_1). Take $n_0 = \max(n_1, n_2)$. For every $n \ge n_0$ *both* witnessing inequalities hold simultaneously, so $c_1 g(n) \le f(n) \le c_2 g(n)$, which is exactly the Θ condition with constants c_1, c_2 and threshold n_0. ■

Combining Examples 3.1 and 3.3 through this theorem, we conclude $\frac{1}{2}n^2 + \frac{5}{2}n - 3 = \Theta(n^2)$. Insertion sort's worst case is *tightly* quadratic — not just bounded above by n^2, but genuinely of that order.

3.5.1 A theorem you will reuse: polynomials are Theta of their top term

The two examples generalize into a workhorse fact. It justifies the move you have already been itching to make: just read off the highest power.

Formal

Theorem 3.2 (Degree dominates)**.** *Let* $p(n) = a_d n^d + a_{d-1} n^{d-1} + \cdots + a_1 n + a_0$ *be a polynomial of degree* d *with leading coefficient* $a_d > 0$*. Then* $p(n) = \Theta(n^d)$*.*

Formal

Proof sketch. **Upper bound.** For $n \geq 1$ each $n^k \leq n^d$, so

$$p(n) \leq \big(\,|a_d| + |a_{d-1}| + \cdots + |a_0|\,\big) n^d =: c_2\, n^d,$$

giving $p = O(n^d)$. **Lower bound.** Factor out n^d: $p(n) = n^d\big(a_d + a_{d-1}/n + \cdots + a_0/n^d\big)$. The parenthesized factor tends to $a_d > 0$ as $n \to \infty$, so for all n past some n_0 it exceeds $a_d/2 > 0$. Hence $p(n) \geq (a_d/2)\, n^d$, giving $p = \Omega(n^d)$. By Theorem 3.1, $p = \Theta(n^d)$. ■

Focus

Two rules you will use a hundred times. *Drop low-order terms* (they are out-grown by the leading term) and *drop constant factors* (they are absorbed by c). So $7n^3 - 100n^2 + 4n + 9999$ is just $\Theta(n^3)$, and $\frac{n \log n}{2} + 30n$ is just $\Theta(n \log n)$. The notation exists precisely so you may make these two moves without apology.

3.6 The little ones: little-o and little-omega

O and Ω are loose — they allow f and g to grow at the *same* rate. Indeed $n^2 = O(n^2)$. The *little* versions are strict: they insist that one function grows *strictly slower* (little-o) or *strictly faster* (little-omega) than the other, with room to spare.

The cleanest way to feel the difference: in O, *some* constant c works. In little-o, the bound must hold for *every* positive constant, no matter how tiny.

Formal

Definition 3.4 (little-o)**.** $f(n) = o(g(n))$ if for *every* constant $c > 0$ there exists $n_0 > 0$ such that $0 \leq f(n) < c\, g(n)$ for all $n \geq n_0$.

Definition 3.5 (little-omega)**.** $f(n) = \omega(g(n))$ if for *every* constant $c > 0$ there exists $n_0 > 0$ such that $0 \leq c\, g(n) < f(n)$ for all $n \geq n_0$.

That "for every c" is the whole game. Take $f(n) = 2n$ and $g(n) = n^2$. Is $2n = o(n^2)$? Pick *any* c, say $c = 0.001$. We need $2n < 0.001\, n^2$, i.e. $2 < 0.001\, n$, i.e. $n > 2000$. So $n_0 = 2001$ works for $c = 0.001$. Try $c = 10^{-9}$ and you would just need a bigger n_0 — but one always exists. The smaller the c, the longer you wait, but you always eventually win. That is little-o.

By contrast $2n^2 = O(n^2)$ but $2n^2 \neq o(n^2)$: choose $c = 1$ and you would need $2n^2 < n^2$, i.e. $2 < 1$, which never holds. A function is never little-o of itself.

Intuition

A clean way to remember the family, when the limit exists, is to look at the ratio $f(n)/g(n)$ as $n \to \infty$:

$$\lim_{n\to\infty} \frac{f(n)}{g(n)} = \begin{cases} 0 & \Rightarrow\ f = o(g) \quad (f \text{ vanishes next to } g), \\ \text{a positive constant} & \Rightarrow\ f = \Theta(g) \quad (\text{same rate}), \\ \infty & \Rightarrow\ f = \omega(g) \quad (f \text{ runs away from } g). \end{cases}$$

Big-O is the union of the first two cases (0 or a constant); big-Ω is the union of the last two. The limit test is not the official definition (the limit need not exist), but when it exists it is the fastest way to classify a pair of functions.

Example 3.4. $\log n = o(n)$. The ratio $(\log_2 n)/n \to 0$: logarithms crawl while n strides. So any logarithm is little-o of n, hence of any positive power n^ε. Logs are, asymptotically, almost free.

Walking question

A genuinely surprising one to ponder on a walk: is $n^{100} = o(2^n)$? It feels like n^{100} should win — the exponent is huge. But 2^n is exponential and *every* polynomial is little-o of *every* exponential with base > 1. A clean way to see it: take $\log_2$ of the ratio, $\log_2\!\left(n^{100}/2^n\right) = 100\log_2 n - n$. The $-n$ term grows steadily while $100\log_2 n$ crawls, so the whole expression marches to $-\infty$; hence the ratio itself marches to 0. Even with the degree cranked to 100, the crossover merely waits until around $n = 1000$ and then 2^n pulls ahead and never trails again. Exponentials always win, no matter how large the polynomial's degree.

3.7 An analogy: comparing functions is comparing numbers

There is a beautiful symmetry hiding in these five notations. Line them up against the relations you already know between plain numbers:

Functions	Numbers	Reading
$f = O(g)$	$a \leq b$	f grows no faster than g
$f = \Omega(g)$	$a \geq b$	f grows no slower than g
$f = \Theta(g)$	$a = b$	f grows at the same rate as g
$f = o(g)$	$a < b$	f grows strictly slower than g
$f = \omega(g)$	$a > b$	f grows strictly faster than g

This analogy is more than a memory aid; many properties carry straight over. *Transitivity* holds: if $f = O(g)$ and $g = O(h)$ then $f = O(h)$, just as $a \leq b$ and $b \leq c$ give $a \leq c$. *Reflexivity* holds for the big ones: $f = O(f)$, $f = \Theta(f)$, $f = \Omega(f)$ (but *not* for the little ones — nothing is o of itself, just as no number is $<$ itself). *Symmetry* holds only for Θ: $f = \Theta(g)$ iff $g = \Theta(f)$, mirroring $a = b$ iff $b = a$. And the little/big pair are *transposes*: $f = o(g)$ iff $g = \omega(f)$, exactly like $a < b$ iff $b > a$.

Common trap

The analogy has *one crucial leak*: numbers obey *trichotomy* — any two numbers satisfy exactly one of $a < b$, $a = b$, $a > b$. Functions do not. Two functions can be *incomparable*: neither $f = O(g)$ nor $f = \Omega(g)$. For instance, $f(n) = n$ and $g(n) = n^{1+\sin n}$ keep overtaking each other forever, so neither bounds the other. In practice the functions you meet (polynomials, logs, exponentials) are all comparable, so the trichotomy intuition usually serves — but know that it can break.

3.8 A field guide to common growth rates

Here are the functions you will meet over and over, sorted slowest-growing (best) to fastest-growing (worst). Each line is little-o of the line below it.

Class	Name	Where it shows up
$\Theta(1)$	constant	array index, hash lookup (ideal)
$\Theta(\log n)$	logarithmic	binary search, balanced-tree height
$\Theta(n)$	linear	one scan of the input
$\Theta(n \log n)$	linearithmic	mergesort, heapsort, good comparison sorts
$\Theta(n^2)$	quadratic	insertion/selection sort, all-pairs naively
$\Theta(n^3)$	cubic	naive matrix multiply, Floyd–Warshall
$\Theta(2^n)$	exponential	brute-force subset search
$\Theta(n!)$	factorial	brute-force permutation search (TSP)

Figure 3.2 draws the most common classes on one set of axes. Notice how brutally the ordering separates them once n leaves the cramped corner near the origin: $\log n$ flattens almost to the floor, n and $n \log n$ rise gently, n^2 curls upward, and 2^n shoots off the top of the page almost immediately.

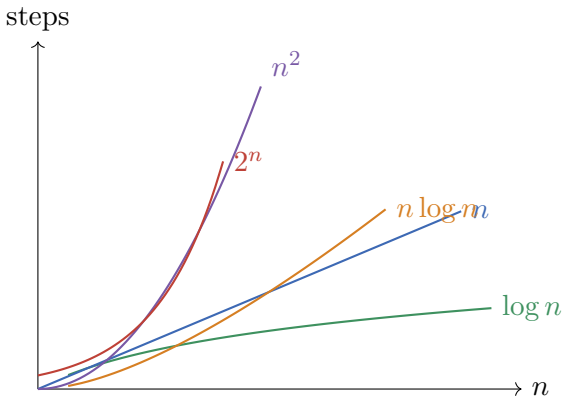


Figure 3.2: Common growth rates on shared axes. The vertical order at the right edge is the asymptotic order: slower-growing curves stay low, faster-growing curves climb away. Each curve is eventually little-o of every curve above it.

The chasm between the polynomial classes (everything down to n^3) and the exponential ones is the single most important divide in all of algorithms; an entire late chapter on NP-completeness is about

which problems we can keep on the polynomial side. To feel the chasm, put real seconds on it. Suppose your machine does 10^9 basic steps per second:

n	$n \log_2 n$	n^2	2^n
10	33 ns	100 ns	1024 ns
20	86 ns	400 ns	1.0 ms
50	282 ns	2.5 µs	13 days
100	664 ns	10 µs	4×10^{13} yr
10^6	20 ms	17 min	— (heat death)

At $n = 100$, $n \log n$ finishes before you blink and 2^n outlasts the universe by many orders of magnitude. *This* is why growth rate, not the constant, is the thing to fight over.

Why this matters

Logarithms deserve special affection. Because $\log n$ grows so slowly, an $O(\log n)$ operation is nearly constant for any input you will ever see: $\log_2$ of a billion is about 30, and $\log_2$ of the number of atoms in the observable universe is under 270. When you turn an $O(n)$ search into an $O(\log n)$ one — the leap from scanning a list to binary-searching a sorted array, or to walking a balanced tree — you are not shaving a little time. You are buying the right to make your data a billion times bigger for the cost of a handful of extra steps. Whole data structures in later chapters exist to manufacture that logarithm.

History and connection

Big-O notation was born in number theory, not computer science: Paul Bachmann introduced the symbol in 1894 and Edmund Landau popularized it (the symbols are still sometimes called "Landau notation"). Donald Knuth, in the 1970s, championed its use for algorithm analysis and, finding the literature sloppy, pinned down the matching Ω and Θ with the precise meanings we use today. This chapter mirrors **CLRS Chapter 3, "Characterizing Running Times"** (Section 3.1 on O, Ω, Θ and Section 3.2 on standard notations and common functions). When you open CLRS, the set-based definitions and the asymmetric "=" will already be old friends; CLRS adds the wrinkle of asymptotic notation *inside* equations (e.g. $2n^2 + \Theta(n)$), which is just these same ideas used as a noun mid-formula.

3.9 Manipulating asymptotics: the algebra of growth

You rarely build a bound from c and n_0 in the wild. Instead you compose small facts with a few algebraic rules. Here are the ones that do the daily work; each follows directly from the definitions, and proving one or two yourself is the best exercise of the chapter.

Formal

Lemma 3.1 (Working rules for O)**.** *Let $f_1 = O(g_1)$ and $f_2 = O(g_2)$. Then:*

1. ***Sum / max:*** $f_1 + f_2 = O\big(\max(g_1, g_2)\big) = O(g_1 + g_2)$.

2. ***Product:*** $f_1 \cdot f_2 = O(g_1 \cdot g_2)$.
3. ***Scaling:*** *for any constant* $a > 0$, $a \cdot f_1 = O(g_1)$.
4. ***Transitivity:*** *if also* $g_1 = O(h)$, *then* $f_1 = O(h)$.

The same four rules hold verbatim with O *replaced by* Ω *or by* Θ.

Rule 1 is the one beginners trip over, so let us prove it and see why "the bigger one wins."

Formal

Proof of the sum rule. We are given $f_1(n) \le c_1 g_1(n)$ for $n \ge n_1$ and $f_2(n) \le c_2 g_2(n)$ for $n \ge n_2$. Let $n_0 = \max(n_1, n_2)$ and $c = c_1 + c_2$. For $n \ge n_0$ both bounds hold, so

$$f_1(n) + f_2(n) \;\le\; c_1 g_1(n) + c_2 g_2(n) \;\le\; (c_1 + c_2)\max\big(g_1(n), g_2(n)\big) = c \cdot \max(g_1, g_2)(n).$$

Thus $f_1 + f_2 = O(\max(g_1, g_2))$. ■

Focus

The sum rule is why you keep only the dominant term. A program that does an $O(n)$ phase, then an $O(n^2)$ phase, then an $O(n \log n)$ phase runs in $O(n + n^2 + n \log n) = O(n^2)$ — the slowest phase swallows the rest. When you read a running time, your eye should jump straight to the heaviest term and ignore the others.

Example 3.5. A doubly nested loop where the inner loop's length grows with the outer index:

$$\sum_{i=1}^{n} \sum_{j=1}^{i} 1 \;=\; \sum_{i=1}^{n} i \;=\; \frac{n(n+1)}{2} \;=\; \Theta(n^2).$$

This is the cost shape of insertion sort and of many "compare each pair" routines: the inner work is $1+2+\cdots+n$, a triangle of area $\approx n^2/2$, which the notation cleanly reports as $\Theta(n^2)$. (The appendix on summations derives $\sum i = n(n+1)/2$ from scratch if you want the gory details.)

Figure 3.3 makes the "triangle" literal: stack one dot for the inner work at $i = 1$, two dots at $i = 2$, and so on. The dots fill half of an $n \times n$ square, so their count is about $n^2/2$ — a constant ($\frac{1}{2}$) times n^2, which is exactly what $\Theta(n^2)$ asserts.

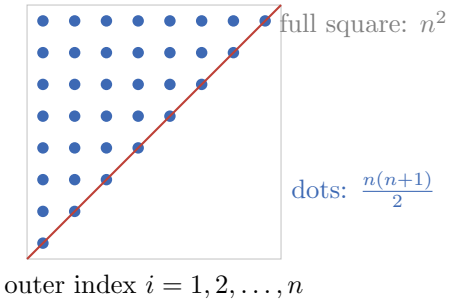


Figure 3.3: The work of nested loops as a triangle. Column i holds i units of inner work; the dots fill just over half the $n \times n$ square, so the total is $\frac{n(n+1)}{2} = \Theta(n^2)$.

Algorithm lab

Trace the growth yourself. Take the function $T(n) = 3n^2 + 50n + 200$.

1. Build a table of $T(n)$, $3n^2$, and the ratio $T(n)/n^2$ for $n = 1, 10, 100, 1000$. Watch the ratio slide toward 3.
2. That limiting ratio of 3 is your c_1/c_2 neighborhood: find a single c_2 with $T(n) \le c_2 n^2$ for all $n \ge 1$ (try $c_2 = 253$ bluntly, then sharpen it). Then find c_1 and n_0 with $c_1 n^2 \le T(n)$ (try $c_1 = 3$).
3. Conclude $T(n) = \Theta(n^2)$ by exhibiting your c_1, c_2, n_0. Notice how the constants 50 and 200 never appear in the answer — they only pushed n_0 a little to the right.

This is the entire skill: turn a messy formula into one Greek symbol by finding witnesses.

3.10 Putting it to work: bounding an algorithm directly

Let us close the loop by reading a running time straight off pseudocode, the way you will for the rest of the book. Here is a routine that, given an array A of length n, checks whether it contains any duplicated value by brute force.

Algorithm 6: HASDUPLICATE(A, n)

Input: An array $A[1 \ldots n]$ of n values.
Output: TRUE if some value appears twice, else FALSE.

```
1 for i ← 1 to n − 1 do
2     for j ← i + 1 to n do
3         if A[i] = A[j] then
4             return TRUE;
5 return FALSE;
```

Counting the work. The body of the inner loop (the comparison) is the basic operation. For a fixed i, the inner loop runs j from $i+1$ to n, that is $n - i$ times. Summing over all outer iterations,

$$\sum_{i=1}^{n-1} (n - i) \;=\; (n-1) + (n-2) + \cdots + 1 \;=\; \frac{(n-1)n}{2}.$$

By Theorem 3.2 this is $\Theta(n^2)$ — *in the worst case*, when no early RETURN fires (no duplicate, or the only duplicate is the very last pair). So the worst-case running time is $\Theta(n^2)$.

What about best case? If $A[1] = A[2]$, the routine returns after a single comparison: best-case cost is $\Theta(1)$. So we can say the running time is $O(n^2)$ (it is never worse than quadratic) and $\Omega(1)$ (it always does at least constant work) — but we *cannot* wrap the whole thing in a single Θ, because best and worst cases have different growth rates. This is the honest situation for many algorithms, and the notation lets us say exactly as much as is true and no more.

Common trap

"Θ of the worst case" and "Θ of the running time" are different claims. HasDuplicate's *worst case* is $\Theta(n^2)$ — a tight statement about one specific input family. Its *running time* overall is only $O(n^2)$ and $\Omega(1)$, because the cost genuinely varies with the input. Reserve a single Θ for when best and worst cases share a growth rate (as in mergesort, always $\Theta(n \log n)$). When they differ, say O for the ceiling and Ω for the floor, and resist the urge to collapse them.

Cost summary

The five notations at a glance.

Notation	Meaning	Number analogue
$f = O(g)$	$\leq c\,g$ eventually, some c	$\leq$
$f = \Omega(g)$	$\geq c\,g$ eventually, some c	$\geq$
$f = \Theta(g)$	$c_1 g \leq f \leq c_2 g$ eventually	$=$
$f = o(g)$	$< c\,g$ eventually, *every* c	$<$
$f = \omega(g)$	$> c\,g$ eventually, *every* c	$>$

Every bound is "$\exists$ constants, $\forall\, n \geq n_0$, inequality." For polynomials: Θ of the top power. For sums: keep the dominant term. For products: multiply the bounds. Logs $\prec$ powers $\prec$ exponentials $\prec$ factorials, each gap a little-o.

3.11 Exercises

Exercise 3.1. For each pair, state whether $f = O(g)$, $f = \Omega(g)$, both (i.e. Θ), and whether either little version holds: (a) $f = 5n$, $g = n^2$; (b) $f = n^2 + n$, $g = 100n^2$; (c) $f = 2^n$, $g = 3^n$; (d) $f = \log_2 n$, $g = \log_{10} n$; (e) $f = n$, $g = n \log n$.

Exercise 3.2. Prove that $3n^2 + 10n + 7 = O(n^2)$ by exhibiting explicit constants c and n_0 and verifying the inequality for all $n \geq n_0$. (Any valid pair earns full marks; aim for small, clean numbers.)

Exercise 3.3. Prove that $\frac{n^2}{2} - 3n = \Theta(n^2)$. You must supply *both* an upper bound (c_2, n_0) and a lower bound (c_1, n_0); take care that the $-3n$ does not sink the lower bound.

Exercise 3.4. Show that $n^2 \neq O(n)$ by the contradiction method of Example 3.2: assume $n^2 \leq cn$ for $n \geq n_0$ and derive an impossibility.

Exercise 3.5. Using only the definition of O (constants c and n_0), prove the transitivity rule: if $f = O(g)$ and $g = O(h)$, then $f = O(h)$. Be explicit about how you combine the two sets of witnessing constants.

Exercise 3.6. Prove that $f(n) = \Theta(g(n))$ if and only if $g(n) = \Theta(f(n))$ (the symmetry of Θ). Then give a concrete f, g showing that $f = O(g)$ does *not* imply $g = O(f)$, so O is *not* symmetric.

Exercise 3.7. Use the limit characterization to decide each: (a) is $n \log n = o(n^2)$? (b) is $\sqrt{n} = o(n)$? (c) is $n = o(n + \sqrt{n})$? For each, compute $\lim_{n\to\infty} f(n)/g(n)$ and read off the answer.

Exercise 3.8. A triple-nested loop runs i from 1 to n, j from 1 to i, and k from 1 to j, doing constant work in the innermost body. Write the total work as a double sum, evaluate it, and give the tight Θ bound. (You may use $\sum_{i=1}^{n} i^2 = \frac{n(n+1)(2n+1)}{6}$ from the summations appendix.)

Exercise 3.9. *(Challenge.)* Prove that $n^k = o(2^n)$ for every fixed positive integer k. *Hint:* consider $\log_2$ of the ratio, $\log_2\bigl(n^k/2^n\bigr) = k\log_2 n - n$, and argue that this tends to $-\infty$, so the ratio tends to 0.

Exercise 3.10. *(Challenge.)* Give two functions $f, g : \mathbb{N} \to \mathbb{R}_{\geq 0}$ such that *neither* $f = O(g)$ *nor* $g = O(f)$ holds, and explain in one or two sentences why each O statement fails. (This shows asymptotic comparison is not a total order — trichotomy can fail.)

Exercise 3.11. *(Synthesis.)* Insertion sort runs in $\Theta(n^2)$ worst case; mergesort runs in $\Theta(n \log n)$ always. Suppose on your machine insertion sort costs exactly $2n^2$ nanoseconds and mergesort costs exactly $50n \log_2 n$ nanoseconds. Find, by hand or by a small table, the approximate input size n^* beyond which mergesort wins, and explain why the existence of such a crossover is guaranteed by the asymptotics no matter how the two constants (2 and 50) had been chosen.

Chapter 4

Divide and Conquer, Recurrences, and the Master Theorem

There is a single idea hiding inside an astonishing number of fast algorithms. You have probably already used it without naming it. Suppose a friend hands you a thick phone book and asks you to find the listing for "Okonkwo." You do not start at page one and read every name. You flip to the middle, see that you have landed on the "M" pages, and instantly throw away the entire first half of the book. You repeat. Each glance discards half of what remains. A book of a million names is conquered in about twenty glances.

That move — *cut the problem into smaller copies of itself, solve those, and stitch the answers back together* — is the whole subject of this chapter. We are going to slow it down until it is almost embarrassing, then build it back up into one of the most powerful design techniques you own. Along the way we have to learn how to *count* the work such algorithms do, which leads us to *recurrences* and to a remarkable shortcut for solving them called the *master theorem*.

Focus

By the end of this chapter you should be able to: (1) recognize when a problem splits into independent subproblems; (2) write down a recurrence $T(n)$ that describes the running time of a recursive algorithm; (3) solve that recurrence three different ways — by guessing and proving (substitution), by drawing a recursion tree, and by plugging into the master theorem; and (4) read the answer the master theorem gives and *feel* why it is true.

4.1 The shape of a divide-and-conquer algorithm

Every divide-and-conquer algorithm has the same three-beat rhythm. Memorize the rhythm and most of these algorithms will feel like variations on one tune.

Intuition

Divide. Break the problem into a few smaller subproblems that are *the same kind of problem*, just smaller.

Conquer. Solve each subproblem *recursively* — call the very same procedure on the smaller input. Once the subproblem is tiny enough (often size 1), solve it directly; that tiny case is the *base case*.
Combine. Glue the subproblem answers together into an answer for the original problem.

The word "recursively" in the conquer step is doing heavy lifting. We do not write three separate algorithms for the three sizes of the problem; we write *one* algorithm that calls itself. Each call shrinks the input, and because inputs cannot shrink forever, the chain of calls must eventually bottom out at the base case. That is the same logic as a proof by induction, and it is no accident: correctness of a divide-and-conquer algorithm is almost always an induction proof in disguise.

Focus

The two questions you must answer for *any* divide-and-conquer design: (1) *What is the base case, and is it obviously correct?* (2) *If the recursive calls return correct answers on the smaller inputs, does the combine step produce a correct answer on the whole input?* If both are "yes," induction guarantees the algorithm is correct on every size.

4.1.1 A first, familiar example: binary search

Let us cash out the phone-book story as code. Binary search looks for a value x in a *sorted* array $A[1 \dots n]$.

Algorithm 7: BINARY-SEARCH(A, x, lo, hi)

Input: A sorted array A, a target x, and bounds $lo \le hi + 1$.
Output: An index i with $A[i] = x$, or NIL if x is absent.

```
1 if lo > hi then
2     return NIL;                                   // base case:  empty range
3 mid ← ⌊(lo + hi)/2⌋;
4 if A[mid] = x then
5     return mid
6 else if A[mid] > x then
7     return BINARY-SEARCH(A, x, lo, mid − 1);                  // left half
8 else
9     return BINARY-SEARCH(A, x, mid + 1, hi);                 // right half
```

Divide: compare against the middle and pick a half. Conquer: search that half recursively. Combine: nothing to do — the half's answer *is* our answer. This is the friendliest kind of divide-and-conquer, where "divide" throws away work for free and "combine" is trivial. How long does it take? Each call does a constant amount of work (one comparison, some arithmetic) and then makes one call on a problem of half the size. If $T(n)$ is the time on a range of n elements,

$$T(n) = T(n/2) + c.$$

We will learn to read that line like a sentence. For now, trust the phone-book count: about $\log_2 n$ halvings, each costing c, so $T(n) = \Theta(\log n)$.

4.2 Merge sort, revisited slowly

You may have met merge sort already. We are going to meet it again, more carefully, because it is the cleanest possible illustration of the paradigm and because its analysis is the gateway to everything else.

4.2.1 The idea

Intuition

To sort a pile of n cards: if the pile is a single card, it is already sorted — done. Otherwise split the pile into two halves, sort each half (by the same method, recursively), and then *merge* the two sorted halves into one sorted pile. Merging is easy because both halves are already sorted: repeatedly take the smaller of the two top cards.

The clever part is *merge*, the combine step. Given two sorted lists, you can zip them together into one sorted list in a single pass. Keep a finger on the front of each list; compare the two fingered elements; copy the smaller one out and advance that finger. When one list empties, copy the rest of the other. Figure 4.1 shows a single merge step frozen mid-zip.

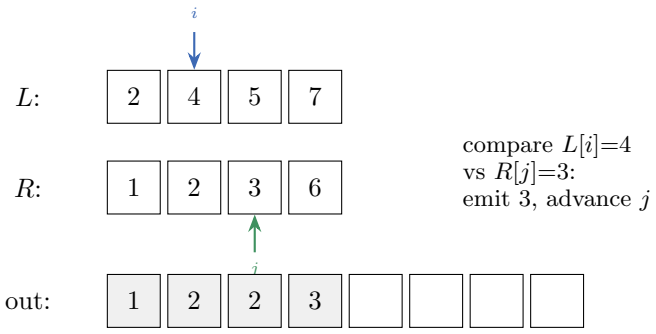


Figure 4.1: One step of MERGE. Two fingers i, j scan the sorted inputs L and R; the smaller fingered value is copied to the output and its finger advances. Here $4 > 3$, so 3 is emitted and j steps right.

Algorithm 8: MERGE(A, lo, mid, hi)

Input: $A[lo \ldots mid]$ and $A[mid+1 \ldots hi]$ are each sorted.
Output: $A[lo \ldots hi]$ sorted, in place.

```
L ← A[lo ... mid] with a +∞ sentinel appended;
R ← A[mid + 1 ... hi] with a +∞ sentinel appended;
i ← 1;    j ← 1;
for k ← lo to hi do
    if L[i] ≤ R[j] then
        A[k] ← L[i];    i ← i + 1
    else
        A[k] ← R[j];    j ← j + 1
```

The $+\infty$ sentinels are a small trick so we never have to check "has this list run out?" inside the

loop: once a real list is exhausted, its finger sits on $+\infty$, which loses every comparison, so the other list drains naturally.

Algorithm 9: MERGE-SORT(A, lo, hi)

Input: An array A and bounds $lo \le hi$.
Output: $A[lo \dots hi]$ sorted in nondecreasing order.

```
1 if lo ≥ hi then
2     return ;                          // base case:  0 or 1 element, already sorted
3 mid ← ⌊(lo + hi)/2⌋;
4 MERGE-SORT(A, lo, mid);                                          // conquer left
5 MERGE-SORT(A, mid + 1, hi);                                      // conquer right
6 MERGE(A, lo, mid, hi);                                           // combine
```

4.2.2 A full numeric trace

Let us sort $A = [5, 2, 4, 7, 1, 3, 2, 6]$ ($n = 8$). I will draw the recursion as a tree: splitting on the way down, merging on the way up.

Algorithm lab

Trace it yourself. Cover the answers below and run the splits in your head before peeking.

Splitting down:

- $[5,2,4,7,1,3,2,6] \to [5,2,4,7]$ and $[1,3,2,6]$
- $[5,2,4,7] \to [5,2]$ and $[4,7]$; $\quad [1,3,2,6] \to [1,3]$ and $[2,6]$
- $[5,2] \to [5],[2]$; $\quad [4,7] \to [4],[7]$; $\quad [1,3] \to [1],[3]$; $\quad [2,6] \to [2],[6]$

Merging up:

- $[5],[2] \to [2,5]$; $\quad [4],[7] \to [4,7]$; $\quad [1],[3] \to [1,3]$; $\quad [2],[6] \to [2,6]$
- $[2,5],[4,7] \to [2,4,5,7]$; $\quad [1,3],[2,6] \to [1,2,3,6]$
- $[2,4,5,7],[1,2,3,6] \to [1,2,2,3,4,5,6,7]$

Watch the last merge in slow motion. Fingers start at the fronts of $L = [2,4,5,7]$ and $R = [1,2,3,6]$.

step	compare	emit	L remaining	R remaining
1	2 vs 1	1	2, 4, 5, 7	2, 3, 6
2	2 vs 2	2	4, 5, 7	2, 3, 6
3	4 vs 2	2	4, 5, 7	3, 6
4	4 vs 3	3	4, 5, 7	6
5	4 vs 6	4	5, 7	6
6	5 vs 6	5	7	6
7	7 vs 6	6	7	—
8	(R empty)	7	—	—

Output: $[1,2,2,3,4,5,6,7]$. Notice step 2: when the two fingered elements tie, we took from L because the test is $L[i] \le R[j]$. That choice makes merge sort *stable* (equal elements keep their

original relative order), a property that matters more than you would guess in real systems.

Common trap

The merge step needs *extra space* for the copies L and R — merge sort is not in place. A classic mistake is to assume you can merge two halves of one array back into that same array without a scratch buffer. You cannot do it in $O(1)$ extra space without a much fancier algorithm; the straightforward merge uses $\Theta(n)$ auxiliary memory. (We will revisit this trade-off in the cost summary.)

4.2.3 Why it is correct

Formal

Claim. MERGE-SORT(A, lo, hi) leaves $A[lo \dots hi]$ sorted.
Proof by strong induction on $m = hi - lo + 1$, the number of elements.
Base case ($m \le 1$): a range of 0 or 1 element is sorted by definition, and the algorithm returns without touching it. True.
Inductive step ($m \ge 2$): assume the claim holds for all ranges of fewer than m elements. Since $m \ge 2$, the two recursive calls operate on ranges of sizes $\lceil m/2 \rceil$ and $\lfloor m/2 \rfloor$, both strictly less than m and both at least 1. By the inductive hypothesis, after the two calls $A[lo \dots mid]$ and $A[mid + 1 \dots hi]$ are each sorted. MERGE then combines two sorted ranges into one sorted range (this is the merge *lemma*; prove it as a loop invariant: "at the start of iteration k, $A[lo \dots k-1]$ holds the $k - lo$ smallest of the merged elements, in order, and $L[i], R[j]$ are the smallest not-yet-copied elements of each list"). Hence $A[lo \dots hi]$ is sorted. By induction the claim holds for all m. ■

That is the entire shape of a divide-and-conquer correctness proof, and you will reuse it constantly: base case obvious, recursive calls correct by hypothesis, combine step correct by a small lemma.

4.3 Counting the work: recurrences

Now the analysis. How long does MERGE-SORT take on n elements? The honest answer is itself recursive, because the algorithm is recursive. Let $T(n)$ denote the worst-case running time on an input of size n. Reading the code:

- If $n \le 1$, we do a constant amount of work: $T(n) = \Theta(1)$.
- If $n > 1$, we make two recursive calls, each on half the input, costing $T(n/2)$ each. Computing mid is constant. MERGE on n elements runs a single loop of n iterations, so it costs $\Theta(n)$.

Putting those together gives the *recurrence*

$$T(n) = \begin{cases} \Theta(1) & \text{if } n \le 1, \\ 2\,T(n/2) + \Theta(n) & \text{if } n > 1. \end{cases}$$

Definition 4.1 (Recurrence)**.** A *recurrence* is an equation that defines a function (here, the running time T) in terms of its own values on smaller inputs, together with one or more base cases. Solving

a recurrence means finding a closed-form bound — usually a $\Theta(\cdot)$ bound — that does not refer to T on the right-hand side.

Focus

Two conventions we will use without further apology, because they never change the asymptotic answer for the algorithms in this book. **(1) Floors and ceilings.** We write $T(n/2)$ even though the true sizes are $\lceil n/2 \rceil$ and $\lfloor n/2 \rfloor$. **(2) Small base cases.** We treat $T(n) = \Theta(1)$ for n below some constant. Both simplifications are justified rigorously in CLRS; we lean on them so the algebra stays clean.


We now have three tools to solve recurrences. We will learn all three, because each teaches you something the others hide.

4.4 Method 1: the recursion tree (see the work)

The recursion tree turns a recurrence into a picture you can literally add up. Draw a node for the top-level call and label it with the *non-recursive* work that call does — for merge sort, that is the cn cost of merging, not the recursive calls. Then draw its children: the subproblems it spawns. Repeat until you hit base cases. Finally, sum the labels.

4.4.1 Merge sort's tree

For $T(n) = 2T(n/2) + cn$, the root does cn work and has two children of size $n/2$. Each of those does $c(n/2)$ work and has two children of size $n/4$, and so on.

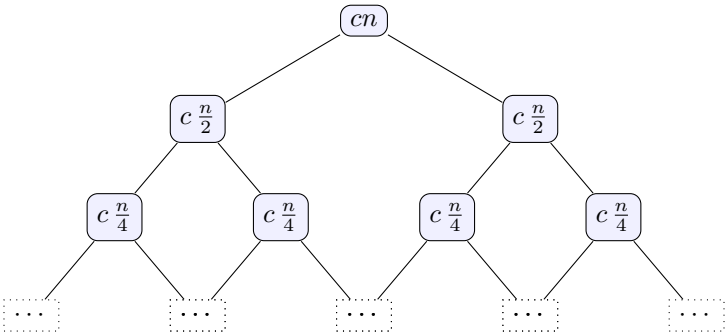

Here is the beautiful pattern. Add up each *level*:

- Level 0 (root): cn.
- Level 1: two nodes of $c(n/2)$, total cn.
- Level 2: four nodes of $c(n/4)$, total cn.
- Level i: 2^i nodes of $c(n/2^i)$, total cn.

Intuition

Every level costs the same: cn. The subproblems get smaller, but there are proportionally more of them, and the two effects cancel exactly. So the only remaining question is: *how many levels are there?*

The size at level i is $n/2^i$. We reach the base case (size 1) when $n/2^i = 1$, i.e. $i = \log_2 n$. So there are $\log_2 n + 1$ levels, each costing cn, and the total is

$$T(n) = cn\,(\log_2 n + 1) = \Theta(n \log n).$$

Walking question

Take this on a walk: *why* does merge sort beat insertion sort's $\Theta(n^2)$? Insertion sort, in the worst case, does about n units of work for each of n elements — a full rectangle, $n \times n$. Merge sort does cn work on each of only $\log n$ levels — a much shorter stack of equal rows. The win is replacing the factor n by the factor $\log n$. For a million elements that is the difference between 10^{12} and roughly 2×10^7 operations: about fifty thousand times faster. Where exactly did the log come from, and what feature of the splitting produced it?

4.4.2 An unbalanced tree, to build instinct

The recursion tree shines when the levels do *not* all cost the same. Consider $T(n) = T(n/3) + T(2n/3) + cn$ (this shape shows up in some quicksort and selection analyses). The two children have sizes $n/3$ and $2n/3$; together they still hold all n elements, so each *full* level still sums to about cn — as long as the level is complete. But the two branches reach the bottom at different depths. The shallowest leaf is at depth $\log_3 n$ (following the /3 branch), and the deepest at depth $\log_{3/2} n$ (following the /(2/3) branch). Levels near the top all cost cn; below depth $\log_3 n$ some branches have already bottomed out, so those levels cost *less* than cn. The total is therefore at most $cn \cdot \log_{3/2} n = \Theta(n \log n)$ and at least $cn \cdot \log_3 n = \Omega(n \log n)$, pinning it to $\Theta(n \log n)$. The tree (Figure 4.2) makes the lopsidedness visible in a way a formula would not.

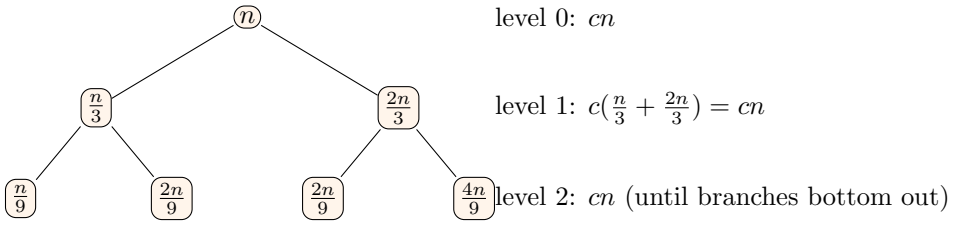


Figure 4.2: The lopsided split $T(n) = T(n/3) + T(2n/3) + cn$. Sizes are unequal, but each *full* level still sums to cn. The left (/3) branch reaches a leaf at depth $\log_3 n$; the right (/(2/3)) branch runs deeper, to $\log_{3/2} n$.

4.5 Method 2: substitution (guess, then prove)

The substitution method is exactly what it sounds like: *guess* the form of the answer, then *prove* it by induction, substituting the inductive hypothesis into the recurrence. It is the most powerful

method — it can handle recurrences the master theorem cannot — but it asks you to guess well, which is a skill the recursion tree helps you develop.

4.5.1 Proving an upper bound for merge sort

Let us prove $T(n) = O(n \log n)$ for $T(n) = 2T(n/2) + cn$ rigorously, to see the machinery. We guess that there is a constant $d > 0$ with $T(n) \le d\, n \log_2 n$ for all $n \ge 2$, and we try to verify it by induction.

Formal

Inductive step. Assume the bound holds for all sizes below n; in particular $T(n/2) \le d\,\frac{n}{2}\log_2 \frac{n}{2}$. Substitute into the recurrence:

$$\begin{aligned} T(n) &= 2\,T(n/2) + cn \\ &\le 2\Big(d\,\tfrac{n}{2}\log_2 \tfrac{n}{2}\Big) + cn \\ &= d\,n\,(\log_2 n - 1) + cn \\ &= d\,n\log_2 n - dn + cn \\ &= d\,n\log_2 n - (d-c)\,n. \end{aligned}$$

As long as we choose $d \ge c$, the term $-(d-c)n \le 0$, so $T(n) \le d\,n\log_2 n$. The inductive step goes through.

Common trap

You must handle the *base case* of the *proof*, not just the algorithm. Here the guess $d\,n\log_2 n$ is 0 at $n = 1$ (since $\log_2 1 = 0$), but $T(1) = \Theta(1) > 0$, so the bound *fails* at $n = 1$. The fix is standard: start the induction at $n = 2$ instead. Since asymptotic notation only cares about large n, we are free to ignore finitely many small cases, and we pick d large enough to cover $n = 2, 3$ directly. Forgetting to repair the base case is the single most common substitution-method error.

4.5.2 The danger of a sloppy guess

Common trap

Suppose you tried to prove $T(n) = O(n)$ for the same recurrence, guessing $T(n) \le dn$. Substituting: $T(n) \le 2(d\,\frac{n}{2}) + cn = dn + cn$. You might be tempted to write "$= O(n)$" and declare victory — but you have proved $T(n) \le dn + cn$, which is *not* $\le dn$. The constant grew. The "proof" must reproduce the *exact* guessed form with the *same* constant, and here it cannot, because the true answer $n\log n$ really is bigger than n. A guess that is too small leaks an extra additive term every level; that leak is the recurrence telling you to guess higher.

4.6 Method 3: the master theorem (the lookup table)

The recursion tree showed us something general. A huge family of divide-and-conquer recurrences has the shape

$$\boxed{T(n) = a\,T(n/b) + f(n)}$$

where $a \geq 1$ is the number of subproblems, $b > 1$ is the factor by which the input shrinks, and $f(n)$ is the cost of dividing and combining (the non-recursive work). Merge sort is $a = 2, b = 2, f(n) = cn$. Binary search is $a = 1, b = 2, f(n) = c$. The master theorem reads off the answer for almost all such recurrences without your having to draw the tree each time.

4.6.1 The one number that decides everything

Build the recursion tree in your head. Level i has a^i nodes, each of size n/b^i. The work at the leaves is governed by how many leaves there are. The tree bottoms out at depth $\log_b n$, where the number of leaves is

$$a^{\log_b n} = n^{\log_b a}.$$

That exponent, $\log_b a$, is the hinge of the entire theorem. Give it a name and a comparison object:

$$n^{\log_b a} \quad \text{(the leaf/recursion cost)} \qquad \text{vs.} \qquad f(n) \quad \text{(the per-call combine cost).}$$

Intuition

The master theorem is a *tug of war* between two costs: the work piling up at the leaves, which totals about $n^{\log_b a}$, and the work done at the root, $f(n)$, which then echoes down the tree. Whichever cost is *polynomially bigger* wins and sets the answer. If they are the same size, every level contributes equally (as in merge sort) and you pay an extra logarithmic factor for the number of levels.

4.6.2 The statement

Theorem 4.1 (Master Theorem)**.** *Let $a \geq 1$ and $b > 1$ be constants, let $f(n)$ be a nonnegative function, and let $T(n) = a\,T(n/b) + f(n)$ (interpreting n/b as $\lfloor n/b \rfloor$ or $\lceil n/b \rceil$). Let $E = \log_b a$. Then:*

Case 1 (leaves win). *If $f(n) = O(n^{E-\varepsilon})$ for some constant $\varepsilon > 0$, then $T(n) = \Theta\big(n^E\big)$.*

Case 2 (tie). *If $f(n) = \Theta(n^E)$, then $T(n) = \Theta\big(n^E \log n\big)$.*

Case 3 (root wins). *If $f(n) = \Omega(n^{E+\varepsilon})$ for some constant $\varepsilon > 0$,* and *the regularity condition $a\,f(n/b) \leq k\,f(n)$ holds for some constant $k < 1$ and all large n, then $T(n) = \Theta\big(f(n)\big)$.*

Focus

The recipe in practice:

1. Compute $E = \log_b a$. Write down n^E.
2. Compare $f(n)$ to n^E.

3. If f is polynomially *smaller* ⇒ Case 1, answer n^E.
4. If f is the *same* order ⇒ Case 2, answer $n^E \log n$.
5. If f is polynomially *larger* (and regular) ⇒ Case 3, answer $f(n)$.

Common trap

"Polynomially smaller/larger" is a real requirement, not decoration. Case 1 needs $f(n) = O(n^{E-\varepsilon})$ for a *fixed positive* ε — f must be smaller by an honest factor of n^{ε}, not merely smaller by a log. There is a gap between the cases: if $f(n)$ sits just a logarithm away from n^E (for example $f(n) = n^E \log n$), *none* of the three cases applies, and you must fall back to a recursion tree or to Akra–Bazzi (Section 4.9).

4.6.3 Why each case is true, in pictures

Recall: level i contributes $a^i f(n/b^i)$, and there are $\log_b n$ levels with a leaf level of total cost $\Theta(n^E)$. Figure 4.3 draws the per-level cost for each case as a stack of bars, top of the tree at the left.

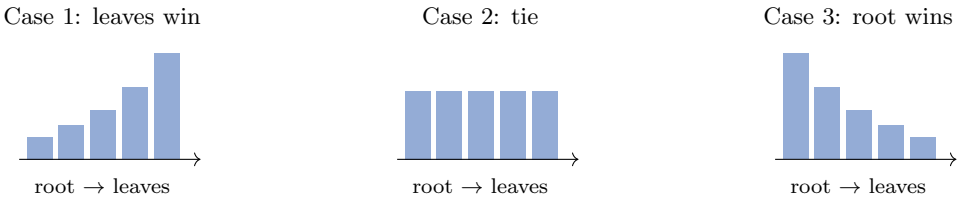


Figure 4.3: Per-level work down the recursion tree (root at left, leaves at right). Case 1: costs grow toward the leaves (a geometric series dominated by its last term, n^E). Case 2: every level costs the same (sum is $n^E \log n$). Case 3: costs shrink toward the leaves (dominated by the first term, $f(n)$).

- **Case 1.** f shrinks as you go down so slowly relative to the branching that the costs *grow* geometrically toward the leaves. A geometric series is dominated by its largest term — here the leaf level, n^E. So the total is $\Theta(n^E)$: *the leaves win.*
- **Case 2.** Every level costs the same, $\Theta(n^E)$ (this is exactly the merge-sort picture). With $\log_b n$ equal levels, the total is $\Theta(n^E \log n)$: *a tie, pay for the levels.*
- **Case 3.** f is so big at the top that the per-level costs *shrink* geometrically as you descend. A decreasing geometric series is dominated by its *first* term — the root, $f(n)$. The regularity condition is the fine print guaranteeing the series really does decrease geometrically. So the total is $\Theta(f(n))$: *the root wins.*

Why this matters

This single theorem is why so much of practical algorithm design reduces to "arrange to call yourself fewer times, or shrink the input faster, or do less combining." Each of those moves a, b, or f, and the master theorem turns the change instantly into an asymptotic verdict. Database query planners, numerical libraries (FFT, matrix multiply), and graphics geometry

code are all quietly tuned by exactly this trade-off.

4.7 Worked examples with the master theorem

Let us drill all three cases until plugging in is automatic.

Example 4.1 (Merge sort — Case 2)**.** $T(n) = 2T(n/2)+cn$. Here $a = 2, b = 2$, so $E = \log_2 2 = 1$ and $n^E = n$. Compare $f(n) = cn = \Theta(n) = \Theta(n^E)$: a tie. Case 2 gives $T(n) = \Theta(n^E \log n) = \Theta(n \log n)$. Matches the tree.

Example 4.2 (Binary search — Case 2 with $E = 0$)**.** $T(n) = T(n/2) + c$. Here $a = 1, b = 2$, so $E = \log_2 1 = 0$ and $n^E = n^0 = 1$. Compare $f(n) = c = \Theta(1) = \Theta(n^E)$: a tie. Case 2 gives $T(n) = \Theta(n^0 \log n) = \Theta(\log n)$. The phone-book answer, confirmed.

Example 4.3 (Leaves win — Case 1)**.** $T(n) = 8T(n/2) + cn^2$. Here $a = 8, b = 2$, so $E = \log_2 8 = 3$ and $n^E = n^3$. Compare $f(n) = cn^2$ to n^3: $n^2 = O(n^{3-\varepsilon})$ with, say, $\varepsilon = 1$. So f is polynomially smaller — Case 1 — and $T(n) = \Theta(n^3)$. Eight subproblems is a lot of branching; the leaves overwhelm the quadratic combine.

Example 4.4 (Root wins — Case 3)**.** $T(n) = 2T(n/2) + cn^2$. Here $E = \log_2 2 = 1$, $n^E = n$. Compare $f(n) = cn^2$ to n: $n^2 = \Omega(n^{1+\varepsilon})$ with $\varepsilon = 1$. Check regularity: $af(n/b) = 2 \cdot c(n/2)^2 = \frac{cn^2}{2} = \frac{1}{2}f(n) \le kf(n)$ with $k = \frac{1}{2} < 1$. Both conditions hold — Case 3 — so $T(n) = \Theta(n^2)$. The expensive quadratic combine at the top dominates everything below it.

Example 4.5 (A gap case — master theorem does *not* apply)**.** $T(n) = 2T(n/2) + n \log n$. Here $E = 1$, $n^E = n$. Is $f(n) = n \log n$ polynomially bigger than n? No: $\log n$ grows slower than n^ε for *every* $\varepsilon > 0$, so there is no valid ε for Case 3, and f is not $\Theta(n)$ either. We are in the gap. A recursion tree (every level costs $n \log \frac{n}{2^i}$, summed over $\log n$ levels) gives $T(n) = \Theta(n \log^2 n)$ — a result the master theorem simply cannot reach.

Algorithm lab

Trace it yourself. Classify each recurrence by computing $E = \log_b a$ and comparing to f. Cover the answers.

1. $T(n) = 4T(n/2) + n$. ($E = 2$; $f = n = O(n^{2-\varepsilon})$; Case 1; $\Theta(n^2)$.)
2. $T(n) = 4T(n/2) + n^2$. ($E = 2$; tie; Case 2; $\Theta(n^2 \log n)$.)
3. $T(n) = 4T(n/2) + n^3$. ($E = 2$; $f = \Omega(n^{2+\varepsilon})$, regular; Case 3; $\Theta(n^3)$.)
4. $T(n) = 3T(n/4) + n \log n$. ($E = \log_4 3 \approx 0.79$; $n \log n = \Omega(n^{0.79+\varepsilon})$, regular; Case 3; $\Theta(n \log n)$.)
5. $T(n) = 2T(n/2) + \frac{n}{\log n}$. ($E = 1$; gap below n; master fails; tree gives $\Theta(n \log \log n)$.)

4.8 Two motivating algorithms beyond sorting

Divide and conquer is not just for sorting. Two famous examples show it producing genuinely surprising speedups, and both give us nontrivial recurrences to chew on.

4.8.1 Maximum subarray

The problem. You are given an array of numbers, some positive, some negative — think daily changes in a stock price. Find the contiguous stretch (subarray) whose sum is largest. For


$$[13, -3, -25, 20, -3, -16, -23, 18, 20, -7, 12, -5, -22, 15, -4, 7]$$

the best stretch is $[18, 20, -7, 12]$, summing to 43.

The brute-force approach tries all $\Theta(n^2)$ subarrays — too slow. Divide and conquer does better. Split the array at the midpoint m. The maximum subarray must be one of exactly three things:

1. entirely in the *left* half $A[lo \dots m]$,
2. entirely in the *right* half $A[m+1 \dots hi]$, or
3. *crossing* the midpoint, using some of the left and some of the right.

Cases 1 and 2 are smaller copies of the same problem — solve them recursively. Case 3 is the new, combine work: a crossing subarray is forced to include $A[m]$ and $A[m+1]$, so we can find the best one by sweeping leftward from m for the best left-piece and rightward from $m+1$ for the best right-piece, in $\Theta(n)$ time. Take the best of the three.



Algorithm 10: MAX-SUBARRAY(A, lo, hi)

Input: Array A, bounds $lo \le hi$.
Output: The maximum sum of a contiguous subarray of $A[lo \dots hi]$.

```
if lo = hi then
    return A[lo];                                   // base case: one element
m ← ⌊(lo + hi)/2⌋;
left ← MAX-SUBARRAY(A, lo, m);
right ← MAX-SUBARRAY(A, m + 1, hi);
cross ← MAX-CROSSING(A, lo, m, hi);                 // Θ(n) sweep
return max(left, right, cross);
```

Two recursive calls on half the input, plus a $\Theta(n)$ crossing sweep:

$$T(n) = 2T(n/2) + \Theta(n) = \Theta(n \log n).$$

Same recurrence as merge sort. We turned an $\Theta(n^2)$ brute force into $\Theta(n \log n)$ by the same three-beat rhythm.

History and connection

The maximum-subarray problem has a famous twist: a clever *linear*-time dynamic-programming solution (Kadane's algorithm) beats the divide-and-conquer $\Theta(n \log n)$. We present the D&C version because it is the cleanest illustration of "the answer is left, right, or crossing." This maps to CLRS Chapter 4, Section 4.1, and you will meet Kadane-style thinking again in the dynamic-programming chapter. Lesson: divide and conquer is a powerful default, but not always the last word.

4.8.2 Strassen's matrix multiplication

Multiplying two $n \times n$ matrices the obvious way costs $\Theta(n^3)$: each of the n^2 output entries is a dot product of length n. For decades people assumed n^3 was simply the cost of matrix multiply. In 1969 Volker Strassen stunned the field by doing it faster, using divide and conquer.

Split each $n \times n$ matrix into four $\frac{n}{2} \times \frac{n}{2}$ blocks (Figure 4.4). The naive block formula needs *eight* multiplications of half-size blocks (plus some additions), giving

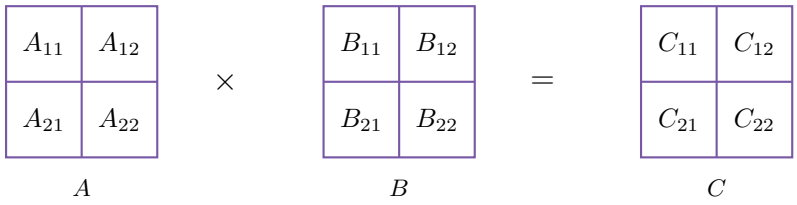


Figure 4.4: Block partition for matrix multiply. Each block is $\frac{n}{2} \times \frac{n}{2}$; e.g. $C_{11} = A_{11}B_{11} + A_{12}B_{21}$. The naive scheme computes the four C-blocks with eight block products; Strassen needs only seven.

$$T(n) = 8\,T(n/2) + \Theta(n^2).$$

Master theorem: $E = \log_2 8 = 3$, and $f(n) = n^2 = O(n^{3-\varepsilon})$, so Case 1 yields $\Theta(n^3)$ — no improvement, as expected. The branching factor $a = 8$ is the villain.

Strassen's insight: with a sequence of clever additions and subtractions, you can compute the four product blocks using only *seven* half-size multiplications instead of eight. That single saved multiplication changes a from 8 to 7:

$$T(n) = 7\,T(n/2) + \Theta(n^2).$$

Now $E = \log_2 7 \approx 2.807$, and $f(n) = n^2 = O(n^{2.807-\varepsilon})$, so Case 1 gives

$$T(n) = \Theta\big(n^{\log_2 7}\big) \approx \Theta(n^{2.807}).$$

Why this matters

Read that again: by trading one multiplication for a handful of additions at every level of recursion, Strassen broke the "obvious" n^3 barrier. For large matrices $n^{2.807}$ is dramatically less than n^3, and variants of this idea power high-performance linear-algebra libraries to this day. The lesson that *reducing the branching factor a is worth a lot of constant-factor pain in*

f is one of the deepest takeaways of this chapter — and it is the master theorem that makes the payoff legible at a glance.

History and connection

Strassen's algorithm is CLRS Chapter 4, Section 4.2. It opened a still-active race: the exponent has since been pushed below 2.38 by Coppersmith–Winograd and successors, though those algorithms are galactic — their constants are so huge they only win on impossibly large inputs. Strassen itself, by contrast, is used in practice.

4.9 When the master theorem is not enough: Akra–Bazzi

The master theorem requires every subproblem to be the *same* size n/b. Real recurrences are not always so tidy. What about

$$T(n) = T(n/3) + T(2n/3) + cn,$$

the lopsided split we drew earlier? The subproblems have *different* sizes, so Theorem 4.1 does not apply at all.

The *Akra–Bazzi method* generalizes the master theorem to recurrences of the form

$$T(n) = \sum_{i=1}^{k} a_i\, T(n/b_i) + f(n),$$

with possibly different shrink factors b_i. You find the unique exponent p solving

$$\sum_{i=1}^{k} \frac{a_i}{b_i^{p}} = 1,$$

and then $T(n) = \Theta\Big(n^p\big(1 + \int_1^n \frac{f(u)}{u^{p+1}}\,du\big)\Big)$.

Example 4.6 (Akra–Bazzi on the lopsided split)**.** For $T(n) = T(n/3) + T(2n/3) + cn$ we have two terms with $a_1 = a_2 = 1$, $b_1 = 3$, $b_2 = 3/2$. Solve $\frac{1}{3^p} + \frac{1}{(3/2)^p} = 1$. Try $p = 1$: $\frac{1}{3} + \frac{2}{3} = 1$. It works, so $p = 1$. The integral term then contributes a $\log n$ factor (because $f(u)/u^{p+1} = cu/u^2 = c/u$ integrates to $c \ln n$), giving $T(n) = \Theta(n \log n)$ — exactly what our recursion tree predicted by hand.

Focus

You do not need to memorize the Akra–Bazzi integral for this book. Take away only this: when the master theorem stalls (unequal subproblem sizes, or a log in the gap), *the recursion tree never fails you*, and Akra–Bazzi exists as a heavier formal tool. Knowing the tool exists is enough; reach for it when you meet a recurrence the master theorem cannot classify.

4.10 Cost summary

Cost summary

The five recurrences worth knowing cold:

Recurrence	Solution	Example
$T(n) = T(n/2) + \Theta(1)$	$\Theta(\log n)$	binary search
$T(n) = 2T(n/2) + \Theta(1)$	$\Theta(n)$	tree traversal
$T(n) = 2T(n/2) + \Theta(n)$	$\Theta(n \log n)$	merge sort, max-subarray
$T(n) = 2T(n/2) + \Theta(n^2)$	$\Theta(n^2)$	root-dominated combine
$T(n) = 7T(n/2) + \Theta(n^2)$	$\Theta(n^{\log_2 7})$	Strassen

Merge sort specifically:

- Time: $\Theta(n \log n)$ in *best, average, and worst* cases — its running time does not depend on the input order.
- Extra space: $\Theta(n)$ for the merge buffer (not in place).
- Stable: yes (equal keys keep their order).

Pause

If this chapter felt like a lot, here is the whole thing in four sentences. Divide and conquer splits a problem into smaller copies of itself, solves them recursively, and combines the results. The running time obeys a recurrence $T(n) = aT(n/b) + f(n)$. You solve such recurrences by drawing a recursion tree, by guessing-and-proving (substitution), or by the master theorem, which compares $f(n)$ against $n^{\log_b a}$ and reports which one wins. Everything else in this chapter is practice and proof of those four sentences.

4.11 Exercises

Exercise 4.1 (Warmup: classify by inspection)**.** For each recurrence, give $E = \log_b a$, the master-theorem case, and the Θ-bound. (a) $T(n) = 2T(n/4) + 1$. (b) $T(n) = 2T(n/4) + \sqrt{n}$. (c) $T(n) = 2T(n/4) + n$. (d) $T(n) = 16T(n/4) + n^2$.

Exercise 4.2 (Trace merge)**.** Run MERGE by hand on the two sorted runs $L = [1, 4, 4, 8]$ and $R = [2, 4, 6]$, writing the comparison table as we did in the chapter. How many comparisons did it take, and where did ties go?

Exercise 4.3 (Recursion tree from scratch)**.** Draw the recursion tree for $T(n) = 3T(n/2) + n$. Find the cost of level i, the number of levels, and sum them to get a Θ-bound. Then confirm your answer with the master theorem. (Hint: $E = \log_2 3 \approx 1.585$; the levels do *not* all cost the same.)

Exercise 4.4 (Substitution practice)**.** Use the substitution method to prove $T(n) = O(n^2)$ for $T(n) = 4T(n/2) + n$. Then, more sharply, prove $T(n) = \Theta(n^2)$. What goes wrong if you instead guess $T(n) = O(n^2)$ but try the form dn^2 without an extra lower-order term — and how does subtracting a cn term rescue the proof?

Exercise 4.5 (The gap, felt directly)**.** The master theorem cannot solve $T(n) = 2T(n/2) + n \log n$. Draw the recursion tree, show that level i costs $n \log(n/2^i) = n(\log n - i)$, and sum $\sum_{i=0}^{\log n} n(\log n - i)$ to prove $T(n) = \Theta(n \log^2 n)$.

Exercise 4.6 (Max-subarray crossing)**.** Write pseudocode for MAX-CROSSING(A, lo, m, hi) that finds the best subarray crossing the midpoint in $\Theta(n)$ time. Argue why it must include both $A[m]$ and $A[m+1]$, and trace it on the 1-indexed array $A = [2, -5, 6, -2, 3, -1]$ with $lo = 1$, $hi = 6$, so $m = \lfloor (1+6)/2 \rfloor = 3$ (the left piece ends at index 3 holding 6, and the right piece starts at index 4 holding -2).

Exercise 4.7 (Counting inversions)**.** An *inversion* is a pair $i < j$ with $A[i] > A[j]$ — a measure of how unsorted A is. Modify merge sort so that, while merging, it also counts inversions in $\Theta(n \log n)$ total time. (Hint: when an element from the *right* list is emitted during a merge, every element still remaining in the *left* list forms an inversion with it. Why?) Trace your count on $[2, 4, 1, 3, 5]$ and verify it equals 3.

Exercise 4.8 (Strassen's bookkeeping)**.** Strassen replaces 8 multiplications by 7 at the cost of going from about 4 block additions to 18. Write the recurrence $T(n) = 7T(n/2) + cn^2$, classify it with the master theorem, and explain why the jump from 18 additions does *not* change the asymptotic exponent. For what rough range of n would a careful implementor expect Strassen to start beating the n^3 method, given its larger constant?

Exercise 4.9 (Akra–Bazzi)**.** Use Akra–Bazzi to solve $T(n) = T(n/4) + T(n/2) + n$. First find p from $4^{-p} + 2^{-p} = 1$ (show that $p = 1$ does *not* satisfy it, then argue $p < 1$), estimate p numerically, and state the resulting Θ-bound. Compare it to the master-theorem-style guess you would make if the two subproblems had been *equal* sized.

Exercise 4.10 (Challenge: closest pair of points)**.** Given n points in the plane, you want the two closest ones. Brute force is $\Theta(n^2)$. Sketch a divide-and-conquer algorithm: sort by x, split into left and right halves, recurse, and combine by checking pairs near the dividing line. Argue that the combine step can be done in $\Theta(n)$ time (the famous "only a constant number of points can be close across the strip" argument), and conclude $T(n) = 2T(n/2) + \Theta(n) = \Theta(n \log n)$. You need not prove the strip lemma; just state clearly what it claims.

Exercise 4.11 (Challenge: why polynomial gap?)**.** Construct a function $f(n)$ with $f(n) = \Omega(n^{\log_b a})$ but *not* $\Omega(n^{\log_b a + \varepsilon})$ for any $\varepsilon > 0$, so that Case 3 of the master theorem does not apply even though f "looks bigger." Explain in your own words why the theorem demands a *polynomial* gap rather than merely $f(n) > n^{\log_b a}$.

Chapter 5

Probability and Randomized Algorithms

So far, every algorithm you have met has been a faithful little machine: feed it the same input twice and it does exactly the same thing twice, step for step. In this chapter we hand the machine a coin. We let it flip that coin and decide what to do based on the result. That sounds reckless — who wants a sorting routine that behaves differently each time you run it? — but it turns out to be one of the most beautiful and practical ideas in all of computing. Randomness, used deliberately, can make an algorithm *faster on average*, *simpler to reason about*, and *immune to the adversary who picks your worst-case input*.

To understand why, we need two things. First, a working vocabulary of probability — not the whole subject, just the handful of tools that algorithm designers reach for constantly. Second, a way to talk about "how long does this take *on average*" that is just as rigorous as the worst-case analysis you already know. Both threads come together in a single, surprisingly powerful device called the *indicator random variable*. Master that one trick and a huge swath of average-case analysis becomes almost mechanical.

Focus

The destination of this chapter: you will be able to take an algorithm whose running time depends on chance (or on the order of its input), set up the expected cost with indicator random variables, and *compute* that expectation rather than guess at it. We build the probability tools first, then spend them on three concrete problems: the hiring problem, randomly permuting an array, and the famous birthday-paradox style counting that underlies hashing and quicksort.

5.1 Two Different Kinds of "Average"

Before any formulas, let us get the big picture straight, because beginners routinely confuse two genuinely different ideas that both get called "average-case."

Intuition

There are two distinct sources of uncertainty an analysis might average over.
(1) Random input. The algorithm is completely deterministic, but we *assume* the input arrives drawn from some probability distribution (say, "all $n!$ orderings of the array are equally likely"). We average the running time over that distribution. This is *probabilistic analysis* of a deterministic algorithm.
(2) Random choices inside the algorithm. The input is whatever it is — possibly chosen by a malicious adversary — but the *algorithm itself* flips coins as it runs. We average over the algorithm's own coin flips. This is a *randomized algorithm.*
The second is far more satisfying, because *you* control the coins. You do not have to cross your fingers and hope the input is nicely shuffled; you shuffle it yourself. The guarantee then holds for *every* input.

The hiring problem below starts as case (1) and we will deliberately convert it into case (2). That conversion — turning an assumption about the input into a fact you enforce with your own randomness — is the single most important habit in this chapter.

5.2 The Hiring Problem

Here is a story with a clean cost structure. You are hiring an office assistant through an employment agency. Each day the agency sends you exactly one candidate. Interviewing a candidate is cheap (cost c_i per interview), but *hiring* is expensive: to hire someone you must first fire whoever currently holds the job and pay a large fee c_h for the new hire ($c_h \gg c_i$).

You want the best possible assistant, so you adopt a simple rule:

Algorithm 11: HIRE-ASSISTANT(n)

Input: a sequence of n candidates, interviewed one at a time
Output: the running staff is always the best candidate seen so far

```
1 best ← 0 ;                    // candidate 0 is a fictional least-qualified dummy
2 for i ← 1 to n do
3     interview candidate i;
4     if candidate i is better than candidate best then
5         best ← i;
6         hire candidate i;
```

You interview everyone: that costs $n\,c_i$, no surprises, it happens every time. The interesting cost is hiring. Every time you meet someone better than everyone before, you hire them (and eat the fee c_h). *How many times do you hire?*

Intuition

The worst case is easy and brutal. If the candidates arrive in strictly increasing order of quality — worst first, best last — then *every* candidate is better than all the predecessors, so you hire all n of them. Total hiring cost $n\,c_h$. Ouch.
But surely that exact adversarial order is rare. If candidates show up in a *random* order, you

would expect to hire only occasionally: most new candidates are not record-breakers. The whole question is: how few hires, on average?

The answer, which we will prove, is shockingly small: about $\ln n$ hires. For $n = 1000$ candidates you expect to hire roughly 7 times, not 1000. To get there we need the right tool.

5.3 Random Variables and Expectation

Let us nail down the vocabulary. A *sample space* S is the set of all possible outcomes of a random experiment, and a *probability distribution* assigns to each outcome a number in $[0, 1]$ so that the numbers sum to 1. An *event* is a subset of S, and its probability is the sum of the probabilities of the outcomes inside it.

Definition 5.1 (Random variable)**.** A *random variable* X is a function from the sample space to the real numbers. It attaches a number to each outcome. We write $\Pr\{X = x\}$ for the probability of the event "X takes the value x," meaning the total probability of all outcomes mapped to x.

The number we care about most is the *average value* of a random variable, weighting each possible value by how likely it is.

Definition 5.2 (Expectation)**.** The *expected value* (or *expectation*, or *mean*) of a random variable X is

$$\mathbb{E}[X] \;=\; \sum_{x} x \cdot \Pr\{X = x\},$$

the sum over all values x that X can take, of the value times its probability.

Example 5.1. Roll a fair six-sided die; let X be the number shown. Each value has probability $\frac{1}{6}$, so

$$\mathbb{E}[X] = 1 \cdot \tfrac{1}{6} + 2 \cdot \tfrac{1}{6} + 3 \cdot \tfrac{1}{6} + 4 \cdot \tfrac{1}{6} + 5 \cdot \tfrac{1}{6} + 6 \cdot \tfrac{1}{6} = \frac{21}{6} = 3.5.$$

Notice that 3.5 is not a face of the die at all. The expectation is a weighted center of mass, not a value you ever literally observe. That is normal and important: expectations need not be "achievable" outcomes.

The single property of expectation that powers nearly everything in this chapter is its *linearity*.

Theorem 5.1 (Linearity of expectation)**.** *For any two random variables X and Y defined on the same sample space, and any constant a,*

$$\mathbb{E}[X + Y] = \mathbb{E}[X] + \mathbb{E}[Y], \qquad \mathbb{E}[aX] = a\,\mathbb{E}[X].$$

More generally, for any random variables $X_1, \dots, X_n$,

$$\mathbb{E}\left[\sum_{i=1}^{n} X_i\right] = \sum_{i=1}^{n} \mathbb{E}[X_i].$$

Focus

Read the last line again and notice the missing fine print. **There is no independence assumption.** Linearity of expectation holds even when the X_i push and pull on each other in complicated ways. This is the loophole that makes hard problems easy: we get to break a tangled quantity into a sum of simple pieces, take the expectation of each piece separately, and add up — without ever worrying whether the pieces are correlated.

Common trap

Linearity is for *sums*, not products. In general $\mathbb{E}[XY] \neq \mathbb{E}[X]\,\mathbb{E}[Y]$; that product rule needs X and Y to be *independent*. Beginners who get drunk on linearity often try to factor a product of random variables and quietly produce nonsense. If you find yourself splitting a product, stop and check independence explicitly.

5.4 Indicator Random Variables: The Master Trick

Here is the device that makes this whole subject click. Suppose you want to count how many times some event happens — how many record-breaking candidates, how many collisions, how many inversions. Counting is hard to do directly because the events interact. The trick is to attach a tiny 0/1 variable to *each* possible occurrence, then add them up.

Definition 5.3 (Indicator random variable)**.** Given an event A, the *indicator random variable* $I\{A\}$ is defined by

$$I\{A\} = \begin{cases} 1 & \text{if event } A \text{ occurs,} \\ 0 & \text{if event } A \text{ does not occur.} \end{cases}$$

The whole point is contained in one tiny lemma, and you should let it sink in.

Lemma 5.1 (Expectation of an indicator)**.** *For any event A, the indicator $X_A = I\{A\}$ satisfies*

$$\mathbb{E}[X_A] = \Pr\{A\}.$$

Proof. X_A takes only the values 1 and 0. By the definition of expectation,

$$\mathbb{E}[X_A] = 1 \cdot \Pr\{A\} + 0 \cdot \Pr\{\overline{A}\} = \Pr\{A\}. \qquad \square$$

Intuition

The expected value of a yes/no variable is just the probability that the answer is yes. So an indicator is a bridge: it converts a *probability* (something you compute by reasoning about chance) into an *expectation* (something you can add up with linearity). The recipe, which we will run three times in this chapter, is:

1. Write the quantity you want to count as a **sum of indicators**, one per possible occurrence.
2. Take the expectation, and use **linearity** to push it inside the sum.

3. Replace each $\mathbb{E}[\text{indicator}]$ by the corresponding **probability** (Lemma 5.1).
4. Compute those probabilities — usually each one is easy — and **sum**.

Figure 5.1 is the whole pipeline on one line: a hard count on the left, dissolved into easy probabilities on the right.




Figure 5.1: The indicator recipe as a pipeline. Each arrow is one of the four steps; the only place that needs real thought is the rightmost box, computing each $\Pr\{A_i\}$, and those are usually one-liners.

Warm-up: how many heads in n coin flips?

Flip a fair coin n times; let X be the total number of heads. You could grind through the binomial distribution, but watch how the indicator recipe dissolves it. Let $X_i = I\{\text{flip } i \text{ is heads}\}$. Then $X = \sum_{i=1}^{n} X_i$, and

$$\mathbb{E}[X] = \mathbb{E}\left[\sum_{i=1}^{n} X_i\right] = \sum_{i=1}^{n} \mathbb{E}[X_i] = \sum_{i=1}^{n} \Pr\{\text{flip } i \text{ heads}\} = \sum_{i=1}^{n} \tfrac{1}{2} = \frac{n}{2}.$$

No binomial coefficients, no summation identities. Four lines. That is the power you are buying.

Algorithm lab

Trace the recipe by hand for $n = 3$ flips. List the 8 equally likely outcomes (HHH, HHT, ..., TTT), count the heads in each, average the eight counts directly, and confirm you get $3/2 = 1.5$. Then redo it with the indicator method and feel how much shorter the second path is. Once both give 1.5 you have internalized the trick.

5.5 Solving the Hiring Problem with Indicators

Now we cash in. Assume the candidates arrive in a *uniformly random order*: all $n!$ orderings are equally likely (this is the probabilistic-analysis assumption; we will justify or replace it soon). Let X be the number of times we hire. We want $\mathbb{E}[X]$.

Step 1: write X as a sum of indicators. Define, for each candidate i,

$$X_i = I\{\text{candidate } i \text{ is hired}\}.$$

Hiring happens at step i exactly when candidate i is better than all of candidates $1, 2, \ldots, i-1$. Then $X = X_1 + X_2 + \cdots + X_n$.

Step 2: linearity.

$$\mathbb{E}[X] = \sum_{i=1}^{n} \mathbb{E}[X_i] = \sum_{i=1}^{n} \Pr\{\text{candidate } i \text{ is the best of the first } i\}.$$

Step 3: compute the probability. Look only at the first i candidates. Because the order is uniformly random, each of these i candidates is equally likely to be the best *among those first i*. There are i of them, so the chance that the best one happens to sit in position i is exactly $1/i$. Hence $\mathbb{E}[X_i] = 1/i$.

Common trap

Notice we only needed the *relative* order of the first i candidates to be uniform, and by symmetry every candidate is equally likely to be the local maximum. A common error is to instead reason "candidate i must be the global best, probability $1/n$." That is wrong — we are not asking whether i is the best overall, only whether i beats the $i-1$ people who came before. Those are different events with different probabilities.

Step 4: sum.

$$\mathbb{E}[X] = \sum_{i=1}^{n} \frac{1}{i} = H_n,$$

the n-th *harmonic number*. And we know from calculus (the harmonic series is squeezed between two logarithms) that

$$\ln n \;<\; H_n \;\le\; \ln n + 1, \qquad \text{so} \qquad \mathbb{E}[X] = \ln n + O(1).$$

Formal

Theorem (expected hires). Assuming candidates are interviewed in a uniformly random order, Hire-Assistant hires an expected $H_n = \ln n + O(1)$ times, for a total expected hiring cost of $O(c_h \ln n)$.

Let us make that concrete.

Example 5.2. For $n = 1000$: $H_{1000} \approx \ln 1000 + 0.577 \approx 6.91 + 0.58 \approx 7.49$. So you expect to hire about 7 or 8 times, not 1000. For $n = 10^6$: $H_{10^6} \approx \ln 10^6 \approx 13.8$. A million applicants, fourteen hires. The worst case wanted a million hires; the average wants fourteen. That gap is the entire reason this chapter exists.

Randomizing the algorithm

There is a catch hiding in the phrase "assuming a uniformly random order." Real candidates do not arrive in random order; the agency might, out of malice or laziness, send them worst-first and force n hires every single time. The probabilistic analysis describes a hope, not a guarantee.

So we *enforce* the hope. Before interviewing anyone, we collect all the applications and *randomly permute the list ourselves*, then interview in that scrambled order:

Algorithm 12: RANDOMIZED-HIRE-ASSISTANT(n)

Input: a list of n candidates in arbitrary (possibly adversarial) order
Output: expected number of hires is H_n, for *every* input

```
1 randomly permute the list of candidates;
2 best ← 0;
3 for i ← 1 to n do
4 |   interview candidate i;
5 |   if candidate i is better than candidate best then
6 |   |   best ← i;    hire candidate i;
```

Now the random order is a *fact we created*, not an assumption about the world. The $\mathbb{E}[X] = H_n$ bound holds no matter how the adversary arranges the input, because we shuffle away their arrangement. This is the conversion promised at the start of the chapter: assumption-about-input becomes fact-enforced-by-randomness.

Why this matters

This pattern — shuffle the input, then run a simple deterministic procedure — is everywhere. It is exactly how randomized quicksort defeats the already-sorted-array worst case (Chapter on quicksort), how randomized hashing defeats an adversary who tries to flood one bucket, and how load balancers spread work. The lesson generalizes far past hiring: *if a deterministic algorithm has a rare bad case that an adversary could trigger, inject your own randomness so that no input is reliably bad.*

5.6 Randomly Permuting an Array

That last algorithm leaned on a step we waved at: "randomly permute the list." This is its own little algorithm and it is shockingly easy to get subtly wrong. Our goal is a *uniform random permutation*: a procedure that produces each of the $n!$ orderings with probability exactly $1/n!$.

The right way: Randomize-In-Place

The clean method shuffles the array in a single left-to-right pass. At step i it swaps element i with a randomly chosen element from positions i through n (so possibly with itself).

Algorithm 13: RANDOMIZE-IN-PLACE(A, n)

Input: an array $A[1 \ldots n]$
Output: A holds a uniform random permutation of its original contents

```
1 for i ← 1 to n do
2 |   j ← RANDOM(i, n) ;                    // uniform integer in {i, ..., n}
3 |   swap A[i] ↔ A[j];
```

Here RANDOM(a, b) returns an integer in $\{a, a+1, \ldots, b\}$, each equally likely, in $O(1)$ time. The whole routine is one loop of n iterations doing $O(1)$ work each, so it runs in $\Theta(n)$ time — you cannot do better, since you must touch every element.

The key picture is the *shrinking window*: once position i is filled it is frozen, and the random draw for the next position is taken only from the unfrozen tail. Figure 5.2 shows the window narrowing by one cell each step for $n = 5$.

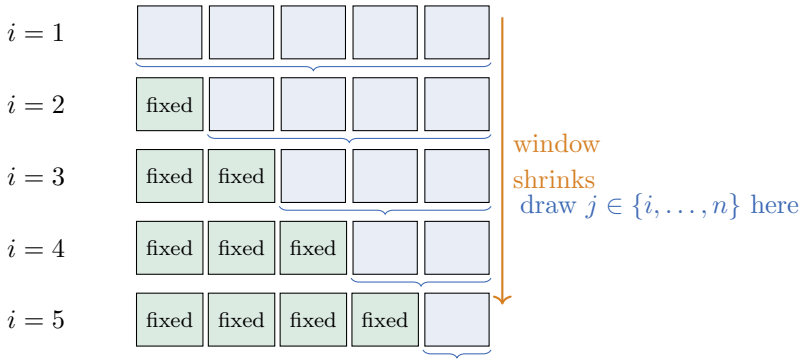


Figure 5.2: The shrinking pick-window of RANDOMIZE-IN-PLACE for $n = 5$. Green cells are frozen (already chosen and never touched again); the blue tail is the range $\{i, \ldots, n\}$ from which RANDOM draws at step i. Each step freezes one more cell, so the window loses exactly one position per row.

This is sometimes called the Fisher–Yates shuffle, or Knuth's shuffle. Let us see why it is uniform.

Lemma 5.2 (Uniformity of RANDOMIZE-IN-PLACE)**.** RANDOMIZE-IN-PLACE *produces a uniform random permutation: every ordering appears with probability* $1/n!$.

Proof by loop invariant. We use the invariant: *just before the iteration for index* i*, the subarray* $A[1 \ldots i-1]$ *contains any given sequence of* $i-1$ *of the original elements with probability* $(n-i+1)!/n!$. (Equivalently: the prefix of length $i-1$ is a uniformly random arrangement of some $(i-1)$-subset.)

Initialization $(i = 1)$**.** The prefix $A[1 \ldots 0]$ is empty, so there is exactly one "arrangement" of 0 elements, and the claimed probability is $(n-0)!/n! = 1$. True.

Maintenance. Assume the invariant holds before iteration i. Consider any specific desired arrangement of $A[1 \ldots i]$, say $(x_1, x_2, \ldots, x_i)$. For $A[1 \ldots i]$ to end up as this sequence, two things must happen: the prefix $A[1 \ldots i-1]$ already equaled $(x_1, \ldots, x_{i-1})$ *before* this iteration (probability $(n-i+1)!/n!$ by the invariant), *and* the swap put x_i into position i. Once the prefix is fixed, x_i still sits somewhere in $A[i \ldots n]$ — that is $n-i+1$ positions — and RANDOM(i, n) picks its position with probability $1/(n-i+1)$. These two are independent, so

$$\Pr\{A[1 \ldots i] = (x_1, \ldots, x_i)\} = \frac{(n-i+1)!}{n!} \cdot \frac{1}{n-i+1} = \frac{(n-i)!}{n!},$$

which is exactly the invariant with i in place of $i-1$. Maintenance holds.

Termination $(i = n+1)$**.** The invariant now describes the full array: each complete permutation $(x_1, \ldots, x_n)$ occurs with probability $(n-n)!/n! = 1/n!$. That is uniformity. □

Example 5.3. Trace the shuffle on $A = [a, b, c]$, $n = 3$. Suppose RANDOM returns: $j = 3$ at $i = 1$, then $j = 2$ at $i = 2$, then $j = 3$ at $i = 3$.

i	range for j	drawn j	array after swap	
start	—	—	$[a, b, c]$	
1	$\{1, 2, 3\}$	3	$[c, b, a]$	(swap $A[1] \leftrightarrow A[3]$)
2	$\{2, 3\}$	2	$[c, b, a]$	(swap with self)
3	$\{3\}$	3	$[c, b, a]$	(forced)

This run yields $[c, b, a]$. There are $3 \cdot 2 \cdot 1 = 6$ equally likely sequences of draws (3 choices at $i = 1$, then 2, then 1), and you can check that the six runs land on the six distinct permutations exactly once each — which is precisely uniformity.

A tempting wrong way

Common trap

A natural-looking "fix" is to let j range over *all* of $\{1, \ldots, n\}$ at every step instead of $\{i, \ldots, n\}$:

```
for i = 1 to n:  swap A[i] with A[RANDOM(1, n)]
```


This looks more random — every position can move anywhere! — but it is *not* uniform. It performs n swaps, each with n equally likely choices, so it follows one of n^n equally likely paths. But there are only $n!$ permutations, and $n!$ does not divide n^n for $n \geq 3$. By pigeonhole, the permutations cannot all get equal probability: some orderings are slightly favored. For $n = 3$ the six permutations receive the path-counts $\{4, 4, 4, 5, 5, 5\}$ out of the 27 paths — not all $27/6 = 4.5$ — so three arrangements are over-represented and three are under-represented. The lesson: more visible randomness is not the same as uniform randomness. Use the proven RANDOMIZE-IN-PLACE with its shrinking range.

Walking question

Take the broken shuffle above for $n = 3$ on a walk and enumerate it. There are 27 equally likely (j_1, j_2, j_3) triples. Tally which of the 6 permutations each triple produces. You should find three permutations appearing 5 times and three appearing 4 times (so $3 \cdot 5 + 3 \cdot 4 = 27$ paths in all, as it must). Then ask yourself: *why* does the correct version, with its shrinking range $\{i, \ldots, n\}$, give exactly $3! = 6$ paths mapping one-to-one onto the 6 permutations? The phrase "$n!$ equally likely paths" versus "n^n equally likely paths" is the whole story.

5.7 A Recursion-Tree-Free Look at the Numbers

It helps to *see* the harmonic sum that controls the hiring problem. Each term $1/i$ is the probability that candidate i breaks the record. The early candidates almost always break it $(1/1, 1/2, 1/3, \ldots)$; the later ones rarely do. Plotting the terms makes the $\ln n$ growth visible: it is the area under the curve $1/x$.

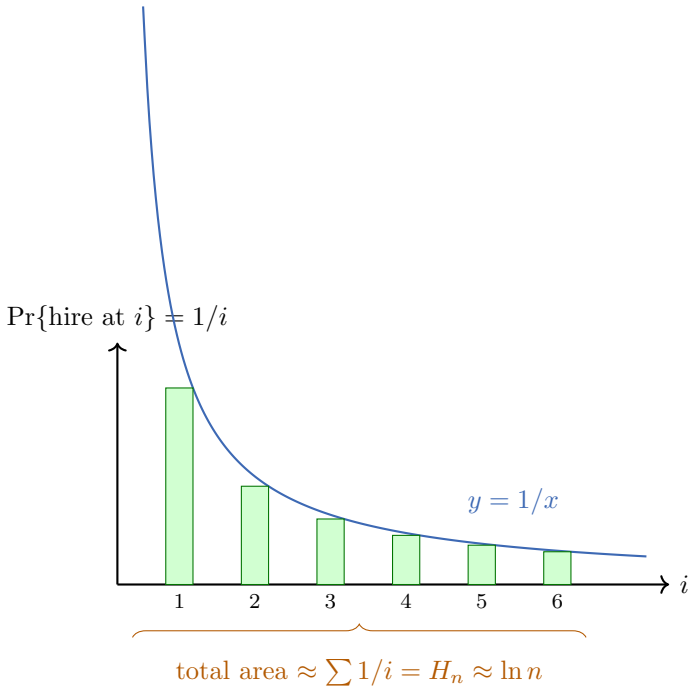

The bars are the actual probabilities $1/i$; the smooth curve is $1/x$. The sum of the bar heights is H_n, and it tracks the area under $1/x$ from 1 to n, which is $\ln n$. That single picture is why "a million applicants" costs only "fourteen hires."

5.8 A Second Helping: Expected Number of Inversions

To prove the indicator method is a reusable hammer and not a one-off trick, let us swing it at a different problem. An *inversion* in an array $A[1 \ldots n]$ of distinct numbers is a pair of indices (i, j) with $i < j$ but $A[i] > A[j]$ — a pair that is out of order. Inversions measure how unsorted an array is (insertion sort, from an earlier chapter, runs in time proportional to the number of inversions). *If the array is a uniform random permutation, how many inversions do we expect?*

Before the algebra, a picture of what we are counting. Figure 5.3 shows a small array; every line connects a pair (i, j) with $i < j$, and a pair is an inversion exactly when the left value is the larger one.




Figure 5.3: Inversions of $A = [3, 1, 4, 2]$. Solid red arcs above are the three inversions (3>1, 3>2, 4>2); dashed green arcs below are the three in-order pairs. There are $\binom{4}{2} = 6$ pairs total, and here exactly half are inverted — the average outcome the calculation below predicts.

Run the recipe. For each pair $i < j$ define the indicator

$$X_{ij} = I\{\, A[i] > A[j] \,\} = I\{(i, j) \text{ is an inversion}\}.$$

The total number of inversions is $X = \sum_{i<j} X_{ij}$. By linearity,

$$\mathbb{E}[X] = \sum_{1 \le i < j \le n} \mathbb{E}[X_{ij}] = \sum_{1 \le i < j \le n} \Pr\{A[i] > A[j]\}.$$

For any fixed pair of distinct values, in a uniform random permutation they are equally likely to appear in either order, so $\Pr\{A[i] > A[j]\} = \frac{1}{2}$. The number of pairs with $i < j$ is $\binom{n}{2} = \frac{n(n-1)}{2}$. Therefore

$$\mathbb{E}[X] = \binom{n}{2} \cdot \frac{1}{2} = \frac{n(n-1)}{4}.$$

Example 5.4. For $n = 10$: $\mathbb{E}[X] = \frac{10 \cdot 9}{4} = 22.5$ inversions on average. For $n = 100$: $\frac{100 \cdot 99}{4} = 2475$. Roughly a quarter of all pairs are inverted in a random array — which is why insertion sort, costing one unit per inversion, runs in expected $\Theta(n^2)$ time on random input. The indicator method just *told* us the average-case running time of an algorithm from two earlier chapters, almost for free.

Focus

Look back at the three problems — heads in coin flips, hires, inversions. The *same four-line recipe* solved all three. Decompose into indicators, apply linearity, swap each expectation for a probability, sum. When you see "expected number of *[somethings]*," your hand should already be reaching for an indicator per *something*.

5.9 Las Vegas vs. Monte Carlo: Two Flavors of Randomized Algorithm

Randomized algorithms come in two temperaments, and it is worth naming them.

Intuition

A **Las Vegas** algorithm always returns the *correct* answer; only its *running time* is random. Randomized quicksort and RANDOMIZED-HIRE are Las Vegas: the output is never wrong, but how long it takes depends on the coins. You gamble with time, never with correctness.

A **Monte Carlo** algorithm always finishes in a *bounded* time, but may occasionally return a *wrong* answer, with some controllable small probability. Many primality tests and approximate-counting schemes are Monte Carlo: fast and bounded, but right only "with high probability."

Mnemonic: in Las Vegas you are guaranteed to leave with the right answer, you just do not know *when*; in Monte Carlo you leave *on time*, but might leave with the wrong souvenir.

This chapter's algorithms are all Las Vegas. We will meet Monte Carlo algorithms later, especially in the number-theory chapter, where being wrong one time in a billion is a perfectly good trade for enormous speed.

5.10 What "Expected Running Time" Really Means

We should be careful about a phrase we have been using loosely. When we say a randomized algorithm has *expected running time* $T(n)$, we mean: *fix* any input of size n, then average the running time over the algorithm's internal coin flips. The expectation is taken over the randomness of the algorithm, with the input held fixed and adversarial.

Formal

For a randomized algorithm $\mathcal{A}$, the expected running time on an input x is

$$T_{\mathcal{A}}(x) = \mathbb{E}_r\big[\,\text{steps } \mathcal{A} \text{ takes on input } x \text{ using random bits } r\,\big],$$

where the expectation is over the algorithm's random bits r. The *worst-case expected running time* is then $\max_{|x|=n} T_{\mathcal{A}}(x)$: the worst this average gets over all inputs of size n.

Common trap

Do not confuse *expected* running time with *worst-case* running time. Randomized quicksort has expected running time $\Theta(n \log n)$ but worst-case running time $\Theta(n^2)$ — the bad case still exists, it has just become astronomically unlikely (the coins would all have to conspire). "Expected $\Theta(n \log n)$" is a promise about the average over coins, not a promise that n^2 can never happen.

5.11 Putting It Together: a Tiny End-to-End Example

Let us run one complete numeric story through the machinery, hiring problem style, to leave no gap between the abstract recipe and concrete arithmetic.

Example 5.5 (Hiring with $n = 4$, fully enumerated)**.** Take four candidates with qualities $1 < 2 < 3 < 4$ (so 4 is best). With a uniform random arrival order there are $4! = 24$ equally likely orderings. We claim $\mathbb{E}[\text{hires}] = H_4 = 1 + \frac{1}{2} + \frac{1}{3} + \frac{1}{4} = \frac{25}{12} \approx 2.083$.

Let us sanity-check by counting hires for a few orders (candidate 0 is the dummy, so the first real candidate is always hired):

- Order $1, 2, 3, 4$: hire at every step. 4 hires.
- Order $4, 3, 2, 1$: hire only the first. 1 hire.
- Order $2, 1, 4, 3$: hire 2, then 4. 2 hires.
- Order $3, 1, 4, 2$: hire 3, then 4. 2 hires.

If you grind through all 24 orders, the hire counts sum to 50, giving average $50/24 = 25/12 \approx 2.083$ — exactly H_4. The indicator argument gave this in four lines; the brute-force enumeration confirms it. Seeing both agree is the point: the recipe is not magic, it is bookkeeping done cleverly.

Algorithm lab

Reproduce Example 5.5 yourself. Write out all 24 permutations of $\{1, 2, 3, 4\}$ (or just generate them mentally in lexicographic order), count hires for each, and confirm the total is 50. Then group the 24 orders by "did candidate at position i get hired?" and verify that position i is a hire in exactly $24/i$ of the orders — 24 for $i = 1$, 12 for $i = 2$, 8 for $i = 3$, 6 for $i = 4$ — which is the indicator probability $1/i$ in disguise.

Cost summary

Costs at a glance.

- RANDOMIZE-IN-PLACE: $\Theta(n)$ time, $O(1)$ extra space; produces each of $n!$ permutations with probability $1/n!$.
- HIRE-ASSISTANT (deterministic, random input): interviewing $\Theta(n)$ always; expected hires $H_n = \ln n + O(1)$; worst-case hires n.
- RANDOMIZED-HIRE-ASSISTANT: same expected hires H_n for *every* input (adversary cannot force the worst case); cost of the shuffle is $\Theta(n)$, dwarfed by interviewing.
- Expected inversions in a uniform random permutation: $\binom{n}{2}/2 = n(n-1)/4 = \Theta(n^2)$.

History and connection

This material is CLRS Chapter 5, "Probabilistic Analysis and Randomized Algorithms" — indicator random variables (5.2), the hiring problem (5.1–5.3), RANDOMIZE-IN-PLACE (5.3), and the further probabilistic-analysis topics (5.4, the birthday paradox, balls and bins, streaks, and the on-line hiring problem) that make excellent follow-up reading. The indicator-random-variable technique as a teaching device was popularized by CLRS itself; the in-place uniform shuffle is due to R. A. Fisher and F. Yates (1938) and was rediscovered and analyzed by Donald Knuth, which is why you will hear it called both the Fisher–Yates and the Knuth shuffle. The probabilistic method more broadly — of which linearity of expectation is the gentlest entry point — was pioneered by Paul Erdős; the classic reference is Alon and Spencer's *The Probabilistic Method*. After this chapter, the randomized-quicksort analysis (in the quicksort chapter) and randomized hashing (in the hashing chapter) reuse *exactly* the indicator machinery you just learned.

Why this matters

Why does any of this matter outside a textbook? Because the "shuffle, then run something simple" pattern is load-bearing in real systems. Randomized quicksort is the default sort in many language standard libraries precisely because randomization makes the $\Theta(n^2)$ case vanish in practice without any input assumptions. Hash tables randomize their hash function so that no adversary can craft keys that all collide — a real security concern ("hash-flooding" denial-of-service attacks against web servers were patched exactly this way). Distributed systems pick random servers to balance load. Cryptography is *built* on randomness. The humble indicator random variable is your first rigorous tool for predicting how all of these behave on average.

5.12 Summary

You arrived with deterministic machines and leave with dice in your toolbox. The throughline:

- **Two averages.** Probabilistic analysis averages a deterministic algorithm over a random *input*; a randomized algorithm averages over its own *coin flips*. Prefer the second: it guarantees the bound for every input.
- **Expectation and its linearity.** $\mathbb{E}[X] = \sum_x x \Pr\{X = x\}$, and $\mathbb{E}[\sum X_i] = \sum \mathbb{E}[X_i]$ *always*, correlated or not. That no-fine-print linearity is the workhorse.
- **Indicator random variables.** $\mathbb{E}[I\{A\}] = \Pr\{A\}$. To find an expected count, write it as a sum of indicators, apply linearity, replace each expectation by a probability, and sum. We ran this recipe on coin flips ($n/2$), hires (H_n), and inversions ($n(n-1)/4$).
- **The hiring problem.** Expected hires $= H_n = \ln n + O(1)$: tiny. Randomizing the input order makes this guarantee hold against any adversary.
- **Uniform shuffling.** RANDOMIZE-IN-PLACE swaps $A[i]$ with a random later (or equal) position, runs in $\Theta(n)$, and is provably uniform by a loop invariant. The all-positions variant looks more random but is provably *not* uniform.

Everything from here — quicksort, hashing, skip lists, primality testing — leans on these few ideas. Hold onto the indicator recipe most tightly; it is the single most reused tool in the analysis of algorithms.

5.13 Exercises

Exercise 5.1 (Warm-up: expectation of a biased coin)**.** A coin comes up heads with probability p and tails with probability $1 - p$. Let X be the indicator that a single flip is heads. Compute $\mathbb{E}[X]$ directly from the definition of expectation, and confirm it equals $\Pr\{\text{heads}\}$ as Lemma 5.1 promises. Then, for n independent such flips, find the expected number of heads using indicators.

Exercise 5.2 (Expected maximum index of a hire)**.** In HIRE-ASSISTANT with random input, candidate 1 is always hired and candidate n is hired with probability $1/n$. Using indicators, what is the expected number of *interviews that result in a hire among the last half* of candidates, i.e. positions $\lceil n/2 \rceil$ through n? Express your answer as a difference of harmonic numbers and estimate it for large n.

Exercise 5.3 (Two dice)**.** Roll two fair dice and let X be the sum of the faces. Use linearity of expectation (write $X = X_1 + X_2$ for the two dice) to find $\mathbb{E}[X]$ in two lines, without summing over all 36 outcomes. Then find $\mathbb{E}[X]$ the long way and confirm they agree.

Exercise 5.4 (Tracing the shuffle)**.** Run RANDOMIZE-IN-PLACE on $A = [w, x, y, z]$ ($n = 4$) assuming RANDOM returns $j = 2, 4, 3, 4$ at steps $i = 1, 2, 3, 4$ respectively. Show the array after each swap. Then argue, using Lemma 5.2, why this particular output had probability exactly $1/24$ before the run started.

Exercise 5.5 (Why the broken shuffle fails, in miniature)**.** Consider the incorrect shuffle that, for each i from 1 to n, swaps $A[i]$ with $A[\text{RANDOM}(1, n)]$. For $n = 2$, enumerate all $2^2 = 4$ equally likely

paths and compute the probability of each of the two permutations of $[a, b]$. Are they both $1/2$? Now do the same for the *correct* RANDOMIZE-IN-PLACE and confirm it gives $1/2$ each. (For $n = 2$ the broken version happens to be uniform; explain why it first breaks at $n = 3$, in terms of $n!$ dividing n^n.)

Exercise 5.6 (Expected inversions, restricted)**.** In a uniform random permutation of $\{1, \ldots, n\}$, what is the expected number of inversions (i, j) with $i < j$ that are *adjacent*, i.e. $j = i + 1$? Use one indicator per adjacent pair, and compare your answer to the total expected inversions $n(n-1)/4$. What fraction of inversions, on average, are adjacent?

Exercise 5.7 (Expected number of fixed points)**.** A *fixed point* of a permutation π of $\{1, \ldots, n\}$ is an index i with $\pi(i) = i$. For a uniform random permutation, define $X_i = I\{\pi(i) = i\}$ and use the indicator recipe to show the expected number of fixed points is exactly 1, *independent of* n. (This is a famous and counterintuitive fact: whether you shuffle 5 cards or 5 million, on average exactly one ends up in its original place.)

Exercise 5.8 (Coupon collector, gently)**.** You repeatedly draw a uniformly random coupon from n distinct types (with replacement). Let T be the number of draws until you have collected all n types. Split the process into n *phases*: phase k is the time spent holding exactly $k - 1$ distinct types while waiting for a new one. Argue that the expected length of phase k is $\frac{n}{n-k+1}$ (a geometric waiting time), then use linearity to show $\mathbb{E}[T] = nH_n \approx n \ln n$. Compare this $n \ln n$ to the hiring problem's $\ln n$ and explain in words why one carries an extra factor of n.

Exercise 5.9 (Challenge: expected comparisons in a max-scan)**.** You scan an array of n distinct numbers in random order, keeping a running maximum (like HIRE-ASSISTANT, but you only update a variable rather than pay a hiring fee). Each time you see a new record you do one "update." You already know the expected number of updates is H_n. Now suppose each update costs i units when it happens at position i (later updates are more expensive). Using indicators *and* the fact that $\mathbb{E}[i \cdot X_i] = i \cdot \mathbb{E}[X_i]$ here (why is this valid even though i multiplies the indicator?), compute the expected total update cost $\sum_{i=1}^{n} i \cdot \Pr\{\text{record at } i\}$. Simplify it to a closed form and give its asymptotic order.

Exercise 5.10 (Challenge: Monte Carlo majority)**.** An array of n elements is promised to contain a *strict majority* element (one value occupying more than $n/2$ slots). Here is a Monte Carlo algorithm: pick a random index, read its value v, and *guess* that v is the majority. (a) What is the probability this single guess is correct? (b) If you repeat the guess k times independently and output any value that you guessed at least once, bound the probability that the true majority is never guessed. (c) How large must k be to make the failure probability below $1/1000$? This is the essence of probability amplification — turning a coin-flip-quality algorithm into a reliable one by repetition.

Part II

Sorting and Order Statistics

Chapter 6

Heaps and Heapsort

So far you have met two sorting algorithms with very different personalities. Insertion sort is simple and gentle and runs in $\Theta(n^2)$ time in the worst case. Merge sort is clever, divides and conquers, and runs in $\Theta(n \log n)$ time — but it pays for that speed with an extra array of scratch space the size of the input. A natural question hangs in the air: *can we sort in* $\Theta(n \log n)$ *time without borrowing a second array?*

The answer is yes, and the tool that gets us there is one of the most beautiful data structures in all of computing: the **binary heap**. A heap is a tree that secretly lives inside a plain array, with no pointers, no allocation, no fuss. Once you understand it, you get two prizes at once. The first prize is **heapsort**: an in-place, worst-case $\Theta(n \log n)$ sorting algorithm. The second prize is the **priority queue**: a tiny, fast scheduler that answers the question "what is the most important thing waiting right now?" over and over, and which we will lean on heavily later when we build Dijkstra's algorithm and Prim's algorithm for graphs.

This chapter slows everything down. We will build the array-as-tree picture by hand, trace every operation on real numbers, prove the loop invariants, and derive — not merely state — the surprising fact that you can turn a random array into a heap in *linear* time.

6.1 The shape of a heap

6.1.1 A tree hiding in an array


Picture a binary tree. Not a search tree — forget everything you might know about "smaller on the left, bigger on the right." Just a tree where every node has at most two children. We are going to insist on one strict shape rule:

Focus

A **complete binary tree** is filled level by level, top to bottom, and within each level left to right. Every level is completely full except possibly the last, and the last level is packed as far to the left as it will go. There are no gaps.

That "no gaps" rule is the magic ingredient, because it means we never need pointers. If the tree has no holes, we can lay the nodes out in an array just by reading them off level by level, and then

a child's position is always a fixed arithmetic step away from its parent's. Let me show you.

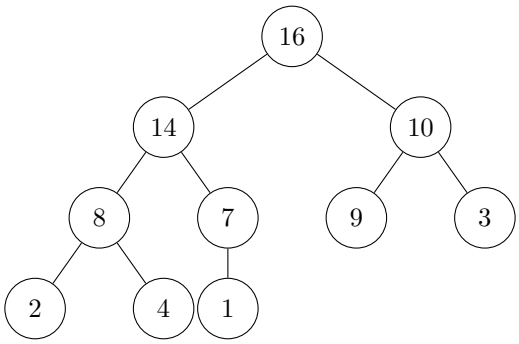

Now read those nodes off level by level: $16, 14, 10, 8, 7, 9, 3, 2, 4, 1$. Drop them into an array, and (following CLRS) we will index that array starting from 1, not 0, because the arithmetic comes out cleaner:

16	14	10	8	7	9	3	2	4	1
1	2	3	4	5	6	7	8	9	10

The gray numbers underneath are array indices. Stare at the tree and the array together. The root 16 is at index 1. Its children, 14 and 10, are at indices 2 and 3. The children of 14 (index 2) are 8 and 7, at indices 4 and 5. The children of 10 (index 3) are 9 and 3, at indices 6 and 7. A pattern is forming.

Focus

For a 1-indexed array, the node at index i has

$$\text{Parent}(i) = \lfloor i/2 \rfloor, \qquad \text{Left}(i) = 2i, \qquad \text{Right}(i) = 2i + 1.$$

Check it on index 2: its left child is $2 \cdot 2 = 4$ (the value 8) and its right child is $2 \cdot 2 + 1 = 5$ (the value 7). Its parent is $\lfloor 2/2 \rfloor = 1$ (the root). Every one of these is a single multiply, add, or shift. On real hardware, doubling is a left bit-shift and halving is a right bit-shift, so these are about the cheapest operations a computer can do.

Intuition

A heap is a *tree you can think about* but an *array you can store*. You get the conceptual clarity of a tree — parents, children, levels, height — with the memory layout and cache-friendliness of a flat array. There are no nodes to allocate and no pointers to chase or break. The tree structure is entirely *implied* by the index arithmetic.

Common trap

The most common beginner stumble: doing this with 0-indexed arrays but using the 1-indexed formulas. If your language indexes from 0 (most do), the formulas shift to $\text{Left}(i) = 2i + 1$, $\text{Right}(i) = 2i + 2$, and $\text{Parent}(i) = \lfloor (i - 1)/2 \rfloor$. Pick a convention and *write it at the top of*

your code. In this chapter we follow CLRS and index from 1.

6.1.2 The heap property: the ordering rule

The shape rule (complete tree) tells us *where* things go. We now add an *ordering* rule that tells us how the values relate. There are two flavors.

Formal

An array $A[1 \dots n]$ is a **max-heap** if, for every node i other than the root,

$$A[\text{Parent}(i)] \geq A[i].$$

Equivalently: every parent is at least as large as each of its children. It is a **min-heap** if instead $A[\text{Parent}(i)] \leq A[i]$ everywhere.

Look back at our example tree. The root is 16, the largest value. Below 16 sit 14 and 10, both smaller. Below 14 sit 8 and 7; below 10 sit 9 and 3. Walk down any path from the root to a leaf and the values only ever *decrease* (or stay equal). That is a max-heap.

Common trap

A heap is **not** a sorted array, and it is **not** a binary search tree. In a max-heap the only promise is parent $\geq$ children. There is *no* relationship enforced between a node and its sibling, or between an uncle and a niece, or between the two subtrees. In our example, 9 (deep on the right) is bigger than 8, 7, 2, 4, and 1 (all on the left), even though those left nodes sit higher in the tree. The heap property is purely local: parent versus child, and nothing more. This local-ness is exactly what makes heaps cheap to maintain.

For the rest of the chapter we work with max-heaps; min-heaps are the mirror image, obtained by flipping every $\geq$ to $\leq$.

Focus

A heap actually has two pieces of bookkeeping. The array A has some allocated length, written $A.\mathit{length}$. But only the first $A.\mathit{heapsize}$ elements are "in the heap" right now, with $0 \leq A.\mathit{heapsize} \leq A.\mathit{length}$. Elements past the heap size are still physically in the array but are not part of the tree. This split will be the secret to making heapsort in-place: as we extract elements, the heap shrinks and the sorted region grows, all inside one array.

6.1.3 How tall is a heap?

The height of a tree is the number of edges on the longest path from the root down to a leaf. Because a heap is a complete binary tree, its height is tightly controlled by the number of elements.

Lemma 6.1 (Height of a heap)**.** *A heap with n elements has height $h = \lfloor \log_2 n \rfloor$.*

Intuition

Each new level of a binary tree can hold twice as many nodes as the one above it: level 0 holds 1 node, level 1 holds up to 2, level 2 up to 4, and in general level k holds up to 2^k nodes. To pile up n nodes you need about $\log_2 n$ levels, because doubling $\log_2 n$ times is what gets you to n. So the tree is short and wide: $n = 1{,}000{,}000$ items fit in a tree only 20 levels tall.

Formal

A complete binary tree of height h has at least 2^h nodes (the levels 0 through $h-1$ are completely full, contributing $1+2+\cdots+2^{h-1} = 2^h - 1$ nodes, plus at least one node on level h) and at most $2^{h+1} - 1$ nodes (every level full). Hence

$$2^h \le n \le 2^{h+1} - 1 < 2^{h+1}.$$

Taking $\log_2$ of $2^h \le n < 2^{h+1}$ gives $h \le \log_2 n < h+1$, so $h = \lfloor \log_2 n \rfloor = \Theta(\log n)$.

This $\Theta(\log n)$ height, recorded in Lemma 6.1, is the source of every speed claim in the chapter. The basic heap operations all do work proportional to the height, so they all cost $O(\log n)$.

6.2 Max-heapify: repairing one broken spot

Here is the workhorse. Suppose you have an array that is *almost* a heap. Specifically, you point at a node i, and you are promised that the left subtree of i and the right subtree of i are both already valid max-heaps. The only possible problem is at i itself: maybe $A[i]$ is smaller than one of its children, which would violate the heap property right there. The procedure MAX-HEAPIFY fixes that single violation by letting the value at i "sink" or "float down" to where it belongs.

Intuition

Think of a too-small value sitting at the top of two good heaps as a bubble of air trapped under water. It does not belong up high. MAX-HEAPIFY lets it sink, one level at a time, swapping past the larger of its two children, until either it is bigger than both children or it has hit the bottom. As it sinks, the bigger child rises to take the parent's place — exactly what the heap property wants up top.

Algorithm 14: MAX-HEAPIFY(A, i) — sink the value at i into place

Input: Array A with heap size $A.heapsize$; index i whose two child subtrees are already max-heaps.

Output: The subtree rooted at i is now a valid max-heap.

```
1  l ← Left(i);
2  r ← Right(i);
3  if l ≤ A.heapsize and A[l] > A[i] then
4  |  largest ← l;
5  else
6  |  largest ← i;
7  if r ≤ A.heapsize and A[r] > A[largest] then
8  |  largest ← r;
9  if largest ≠ i then
10 |  exchange A[i] ↔ A[largest];
11 |  MAX-HEAPIFY(A, largest);
```


Read it slowly. We find the index of the largest among the node and its two children (carefully checking that each child actually exists, i.e. its index is within the heap size). If the node itself is already the largest, there is nothing to do — the heap property holds here and we stop. Otherwise we swap the node with its largest child, which fixes the violation at i, and then we recurse on the child we swapped into, because the swap may have created a new violation one level down.

6.2.1 A full numeric trace

Let us run MAX-HEAPIFY$(A, 2)$ on this array, where the subtrees are valid heaps but the value at index 2 is too small. Take

$$A = [\,16,\ \mathbf{4},\ 10,\ 14,\ 7,\ 9,\ 3,\ 2,\ 8,\ 1\,], \qquad heapsize = 10.$$

As a tree, with the offending 4 in red:

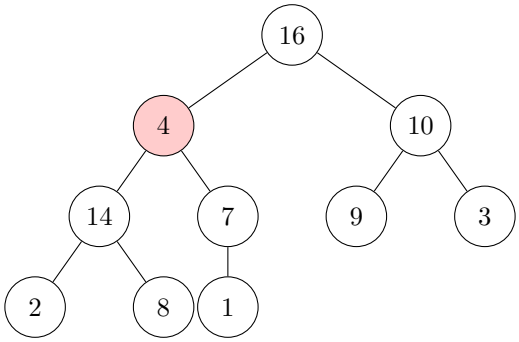

Call Max-Heapify$(A, 2)$. Here $i = 2$, so $l = 4$ and $r = 5$. The values are $A[2] = 4$, $A[4] = 14$, $A[5] = 7$. The largest of $\{4, 14, 7\}$ is 14 at index 4, so $largest = 4 \neq i$. We swap $A[2] \leftrightarrow A[4]$:

$$A = [\,16,\ 14,\ 10,\ \mathbf{4},\ 7,\ 9,\ 3,\ 2,\ 8,\ 1\,].$$

The 14 has floated up; the 4 has dropped to index 4. Now we recurse on index 4.


Call Max-Heapify$(A, 4)$. Now $i = 4$, so $l = 8$ and $r = 9$. Values: $A[4] = 4$, $A[8] = 2$, $A[9] = 8$. The largest of $\{4, 2, 8\}$ is 8 at index 9, so *largest* $= 9$. Swap $A[4] \leftrightarrow A[9]$:

$$A = [\,16,\ 14,\ 10,\ 8,\ 7,\ 9,\ 3,\ 2,\ \mathbf{4},\ 1\,].$$

Recurse on index 9.

Call Max-Heapify$(A, 9)$. Now $i = 9$, so $l = 18$ and $r = 19$. Both exceed *heapsize* $= 10$, so node 9 has no children — it is a leaf. Thus *largest* $= i$, the test *largest* $\neq i$ fails, and we stop.

The 4 has sunk all the way to a leaf, and the array is now a valid max-heap:

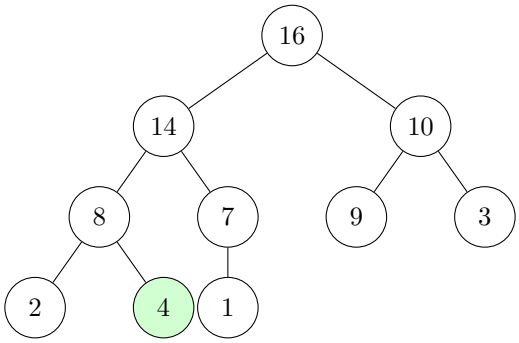

Notice the path the 4 took: index $2 \to 4 \to 9$, exactly one node per level, straight down the tree. That is the crucial observation for the running time.

6.2.2 Why it is correct

Focus

The promise Max-Heapify relies on. It is only correct if, when you call it on i, the subtrees rooted at Left(i) and Right(i) are *already* valid max-heaps. The procedure fixes a violation *at* i; it cannot fix a mess scattered throughout the subtrees.

Given that promise, here is the gentle correctness argument, by induction on the height of node i.

- **Base case.** If i is a leaf, it has no children, so *largest* $= i$ and the procedure does nothing. A single node is trivially a max-heap. Correct.
- **Inductive step.** Suppose Max-Heapify is correct on every node of height less than h, and let i have height h. We pick *largest* to be the index of the maximum of $A[i]$, $A[l]$, $A[r]$. If *largest* $= i$, then $A[i]$ already dominates both children; combined with the promise that the subtrees are heaps, the whole subtree at i is a heap, and we correctly stop. If instead *largest* $\neq i$, we swap, which places the true maximum at i — so the heap property now holds between i and both of its children. The swap may have lowered a value into the child at *largest*, possibly breaking the property there; but the two subtrees of *largest* were untouched and are still heaps, so the promise holds for the recursive call. That child has height $h - 1 < h$, so by the inductive hypothesis the recursive call repairs it. The subtree at i is now fully a max-heap.

6.2.3 Cost of Max-Heapify

Each call does a constant amount of work — a few comparisons and at most one swap — and then either stops or recurses on a node one level down. So the total work is proportional to the number of levels the value sinks, which is at most the height h of the starting node. Since the height of any node is at most $\lfloor \log_2 n \rfloor$ (Lemma 6.1), we get the following.

Cost summary

MAX-HEAPIFY on a node of height h runs in $O(h)$ time, hence $O(\log n)$ in the worst case on an n-element heap. It uses $O(1)$ extra space if written as a loop (the recursion is tail recursion and turns into a **while** loop with no stack growth).

Remark 6.1. You can also bound the recurrence directly. A subtree of n nodes has children subtrees of at most $2n/3$ nodes each (the worst case is when the bottom level is exactly half full). So the running time obeys $T(n) \le T(2n/3) + \Theta(1)$, which by the master theorem (case 2 with $a = 1$, $b = 3/2$) solves to $T(n) = O(\log n)$. Same answer, arrived at two ways.

Walking question

Convince yourself that MAX-HEAPIFY really only walks one root-to-leaf path and never branches sideways. Why can it never need to "go back up"? Think about what is true above i before the call and whether any swap can disturb it.

6.3 Build-Max-Heap: a heap from chaos

We can fix one broken spot. How do we turn a completely arbitrary array into a heap? The clean idea: call MAX-HEAPIFY on every node, but in the *right order*. MAX-HEAPIFY demands that a node's subtrees already be heaps, so we must process nodes **bottom-up** — repair the small subtrees first, then larger ones built on top of them.

Focus

Here is a free fact that cuts our work in half. In an array of size n, the elements indexed $\lfloor n/2 \rfloor + 1, \lfloor n/2 \rfloor + 2, \ldots, n$ are exactly the *leaves* of the tree. A leaf has no children, so it is already a one-element max-heap — nothing to fix. We only need to run MAX-HEAPIFY on the internal nodes, indices 1 through $\lfloor n/2 \rfloor$, and we sweep them in *decreasing* order so children are handled before parents.

Algorithm 15: BUILD-MAX-HEAP(A) — heapify an arbitrary array

Input: Array $A[1 \ldots n]$ in any order.
Output: A rearranged in place into a max-heap.

```
1 A.heapsize ← A.length;
2 for i ← ⌊A.length/2⌋ downto 1 do
3     MAX-HEAPIFY(A, i);
```

6.3.1 A full numeric trace

Take the unordered array

$$A = [\,4,\ 1,\ 3,\ 2,\ 16,\ 9,\ 10,\ 14,\ 8,\ 7\,], \qquad n = 10.$$

The internal nodes are indices 1 through $\lfloor 10/2 \rfloor = 5$. We process $i = 5, 4, 3, 2, 1$.

$i = 5$**:** node $A[5] = 16$, children $A[10] = 7$ only ($A[11]$ doesn't exist). $16 > 7$, no swap needed.

$i = 4$**:** node $A[4] = 2$, children $A[8] = 14$, $A[9] = 8$. Largest is 14; swap. Now $A[4] = 14$, $A[8] = 2$. The new node $A[8] = 2$ is a leaf; stop.

$$A = [\,4,\ 1,\ 3,\ 14,\ 16,\ 9,\ 10,\ 2,\ 8,\ 7\,].$$

$i = 3$**:** node $A[3] = 3$, children $A[6] = 9$, $A[7] = 10$. Largest is 10; swap. $A[3] = 10$, $A[7] = 3$. Node $A[7] = 3$ is a leaf; stop.

$$A = [\,4,\ 1,\ 10,\ 14,\ 16,\ 9,\ 3,\ 2,\ 8,\ 7\,].$$

$i = 2$**:** node $A[2] = 1$, children $A[4] = 14$, $A[5] = 16$. Largest is 16; swap. $A[2] = 16$, $A[5] = 1$. Recurse on index 5: $A[5] = 1$, child $A[10] = 7$; largest is 7, swap, $A[5] = 7$, $A[10] = 1$. Node 10 is a leaf; stop.

$$A = [\,4,\ 16,\ 10,\ 14,\ 7,\ 9,\ 3,\ 2,\ 8,\ 1\,].$$

$i = 1$**:** node $A[1] = 4$, children $A[2] = 16$, $A[3] = 10$. Largest is 16; swap. $A[1] = 16$, $A[2] = 4$. Recurse on index 2: this is exactly the MAX-HEAPIFY$(A, 2)$ we traced earlier! The 4 sinks $2 \to 4 \to 9$, giving

$$A = [\,16,\ 14,\ 10,\ 8,\ 7,\ 9,\ 3,\ 2,\ 4,\ 1\,].$$

That is a valid max-heap — the very tree we drew at the start of the chapter.

6.3.2 Why it is correct: a loop invariant

Formal

Loop invariant for Build-Max-Heap. At the start of each iteration of the **for** loop with counter i, each of the nodes $i + 1, i + 2, \ldots, n$ is the root of a valid max-heap.

Initialization. Before the first iteration, $i = \lfloor n/2 \rfloor$, so the nodes $i + 1, \ldots, n$ are exactly the leaves. Every leaf is a one-node heap, so the invariant holds.

Maintenance. Consider an iteration with counter i. The children of i are indexed $2i$ and $2i + 1$, both *strictly greater* than i, so by the invariant they are already roots of valid max-heaps. That is exactly the promise MAX-HEAPIFY(A, i) requires, so after it runs, node i is the root of a max-heap too. The higher-indexed nodes were not touched, so they remain heaps. Decrementing i reestablishes the invariant for the next iteration.

Termination. The loop ends when $i = 0$. The invariant then says nodes $1, \ldots, n$ are all roots of max-heaps. In particular node 1, the root of the whole tree, is a max-heap — which is exactly what we wanted.


6.3.3 The surprising linear-time analysis

Here is the part people get wrong. The lazy estimate says: we call MAX-HEAPIFY on $O(n)$ nodes, and each call costs $O(\log n)$, so the total is $O(n \log n)$. That bound is *correct but loose*. The truth is better: BUILD-MAX-HEAP runs in $O(n)$ time. Let us see why.

Intuition

The $O(n \log n)$ estimate pretends every node sinks all the way down through $\log n$ levels. But most nodes are near the bottom and barely sink at all! Half the nodes are leaves (sink 0), a quarter are one level up (sink at most 1), an eighth sink at most 2, and so on. The cheap, numerous nodes vastly outnumber the expensive, rare ones near the root. When you add up the real costs honestly, the total collapses to linear.

The picture below makes the imbalance visible. Each row is a level of the tree; the rows near the bottom are crowded with cheap nodes, while the expensive nodes near the top are few. The arrow on the right of each row is the most a node on that row can sink.



height 3: $\sim n/2^{3+1}$ nodes, each sinks ≤ 3

height 2: $\sim n/2^{2+1}$ nodes, each sinks ≤ 2

height 1: $\sim n/2^{1+1}$ nodes, each sinks ≤ 1

height 0: $\sim n/2^{0+1}$ nodes, each sinks ≤ 0

This is a 10-node heap, so the counts are small; in a large heap the doubling is exact and each row down holds twice as many nodes as the one above. Notice how the green bottom rows — the cheap, numerous nodes near height 0 — dwarf the purple top rows near the root. That visual imbalance is the whole secret.

Let us count carefully. A MAX-HEAPIFY call on a node of height h costs $O(h)$. So we need to know: how many nodes have each height? In a heap with n elements, the number of nodes at height h is at most $\lceil n/2^{h+1} \rceil$.

Focus

Why $\lceil n/2^{h+1} \rceil$? Height-0 nodes are the leaves: there are about $n/2$ of them ($\lceil n/2 \rceil$ exactly). Height-1 nodes are about $n/4$, height-2 are about $n/8$. Each step up the tree halves the count, so height-h nodes number about $n/2^{h+1}$.

The total cost of BUILD-MAX-HEAP is therefore at most

$$\sum_{h=0}^{\lfloor \log_2 n \rfloor} \lceil \frac{n}{2^{h+1}} \rceil O(h) \;=\; O\left(n \sum_{h=0}^{\lfloor \log_2 n \rfloor} \frac{h}{2^{h+1}} \right) \;=\; O\left(n \sum_{h=0}^{\infty} \frac{h}{2^h} \right).$$

Everything now hinges on that last infinite sum, $\sum_{h=0}^{\infty} h/2^h$. This is a standard series. Using the identity $\sum_{h=0}^{\infty} h x^h = x/(1-x)^2$ for $|x| < 1$, plug in $x = 1/2$:

$$\sum_{h=0}^{\infty} \frac{h}{2^h} = \frac{1/2}{(1-1/2)^2} = \frac{1/2}{1/4} = 2.$$

The sum is a *constant*, namely 2. Therefore

$$\text{cost of BUILD-MAX-HEAP} = O(n \cdot 2) = O(n).$$

Cost summary

BUILD-MAX-HEAP converts an arbitrary n-element array into a max-heap in $\Theta(n)$ time — **linear**, not $n \log n$. It works in place, using $O(1)$ extra space.

Intuition

The intuition behind "the sum is just 2": the nodes that are expensive to sink (high up, large h) are exponentially rare, while the cheap nodes (low down, small h) are exponentially common. The geometric decay of the counts overwhelms the linear growth of the per-node cost. This tension between a linearly growing weight and a geometrically shrinking population, resolving to a constant, is a pattern you will meet again and again in algorithm analysis.

Common trap

If you build a heap by *inserting* elements one at a time instead (a method we will meet under priority queues), each insertion costs $O(\log n)$ and the total really is $\Theta(n \log n)$ in the worst case. The clever bottom-up BUILD-MAX-HEAP is faster precisely because it does most of its work near the cheap bottom of the tree. Do not confuse the two construction methods.


6.4 Heapsort

Now the payoff. We have a max-heap, so the largest element of the whole array is sitting right at the root, index 1. That is a tantalizing position: in a sorted array (ascending), the largest element belongs at the *end*. So:

Intuition

The heapsort move. The maximum is at the front (index 1). The slot it ultimately belongs in is the back. So swap them: put the max where it belongs at the end, and bring the back element up to the root. Now shrink the heap by one so that the parked maximum is "out of the game," and call MAX-HEAPIFY on the root to fix the one violation we just created. The new maximum bubbles up to the root, and we repeat. Each round freezes one more element into its correct final place at the growing sorted tail.

The single move is worth a picture. The largest element lives at the front of the heap; the sorted tail grows at the back. One step swaps them, shrinks the heap boundary leftward by one, and re-heapifies the front:

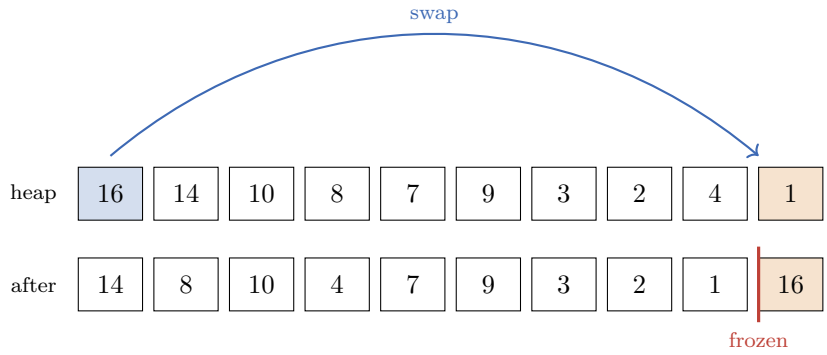

The blue root and the orange last slot trade places; the red bar then walls off the now-frozen maximum, and MAX-HEAPIFY repairs the shrunken heap on its left.

Algorithm 16: HEAPSORT(A) — sort an array ascending, in place

Input: Array $A[1 \ldots n]$ in any order.
Output: A sorted in nondecreasing order.

```
1 BUILD-MAX-HEAP(A);
2 for i ← A.length downto 2 do
3 |   exchange A[1] ↔ A[i];
4 |   A.heapsize ← A.heapsize − 1;
5 |   MAX-HEAPIFY(A, 1);
```

6.4.1 Watching it run

Start from the heap we built, $A = [16, 14, 10, 8, 7, 9, 3, 2, 4, 1]$, heap size 10. We will track the array; a vertical bar | marks the boundary between the shrinking heap (left) and the sorted tail (right).

step	array
start	16 14 10 8 7 9 3 2 4 1
swap 1 ↔ 10, shrink, heapify	14 8 10 4 7 9 3 2 1 | 16
swap 1 ↔ 9, shrink, heapify	10 8 9 4 7 1 3 2 | 14 16
swap 1 ↔ 8, shrink, heapify	9 8 3 4 7 1 2 | 10 14 16
swap 1 ↔ 7, shrink, heapify	8 7 3 4 2 1 | 9 10 14 16
swap 1 ↔ 6, shrink, heapify	7 4 3 1 2 | 8 9 10 14 16
swap 1 ↔ 5, shrink, heapify	4 2 3 1 | 7 8 9 10 14 16
swap 1 ↔ 4, shrink, heapify	3 2 1 | 4 7 8 9 10 14 16
swap 1 ↔ 3, shrink, heapify	2 1 | 3 4 7 8 9 10 14 16
swap 1 ↔ 2, shrink, heapify	1 | 2 3 4 7 8 9 10 14 16
done	1 2 3 4 7 8 9 10 14 16

Watch the sorted tail on the right grow leftward, one frozen element per step, always pulling the

current maximum out of the heap and dropping it just to the left of the previously frozen values. When the heap is down to a single element, that element is automatically the smallest, already in place, and we are done.

Algorithm lab

Trace it yourself. Take $A = [5, 13, 2, 25, 7, 17, 20, 8, 4]$ (nine elements). First run BUILD-MAX-HEAP by hand: process indices $4, 3, 2, 1$ in order, drawing the tree after each MAX-HEAPIFY. You should get a heap with 25 at the root. Then run the heapsort loop and confirm the array marches to $[2, 4, 5, 7, 8, 13, 17, 20, 25]$. Check your work by verifying after every MAX-HEAPIFY that no parent is smaller than a child — if you ever spot one, you slipped.

6.4.2 Correctness via a loop invariant

Formal

Loop invariant for the heapsort loop. At the start of each iteration with counter i:

1. the subarray $A[i+1 \ldots n]$ is sorted and contains the $n - i$ largest elements of the whole array, each in its final position; and
2. the subarray $A[1 \ldots i]$ is a valid max-heap on the current heap size i.

Initialization. Before the first iteration $i = n$, so the sorted tail $A[n+1 \ldots n]$ is empty (vacuously sorted), and $A[1 \ldots n]$ is a max-heap because BUILD-MAX-HEAP just made it one.

Maintenance. In the iteration we swap $A[1]$ (the maximum of the current heap) with $A[i]$. Because the heap held the i largest unsorted elements and $A[1]$ was their maximum, $A[1]$ is the largest element not yet placed — so moving it to position i, just before the sorted tail, keeps $A[i \ldots n]$ sorted and correct. Shrinking the heap to size $i - 1$ removes that frozen element from play. The swap put a possibly-small value at the root, breaking the heap property only at index 1; the two subtrees are untouched and still heaps, so MAX-HEAPIFY$(A, 1)$ restores a valid max-heap on $A[1 \ldots i-1]$. Decrementing i reestablishes the invariant.

Termination. The loop ends at $i = 1$. Then $A[2 \ldots n]$ is sorted and holds the $n-1$ largest elements, while $A[1]$ is the single remaining smallest element. So the whole array $A[1 \ldots n]$ is sorted. Done.

6.4.3 Cost of heapsort

Cost summary

HEAPSORT runs in $\Theta(n \log n)$ time in the worst case and uses $O(1)$ extra space (it sorts in place). The build phase is $\Theta(n)$; the extract phase does $n - 1$ calls to MAX-HEAPIFY, each $O(\log n)$, for $O(n \log n)$. The $\Theta(n \log n)$ term dominates the $\Theta(n)$ build.

The $\Omega(n \log n)$ lower bound (so the running time is Θ, not merely O) comes from the fact that many inputs force the maximum element, after each extraction, to sink a full $\Theta(\log n)$ levels back down. We will not belabor it, but the upper and lower bounds meet at $\Theta(n \log n)$.

Why this matters

Heapsort is the algorithm you reach for when memory is precious and you must guarantee $n \log n$ behavior on *every* input. Quicksort (next chapter) is usually faster in practice on real machines because of better cache behavior, but it can degrade to $\Theta(n^2)$ on adversarial inputs. Merge sort guarantees $\Theta(n \log n)$ but needs $\Theta(n)$ scratch space. Heapsort threads the needle: worst-case $\Theta(n \log n)$ *and* in-place. That is why it shows up in places like the Linux kernel and in introsort (the hybrid behind many standard-library sorts), which starts with quicksort and falls back to heapsort if recursion goes too deep — using heapsort precisely as the worst-case safety net.

Common trap

Heapsort is **not stable**: equal keys can be reordered relative to their original positions, because the swaps fling elements across the array. If you need stability (e.g. sorting records by one field while preserving an earlier ordering on another), heapsort alone will not give it to you without extra tie-breaking keys.

6.5 Priority queues

The heap's second life is as a **priority queue**, and honestly this is where heaps earn their keep in real systems even more than in sorting. A priority queue maintains a set S of elements, each with an associated *key* (its priority), and supports operations that always let you get at the most important element fast.

Focus

A max-priority-queue supports:

- Insert(S, x) — add element x to the set.
- Maximum(S) — return the element with the largest key.
- Extract-Max(S) — remove and return the element with the largest key.
- Increase-Key(S, x, k) — raise element x's key to the new, larger value k.

A min-priority-queue is the mirror image (Minimum, Extract-Min, Decrease-Key) and is what shortest-path and minimum-spanning-tree algorithms actually use.

Why this matters

Priority queues are everywhere a system must repeatedly ask "what next?" An operating-system scheduler picks the highest-priority runnable process. A network router forwards the highest-priority packet. Event-driven simulations pull the next event by time. Dijkstra's shortest-path algorithm repeatedly extracts the closest unfinished vertex. Huffman coding repeatedly extracts the two lowest-frequency symbols. In every case the heap gives you Extract and Insert in $O(\log n)$, which is what makes those algorithms efficient.

6.5.1 Maximum and Extract-Max

Reading the maximum is trivial: it is the root.

Algorithm 17: HEAP-MAXIMUM(A)

Input: Nonempty max-heap A.
Output: The maximum element.

```
1 return A[1];
```

Removing it reuses the heapsort move: take the root, plug the last leaf into the root's slot, shrink, and heapify.

Algorithm 18: HEAP-EXTRACT-MAX(A)

Input: Max-heap A with $A.heapsize \geq 1$.
Output: The maximum element, removed from the heap.

```
1 if A.heapsize < 1 then
2     error "heap underflow";
3 max ← A[1];
4 A[1] ← A[A.heapsize];
5 A.heapsize ← A.heapsize − 1;
6 MAX-HEAPIFY(A, 1);
7 return max;
```

We save the root to return it, move the last element of the heap up to the root, shrink the heap, and let MAX-HEAPIFY sink that moved element to its proper place. One root-to-leaf path of work: $O(\log n)$.

Quick trace. On $A = [16, 14, 10, 8, 7, 9, 3, 2, 4, 1]$, HEAP-EXTRACT-MAX saves 16, moves the last element 1 into the root, shrinks to size 9, giving $[1, 14, 10, 8, 7, 9, 3, 2, 4]$, then heapifies the root: 1 sinks $1 \to 2 \to 4 \to 9$, landing among the leaves, and the array becomes the valid heap $[14, 8, 10, 4, 7, 9, 3, 2, 1]$ with 16 returned. Compare this to the first heapsort step — it is the same operation.

6.5.2 Increase-Key and Insert

The remaining operations move a value *up* the tree instead of down. If you raise a node's key, it may now exceed its parent, so it should "float up" toward the root — the opposite of sinking.

Algorithm 19: HEAP-INCREASE-KEY(A, i, key) — raise $A[i]$ and float it up

Input: Max-heap A, index i, and a new $key \geq A[i]$.
Output: Heap property restored after raising $A[i]$ to key.


```
1 if key < A[i] then
2     error "new key smaller than current key";
3 A[i] ← key;
4 while i > 1 and A[Parent(i)] < A[i] do
5     exchange A[i] ↔ A[Parent(i)];
6     i ← Parent(i);
```

The **while** loop is the floating-up: as long as the node has a parent and is bigger than that parent, swap them and climb. It is the structural twin of MAX-HEAPIFY, walking a leaf-to-root path instead of a root-to-leaf one.

Trace. In $A = [16, 14, 10, 8, 7, 9, 3, 2, 4, 1]$, call HEAP-INCREASE-KEY$(A, 9, 15)$ — raise the value at index 9 (it is 4) up to 15. Set $A[9] = 15$. Its parent is index $\lfloor 9/2 \rfloor = 4$, value 8. Since $15 > 8$, swap: now 15 is at index 4, 8 at index 9. The parent of index 4 is index 2, value 14. Since $15 > 14$, swap: 15 at index 2, 14 at index 4. The parent of index 2 is index 1, value 16. Since $15 < 16$, stop. The 15 has floated up two levels to index 2, and the heap is valid again:

$$A = [\,16,\ 15,\ 10,\ 14,\ 7,\ 9,\ 3,\ 2,\ 8,\ 1\,].$$

The path the raised key climbs is shown below: from index 9 up through index 4 to its resting place at index 2, stopping only when it meets a parent (16) at least as large.

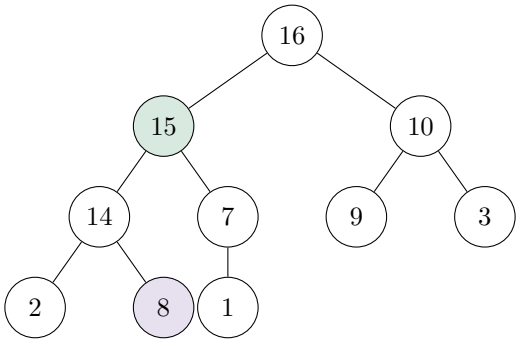

The green node is the raised key 15 in its final spot; the purple node holds the 8 that the climb pushed down into the vacated slot at index 9. Float-up is the exact mirror of the sink in MAX-HEAPIFY: one node per level, along a single path, comparing against just one neighbor (here the parent).

Insertion is then a cute trick: append a sentinel of $-\infty$ as a new leaf (growing the heap), then immediately INCREASE-KEY it up to the real value, which floats it to the correct spot.

Algorithm 20: MAX-HEAP-INSERT(A, key)

Input: Max-heap A and a *key* to insert.
Output: A with *key* added, heap property intact.

```
1 A.heapsize ← A.heapsize + 1;
2 A[A.heapsize] ← −∞;
3 HEAP-INCREASE-KEY(A, A.heapsize, key);
```

Intuition

MAX-HEAPIFY sinks values *down* (used by extract and build); HEAP-INCREASE-KEY floats values *up* (used by insert and key raises). Down-heap walks parent-to-children comparing against the larger child; up-heap walks child-to-parent comparing against the one parent. Two directions, one idea: restore a single local violation by walking the unique path along which it could propagate.

Cost summary

On an n-element heap, all priority-queue operations are fast:

HEAP-MAXIMUM	$\Theta(1)$
HEAP-EXTRACT-MAX	$O(\log n)$
HEAP-INCREASE-KEY	$O(\log n)$
MAX-HEAP-INSERT	$O(\log n)$
BUILD-MAX-HEAP	$\Theta(n)$

because each path-following operation does $O(1)$ work per level and there are $O(\log n)$ levels.

Common trap

A heap is a *terrible* data structure if your main job is to *search* for an arbitrary element or to find the *minimum* of a max-heap. Finding a specific value, or the smallest value, can require scanning $\Theta(n)$ elements, because the heap only promises fast access to the *one* extreme at the root. For two-ended access (both min and max fast), or for searching, reach for a balanced search tree instead. Likewise, INCREASE-KEY needs you to *already know the index i* of the element. Real implementations keep a side table mapping elements to their current heap positions, kept up to date on every swap, so that algorithms like Dijkstra can find the node to update.

History and connection

Heaps and heapsort were invented by J. W. J. Williams in 1964, with the elegant linear-time BUILD-HEAP contributed by Robert W. Floyd the same year. In CLRS, all of this material is **Chapter 6, "Heapsort"**: Section 6.1 introduces heaps, 6.2 is MAX-HEAPIFY, 6.3 is BUILD-MAX-HEAP (with the linear-time analysis), 6.4 is heapsort, and 6.5 is priority queues. When you reach CLRS you will find its treatment crisp and terse; everything here is the slow, worked-through version of those same five sections. Later, CLRS Chapter 19 revisits the idea with Fibonacci heaps, which speed up DECREASE-KEY for advanced graph algorithms.

6.6 Putting it together

Pause

Let us collect the whole chapter in one breath. A **heap** is a complete binary tree stored implicitly in an array, where every parent dominates its children (max-heap). Because the tree has no gaps, children live at indices $2i$ and $2i+1$ and parents at $\lfloor i/2 \rfloor$ — no pointers needed. The tree has height $\Theta(\log n)$.

The one primitive that does all the work downward is **Max-Heapify**, which sinks an out-of-place value along a single root-to-leaf path in $O(\log n)$. Sweeping MAX-HEAPIFY bottom-up over the internal nodes gives **Build-Max-Heap**, which — by the geometric-series miracle — runs in $\Theta(n)$.

From there, **heapsort** repeatedly swaps the root maximum to the end, shrinks the heap, and

re-heapifies, sorting in place in $\Theta(n \log n)$. And the same machinery, plus an upward float (**Heap-Increase-Key**), gives a **priority queue** with $O(\log n)$ insert, extract-max, and key changes — the engine inside schedulers, simulations, Dijkstra, Prim, and Huffman.

Walking question

Here is a question to chew on during a walk. Heapsort and merge sort are both $\Theta(n \log n)$, yet they feel completely different — one floods scratch memory, the other touches a single array. Merge sort builds order by *combining* pieces; heapsort builds order by repeatedly *pulling out the extreme*. Are these two faces of one deeper idea, or genuinely different strategies? And where would quicksort, which you are about to meet, fit on that map?

6.7 Exercises

Exercise 6.1. Using 1-based indexing, what are the indices of the parent, left child, and right child of the node at index 13? Of index 1? Which indices in a heap of size $n = 20$ are leaves?

Exercise 6.2. Is the array $[23, 17, 14, 6, 13, 10, 1, 5, 7, 12]$ a max-heap? If not, identify every parent-child pair that violates the heap property, then run Build-Max-Heap on it by hand and show the resulting heap as both an array and a tree.

Exercise 6.3. Trace Max-Heapify$(A, 3)$ on $A = [27, 17, 3, 16, 13, 10, 1, 5, 7, 12, 4, 8, 9, 0]$ with $heapsize = 14$. Write the array after each swap, and state which index the displaced value finally lands at.

Exercise 6.4. Run the full Heapsort on $A = [5, 3, 17, 10, 84, 19, 6, 22, 9]$. Show the heap after Build-Max-Heap, then the array after each iteration of the extraction loop, marking the boundary between the heap and the sorted tail.

Exercise 6.5. Explain in one or two careful sentences why the elements at indices $\lfloor n/2 \rfloor + 1$ through n are exactly the leaves of a heap with n elements. *Hint:* a node i is internal exactly when it has a left child, i.e. when $2i \le n$.

Exercise 6.6. The text proves $\sum_{h=0}^{\infty} h/2^h = 2$ using a closed-form identity. Give an alternative derivation: let $S = \sum_{h \ge 1} h/2^h$, write down $2S$, subtract S from $2S$, and recognize the resulting series as a plain geometric series. Confirm you get $S = 2$.

Exercise 6.7. Show how to implement Max-Heapify as an iterative **while** loop with no recursion and $O(1)$ extra space. Argue that it visits exactly the same sequence of indices as the recursive version.

Exercise 6.8. Describe how to convert every operation in this chapter into a *min*-heap and *min*-priority-queue (Heap-Minimum, Heap-Extract-Min, Heap-Decrease-Key). What exactly changes in Max-Heapify? Write the pseudocode for Min-Heapify.

Exercise 6.9. Give an array of 7 distinct numbers that is simultaneously a valid max-heap and *not* sorted in descending order, demonstrating concretely that "heap" and "sorted" are different properties. Then explain why the root nonetheless always holds the maximum.

Exercise 6.10 (Challenge)**.** You are given k sorted lists containing n elements in total, and you want to merge them into one sorted list. Describe an $O(n \log k)$ algorithm using a min-heap of size k. Explain why the heap holds at most k elements at any time and why each of the n output steps costs $O(\log k)$.

Exercise 6.11 (Challenge)**.** The operation HEAP-DELETE(A, i) removes the element at an arbitrary index i from a max-heap. Design it to run in $O(\log n)$ time. *Careful:* after you move the last element into slot i, the new value might be too big *or* too small for that position — so a single MAX-HEAPIFY may not suffice. Explain what you must check and write the pseudocode.

Exercise 6.12 (Challenge)**.** Argue that heapsort is not stable by exhibiting a small input of records with equal keys whose relative order is reversed by the algorithm. Then describe a general fix that makes *any* comparison sort stable by augmenting the keys, and state the extra space it costs.

Chapter 7

Quicksort

There is a sorting algorithm that, on paper, has a terrible worst case – quadratic, $\Theta(n^2)$, the same as the clumsy bubble sort you were warned about. And yet this algorithm is, in practice, the one that ships. It is the default in countless standard libraries. It sorts arrays faster than almost anything else with the same asymptotic average. Its name is *quicksort*, and learning why something with a quadratic worst case earns the word "quick" is one of the most rewarding stories in all of algorithms.

This chapter is going to slow that story down to a crawl. We will build the partition step by hand, trace it across real numbers, prove that it does what we claim, and only then ask the hard question: how long does the whole thing take? The answer will pull in everything you learned about asymptotics (Chapter 3), about divide and conquer (Chapter 4), and about probability (Chapter 5). By the end you will understand not just *that* randomized quicksort runs in $\Theta(n \log n)$ expected time, but *why* – down to the individual comparisons, counted one at a time.

7.1 The shape of the idea

Let us begin with the picture before any code. Suppose someone hands you an array of numbers and asks you to sort it. Quicksort's strategy is almost arrogant in its simplicity. Pick one element. Call it the *pivot*. Now shove everything smaller than the pivot to its left and everything larger to its right. The pivot has now landed in its *final, sorted position* – it will never move again. Then recursively do the same thing to the left chunk and the right chunk.

Intuition

Imagine you are sorting a deck of cards by the value 7. You sweep through the deck and toss every card below 7 into a left pile and every card above 7 into a right pile, then set the 7 down in the middle. The 7 is now exactly where it belongs in the final sorted deck: every card to its left is smaller, every card to its right is larger. You have not finished sorting – the two piles are still messes – but you have made undeniable progress, because that one card is locked in. Repeat on each pile. When the piles shrink to a single card, everything is sorted.

This is divide and conquer, but with a twist. In merge sort (Chapter 4) the *divide* step is trivial – you just cut the array in half – and all the real work happens in the *combine* step, where you merge two sorted halves. Quicksort flips this. The divide step, called *partitioning*, does all the work: it

rearranges the elements so that the pivot is correctly placed. And the combine step is *nothing at all*. Once the two halves are sorted, the whole array is already sorted, because everything left of the pivot is smaller than everything right of it. There is no merge.

Focus

Hold onto this contrast. Merge sort: easy split, hard combine. Quicksort: hard split (partition), free combine. Both are $\Theta(n \log n)$ on average, but they spend their effort in opposite places. Quicksort's free combine is exactly why it sorts *in place* – no scratch array needed.

Here is the top-level routine. Notice how short it is. Almost all the substance hides inside PARTITION, which we have not written yet.

Algorithm 21: QUICKSORT(A, p, r)

Input: Array A, and indices $p \le r$ marking the subarray $A[p\,..\,r]$.
Output: $A[p\,..\,r]$ rearranged into nondecreasing order.

```
1 if p < r then
2     q ← PARTITION(A, p, r) ;          // pivot lands at index q
3     QUICKSORT(A, p, q − 1) ;           // sort the left part
4     QUICKSORT(A, q + 1, r) ;           // sort the right part
```

To sort an entire array A of length n (with indices 1 through n), you call QUICKSORT$(A, 1, n)$. The guard $p < r$ is the base case in disguise: a subarray of size 0 or 1 ($p \ge r$) is already sorted, so we do nothing. Everything now rides on PARTITION. Let us build it.

7.2 Lomuto partitioning, built by hand

There are two famous ways to partition. We will start with *Lomuto's* scheme, named for Nico Lomuto, because it is the easier of the two to reason about. It is also the version CLRS presents first.

The plan: we choose the *last* element $A[r]$ as the pivot. We then walk a finger from left to right across the subarray, maintaining a growing region of "small" elements at the front. Let us be painfully concrete about what we are maintaining.

Intuition

Picture the subarray split into four zones as you scan. From left to right: (1) a region of elements known to be $\le$ pivot; (2) a region of elements known to be $>$ pivot; (3) elements you have not looked at yet; (4) the pivot itself, sitting at the far right. Your scanning finger j marks the boundary between "looked at" and "not yet looked at." A second marker i tracks the end of the small region. Each step you examine $A[j]$ and decide which of the first two zones it belongs to. Figure 7.1 freezes this picture at one moment in the middle of the scan.

Here is the code. Read it once, then we will trace it.

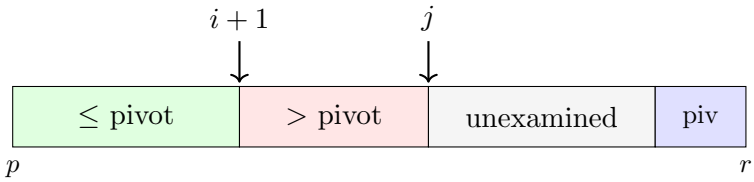


Figure 7.1: The Lomuto invariant. Everything before index $i+1$ is $\leq$ the pivot; everything from $i+1$ up to $j-1$ is $>$ the pivot; $A[j\,..\,r-1]$ is not yet examined; $A[r]$ is the pivot.

Algorithm 22: PARTITION(A, p, r) – Lomuto scheme

Input: Subarray $A[p\,..\,r]$ with $p \leq r$.
Output: Returns an index q; afterward $A[p\,..\,q-1] \leq A[q] < A[q+1\,..\,r]$.

```
1 x ← A[r] ;                                   // the pivot is the last element
2 i ← p − 1 ;                                  // i = end of the ‘‘≤ pivot’’ region
3 for j ← p to r − 1 do
4     if A[j] ≤ x then
5         i ← i + 1;
6         exchange A[i] with A[j];
7 exchange A[i + 1] with A[r] ;                // drop the pivot into place
8 return i + 1;
```

7.2.1 A complete numeric trace

Let us partition the subarray

$$A = [\,2,\ 8,\ 7,\ 1,\ 3,\ 5,\ 6,\ 4\,],$$

with $p = 1$, $r = 8$. The pivot is $x = A[8] = 4$. We start with $i = 0$ (meaning "the small region is empty"). We will show the array after each iteration of j, marking the pivot in **bold** and using a vertical bar to show where i sits (everything up to and including position i is the $\leq$-pivot region).

Algorithm lab

Trace it with me, but also keep a finger on the page and predict each step before you read it. The mechanical rule is: *whenever $A[j] \leq 4$, bump i up by one and swap $A[i]$ with $A[j]$; otherwise do nothing and move on.*

step	j, $A[j]$, decision	array (bar after position i)
start	—	| 2 8 7 1 3 5 6 **4**
$j = 1$	$A[1] = 2 \le 4$: i=1, swap $A[1], A[1]$	2 | 8 7 1 3 5 6 **4**
$j = 2$	$A[2] = 8 > 4$: skip	2 | 8 7 1 3 5 6 **4**
$j = 3$	$A[3] = 7 > 4$: skip	2 | 8 7 1 3 5 6 **4**
$j = 4$	$A[4] = 1 \le 4$: i=2, swap $A[2], A[4]$	2 1 | 7 8 3 5 6 **4**
$j = 5$	$A[5] = 3 \le 4$: i=3, swap $A[3], A[5]$	2 1 3 | 8 7 5 6 **4**
$j = 6$	$A[6] = 5 > 4$: skip	2 1 3 | 8 7 5 6 **4**
$j = 7$	$A[7] = 6 > 4$: skip	2 1 3 | 8 7 5 6 **4**
final swap	swap $A[i+1]$=$A[4]$ with $A[8]$	2 1 3 **4** | 8 7 5 6

The function returns $q = i + 1 = 4$. Look at the result: $[2, 1, 3]$ are all ≤ 4, the pivot 4 sits at index 4, and $[8, 7, 5, 6]$ are all > 4. The pivot is home. Quicksort now recurses on $[2, 1, 3]$ and $[8, 7, 5, 6]$.

Notice the two swaps that actually *moved* things: at $j = 4$ the value 1 (small) traded places with 8 (large), and at $j = 5$ the value 3 (small) traded with the 7 that 8 had been swapped past. Each time we find a small element, we swap it into the small region, pushing one large element out into the large region. The pattern is: *small elements bubble forward, large elements get shoved back,* and at the very end the pivot jumps over the entire large region to land right after the small region.

7.2.2 Why it is correct: a loop invariant

We claimed the output satisfies $A[p\,..\,q-1] \le A[q] < A[q+1\,..\,r]$. Let us prove it the gentle way, with a loop invariant. A loop invariant is a statement that is true before the loop starts and stays true after every iteration; if it survives to the end, it tells you something about the final state.

Formal

Loop invariant (Lomuto). At the start of each iteration of the **for** loop with loop variable j, the following hold:

1. For every index k with $p \le k \le i$, we have $A[k] \le x$.
2. For every index k with $i + 1 \le k \le j - 1$, we have $A[k] > x$.
3. $A[r] = x$ (the pivot has not moved).

In words: everything in the small region is $\le$ the pivot, everything in the large region is $>$ the pivot, and the pivot is still parked at the right end.

Lemma 7.1 (Partition correctness)**.** *After* PARTITION(A, p, r) *returns* $q = i + 1$*, every element of* $A[p\,..\,q-1]$ *is* $\le A[q]$ *and every element of* $A[q+1\,..\,r]$ *is* $> A[q]$*, where* $A[q]$ *equals the original pivot value* x*.*

Proof. We verify the invariant in three steps.

Initialization. Before the first iteration, $j = p$ and $i = p - 1$. Region 1 spans $p \le k \le p - 1$, which is empty, so condition 1 holds vacuously. Region 2 spans $p \le k \le p - 1$, also empty, so condition 2 holds vacuously. And $A[r] = x$ because we have not touched it. The invariant holds.

Maintenance. Suppose the invariant holds at the start of an iteration with loop variable j. We look at $A[j]$.

- If $A[j] > x$: we do nothing but advance j. The element at the old position j now falls into region 2 (indices $i+1$ through the new $j-1$), and it satisfies $A[j] > x$, so condition 2 still holds. Conditions 1 and 3 are untouched.
- If $A[j] \le x$: we increment i and swap $A[i]$ with $A[j]$. The slot $A[i]$ used to be the first element of region 2, so it held a value $> x$; now it receives the value $A[j] \le x$, extending region 1 correctly. The displaced large value lands at the old position j, which becomes the new tail of region 2 as j advances, so condition 2 still holds. Condition 3 is untouched because $j \le r-1 < r$, so we never swap the pivot.

In both cases the invariant survives.

Termination. The loop ends when $j = r$. By condition 1, all of $A[p\,..\,i]$ is $\le x$; by condition 2, all of $A[i+1\,..\,r-1]$ is $> x$. The final swap exchanges $A[i+1]$ with $A[r] = x$. (When the large region is nonempty, $A[i+1]$ held a value $> x$; when it is empty, $i+1 = r$ and the swap is harmless.) After it, $A[i+1] = x$, the values in $A[p\,..\,i]$ are $\le x$, and the values in $A[i+2\,..\,r]$ are $> x$ (the displaced large value joined them). Returning $q = i+1$ makes the claim exact. □

Common trap

A subtle point that trips people up: the inequality on the left is $\le$, not $<$. Elements *equal* to the pivot go to the *left*. That is fine for correctness, but it matters a great deal for performance. If your array is all duplicates – say n copies of the number 5 – Lomuto sends *every* element into the left region, so the partition is maximally unbalanced ($n-1$ on the left, 0 on the right) every single time. That is the worst case in disguise. We will fix this danger later with randomization, and we will see that Hoare's scheme handles equal keys more gracefully.

7.3 The two recursion patterns: best and worst case

Now that partition is trustworthy, the running time of quicksort is decided entirely by *how balanced the splits are*. Partitioning a subarray of size n costs $\Theta(n)$ – one scan, a constant amount of work per element. The question is what sizes the two recursive calls get.

7.3.1 The worst case: maximally lopsided splits

Suppose every single partition is as unbalanced as possible: the pivot is always the smallest (or largest) element, so one side gets $n-1$ elements and the other gets 0. When does this happen? Precisely when the array is already sorted (or reverse sorted) and we keep picking the last element as the pivot. Then the recurrence for the running time $T(n)$ is

$$T(n) = T(n-1) + T(0) + \Theta(n) = T(n-1) + \Theta(n).$$

This unrolls into a sum (the chain in Figure 7.2):

$$T(n) = \Theta(n) + \Theta(n-1) + \cdots + \Theta(2) + \Theta(1) = \Theta\left(\sum_{k=1}^{n} k\right) = \Theta\left(\frac{n(n+1)}{2}\right) = \Theta(n^2).$$




Figure 7.2: The worst-case recursion "tree" for quicksort is really a chain of depth n. Each level removes one element and does linear work on the rest, so the total work is $n+(n-1)+\cdots+1 = \Theta(n^2)$.

So the worst case is genuinely $\Theta(n^2)$. This is no better than insertion sort. If that were the whole story, nobody would use quicksort.

7.3.2 The best case: perfectly even splits

Now suppose we get the opposite luck: every partition splits the subarray into two halves of size $n/2$ (give or take one for the pivot). Then

$$T(n) = 2\,T(n/2) + \Theta(n).$$

This is the merge-sort recurrence, and by the master theorem (Chapter 4) its solution is $T(n) = \Theta(n \log n)$. The recursion tree has depth $\log_2 n$, each level does $\Theta(n)$ total work, and $\log_2 n$ levels times $\Theta(n)$ gives $\Theta(n \log n)$. Figure 7.3 shows why the work per level stays flat at $\Theta(n)$ even as the tree fans out.

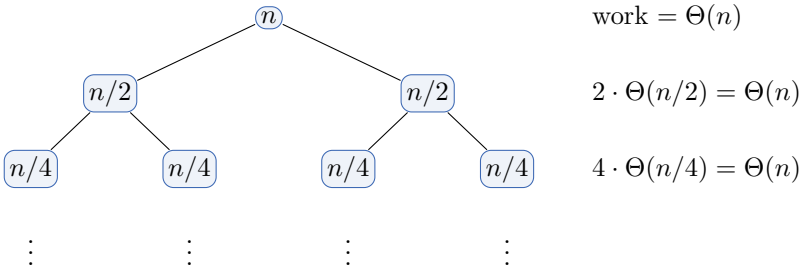


Figure 7.3: The best-case recursion tree. Each level holds subproblems whose sizes sum to n, so each level costs $\Theta(n)$. Balanced halving makes the tree only $\log_2 n$ levels deep, for a total of $\Theta(n \log n)$. Compare the worst-case chain in Figure 7.2, which is n levels deep.

Intuition

Why does balance matter so much? Think about *depth*. Every level of recursion does about $\Theta(n)$ work in total (the partitions at that level collectively scan roughly all n elements). So the running time is essentially $\Theta(n)$ times the *number of levels*. Balanced splits halve the problem each level, giving only $\log_2 n$ levels. Lopsided splits shave off one element per level, giving n levels. That is the entire difference between $n \log n$ and n^2: how fast the subproblems shrink.

7.3.3 The reassuring middle: even bad balance is fine

Here is the fact that makes quicksort believable. You do not need *perfect* balance to get $\Theta(n \log n)$. You just need the split ratio to be bounded away from the extreme. Suppose every partition is a lopsided 9-to-1 split – that sounds awful – so that

$$T(n) = T\left(\tfrac{9n}{10}\right) + T\left(\tfrac{n}{10}\right) + \Theta(n).$$

Draw the recursion tree (Figure 7.4). The shallowest leaf is reached by repeatedly taking the $\frac{1}{10}$ branch, at depth $\log_{10} n$. The deepest leaf is reached by repeatedly taking the $\frac{9}{10}$ branch, at depth $\log_{10/9} n$. Every *full* level does at most $\Theta(n)$ work, and there are at most $\log_{10/9} n = \Theta(\log n)$ levels before everything bottoms out. So the total is at most $\Theta(n \log n)$. A 99-to-1 split would still give $\Theta(n \log n)$; only the constant inside the log changes.

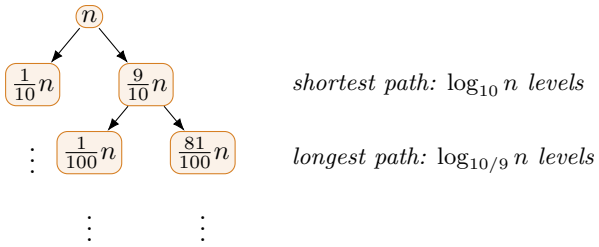


Figure 7.4: A consistently 9-to-1 recursion tree. The lightly loaded $\frac{1}{10}$ branches bottom out quickly ($\log_{10} n$ deep); the heavy $\frac{9}{10}$ branches form the longest root-to-leaf path ($\log_{10/9} n$ deep). Both depths are $\Theta(\log n)$, and each level still costs $\Theta(n)$, so the total stays $\Theta(n \log n)$.

Focus

The lesson: quicksort is $\Theta(n \log n)$ unless the splits are *consistently, catastrophically* lopsided – close to 0-to-n almost every time. A merely "unlucky" split here and there costs you nothing asymptotically. This robustness is the seed of why randomization rescues quicksort: random pivots make consistent catastrophe astronomically unlikely.

7.4 The villain in the input, and how to remove it

So far we have chosen the pivot as $A[r]$, the last element. That choice has a fatal flaw: it makes the running time depend on the *arrangement of the input*. An already-sorted array – one of the most common inputs in the real world – triggers the $\Theta(n^2)$ worst case every time. That is a disaster. Imagine a database that re-sorts an already-sorted log file and grinds to a halt.

Common trap

The naive fix people reach for first is "pick the middle element" or "pick the first element." These help against sorted inputs but do not solve the problem: for *any* fixed deterministic rule for choosing the pivot, an adversary who knows your rule can construct an input that forces the worst case. There is always a bad input. The only escape is to stop letting the input decide.

The cure is one of the most elegant ideas in algorithm design: make the pivot *random*. Instead of always taking $A[r]$, pick a uniformly random index between p and r, swap that element into position r, and proceed exactly as before. The partition logic is unchanged; only the pivot's identity is now a coin flip.

Algorithm 23: RANDOMIZED-PARTITION(A, p, r)

Input: Subarray $A[p\,..\,r]$.
Output: A partition around a uniformly random pivot; returns the pivot index.

```
1 s ← RANDOM(p, r) ;                          // uniform in {p, ..., r}
2 exchange A[r] with A[s] ;                   // move random pivot to the end
3 return PARTITION(A, p, r);
```

Algorithm 24: RANDOMIZED-QUICKSORT(A, p, r)

```
1 if p < r then
2     q ← RANDOMIZED-PARTITION(A, p, r);
3     RANDOMIZED-QUICKSORT(A, p, q − 1);
4     RANDOMIZED-QUICKSORT(A, q + 1, r);
```

Why this matters

This is a profound shift in what "worst case" even means. With deterministic quicksort, the worst case is a property of the *input*: a specific evil array. With randomized quicksort, *no input is reliably bad*. For any fixed array, the algorithm's running time is now a random variable, and we will prove its *expected* value is $\Theta(n \log n)$ regardless of how the input was arranged. The randomness lives in the algorithm's coin flips, not in the data. An adversary can choose the array but cannot see your coins. This same trick – randomize to defeat worst-case inputs – recurs throughout computer science, in hashing (Chapter 11), in load balancing, in cryptography.

History and connection

Quicksort was invented by Tony Hoare in 1959–1961 while he was a young researcher trying to sort words for a machine-translation project in Moscow. He later won the Turing Award. The randomized-pivot and rigorous expected-time analysis are developed carefully in **CLRS Chapter 7** ("Quicksort"), with the indicator-variable argument in **Section 7.4.2**. The Lomuto partition we used is in **Section 7.1**; Hoare's original partition is explored in **Problem 7-1**. Read this chapter first, then CLRS 7 will feel like reviewing an old friend.

7.5 The heart of the matter: expected running time

We now prove the central theorem. Brace yourself – this is the most beautiful analysis in the chapter, and once it clicks you will never forget it.

Theorem 7.1 (Expected time of randomized quicksort)**.** *On any input of n distinct elements,* RANDOMIZED-QUICKSORT *runs in expected time $O(n \log n)$, where the expectation is over the random choices of pivots.*

The whole running time of quicksort is dominated by one operation: *comparing an element to a pivot* inside PARTITION. Every other operation (swaps, index bookkeeping, recursive call overhead) is bounded by a constant times the number of partition calls, and there are at most n partition calls total. So if we can bound the *total number of comparisons* X across the entire run, we have bounded the running time: it is $O(n + X)$.

Focus

The entire analysis reduces to one question: *across the whole sort, how many times does the algorithm compare two elements?* Count the comparisons and you have the running time. We will count them with a clever trick called *indicator random variables*.

7.5.1 The key realization: each pair is compared at most once

Let us rename the elements by their *sorted order*, not their positions in the input. Let $z_1 < z_2 < \cdots < z_n$ be the elements in sorted order, so z_i is the i-th smallest. Define $Z_{ij} = \{z_i, z_{i+1}, \ldots, z_j\}$, the set of elements whose sorted ranks fall between i and j inclusive.

Intuition

Here is the linchpin observation. When are two elements z_i and z_j ever *directly compared*? Comparisons only happen between a pivot and a non-pivot. So z_i and z_j are compared if and only if one of them is chosen as a pivot *while they are still in the same subarray*. And crucially, once two elements are compared, one of them was the pivot, which then leaves the recursion – so **any pair is compared at most once** in the entire run.

Now think about *which* element, chosen as a pivot, would either compare z_i with z_j or else separate them forever. Consider the set Z_{ij}. As long as no element of Z_{ij} has been chosen as a pivot, all of Z_{ij} sits together in one subarray (because any pivot *outside* Z_{ij} is either smaller than every z in Z_{ij}, sending them all right, or larger than every one, sending them all left – never splitting them). The first pivot chosen *from within* Z_{ij} decides their fate:

- If that first pivot is z_i or z_j itself, then z_i and z_j *are* compared (the pivot is compared against every other element in the subarray, including the other one).
- If that first pivot is some *middle* element z_k with $i < k < j$, then z_i goes to the left subarray and z_j goes to the right subarray. They are now separated forever and will *never* be compared.

So z_i and z_j are compared if and only if the *first* element chosen as a pivot from the set Z_{ij} is either z_i or z_j. Figure 7.5 lays out the three cases on a number line of sorted ranks.

Walking question

Before reading the probability calculation, take this on a walk. The set Z_{ij} has exactly $j-i+1$ elements. Each pivot is chosen uniformly at random, so before any of Z_{ij} has been a pivot, each of its $j-i+1$ members is *equally likely* to be the first one chosen from the set. We want the chance that the first one is one of the *two* endpoints, z_i or z_j. Two favorable outcomes out of $j-i+1$ equally likely ones. Can you guess the probability before we derive it?

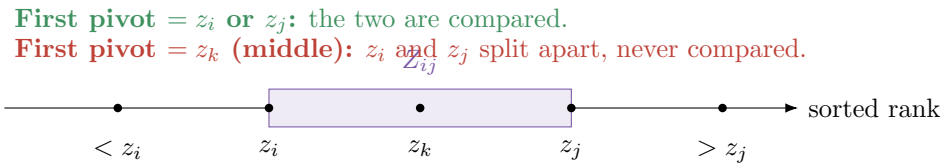


Figure 7.5: The fate of the pair (z_i, z_j) is sealed by the first pivot drawn from the contiguous rank-block Z_{ij}. A pivot from *outside* the block (rank $< z_i$ or $> z_j$) pushes the whole block to one side without splitting it, so it never decides anything. An endpoint pivot compares the pair; a strictly interior pivot z_k separates them forever.

7.5.2 Indicator variables and the count

Define the indicator random variable

$$X_{ij} = \mathbb{I}\{z_i \text{ is compared with } z_j \text{ at some point during the sort}\} = \begin{cases} 1 & \text{if they are compared,} \\ 0 & \text{otherwise.} \end{cases}$$

Since every pair is compared at most once, the total number of comparisons is exactly

$$X = \sum_{i=1}^{n-1} \sum_{j=i+1}^{n} X_{ij}.$$

We want $\mathbb{E}[X]$, the expected number of comparisons. By *linearity of expectation* – which holds whether or not the variables are independent, a fact worth treasuring –

$$\mathbb{E}[X] = \mathbb{E}\left[\sum_{i=1}^{n-1} \sum_{j=i+1}^{n} X_{ij}\right] = \sum_{i=1}^{n-1} \sum_{j=i+1}^{n} \mathbb{E}[X_{ij}] = \sum_{i=1}^{n-1} \sum_{j=i+1}^{n} \Pr[z_i \text{ compared with } z_j].$$

The last equality is the defining property of an indicator: its expectation equals the probability of the event it indicates.

Now we compute that probability using the realization above. Among the $j - i + 1$ elements of Z_{ij}, each is equally likely to be the first chosen as a pivot. The comparison happens exactly when that first pivot is z_i or z_j:

$$\Pr[z_i \text{ compared with } z_j] = \frac{2}{j - i + 1}.$$

Formal

Why the probability is $\frac{2}{j-i+1}$. Restrict attention to the moment when the first pivot *from* Z_{ij} is selected. By symmetry of the uniform random pivot choice, each of the $j - i + 1$ elements of Z_{ij} is equally likely to be that first one, each with probability $\frac{1}{j-i+1}$. The event "compared" is the union of the two disjoint events "z_i is first" and "z_j is first," so its probability is $\frac{1}{j-i+1} + \frac{1}{j-i+1} = \frac{2}{j-i+1}$.

7.5.3 Summing the series

Substitute and let $k = j - i$ so that as j ranges from $i+1$ to n, k ranges from 1 to $n-i$:

$$\mathbb{E}[X] = \sum_{i=1}^{n-1} \sum_{j=i+1}^{n} \frac{2}{j-i+1} = \sum_{i=1}^{n-1} \sum_{k=1}^{n-i} \frac{2}{k+1} < \sum_{i=1}^{n-1} \sum_{k=1}^{n} \frac{2}{k}.$$

The inner sum $\sum_{k=1}^{n} \frac{1}{k}$ is the n-th *harmonic number* H_n, and a fact we will lean on (proved in the summations appendix, and in CLRS) is that $H_n = \ln n + O(1) = O(\log n)$. Therefore

$$\mathbb{E}[X] < \sum_{i=1}^{n-1} 2H_n = \sum_{i=1}^{n-1} O(\log n) = O(n \log n).$$

Since the running time is $O(n + X)$ and $\mathbb{E}[X] = O(n \log n)$, the expected running time is $O(n \log n)$. This proves Theorem 7.1. □

Intuition

Step back and admire what just happened. We did not solve a recurrence. We did not draw a recursion tree. We *counted comparisons one pair at a time*, and the only thing we needed about each pair was: "what is the chance these two ever meet?" Distant pairs (large $j - i$) almost never meet – probability $\frac{2}{j-i+1}$ shrinks toward zero – while adjacent pairs (small $j - i$) meet often. Summing those probabilities gives the harmonic series, and the harmonic series is $\Theta(\log n)$. That logarithm is the whole reason quicksort is fast. The $\log n$ was hiding in the harmonic numbers all along.

Remark 7.1. Why the harmonic number? Because the probability $\frac{2}{j-i+1}$ depends only on the *gap* $j - i$ between the ranks. For each fixed gap d, there are about n pairs at that gap, each contributing $\frac{2}{d+1}$, giving roughly $\frac{2n}{d+1}$. Summing over gaps $d = 1, 2, \ldots, n-1$ produces $2n$ times the harmonic series – exactly the $\Theta(n \log n)$ we found. The structure of the answer is built into the geometry of ranks.

7.6 Hoare partitioning: the original, faster scheme

Lomuto is easy to reason about, but Hoare's original 1961 partition is typically *faster in practice* because it does fewer swaps – on average about three times fewer. It works by sending two fingers toward each other from the two ends, swapping out-of-place pairs as they meet.

Algorithm 25: HOARE-PARTITION(A, p, r)

Input: Subarray $A[p\,..\,r]$ with $p < r$.
Output: An index $q \in \{p, \ldots, r-1\}$ splitting A so that $A[p\,..\,q]$ all $\leq A[q+1\,..\,r]$.

```
1  x ← A[p] ;                                   // pivot = first element
2  i ← p − 1;
3  j ← r + 1;
4  while true do
5      repeat
6          j ← j − 1
7      until A[j] ≤ x;
8      repeat
9          i ← i + 1
10     until A[i] ≥ x;
11     if i < j then
12         exchange A[i] with A[j];
13     else
14         return j;
```

Intuition

The two fingers i and j march toward each other. The left finger i stops when it finds an element that is too big (it belongs on the right). The right finger j stops when it finds an element too small (it belongs on the left). Then they swap, fixing two misplaced elements at once. They keep going until the fingers cross. Where they cross is the boundary: everything at or left of j is $\leq$ the pivot, everything right of j is $\geq$ it.

Common trap

Hoare partition has two gotchas that Lomuto does not. First, the returned index q is *not* the pivot's final resting place – the pivot may still be loose somewhere in the left part. So the recursive calls differ: you call QUICKSORT(A, p, q) and QUICKSORT$(A, q+1, r)$ – note q is *included* in the left call, and there is no "$q-1$" or "$q+1$" skipping a pivot. Second, you must choose the pivot as $A[p]$ (the first element), not $A[r]$; choosing $A[r]$ can cause the loop to run off the end of the array. These off-by-one and boundary subtleties are exactly why textbooks teach Lomuto first.

Algorithm lab

Trace HOARE-PARTITION on $A = [5,\ 3,\ 8,\ 1,\ 9,\ 2,\ 7]$, $p = 1$, $r = 7$, pivot $x = A[1] = 5$.

fingers stop at	comparison	action
j: 7, 2 stop at $A[6]$=2 ≤ 5; i: stop at $A[1]$=5 ≥ 5	i=1 $< j$=6	swap $A[1], A[6]$: $[2,3,8,1,9,5,7]$
j: 9, 1 stop at $A[4]$=1; i: 3, 8 stop at $A[3]$=8	i=3 $< j$=4	swap $A[3], A[4]$: $[2,3,1,8,9,5,7]$
j: stop at $A[3]$=1; i: stop at $A[4]$=8	i=4 $\not< j$=3	return $q = 3$

Final array $[2,3,1,\ 8,9,5,7]$ with $q = 3$. Check: $A[1\,..\,3] = [2,3,1]$ are all ≤ 5, and $A[4\,..\,7] = [8,9,5,7]$ are all ≥ 5. The split is valid even though the pivot 5 is sitting at index 6, not at the boundary. That is why the recursion includes index q on the left.

Why this matters

Why does industry care which partition scheme is used if both are $\Theta(n \log n)$ on average? Because the constant factor is real money. A swap moves data in memory; fewer swaps mean fewer cache misses and fewer writes. Hoare's scheme does about $\frac{1}{3}$ as many swaps as Lomuto's, which is why high-performance library sorts (and hybrids like *introsort*, used in C++'s `std::sort`) build on Hoare-style partitioning. The asymptotics tell you the shape of the curve; the constants tell you who wins the benchmark.

7.7 Engineering the real thing

A production quicksort is rarely the textbook version verbatim. A few refinements turn the idea into a world-class sort:

- **Cut over to insertion sort for tiny subarrays.** When a subarray drops below, say, 10–16 elements, insertion sort (Chapter 2) beats quicksort because its constant factors are tiny and it has no recursion overhead. Many implementations stop recursing at small sizes and finish with a single insertion-sort pass over the whole nearly-sorted array.
- **Median-of-three pivoting.** Instead of a random or fixed pivot, take the median of $A[p]$, $A[r]$, and the middle element. This makes a balanced split far more likely on real-world data and is cheap.
- **Three-way partitioning for duplicates.** Recall the trap: arrays with many equal keys destroy basic quicksort. A *three-way* partition ("Dutch national flag") splits into $< x$, $= x$, and $> x$ regions, so all copies of the pivot are placed at once and never recursed on. This turns the all-duplicates worst case into linear time.
- **Bounded recursion depth (introsort).** To guarantee $O(n \log n)$ even in the worst case, monitor the recursion depth; if it exceeds $\approx 2 \log_2 n$, bail out to heapsort (Chapter 6) for that subarray. You keep quicksort's speed on typical inputs and heapsort's worst-case guarantee. This hybrid is *introsort*, the basis of the C++ standard library sort.

Cost summary

Quicksort at a glance (sorting n elements).

Quantity	Value	When
Best-case time	$\Theta(n \log n)$	balanced splits
Average / expected time	$\Theta(n \log n)$	random pivots, distinct keys
Worst-case time	$\Theta(n^2)$	always-lopsided splits
Auxiliary space	$\Theta(\log n)$ expected	recursion stack
In place?	yes (no scratch array)	—
Stable?	no (swaps reorder equal keys)	—
Comparisons (expected)	$\approx 2n \ln n \approx 1.39\, n \log_2 n$	from $2H_n$ analysis

The expected comparison count $2n \ln n \approx 1.39\, n \log_2 n$ is only about 39% above the information-theoretic floor of $\log_2(n!) \approx n \log_2 n$ comparisons that *any* comparison sort must

pay (Chapter 8). Quicksort is nearly optimal in comparisons *and* pays a small constant, which is the practical magic.

Common trap

"In place" but watch the stack. Quicksort uses no auxiliary *array*, but it does use the call stack for recursion, $\Theta(\log n)$ deep when balanced and $\Theta(n)$ deep in the worst case – enough to overflow the stack on a large adversarial input. The fix is *tail-recursion elimination*: always recurse on the *smaller* side first and loop on the larger side, which caps the stack at $\Theta(\log n)$ even in the worst case. Library implementations do this.

7.8 Putting it all together

Focus

The five things to carry out of this chapter:

1. **Partition is the engine.** It places one pivot in its final spot in $\Theta(n)$ time; the combine step is free. That is what makes quicksort sort in place.
2. **Balance is everything.** Running time is $\Theta(n)$ times the recursion depth. Balanced splits give depth $\log n$; lopsided splits give depth n. Even 99-to-1 splits stay $\Theta(n \log n)$.
3. **Determinism is the enemy.** Any fixed pivot rule has a bad input. Already-sorted data breaks "last-element" pivoting.
4. **Randomization removes the villain.** Random pivots make the expected time $\Theta(n \log n)$ on *every* input. The randomness is in your coins, not the data.
5. **The proof counts comparisons.** Each pair z_i, z_j is compared with probability $\frac{2}{j-i+1}$; summing gives harmonic numbers, hence $\Theta(n \log n)$.

You now understand quicksort more deeply than most people who use it daily. When you open CLRS Chapter 7, you will recognize every move – the loop invariant, the recursion-tree intuition, and especially that gorgeous indicator-variable argument. Go enjoy it.

7.9 Exercises

Exercise 7.1 (Trace Lomuto)**.** Run PARTITION (Lomuto) by hand on

$$A = [\,13,\ 19,\ 9,\ 5,\ 12,\ 8,\ 7,\ 4,\ 11,\ 2,\ 6,\ 21\,]$$

with pivot $A[12] = 21$, then again on the same array with pivot $A[12]$ replaced by 6 (swap the 6 into the last slot first). Show the array after every iteration of j and give the returned index q.

Exercise 7.2 (Counting in the worst case)**.** Exactly how many comparisons does Lomuto PARTITION make on a single call to a subarray of size n? Using this, write and solve the recurrence for the total number of comparisons quicksort makes when every split is maximally unbalanced, and confirm it is $\Theta(n^2)$.

Exercise 7.3 (Best case is no accident)**.** Suppose PARTITION always returned an index q exactly in the middle of the subarray. Write the recurrence and use the master theorem (Chapter 4) to solve it. Then suppose instead that q always lands at the $\frac{1}{4}$ point (a 1-to-3 split). Draw the recursion tree, bound its depth, and argue the total is still $\Theta(n \log n)$.

Exercise 7.4 (The duplicate-key disaster)**.** Let A be an array of n identical elements. Trace what Lomuto PARTITION does, and determine the exact split sizes it produces. Conclude that basic quicksort runs in $\Theta(n^2)$ on all-equal input even with a random pivot. Then describe, in words, how three-way (Dutch-flag) partitioning fixes this.

Exercise 7.5 (Hoare hands-on)**.** Trace HOARE-PARTITION on $A = [\,4,\ 7,\ 2,\ 9,\ 1,\ 6,\ 3\,]$ with pivot $A[1] = 4$. Show the fingers i, j and the array after each swap, and give the returned q. Verify that everything in $A[1\,..\,q]$ is $\leq$ everything in $A[q+1\,..\,r]$. Where did the pivot end up?

Exercise 7.6 (Why the indicator trick works)**.** In the expected-time proof we claimed that two elements z_i and z_j are compared if and only if the first pivot chosen from $Z_{ij} = \{z_i, \ldots, z_j\}$ is one of the two endpoints. Explain carefully why a pivot chosen from *outside* Z_{ij} never separates z_i from z_j, and why a middle element z_k $(i < k < j)$ chosen first guarantees they are never compared.

Exercise 7.7 (Probability of comparing extremes)**.** Using the formula $\Pr[z_i \text{ compared with } z_j] = \frac{2}{j-i+1}$, compute the probability that the smallest and the largest elements (z_1 and z_n) are ever directly compared, as a function of n. What is this probability for $n = 10$, $n = 100$, $n = 1000$? What does the trend tell you intuitively?

Exercise 7.8 (Expected comparisons, exactly)**.** Show that the expected number of comparisons can be written exactly as $\mathbb{E}[X] = \sum_{i=1}^{n-1} \sum_{k=1}^{n-i} \frac{2}{k+1}$. For $n = 4$, evaluate this sum by hand to a fraction. (You should get $\frac{2}{2} + \frac{2}{3} + \frac{2}{4} + \frac{2}{2} + \frac{2}{3} + \frac{2}{2}$ once you list all pairs – organize them and add.)

Exercise 7.9 (Tail recursion and stack depth)**.** Explain why recursing on the *smaller* subarray first and looping on the larger one bounds the recursion-stack depth to $\Theta(\log n)$ even in the $\Theta(n^2)$-time worst case. Hint: each time you push a stack frame, the remaining problem is at most half the size. (Challenge.)

Exercise 7.10 (Randomized vs. shuffle-then-sort)**.** Some people achieve the benefits of a random pivot by first randomly *permuting* the entire input array and then running plain (deterministic, last-element-pivot) quicksort. Argue that this gives the same expected running time $\Theta(n \log n)$. What is one practical advantage of choosing random pivots *during* the recursion instead of shuffling up front? (Challenge.)

Exercise 7.11 (Median-of-three by hand)**.** For the array $A = [\,8,\ 1,\ 4,\ 9,\ 6,\ 3,\ 5,\ 2,\ 7\,]$, compute the median-of-three pivot using $A[1]$, the middle element $A[5]$, and $A[9]$. Then argue, in a sentence or two, why median-of-three makes the already-sorted worst case essentially impossible to trigger by accident. (Warmup-to-medium.)

Chapter 8

Sorting in Linear Time

So far, every sorting algorithm you have met – insertion sort, merge sort, heapsort, quicksort – shares one habit. To decide where an element belongs, the algorithm *compares* it against another element: "is a less than b?" It never peeks inside the values; it only asks the universe, over and over, which of two things is smaller. The very best of these algorithms run in $\Theta(n \log n)$ time, and you might reasonably start to suspect that $n \log n$ is simply the price of sorting. The cosmic toll. The cost of doing business.

This chapter is going to do two surprising things. First, it will *prove* that suspicion partly right: any algorithm that sorts using only comparisons must, in the worst case, take at least $\Theta(n \log n)$ time. That is not a failure of our cleverness; it is a wall built into the rules of the game. But second – and this is the delicious part – it will show you that the wall has a door. If you are allowed to look inside the values, to use them as more than opaque tokens you can only compare, you can sort genuinely faster: in *linear* time, $\Theta(n)$. We will meet three algorithms that walk through that door: **counting sort**, **radix sort**, and **bucket sort**.

Focus

The big idea of this chapter, in one breath: *comparisons* are weak. Each comparison gives you only one bit of information (less, or not less), and you need a lot of bits to pin down the right ordering, so comparison sorting cannot beat $\Theta(n \log n)$. But if the values themselves carry usable structure – they are small integers, or fixed-width keys, or uniformly spread reals – you can extract information *in bulk* instead of one comparison at a time, and sorting drops to $\Theta(n)$.

8.1 Comparisons Are a Kind of Currency

Let me slow all the way down, because the lower bound is the conceptual heart of the chapter and it is easy to nod along without really seeing it.

Suppose I hand you three numbers in three sealed boxes, labelled A, B, C. You cannot see the numbers. Your only allowed move is to point at two boxes and ask me "is the number in this one smaller than the number in that one?" I answer yes or no, truthfully. Your job is to tell me the correct sorted order of the three boxes.

How many questions might you need? Let us count the possible answers you might have to produce. With three distinct values, the sorted order could be any of the $3! = 6$ permutations:

$$ABC, \quad ACB, \quad BAC, \quad BCA, \quad CAB, \quad CBA.$$

Each of these is a genuinely different answer, and before you ask anything you have no idea which one is correct. Every question you ask gets a yes/no answer, which at best splits the still-possible answers into two groups. The best you can hope for from one question is to cut the number of surviving possibilities in half.

Intuition

Think of it as a guessing game. There are 6 secret answers on the table. Each yes/no question can, at most, cut the pile in half. After one question: at least 3 left. After two: at least $\lceil 3/2 \rceil = 2$ left. After three: at least 1. You cannot guarantee you have narrowed it to a single answer in fewer than $\lceil \log_2 6 \rceil = 3$ questions, because two questions can only distinguish $2^2 = 4$ outcomes, and $4 < 6$. There simply are not enough yes/no patterns to go around.

That is the entire argument, and it scales. To sort n elements you must be able to produce any of $n!$ possible orderings. Each comparison is one yes/no question. A sequence of k comparisons produces a pattern of k bits, and there are only 2^k distinct bit-patterns. If your algorithm always finishes in k comparisons, then those 2^k patterns must cover all $n!$ answers – otherwise two different correct orderings would produce the same pattern of answers, and the algorithm could not tell them apart. So we need $2^k \geq n!$, which forces $k \geq \log_2(n!)$.

8.1.1 The Decision Tree: Drawing the Argument

The clean way to make this rigorous is to draw the algorithm as a tree, called a *decision tree*. Forget the algorithm's code for a moment and watch only its comparisons. The first comparison it makes is the root. Depending on the yes/no answer, it goes left or right to its next comparison, and so on. Every internal node is a comparison; every leaf is a final answer (a permutation).

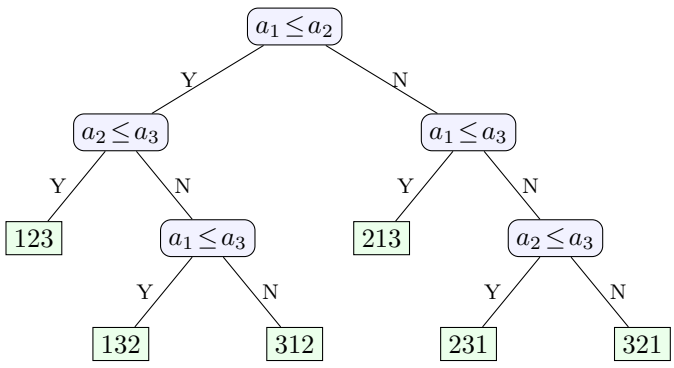


Figure 8.1: A decision tree for sorting three elements. Each internal node is a comparison; "Y"/"N" edges record the answer. A leaf labelled ijk means the sorted order is $a_i \leq a_j \leq a_k$. There are $3! = 6$ leaves, one per permutation, and the deepest leaf is 3 comparisons down.

Look carefully at Figure 8.1. *Running* the algorithm on a particular input means starting at the root and walking down to a leaf, turning left or right according to each comparison's answer. The

number of comparisons that run makes on that input is exactly the length of the path it walks – the *depth* of the leaf it reaches. The *worst-case* number of comparisons is the depth of the deepest leaf: the *height* of the tree.

So the question "how few comparisons can a sorting algorithm guarantee?" becomes a question about trees: how *short* can a tree be if it must have at least $n!$ leaves?

Formal

Two facts about binary trees we will lean on. A binary tree of height h has at most 2^h leaves – because each level doubles the count of nodes available, and the leaves all live at depth $\le h$. Turned around: a binary tree with L leaves has height at least $\log_2 L$.

8.1.2 The Lower Bound, Stated and Proved

Theorem 8.1 (Comparison-sort lower bound)**.** *Any comparison sort, in the worst case, performs $\Omega(n \log n)$ comparisons to sort n elements. Concretely, its decision tree has height at least $\log_2(n!) = \Theta(n \log n)$.*

Proof. Consider any comparison sort and its decision tree T on inputs of length n. Because the algorithm must be *correct*, every one of the $n!$ possible orderings of the input must appear as the label of at least one reachable leaf; if some permutation π labelled no leaf, then the input whose correct answer is π would be sorted wrongly. Hence T has at least $n!$ leaves.

A binary tree with at least $n!$ leaves has height $h \ge \log_2(n!)$. The worst-case comparison count is exactly h, so the algorithm makes at least $\log_2(n!)$ comparisons on some input.

It remains to see that $\log_2(n!) = \Theta(n \log n)$. The upper side is easy: $n! \le n^n$, so $\log_2(n!) \le n \log_2 n$. For the lower side, keep only the top half of the factors,

$$n! \;=\; n \cdot (n-1) \cdots 2 \cdot 1 \;\ge\; \underbrace{n \cdot (n-1) \cdots \tfrac{n}{2}}_{n/2 \text{ factors, each} \ge n/2} \;\ge\; \left(\frac{n}{2}\right)^{n/2},$$

so $\log_2(n!) \ge \frac{n}{2} \log_2 \frac{n}{2} = \frac{n}{2}(\log_2 n - 1) = \Omega(n \log n)$. Both bounds together give $\log_2(n!) = \Theta(n \log n)$. □

Corollary 8.1. *Merge sort and heapsort are asymptotically optimal comparison sorts: their $O(n \log n)$ worst-case running time matches the $\Omega(n \log n)$ lower bound to within a constant factor.*

Common trap

The lower bound is about *comparison* sorts, and only about them. It says nothing about algorithms that do other things with the keys – adding them up, indexing an array with them, slicing them into digits. People sometimes over-read Theorem 8.1 as "sorting is $\Omega(n \log n)$, period." It is not. It is "*comparison-based* sorting is $\Omega(n \log n)$." The rest of this chapter is a tour of what becomes possible the moment you stop limiting yourself to comparisons.

Walking question

Here is something to chew on while you walk. The proof only needs the tree to have $\geq n!$ leaves and to be *binary*. Where exactly did "binary" come from? It came from each comparison having two outcomes. Now imagine a magical machine whose every probe has *three* outcomes (less, equal, greater). Redo the counting. Does three-way branching break the $\Omega(n \log n)$ barrier, or does it only change the base of the logarithm – and why does changing the base of a logarithm not change a $\Theta(n \log n)$ bound at all?

History and connection

This is CLRS Chapter 8, "Sorting in Linear Time." The decision-tree lower bound is Section 8.1; counting sort is 8.2; radix sort is 8.3; bucket sort is 8.4. The information-theoretic flavour of the argument – "you need $\log_2(n!)$ bits, and each comparison yields one bit" – is the same idea that underlies Shannon's information theory and shows up again whenever someone proves that a problem *cannot* be solved faster than some bound. Lower bounds like this are rarer and, in a sense, deeper than algorithms: an algorithm shows one way is possible, but a lower bound rules out *all* ways at once.

8.2 Counting Sort: Sorting Without Comparing

Now for the first door through the wall. Counting sort sorts integers without ever comparing two of them. Instead it asks a different question about each element: "*what* are you?" – and uses the answer as an array index.

Intuition

Picture a classroom of students, each holding a card with a single digit 0–9. You want them lined up in sorted order. Instead of comparing cards pairwise, you put ten labelled bins on the floor – bin 0 through bin 9 – and shout "put your card in the bin that matches your digit." Now just sweep the bins left to right and read the cards out. They come out sorted, and you never compared a single pair. The cost was one pass to fill bins and one pass to drain them: linear. That is counting sort. The catch, already visible, is that you needed one bin per possible value, so this only works when the values come from a small, known range.

8.2.1 The Setup

Counting sort assumes the n input values are integers in a known range $\{0, 1, \ldots, k\}$. The plan:

1. **Count.** Make an array $C[0\,..\,k]$ and set $C[v]$ to the number of input elements equal to v. (One pass over the input.)
2. **Accumulate.** Turn C into a running total, so that $C[v]$ becomes the number of elements *less than or equal to* v. Now $C[v]$ tells you the last position in the sorted output where a value v belongs.
3. **Place.** Walk the input and drop each element into its computed output slot, decrementing

$C[v]$ as you go so equal elements stack up neatly.

Algorithm 26: COUNTING-SORT

Input: Array $A[1..n]$ of integers, each in $\{0, \ldots, k\}$.
Output: Array $B[1..n]$ holding the elements of A in sorted order.

```
1  let C[0..k] be a new array;
2  for v ← 0 to k do
3      C[v] ← 0;
4  for j ← 1 to n do
5      C[A[j]] ← C[A[j]] + 1;                    // C[v] now counts how many equal v
6  for v ← 1 to k do
7      C[v] ← C[v] + C[v − 1];                   // C[v] now counts how many ≤ v
8  for j ← n to 1 do
9      B[ C[A[j]] ] ← A[j];
10     C[A[j]] ← C[A[j]] − 1;
11 return B;
```

The single subtle choice is the *last* loop running *backwards*, from n down to 1. Hold that thought; it is what makes counting sort *stable*, and stability is exactly what radix sort will demand of it in the next section.

8.2.2 A Full Numeric Trace

Let us sort

$$A = (2,\ 5,\ 3,\ 0,\ 2,\ 3,\ 0,\ 3), \qquad n = 8, \quad k = 5.$$

Step 1 – count. Sweep A and tally each value:

v	0	1	2	3	4	5
$C[v]$	2	0	2	3	0	1

(Two 0s, no 1s, two 2s, three 3s, no 4s, one 5. They sum to 8, good.)

Step 2 – accumulate into running totals "how many $\leq v$":

v	0	1	2	3	4	5
$C[v]$	2	2	4	7	7	8

Read $C[3] = 7$ as "there are 7 elements ≤ 3, so the last 3 belongs in slot 7 of the output."

Step 3 – place, scanning A from right ($j = 8$) to left ($j = 1$). At each step we read $A[j]$, look up $C[A[j]]$ to get the slot, write into B, and decrement.

j	$A[j]$	slot $C[A[j]]$	write	then C becomes
8	3	7	$B[7] = 3$	$C[3]: 7 \to 6$
7	0	2	$B[2] = 0$	$C[0]: 2 \to 1$
6	3	6	$B[6] = 3$	$C[3]: 6 \to 5$
5	2	4	$B[4] = 2$	$C[2]: 4 \to 3$
4	0	1	$B[1] = 0$	$C[0]: 1 \to 0$
3	3	5	$B[5] = 3$	$C[3]: 5 \to 4$
2	5	8	$B[8] = 5$	$C[5]: 8 \to 7$
1	2	3	$B[3] = 2$	$C[2]: 3 \to 2$

Collecting the writes by slot index gives

$$B = (\,0,\ 0,\ 2,\ 2,\ 3,\ 3,\ 3,\ 5\,),$$

which is exactly A in sorted order. Notice we never asked "is this bigger than that?" even once.

Figure 8.2 captures the key idea of the placement step: the accumulated array C hands each value a *block* of output slots, and the contiguity of those blocks is what makes the writes land in sorted order with no comparisons.




Figure 8.2: After accumulation, C reserves a contiguous block of output slots for each value: value v owns slots $C[v-1]+1$ through $C[v]$. The placement loop fills each block from its high end downward, which is why scanning the input right-to-left makes the sort stable.

Algorithm lab

Trace it yourself, but flip the final loop to run *forwards*, j from 1 to n, with everything else unchanged. You will find it still sorts! So why do we insist on going backwards? Re-run both directions on an input where you can *tell the equal elements apart* – say, tag them: $3_a, 3_b, 3_c$ in their original left-to-right order. With the backward loop, do $3_a, 3_b, 3_c$ come out in their original relative order in B? With the forward loop, what happens to that order? The answer is the whole point of the next box.

8.2.3 Stability, and Why We Care

Definition 8.1 (Stable sort)**.** A sort is *stable* if elements that compare equal keep their original relative order in the output. If 3_a appeared before 3_b in the input, a stable sort guarantees 3_a still appears before 3_b in the output.

Counting sort as written is stable. Here is the gentle reason. The accumulated $C[v]$ marks the *last* output slot for value v, and we fill from the back. So the *rightmost* input element of value v grabs the highest slot, and as we move leftward through the input, each earlier element of value v grabs

the next-lower slot. Earlier-in-input lands earlier-in-output: that is exactly stability. Run the loop forward instead and the order of equal elements reverses – still sorted, but no longer stable.

Focus

Two properties of counting sort to carry forward: it is **linear** in $n+k$, and it is **stable**. Radix sort, coming next, leans on *both* – it would simply not work without stability.

8.2.4 Cost, and the Catch

Cost summary

Counting sort.

- Initialize C: $\Theta(k)$.
- Count: $\Theta(n)$.
- Accumulate: $\Theta(k)$.
- Place: $\Theta(n)$.

Total time $\Theta(n+k)$. Extra space $\Theta(n+k)$ (the output B and the counter C). When $k = O(n)$ – the range is no bigger than the count of elements – this is $\Theta(n)$: *linear* sorting, beating the $n \log n$ wall.

Common trap

The catch lives in that innocent "$+k$". If your values are 32-bit integers, then k could be about 4,000,000,000, and counting sort would allocate a four-billion-entry array to sort, say, ten numbers. That is a catastrophe of both time and memory. Counting sort is only a good idea when the range k is comparable to (or smaller than) the number of elements n. The moment $k \gg n$, you want a different tool – which is precisely the gap radix sort fills.

8.3 Radix Sort: Many Small Sorts Make One Big Sort

Counting sort is wonderful but only for a small range. What if your keys are big – 32-bit integers, or words, or dates? The trick of *radix sort* is to chop each key into small *digits* and sort by one digit at a time, using a stable sort (counting sort!) for each pass. The digit's range is small, so each pass is cheap; and by ordering the passes cleverly, the small sorts compose into a full sort.

8.3.1 Least Significant Digit First – and Why That Order

The counterintuitive rule is: sort by the *least* significant digit first, then the next, and finish with the *most* significant digit.

Intuition

Sorting most-significant-digit-first feels natural – it is how you would alphabetize by hand – but it forces you to recurse into ever-smaller groups and keep them separated. Least-significant-first is the magic trick: because each pass is *stable*, sorting on a higher digit never disturbs the relative order already established by the lower digits. Each pass refines the previous one. After the last (most significant) pass, ties on the top digit are broken by the order from the previous pass, whose ties are broken by the pass before, all the way down. The whole number ends up sorted.

Algorithm 27: RADIX-SORT

Input: Array $A[1..n]$ of d-digit numbers; digit 1 is least significant.
Output: A sorted into nondecreasing order.

```
1 for i ← 1 to d do
2 |  use a stable sort to sort array A on digit i;
3 return A;
```

8.3.2 A Full Numeric Trace

Sort these seven three-digit numbers:

$$329,\ 457,\ 657,\ 839,\ 436,\ 720,\ 355.$$

That is $n = 7$; I will line them up in columns and sort digit by digit, using a stable sort on each column. The base is 10, so each digit ranges over 0–9.

input	**by 1's**	**by 10's**	**by 100's**
329	72<u>0</u>	7<u>2</u>0	<u>3</u>29
457	35<u>5</u>	3<u>2</u>9	<u>3</u>55
657	43<u>6</u>	4<u>3</u>6	<u>4</u>36
839	45<u>7</u>	8<u>3</u>9	<u>4</u>57
436	65<u>7</u>	3<u>5</u>5	<u>6</u>57
720	32<u>9</u>	4<u>5</u>7	<u>7</u>20
355	83<u>9</u>	6<u>5</u>7	<u>8</u>39

Read it left to right. Column 2 sorts by the units digit only (underlined); note 457 and 657 both end in 7 and, because the sort is stable, 457 stays ahead of 657 exactly as it was in the units-sorted column. Column 3 sorts that result by the tens digit; again ties (like 355 vs. 457, both tens digit 5) keep the order the units pass gave them. Column 4 sorts by the hundreds digit, and we are done:

$$329,\ 355,\ 436,\ 457,\ 657,\ 720,\ 839.$$

Sorted. Let me show the stability paying off precisely. After the tens pass, the order among the 5-tens group is $355, 457, 657$ – and that came purely from their units digits: 355 leads because its units digit 5 is smallest, while 457 and 657 tie on units digit 7 and so keep the order the units pass already gave them. When the hundreds pass scatters them, that internal order survives wherever the hundreds digits agree.

Figure 8.3 isolates that single moment: the tens pass moves 355, 457, and 657 around, but because they share the same tens digit, the order the units pass established travels with them untouched.

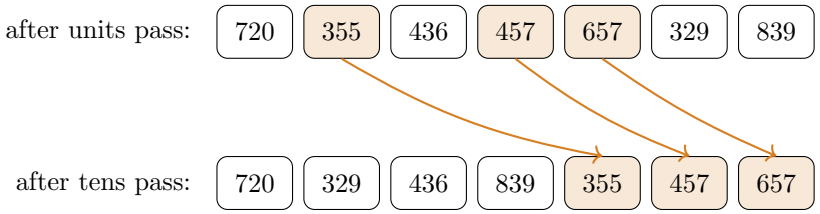


Figure 8.3: Stability in action during the tens pass. The three shaded elements $(355, 457, 657)$ all have tens digit 5, so the tens pass must keep their relative order; the arrows show that the order $355, 457, 657$ – earned by the earlier units pass – is carried over intact. A non-stable sort would be free to permute them and break the result.

Focus

The invariant that makes radix sort correct: *after the pass on digit i, the array is sorted according to the low-order i digits treated as a single number.* The base case ($i = 0$) is trivially true. Each stable pass on digit $i + 1$ preserves it. After d passes, the array is sorted on all d digits – i.e., fully sorted.

Formal

Why the inductive step holds. Assume after pass i the array is sorted on the low i digits. Now stably sort on digit $i+1$. Take any two elements x, y. *(a)* If they differ on digit $i+1$, the new pass orders them correctly by that digit, which dominates all lower digits – correct. *(b)* If they agree on digit $i + 1$, stability keeps their pre-pass relative order, which by the inductive hypothesis already reflects the low i digits – correct. Either way the array is now sorted on the low $i + 1$ digits.

Common trap

Radix sort is correct *only because each pass is stable.* Swap in an unstable per-digit sort and it breaks: a later pass on a higher digit would scramble the careful ordering the lower digits had earned. This is the deep reason we built counting sort to be stable. If you find yourself "optimizing" radix sort by dropping in quicksort per digit, you have quietly broken it.

8.3.3 Cost

Each of the d passes is a counting sort over a digit, whose range is the base b (for decimal digits, $b = 10$). One pass costs $\Theta(n + b)$, and there are d passes:

$$T(n) = \Theta\big(d\,(n + b)\big).$$

There is a lovely tuning knob here. Suppose the keys are w bits wide. You may slice them into digits of any width r bits you like; then each digit ranges over $b = 2^r$ values and there are $d = \lceil w/r \rceil$ digits.

Substituting:

$$T(n) = \Theta\Big(\frac{w}{r}\,(n + 2^r)\Big)\,.$$

Choosing $r = \log_2 n$ (so $2^r = n$) makes each pass cost $\Theta(n)$ and gives

$$T(n) = \Theta\left(\frac{w}{\log_2 n}\,n\right).$$

If the word width w is a constant number of machine words – as it is for ordinary 32- or 64-bit integers – then $w = O(\log n)$ on inputs large enough to address, and this collapses to $\Theta(n)$. *Linear* again.

Cost summary

Radix sort on n keys of d digits in base b: time $\Theta\big(d(n+b)\big)$, stable, extra space $\Theta(n+b)$. With digit width tuned to $r = \log_2 n$ for w-bit keys: $\Theta\big(\frac{w}{\log n}\,n\big)$, which is $\Theta(n)$ whenever $w = O(\log n)$.

Why this matters

Radix sort is not a museum piece. It is how you sort huge files of fixed-width keys fast: sorting billions of 64-bit integers, network packets by IP address, strings of bounded length, database columns. GPU and large-scale sorting routines very often *are* radix sorts, because each pass is a simple, cache-friendly, embarrassingly parallel counting pass with no branchy comparisons. When people say "we sorted a terabyte in record time," a radix sort is frequently doing the heavy lifting underneath.

Walking question

A puzzle for the walk. Radix sort's cost has that d factor, and merge sort is $\Theta(n \log n)$. For which is faster, it comes down to d versus $\log n$. When you sort n distinct integers, how many bits w do you *at minimum* need just to give them distinct values? What does that say about d relative to $\log n$, and does radix sort's apparent "linear" speed quietly smuggle a $\log n$ back in through the word width? (There is a real and much-argued subtlety here. Sit with it.)

8.4 Bucket Sort: Betting on the Distribution

The last linear-time sorter changes the assumption entirely. Counting and radix sort require integer (or integer-like) keys. Bucket sort instead assumes the inputs are *real numbers drawn uniformly at random* from an interval, say $[0, 1)$. Under that assumption it runs in linear time *on average*.

Intuition

If n numbers are sprinkled uniformly over $[0, 1)$, then chopping the interval into n equal slots – $[0, \frac{1}{n}), [\frac{1}{n}, \frac{2}{n}), \ldots$ – should catch roughly one number per slot. So: scatter every number into its slot (cheap, just multiply by n and take the floor), sort each tiny slot with any simple method (they are nearly empty, so this is cheap), then read the slots out in order. Because uniform inputs spread evenly, no slot gets crowded, and the total work stays linear. You are

betting on the distribution; when the bet is right, you win big.

Algorithm 28: BUCKET-SORT

Input: Array $A[1..n]$ with each $A[j] \in [0, 1)$.
Output: The elements of A in sorted order.

```
1 let Bk[0..n−1] be an array of empty lists;
2 for j ← 1 to n do
3 |  insert A[j] into list Bk[⌊n · A[j]⌋];
4 for i ← 0 to n − 1 do
5 |  sort list Bk[i] with insertion sort;
6 return the lists Bk[0], Bk[1], ..., Bk[n − 1] concatenated in order;
```

8.4.1 A Numeric Trace

Take $n = 10$ and the inputs

$$.78,\ .17,\ .39,\ .26,\ .72,\ .94,\ .21,\ .12,\ .23,\ .68.$$

With $n = 10$, the bucket index of value x is $\lfloor 10x \rfloor$ – just the first decimal digit. Scatter:

bucket	contents (in arrival order)
0	–
1	.17, .12
2	.26, .21, .23
3	.39
4	–
5	–
6	.68
7	.78, .72
8	–
9	.94

Now insertion-sort each bucket (most have 0 or 1 element, so there is nothing to do; bucket 1 becomes .12, .17; bucket 2 becomes .21, .23, .26; bucket 7 becomes .72, .78). Concatenate buckets 0 through 9 in order:

$$.12,\ .17,\ .21,\ .23,\ .26,\ .39,\ .68,\ .72,\ .78,\ .94.$$

Sorted. The buckets did the coarse sorting (which tenth are you in?) and insertion sort did the fine sorting inside each tenth. Figure 8.4 draws the same scatter, with each bucket's (already sorted) contents stacked beneath it.

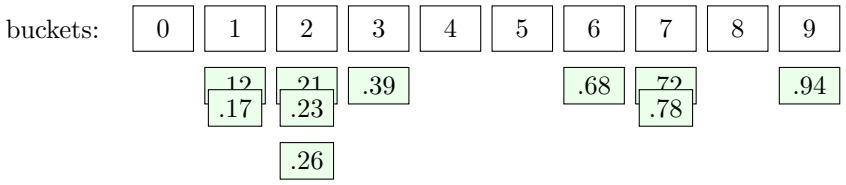


Figure 8.4: The ten buckets after scattering, with each bucket's contents stacked below it (already insertion-sorted). Reading the columns left to right, top to bottom within each, yields the sorted sequence. Most buckets hold zero or one element – the uniform spread keeps them shallow.

8.4.2 Why It Is Linear on Average

The danger is obvious: if every element fell into one bucket, insertion sort would face all n of them and cost $\Theta(n^2)$. The uniform-distribution assumption is precisely what makes that nightmare astronomically unlikely. Let us see the expected cost.

Let n_i be the number of elements landing in bucket i. Scattering is $\Theta(n)$, and concatenation is $\Theta(n)$. The interesting cost is the per-bucket insertion sort, which on n_i elements costs $O(n_i^2)$. So the total expected time is

$$\Theta(n) + \sum_{i=0}^{n-1} O\big(\mathbb{E}[\,n_i^2\,]\big).$$

We need $\mathbb{E}[n_i^2]$. Each of the n elements lands in bucket i independently with probability $\frac{1}{n}$, so n_i is a Binomial$(n, \frac{1}{n})$ count. A standard fact (or a short calculation with indicator variables) gives, for such a binomial,

$$\mathbb{E}[n_i] = n \cdot \tfrac{1}{n} = 1, \qquad \mathrm{Var}(n_i) = n \cdot \tfrac{1}{n} \cdot \big(1 - \tfrac{1}{n}\big) = 1 - \tfrac{1}{n},$$

and therefore, using $\mathbb{E}[n_i^2] = \mathrm{Var}(n_i) + (\mathbb{E}[n_i])^2$,

$$\mathbb{E}[n_i^2] = \Big(1 - \tfrac{1}{n}\Big) + 1^2 = 2 - \tfrac{1}{n} < 2.$$

Each bucket contributes an expected *constant*. Summing over n buckets:

$$\Theta(n) + \sum_{i=0}^{n-1} O(2) = \Theta(n) + O(n) = \Theta(n).$$

Formal

Bucket sort runs in $\Theta(n)$ expected time when inputs are independent and uniform on $[0, 1)$, because each bucket holds a constant number of elements *in expectation*, so the quadratic insertion sorts are quadratic over tiny inputs and sum to linear. Its *worst case* – all elements in one bucket – is still $\Theta(n^2)$; the linearity is an average over the random inputs, not a guarantee on every input.

Cost summary

Bucket sort. Expected time $\Theta(n)$ on uniform $[0, 1)$ inputs; worst-case $\Theta(n^2)$. Extra space $\Theta(n)$. Stable if the per-bucket sort is stable and buckets are read in order.

Common trap

Bucket sort's linearity is a *bet on the input distribution*, not a free lunch. Feed it skewed data – everything clustered in $[0, 0.01)$ – and it degrades toward $\Theta(n^2)$ as one bucket swallows the input. Counting sort and radix sort, by contrast, are linear on *every* input within their key assumptions; their bet is on the *keys* (small range, fixed width), which you can check, not on the *distribution*, which you often cannot. Know which kind of assumption your algorithm is making.

8.5 So When Can You Actually Beat $n \log n$?

Step back and see the shape of the whole chapter. The lower bound and the three fast sorts are not in conflict; they live in different worlds defined by *what the algorithm is allowed to know about the keys*.

Algorithm	Assumption on keys	Time
Merge / heapsort	only comparisons allowed	$\Theta(n \log n)$ worst case
Counting sort	integers in $\{0, \ldots, k\}$, $k = O(n)$	$\Theta(n + k)$
Radix sort	d digits, base b (e.g. fixed-width ints)	$\Theta(d(n + b))$
Bucket sort	reals, uniform on $[0, 1)$	$\Theta(n)$ expected

Focus

The linear-time sorts do not refute the lower bound; they *escape its hypothesis*. Theorem 8.1 constrains algorithms that learn about keys *only* by comparing them. Counting and radix sort learn by *indexing with* the keys; bucket sort learns by *computing a bucket from* the key. None of them is a comparison sort, so none of them is bound by $\Omega(n \log n)$. The price of admission is a usable assumption about the keys: small integer range, bounded width, or a known distribution.

Why this matters

The practical lesson generalizes far past sorting. Whenever you meet a proven lower bound, ask: *what assumption is the bound resting on, and can my real problem quietly drop it?* "Comparison-based" was the load-bearing assumption here, and dropping it bought a $\log n$ factor. The same move – find the hypothesis, then exploit special structure to sidestep it – recurs everywhere in algorithm design: hashing beats balanced-tree lower bounds by abandoning worst-case guarantees, and so on. Lower bounds are not walls so much as maps of where the doors must be.

Summary

- Any sort that touches keys *only* through comparisons needs $\Omega(n \log n)$ comparisons in the worst case. The proof models the algorithm as a binary *decision tree* that must have $\geq n!$ leaves, hence height $\geq \log_2(n!) = \Theta(n \log n)$.

- **Counting sort** sorts integers in $\{0, \ldots, k\}$ in $\Theta(n + k)$ time and is *stable*, by counting occurrences and placing from the back. Linear when $k = O(n)$.
- **Radix sort** sorts d-digit keys in $\Theta(d(n + b))$ time by stably sorting one digit at a time, *least significant first*. Correct precisely because each pass is stable.
- **Bucket sort** sorts uniform reals in $\Theta(n)$ *expected* time by scattering into n buckets and sorting each; $\Theta(n^2)$ worst case.
- All three beat the lower bound by *not being comparison sorts* – they exploit structure in the keys. The cost is a real assumption you must be able to justify.

8.6 Exercises

Exercise 8.1 (Warmup: count the leaves)**.** Draw a decision tree, like Figure 8.1, for sorting *two* elements a_1, a_2. How many leaves does it have, and what is its height? Confirm that the height equals $\lceil \log_2(2!) \rceil$.

Exercise 8.2 (The bound is tight-ish for small n)**.** Compute $\lceil \log_2(n!) \rceil$ for $n = 1, 2, 3, 4, 5$. These are the *minimum possible* worst-case comparison counts. It is known that 5 elements can be sorted using exactly 7 comparisons in the worst case. Does your value of $\lceil \log_2(5!) \rceil$ match 7? (It should – a rare case where the information-theoretic bound is achievable.)

Exercise 8.3 (Counting sort by hand)**.** Run Counting-Sort on $A = (6, 0, 2, 0, 1, 3, 4, 6, 1, 3, 2)$ with $k = 6$. Write out the count array, the accumulated array, and then trace the final placement loop step by step (as in the table in the text). State the sorted output.

Exercise 8.4 (Why backwards?)**.** Tag the equal elements of $A = (3_a, 1, 3_b, 1, 3_c)$ and trace Counting-Sort once with the final loop going backwards and once going forwards. Report the order of the 3's and the 1's in each output, and explain in one sentence why the backward version is stable and the forward version is not.

Exercise 8.5 (Radix by hand)**.** Use radix sort (base 10, least significant digit first) to sort

$$170,\ 045,\ 075,\ 090,\ 002,\ 802,\ 024,\ 066.$$

Show the array after each of the three digit passes, and point out one place where stability of the per-digit sort mattered.

Exercise 8.6 (Choosing the radix)**.** You must sort $n = 2^{20}$ keys, each $w = 64$ bits wide. Using the analysis $T(n) = \Theta\big(\frac{w}{r}(n + 2^r)\big)$, evaluate the cost (up to constants) for digit widths $r = 8$, $r = 16$, and $r = 20$. Which r does the "$r = \log_2 n$" rule recommend here, and does your arithmetic agree that it is the best of the three?

Exercise 8.7 (Bucket sort, skewed input)**.** Bucket sort assumes uniform inputs. Construct an input of n numbers in $[0, 1)$ that forces *every* element into a single bucket, and state the resulting running time. Then describe, in words, a preprocessing step that could rescue performance if you knew the inputs were uniform on $[a, b)$ rather than $[0, 1)$.

Exercise 8.8 (Expected bucket size)**.** Redo the bucket-sort analysis but with m buckets instead of n, where m is a parameter you choose. Show $\mathbb{E}[n_i] = n/m$ and find $\mathbb{E}[n_i^2]$ for a Binomial$(n, 1/m)$ count. For which choice of m (in terms of n) does the total expected time stay $\Theta(n)$, and what goes wrong if m is far too small?

Exercise 8.9 (Sorting strings)**.** You have n strings over the lowercase alphabet, all of length exactly L. Explain how to sort them in $\Theta(L\,(n+26))$ time using radix sort, and say which end (first letter or last letter) you sort on first and why. Then sketch why comparison-sorting them costs $\Theta(nL \log n)$ in the worst case, so radix sort genuinely wins for large n.

Exercise 8.10 (Challenge: a three-way decision tree)**.** Suppose each probe returns one of three answers: "<", "=", or ">". Rebuild the lower-bound argument with ternary decision trees. Show the height is at least $\log_3(n!)$, and then argue that $\log_3(n!) = \Theta(n \log n)$ all the same – so three-way comparisons do *not* break the asymptotic barrier. What constant factor do you save, if any?

Exercise 8.11 (Challenge: stability is not optional)**.** Give a concrete small input ($n = 4$ suffices) and a deliberately *unstable* per-digit sort for which radix sort produces the *wrong* final order. Trace it to show exactly which pass scrambles which earlier ordering. This is the cleanest way to convince yourself that the correctness of radix sort really does depend on stability.

Chapter 9

Medians and Order Statistics

Sorting, as you have now seen several times over, is one of the great workhorses of algorithms. If you have a pile of numbers and you want to know which is the largest, or the smallest, or the one sitting right in the middle, the obvious move is to sort the whole pile and then read off the position you care about. That works. But it is a little like alphabetizing your entire bookshelf just to find one book. Surely, if all you want is *one* item — the middle one, the third-largest, the value that splits the data in two — you should not have to put *everything* in order first.

That nagging feeling is exactly right, and this chapter is about turning it into a precise, fast algorithm. We are going to learn how to find the k-th smallest element of a list in *linear* time — $\Theta(n)$, the same order of growth as simply *looking* at every element once. That is striking. Reading all the input already costs $\Theta(n)$, so we will be doing the selection job for, in a sense, the price of admission.

Intuition

Sorting answers *every* "what is in position i?" question at once, and pays $\Theta(n \log n)$ for the privilege. **Selection** answers just *one* such question. The whole chapter is the discovery that answering one question can be done for $\Theta(n)$ — asymptotically free compared to sorting — if you are clever about throwing away the parts of the input that cannot possibly contain the answer.

9.1 The selection problem

Let us pin down what we are after. Imagine a list (an array) of n numbers. They are not sorted; they sit in whatever order they came. We will assume, to keep things clean, that the numbers are *distinct* — no ties. (Ties can be handled with a little care, but they cloud the ideas, so set them aside for now.)

Definition 9.1 (Order statistic)**.** The **i-th order statistic** of a set of n numbers is the i-th smallest of them. So the 1st order statistic is the minimum, the n-th order statistic is the maximum, and the i-th order statistic for a general i is the value that would land in position i if you sorted the list into increasing order.

Definition 9.2 (Median)**.** The **median** is the "halfway point" of the set. When n is odd there is a single middle element: the median is the i-th order statistic for $i = (n + 1)/2$. When n is even

there are *two* middles; the **lower median** is at $i = \lfloor (n+1)/2 \rfloor = n/2$ and the **upper median** is at $i = \lceil (n+1)/2 \rceil = n/2 + 1$. In this book, when we say "the median" without qualification we mean the lower median, so that the formula $i = \lfloor (n+1)/2 \rfloor$ always works.

Focus

The **selection problem**: given an array A of n distinct numbers and an integer i with $1 \le i \le n$, return the element of A that is larger than exactly $i-1$ of the others — the i-th smallest. The median is the special case $i = \lfloor (n+1)/2 \rfloor$.

Let us make the indices concrete, because this is where beginners stumble. Take the array

$$A = [\,7,\ 3,\ 9,\ 1,\ 5,\ 8,\ 2\,], \qquad n = 7.$$

If we sorted it we would get $[\,1, 2, 3, 5, 7, 8, 9\,]$. So:

- the 1st order statistic (minimum) is 1;
- the 7th order statistic (maximum) is 9;
- the 3rd order statistic is 3;
- the median, $i = \lfloor (7+1)/2 \rfloor = 4$, is 5.

Notice the i-th order statistic is a *value*, not a position in the original array. In the unsorted A, the median value 5 happens to live at index 5, but that coincidence means nothing. We care about its rank, not its address.

Common trap

"i-th smallest" is a **1-based rank**. The 1st smallest is the minimum, not the second-smallest, and not whatever sits at array index 1. A huge fraction of off-by-one bugs in selection code come from sliding between "rank i" and "array index i." Keep them separate in your head: rank is a property of the *sorted order*; index is a property of *where the value currently sits*.

9.1.1 The easy cases warm us up: minimum and maximum

Before the general problem, look at the very simplest order statistics, $i = 1$ and $i = n$. Finding the minimum is the canonical first algorithm everyone writes: walk through the array holding onto the smallest thing seen so far.

Algorithm 29: MINIMUM(A)

Input: An array $A[1\,..\,n]$ of numbers, $n \ge 1$.
Output: The smallest element of A.

```
1 min ← A[1];
2 for j ← 2 to n do
3     if A[j] < min then
4         min ← A[j];
5 return min;
```

This does exactly $n-1$ comparisons, one per element after the first. Can we do better? No — and there is a clean argument why. Think of each comparison as a little tournament match between two values; the loser is the larger one (it cannot be the minimum). To *know* a particular element is the minimum, every other element must have lost at least one match, because an element that never lost might still be smaller than our claimed winner. There are $n-1$ "other" elements, each needing to lose at least once, and each comparison produces exactly one loss. So you need at least $n-1$ comparisons. MINIMUM is optimal.

Walking question

Suppose I ask for the minimum *and* the maximum of the same array. The lazy way runs MINIMUM and MAXIMUM separately: $2(n-1)$ comparisons. Can you do it in roughly $\frac{3}{2}n$ comparisons instead? Hint: process the elements in *pairs*. Compare the two members of a pair to each other first; the smaller is a candidate for the min, the larger a candidate for the max. Count how many comparisons that costs per pair, and you will see where the $\frac{3}{2}$ comes from.

The minimum and maximum are gentle because i is fixed at an extreme. The interesting trouble is the *general* i, and in particular the median, which sits as far from both ends as possible. That is what the rest of the chapter attacks.

9.2 Selection by sorting: the baseline to beat

The honest first algorithm is the one we already grumbled about: sort, then index.

Algorithm 30: SELECTBYSORTING(A, i)

Input: An array $A[1\,..\,n]$ of distinct numbers; a rank i, $1 \le i \le n$.
Output: The i-th smallest element of A.

```
1 B ← SORT(A) ;                          // B is A in increasing order
2 return B[i];
```

It is correct by definition: the i-th order statistic is, literally, the element in position i of the sorted array. With a good comparison sort like merge sort or heapsort, it costs $\Theta(n \log n)$. That is our baseline. Everything we build from here is an attempt to beat it — to get the single answer without paying for the full ordering.

Why this matters

Why fight for the difference between $n \log n$ and n? Because selection is a *subroutine*, called over and over inside bigger jobs. Order statistics power the "median-of-medians" pivots that make quicksort robust; they let databases answer "the 95th percentile latency" without sorting a billion rows; they sit inside k-nearest-neighbor search, robust statistics (the median is far more outlier-resistant than the mean), and load balancers picking a cutoff. When a routine is called n times, shaving a $\log n$ factor off each call is the difference between a system that scales and one that melts.

9.3 Quickselect: partition, then recurse on one side

Here is the key shift in thinking. In Chapter 7 you met PARTITION, the engine inside quicksort. It picks a *pivot*, then rearranges the array so that everything smaller than the pivot sits to its left and everything larger sits to its right, with the pivot itself landing in its final sorted position. Quicksort then recurses on *both* sides.

But for selection we do not need both sides. After partitioning, the pivot is sitting at its true sorted rank. If that rank happens to be exactly i, we are done — we found it. If the pivot's rank is bigger than i, the answer must lie to the *left* of the pivot, so we recurse there and forget the right half entirely. If the pivot's rank is smaller than i, the answer is to the *right*, and we recurse there, forgetting the left.

Intuition

Quicksort recurses on both halves because it wants *everything* sorted. Selection recurses on *one* half because it wants *one* element. Throwing away half the array on each step is the whole trick: it turns the $T(n) = 2T(n/2) + \Theta(n)$ recurrence of quicksort (which gives $n \log n$) into something closer to $T(n) = T(n/2) + \Theta(n)$ (which gives $\Theta(n)$).

9.3.1 Recalling Partition

Let me restate the partition routine so this chapter stands on its own. We use the Lomuto scheme: take the last element as the pivot, sweep a finger across the array, and keep a wall such that everything left of the wall is $\leq$ pivot.

Algorithm 31: PARTITION(A, p, r)

Input: Subarray $A[p\,..\,r]$.
Output: Rearranges $A[p\,..\,r]$ around the pivot $A[r]$; returns the pivot's final index q.

```
1 x ← A[r] ;                                              // the pivot value
2 j ← p − 1 ;                          // j is the wall:  A[p..j] are all ≤ x
3 for k ← p to r − 1 do
4     if A[k] ≤ x then
5         j ← j + 1;
6         swap A[j] ↔ A[k];
7 swap A[j + 1] ↔ A[r] ;                  // drop the pivot just past the wall
8 return j + 1;
```

After PARTITION returns q, three facts hold: $A[q]$ is the original pivot; every element in $A[p\,..\,q-1]$ is less than $A[q]$; and every element in $A[q+1\,..\,r]$ is greater than $A[q]$. So $A[q]$ is in its final sorted slot *within this subarray*. Its rank *within the subarray* is $q - p + 1$ (the count of elements at positions p through q). Figure 9.1 pictures the three regions and how selection chooses which one to keep.

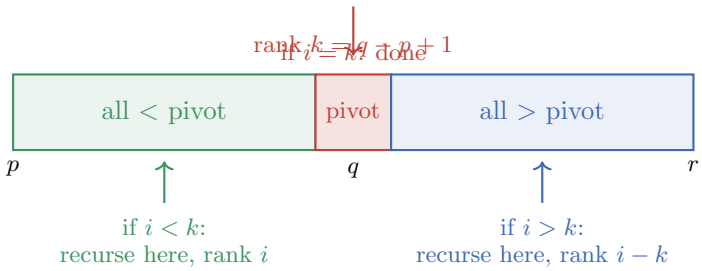


Figure 9.1: After PARTITION, the pivot sits at its true rank $k = q - p + 1$. Selection keeps only the one shaded region that can hold rank i and discards the rest — including the pivot's whole other side.

Common trap

The rank of the pivot *inside the current subarray* is $k = q - p + 1$, not q itself. When you recurse, you must convert between "rank within the whole problem" and "rank within the subarray." Forgetting the $-p + 1$ shift, or forgetting to subtract k when you recurse right, is the number-one bug in quickselect. We will walk a numeric trace precisely to nail this down.

9.3.2 Randomized quickselect

We will use a *randomized* pivot: before partitioning, swap a uniformly random element into the last slot. This is the same idea you saw stabilize quicksort — it defends against adversarial inputs and makes the analysis about randomness in *our* coin flips rather than luck in the input.

Algorithm 32: RANDOMIZEDPARTITION(A, p, r)

Input: Subarray $A[p..r]$.
Output: A partition around a randomly chosen pivot; returns the pivot's index.

```
1 t ← RANDOM(p, r) ;                          // uniform integer in [p, r]
2 swap A[r] ↔ A[t];
3 return PARTITION(A, p, r);
```

Algorithm 33: RandomizedSelect(A, p, r, i)

Input: Subarray $A[p..r]$; rank i with $1 \le i \le r - p + 1$, the rank *within this subarray*.
Output: The i-th smallest element of $A[p..r]$.

```
1  if p = r then
2      return A[p] ;                                  // one element, must be the answer
3  q ← RandomizedPartition(A, p, r);
4  k ← q − p + 1 ;                                    // rank of the pivot within A[p..r]
5  if i = k then
6      return A[q] ;                                  // the pivot is the answer
7  else if i < k then
8      return RandomizedSelect(A, p, q − 1, i) ;      // answer is on the left
9  else
10     return RandomizedSelect(A, q + 1, r, i − k) ; // answer on the right; shift the
        rank
```

Stare at the last line, because that shift is the subtle part. When we recurse *right*, the new subarray $A[q+1..r]$ has had k elements chopped off its front (positions p through q). An element that was the i-th smallest in the old subarray is now the $(i-k)$-th smallest in the new one, because k smaller elements are no longer in the picture. That is why we pass $i - k$, not i. When we recurse *left*, no elements smaller than the target were removed, so the rank i is unchanged.

Focus

Call RandomizedSelect$(A, 1, n, i)$ to find the i-th smallest of the whole array. The procedure never sorts; it only partitions and then dives into the *one* side that can contain the answer, adjusting the rank as it goes.

9.3.3 A full numeric trace

Let us run it on

$$A = [\,7,\ 3,\ 9,\ 1,\ 5,\ 8,\ 2\,], \qquad n = 7,$$

asking for the median, $i = 4$. To make the trace reproducible I will pretend the random pivot choices come out the way I describe; the point is to see the *logic*, not the dice.

Step 1. Call RandomizedSelect$(A, 1, 7, 4)$. Say the random pivot is $A[5] = 5$. Swap it to the end: $A = [7, 3, 9, 1, 2, 8, 5]$. Now partition around $x = 5$. Sweeping $k = 1 \ldots 6$: $7 > 5$ skip; $3 \le 5$ advance wall, A becomes $[3, 7, 9, 1, 2, 8, 5]$; $9 > 5$ skip; $1 \le 5$ advance wall, $[3, 1, 9, 7, 2, 8, 5]$; $2 \le 5$ advance wall, $[3, 1, 2, 7, 9, 8, 5]$; $8 > 5$ skip. Finally drop the pivot just past the wall (position 4): $A = [3, 1, 2, 5, 9, 8, 7]$, and $q = 4$.

The pivot 5 sits at index $q = 4$. Its rank within $A[1..7]$ is $k = q - p + 1 = 4 - 1 + 1 = 4$. We wanted $i = 4$. Since $i = k$, **we are done**: the median is 5. One partition, no recursion at all. That was lucky — the random pivot happened to be the median itself. Let us run a less lucky example to see the recursion fire.

A second trace, $i = 6$ (the 6th smallest). Same starting $A = [7, 3, 9, 1, 5, 8, 2]$, call RandomizedSelect$(A, 1, 7, 6)$. Suppose the random pivot is $A[2] = 3$. Swap to end: $A = [7, 2, 9, 1, 5, 8, 3]$, partition around $x = 3$. Sweep: $7 > 3$ skip; $2 \le 3$ wall to index 1, $[2, 7, 9, 1, 5, 8, 3]$; $9 > 3$ skip; $1 \le 3$

wall to index 2, $[2, 1, 9, 7, 5, 8, 3]$; $5 > 3$ skip; $8 > 3$ skip. Drop pivot at index 3: $A = [2, 1, 3, 7, 5, 8, 9]$, $q = 3$. Rank $k = 3 - 1 + 1 = 3$.

We want $i = 6$; since $6 > 3$, recurse right on $A[4\,..\,7] = [7, 5, 8, 9]$ with new rank $i - k = 6 - 3 = 3$. Call RandomizedSelect$(A, 4, 7, 3)$. Suppose the pivot is $A[6] = 8$. Swap to end ($A[7]$): $A[4\,..\,7]$ becomes $[7, 5, 9, 8]$, partition around $x = 8$. Sweep over $[7, 5, 9]$: $7 \leq 8$ wall, then $5 \leq 8$ wall, then $9 > 8$ skip; drop pivot: $A[4\,..\,7] = [7, 5, 8, 9]$, $q = 6$. Rank within this subarray is $k = 6 - 4 + 1 = 3$. We wanted $i = 3$ here, and $i = k = 3$, so **return** $A[6] = 8$. And indeed the sorted array is $[1, 2, 3, 5, 7, 8, 9]$, whose 6th smallest is 8. Correct.

Algorithm lab

Trace RandomizedSelect$([7, 3, 9, 1, 5, 8, 2], 1, 7, 2)$ by hand, choosing the pivots however you like, and confirm you reach 2 (the 2nd smallest). Do it a second time with *different* pivot choices and confirm you still reach 2. The pivots change the *path*; the answer never moves. That invariance — same output regardless of the coin flips — is exactly what makes a randomized algorithm trustworthy.

9.3.4 Why quickselect is correct

Correctness rests on a single invariant, proved by induction on the size of the subarray $n' = r - p + 1$.

Formal

Claim. RandomizedSelect(A, p, r, i), called with $1 \leq i \leq r - p + 1$, returns the i-th smallest element of $A[p\,..\,r]$.
Base case. If $p = r$ the subarray has one element, $n' = 1$, and the only legal rank is $i = 1$. The procedure returns $A[p]$, which is indeed the 1st (and only) smallest. True.
Inductive step. Assume the claim for all subarrays smaller than $A[p\,..\,r]$. After RandomizedPartition returns q, the pivot $A[q]$ is greater than exactly the $k - 1$ elements in $A[p\,..\,q - 1]$ and less than the elements in $A[q + 1\,..\,r]$, so the pivot's true rank in $A[p\,..\,r]$ is $k = q - p + 1$.

- If $i = k$, the i-th smallest is precisely the pivot; we return $A[q]$.
- If $i < k$, the i-th smallest of $A[p\,..\,r]$ lies among the $k - 1$ elements strictly below the pivot, i.e. in $A[p\,..\,q - 1]$, and at the *same* rank i (no smaller element was removed). That subarray is smaller, so by induction the recursive call returns the right value.
- If $i > k$, the target lies in $A[q + 1\,..\,r]$. Exactly k elements (the pivot and the $k - 1$ below it) were removed from the front, all of them smaller than the target, so the target's rank in the new subarray is $i - k$. Again by induction the recursive call is correct.

In all three cases the value returned is the i-th smallest of $A[p\,..\,r]$. □

9.4 How fast is quickselect?

Now the heart of the matter. Each call does $\Theta(n)$ work to partition, then recurses on *one* side. The size of that side depends on where the pivot fell — and that is random. So we get a range of behaviors.

9.4.1 The worst case is bad

Imagine the pivot is, every single time, the smallest remaining element. Then the partition peels off just one element and recurses on the other $n-1$. The sizes go $n, n-1, n-2, \ldots, 1$, and the total work is

$$\Theta(n) + \Theta(n-1) + \cdots + \Theta(1) = \Theta\left(\sum_{j=1}^{n} j\right) = \Theta(n^2).$$

So in the worst case, quickselect is *quadratic* — no better than the naive bubble-style approaches. With random pivots this worst case is astronomically unlikely (it requires the random choice to land on the extreme every time), but it is possible, and a worst-case-conscious engineer will not be satisfied. We will fix it in the next section. First, let us see why the *expected* case is excellent.

9.4.2 Expected linear time: the intuition first

Intuition

A random pivot splits the array somewhere. On average it lands near the middle — not exactly at the median, but "balanced enough." A pivot is what we will call **good** if it falls in the middle half of the values, i.e. its rank is between $n/4$ and $3n/4$. The chance of that is $1/2$ (half the positions qualify). A good pivot guarantees the side we recurse into has at most $3/4$ of the elements. So *at least half the time*, the problem shrinks to at most three-quarters its size. Shrinking by a constant factor a constant fraction of the time is exactly the condition for a geometric series — and a geometric series of linear-work terms sums to linear total work.

Let us make that intuition into a clean bound, then sketch the sharper expectation argument.

A clean bound via "good" pivots. Call a partition step *lucky* if the pivot's rank lands in the middle half, between $\lceil n/4 \rceil$ and $\lfloor 3n/4 \rfloor$. There are about $n/2$ such ranks out of n, so a uniformly random pivot is lucky with probability $\geq 1/2$. When a step is lucky, whichever side we recurse on has size at most $3n/4$ (because at least $n/4$ elements sit on each side of a middle-half pivot). Now think of the sequence of subproblem sizes. Each step does $\leq c\,n$ work for the current n. On average we need at most 2 tries to get a lucky step (a geometric random variable with success probability $1/2$ has mean 2). So, in expectation, the size shrinks by a factor of $3/4$ every 2 steps. Writing $T(n)$ for the expected work,

$$T(n) \leq T\left(\tfrac{3}{4}n\right) + (\text{expected work to reach a lucky step}).$$

The expected work to reach a lucky step is at most $2cn$ (two partitions, each $\leq cn$, since sizes only shrink). So

$$T(n) \leq T\left(\tfrac{3}{4}n\right) + 2cn.$$

Unrolling this geometric recurrence,

$$T(n) \leq 2cn\left(1 + \tfrac{3}{4} + \left(\tfrac{3}{4}\right)^2 + \cdots\right) = 2cn \cdot \frac{1}{1 - 3/4} = 2cn \cdot 4 = 8cn = \Theta(n).$$

The geometric series $\sum (3/4)^j$ converges to 4, a *constant*, so the whole thing is linear.

Focus

The reason quickselect is linear and quicksort is $n \log n$ comes down to one line: selection recurses on *one* side, so its sizes form a *geometric* (shrinking) sequence that sums to $\Theta(n)$; sorting recurses on *both* sides, so it must touch every level fully, paying $\Theta(n)$ per level across $\Theta(\log n)$ levels.

Figure 9.2 makes the contrast visual: quicksort's tree is full and fat, while quickselect walks a single shrinking path down one branch.

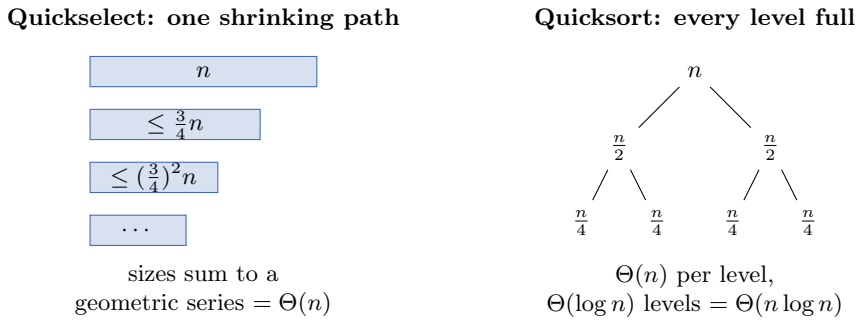


Figure 9.2: Selection descends a single branch whose sizes shrink by a constant factor, so the total work is a convergent geometric series and stays linear. Sorting must fill out the entire tree, paying linear work on each of its $\Theta(\log n)$ levels.

9.4.3 Expected linear time: the sharper analysis

The "good pivot" bound is honest and gives the right answer, $\Theta(n)$. CLRS derives the constant more precisely with indicator random variables; let us walk that path gently, because it is a beautiful use of the tools from Chapter 5.

When we partition a subarray of size n, the pivot is equally likely to have any rank from 1 to n, each with probability $1/n$. If the pivot rank is k, the recursion goes left into a subarray of size $k-1$ or right into a subarray of size $n-k$ (or stops, if we got lucky and $i = k$). To get an *upper* bound on the expected time, assume the adversary always sends us into the *larger* of the two sides — that can only slow us down. The larger side has size $\max(k-1,\, n-k)$.

Let $T(n)$ be the maximum, over all i, of the expected running time on an array of n elements. Then

$$T(n) \le \frac{1}{n} \sum_{k=1}^{n} T\big(\max(k-1,\, n-k)\big) + \Theta(n).$$

As k ranges over $1, \ldots, n$, the quantity $\max(k-1, n-k)$ runs through the values $\lfloor n/2 \rfloor, \ldots, n-1$, and each such size is hit *at most twice*. So

$$T(n) \le \frac{2}{n} \sum_{m=\lfloor n/2 \rfloor}^{n-1} T(m) + \Theta(n).$$

Now guess $T(n) \le c\,n$ for a constant c to be chosen, and substitute:

$$T(n) \le \frac{2}{n} \sum_{m=\lfloor n/2 \rfloor}^{n-1} c\,m + \Theta(n) = \frac{2c}{n} \sum_{m=\lfloor n/2 \rfloor}^{n-1} m + \Theta(n).$$

The inner sum is a stretch of consecutive integers. Bounding it from above by the full sum minus the small head,

$$\sum_{m=\lfloor n/2\rfloor}^{n-1} m = \sum_{m=1}^{n-1} m - \sum_{m=1}^{\lfloor n/2\rfloor-1} m \le \frac{(n-1)n}{2} - \frac{(n/2-1)(n/2)}{2} \le \frac{3n^2}{8}.$$

(You can verify the $3n^2/8$ by a little algebra; it is the cleanest constant that survives the floors.) Plugging back in,

$$T(n) \le \frac{2c}{n}\cdot\frac{3n^2}{8} + \Theta(n) = \frac{3cn}{4} + \Theta(n).$$

Write the $\Theta(n)$ term as an for a constant a. Then

$$T(n) \le \frac{3cn}{4} + an = cn - \left(\frac{cn}{4} - an\right).$$

If we choose $c \ge 4a$, the parenthesized quantity is ≥ 0, so $T(n) \le cn$, completing the induction. Hence $T(n) = \Theta(n)$: quickselect runs in **expected linear time**.

Formal

Theorem. On an array of n distinct numbers, RandomizedSelect runs in expected time $\Theta(n)$, where the expectation is over the algorithm's own random pivot choices and holds for every input and every rank i.

Cost summary

Randomized quickselect.

- Expected time: $\Theta(n)$ — linear, for *any* input.
- Worst-case time: $\Theta(n^2)$ — but only on a vanishingly unlikely sequence of pivot choices, not on any fixed input.
- Extra space: $\Theta(1)$ if you turn the tail recursion into a loop; $\Theta(\log n)$ expected stack depth otherwise. The array is permuted in place.
- Comparisons in the expected case: about $3.4n$ for the median with a careful implementation — genuinely cheaper than sorting.

Common trap

"Expected linear" is *not* "always linear." For most applications the expectation, plus the fact that bad luck is exponentially rare, is plenty. But if you are building something where a rare quadratic blowup is unacceptable — a real-time system, or code facing an adversary who can see your random seed — you need a *worst-case* guarantee. That is precisely what the next section delivers.

9.5 Median of medians: worst-case linear selection

Now for one of the most celebrated results in algorithms: you can find the i-th order statistic in $\Theta(n)$ time *in the worst case*, with no randomness at all. This is the 1973 algorithm of Blum, Floyd, Pratt, Rivest, and Tarjan, often called Select or simply "median of medians."

The problem with quickselect's worst case was bad pivots. A random pivot is good *on average*, but a single unlucky run can pick the extreme every time. The fix is to stop gambling and instead *compute* a pivot that is guaranteed to be reasonably central — guaranteed to throw away a constant fraction of the array no matter what. The genius is doing that guarantee-computation cheaply enough that it does not wreck the linear budget.

Intuition

We cannot afford to find the *true* median to use as a pivot — that is the very problem we are trying to solve, so it would be circular. But we do not need the true median. We need a pivot that is merely "okay" — guaranteed to split off at least, say, 30% of the array on each side. The median-of-medians trick manufactures such an okay pivot by finding the median of a small *sample* of medians, cleverly chosen so its quality can be proven.

9.5.1 The five steps

The algorithm SELECT(A, i) does the following.

1. **Group.** Divide the n elements into groups of 5 (the last group may have fewer). There are $\lceil n/5 \rceil$ groups.

2. **Sort each group.** Find the median of each group of 5. Since each group is tiny, you can sort it with a fixed number of comparisons — a constant amount of work per group, $\Theta(n)$ total.

3. **Recurse for the pivot.** Collect the $\lceil n/5 \rceil$ group medians into a list and *recursively call* SELECT to find *their* median. Call this value x, the "median of medians."

4. **Partition around x.** Use x as the pivot in a partition of the whole array. Let k be x's rank in A.

5. **Recurse into one side.** Exactly as in quickselect: if $i = k$ return x; if $i < k$ recurse left; if $i > k$ recurse right with rank $i - k$.

Steps 4 and 5 are pure quickselect. The new ideas are steps 1–3, which replace "pick a random pivot" with "compute a provably central pivot."

Algorithm 34: SELECT(A, p, r, i) – deterministic, worst-case linear

Input: Subarray $A[p..r]$ of distinct numbers; rank i, $1 \le i \le r - p + 1$.
Output: The i-th smallest element of $A[p..r]$.

$n \leftarrow r - p + 1$;
if $n \le 5$ **then**
  sort $A[p..r]$ directly and **return** $A[p + i - 1]$;
divide $A[p..r]$ into $\lceil n/5 \rceil$ groups of 5 (last group may be smaller);
for *each group* **do**
  sort it and record its median;
let M be the array of the $\lceil n/5 \rceil$ group medians;
$x \leftarrow$ SELECT$\big(M,\, 1,\, |M|,\, \lfloor (|M| + 1)/2 \rfloor\big)$; `// median of medians`
$q \leftarrow$ PARTITIONAROUND(A, p, r, x) ; `// partition` $A[p..r]$ `using value` x `as pivot`
$k \leftarrow q - p + 1$;
if $i = k$ **then**
  return x;
else if $i < k$ **then**
  return SELECT$(A, p, q - 1, i)$;
else
  return SELECT$(A, q + 1, r, i - k)$;

Here PARTITIONAROUND(A, p, r, x) is just PARTITION modified to use a specified pivot *value* x (find x in the subarray, swap it to the end, and run the usual Lomuto sweep). Everything else mirrors quickselect.

9.5.2 Why the pivot is guaranteed good

This is the crux, and it is best seen as a picture. Lay out the $\lceil n/5 \rceil$ groups as columns, each column sorted from smallest (bottom) to largest (top), and arrange the columns left to right by their median. The median-of-medians x sits in the middle column, at the middle height. Figure 9.3 draws a small case.

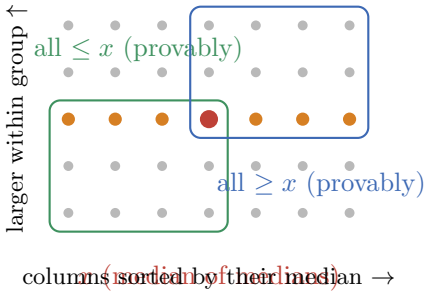


Figure 9.3: Seven groups of five, each column sorted upward, columns ordered left to right by their median (orange). The median-of-medians x (red) dominates the entire green block ($\ge \frac{3}{10}n$ elements that are $\le x$) and is dominated by the blue block (another $\ge \frac{3}{10}n$ elements that are $\ge x$).

Read the picture carefully. Each column is a group of 5, sorted so larger elements are higher. The orange dots are the group medians; columns are arranged so their medians increase left to right. The

red dot x is the median of those medians.

Now look at the green block: the lower-left region. Take any column *to the left* of x's column (its median is $\le x$). In such a column, the median and the two elements below it — that is 3 of the 5 — are all $\le$ the column's median, hence $\le x$. The same holds for x's own column. So in roughly half the columns, at least 3 elements are guaranteed $\le x$. By a symmetric argument (the blue block), in roughly half the columns at least 3 elements are guaranteed $\ge x$.

Formal

How many elements are guaranteed $\le x$? At least half of the $\lceil n/5 \rceil$ groups contribute 3 elements each that are $\le x$. Being careful with the group containing x and a possibly-undersized last group, the count of elements guaranteed $\le x$ is at least

$$3\left(\left\lceil \tfrac{1}{2}\left\lceil \tfrac{n}{5}\right\rceil\right\rceil - 2\right) \ge \frac{3n}{10} - 6.$$

By symmetry, at least $\frac{3n}{10} - 6$ elements are guaranteed $\ge x$. Therefore the side we recurse into in step 5 has size at most

$$n - \left(\frac{3n}{10} - 6\right) = \frac{7n}{10} + 6.$$

Focus

The payoff in one line: the pivot x is *guaranteed* to throw away at least about $\frac{3}{10}n$ elements, so the recursion never faces a subproblem bigger than $\frac{7}{10}n + 6$. No randomness, no luck — a worst-case promise. (Why groups of 5? See the box after the analysis.)

9.5.3 The recurrence, and why 5 is magic

Now we tally the work. Let $T(n)$ be the worst-case running time of SELECT on n elements.

- Grouping into fives and finding each group's median: $\Theta(n)$, since each of the $\lceil n/5 \rceil$ groups costs a constant (sort 5 items in ≤ 7 comparisons).
- The recursive call to find the median of medians runs on $\lceil n/5 \rceil$ elements: $T(\lceil n/5 \rceil)$.
- Partitioning around x: $\Theta(n)$.
- The recursive call in step 5 runs on at most $\frac{7n}{10} + 6$ elements: $T(\frac{7n}{10} + 6)$.

Putting it together, for n above some small threshold,

$$T(n) \le T\left(\left\lceil \tfrac{n}{5}\right\rceil\right) + T\left(\tfrac{7n}{10} + 6\right) + \Theta(n).$$

This is an unusual recurrence: it has *two* recursive calls, but on subproblems whose sizes add up to *less than* n. That is the whole game. Notice $\frac{1}{5} + \frac{7}{10} = \frac{2}{10} + \frac{7}{10} = \frac{9}{10} < 1$. The two children together are only 9/10 of the parent, so the work per level *shrinks geometrically*, and a geometric series of linear terms is linear.

Let us verify by the substitution method. Guess $T(n) \le c\,n$ for all n past the threshold, with c to

be fixed and the $\Theta(n)$ term written as an:

$$T(n) \le c\lceil \tfrac{n}{5} \rceil + c\left(\tfrac{7n}{10} + 6\right) + an \le \frac{cn}{5} + c + \frac{7cn}{10} + 6c + an.$$

Combine the n terms: $\frac{cn}{5} + \frac{7cn}{10} = \frac{2cn+7cn}{10} = \frac{9cn}{10}$. So

$$T(n) \le \frac{9cn}{10} + 7c + an = cn - \left(\frac{cn}{10} - 7c - an\right) = cn - \left(\left(\tfrac{c}{10} - a\right)n - 7c\right).$$

We need the bracket ≥ 0, i.e. $(\frac{c}{10} - a)n \ge 7c$. Choose $c = 20a$, say. Then $\frac{c}{10} - a = 2a - a = a$, and the condition becomes $an \ge 7c = 140a$, i.e. $n \ge 140$. So for all $n \ge 140$ (handle smaller n by the brute-force base case), $T(n) \le cn = 20an$. Hence

$$\boxed{T(n) = \Theta(n)} \qquad \text{worst case.}$$

Formal

Theorem (Blum–Floyd–Pratt–Rivest–Tarjan, 1973). The deterministic SELECT algorithm finds the i-th order statistic of n distinct numbers in $\Theta(n)$ time in the *worst case*.

Walking question

Why groups of 5, and not 3 or 7? Redo the recurrence with groups of g. The sample has n/g medians, so the pivot call is $T(n/g)$; the guaranteed discard is about $\frac{1}{2} \cdot \lceil g/2 \rceil$ per group, giving a surviving side of about $(1 - \frac{1}{2} \cdot \frac{\lceil g/2 \rceil + 1}{g})\, n$. For the two children to sum to less than n you need $\frac{1}{g}$ + (survivor fraction) < 1. Check $g = 3$: the fractions come out to $\frac{1}{3} + \frac{2}{3} = 1$ — exactly 1, *not* less, so the proof breaks and you do *not* get linear time. Check $g = 7$: it works, but the constant is worse and sorting groups of 7 is fiddlier. Five is the smallest odd group size that makes the two fractions sum below 1 with room to spare. That is the "magic" of five.

Common trap

A tempting "simplification" is to use the median of medians *without* the recursion in step 3 — say, pick the median of a fixed-size sample. That gives a fast *expected* bound but loses the worst-case guarantee, because a small fixed sample can be unrepresentative. The recursive median-of-medians is what makes the pivot's quality *provable for every input*. Removing the recursion removes the theorem.

9.5.4 Two algorithms, two temperaments

You now hold two linear selection algorithms, and they have genuinely different personalities.

	Randomized quickselect	**Median of medians**
Expected time	$\Theta(n)$	$\Theta(n)$
Worst-case time	$\Theta(n^2)$	$\Theta(n)$
Randomness	yes	none (deterministic)
Hidden constant	small ($\approx 3.4n$ cmps)	large (often $> 20n$)
In practice	usually faster	a safety net / pivot oracle

In practice, randomized quickselect is the one you reach for; its constants are small and its bad case never actually happens. Median of medians earns its keep when you cannot tolerate *any* quadratic risk, or — elegantly — as the *pivot oracle inside* an otherwise-randomized quicksort, giving a sort that is $\Theta(n \log n)$ in the worst case ("introselect" and "introsort" use exactly this hybrid idea).

Why this matters

The deeper lesson outlasts the algorithm. Median of medians is the textbook example of **spending a little work to guarantee good structure, then proving the guarantee pays for itself**. The recurrence $T(n) \le T(n/5) + T(7n/10) + \Theta(n)$ — two children summing to under 1 — is a pattern you will meet again whenever a clever preprocessing step shrinks two pieces that together are smaller than the whole. Recognizing "the children sum to less than the parent, so it is linear" is a transferable instinct worth far more than the specific constant 5.

History and connection

The expected-linear quickselect is due to C. A. R. Hoare (1961), the same Tony Hoare who gave us quicksort; he called it FIND. The deterministic worst-case-linear SELECT is the 1973 work of Manuel Blum, Robert Floyd, Vaughan Pratt, Ron Rivest, and Robert Tarjan — a remarkable roster, several of them later Turing Award winners. In CLRS (4th edition) this material is **Chapter 9, "Medians and Order Statistics"**: Section 9.1 covers minimum and maximum, Section 9.2 is randomized RANDOMIZEDSELECT and its expected-linear analysis, and Section 9.3 is the deterministic median-of-medians SELECT. The indicator-variable expectation argument leans on the probability background from CLRS Chapter 5, which mirrors our Chapter 5 here.

Algorithm lab

Implement both algorithms and *count comparisons* on the same inputs.

1. Generate 10,000 random permutations of $1 \,..\, 1001$ and select the median with quickselect. Plot a histogram of the comparison counts. You should see them cluster tightly a little above $3n$, with no truly bad runs — visceral proof that the $\Theta(n^2)$ worst case is a phantom in practice.
2. Feed quickselect a *sorted* array with the "always pick the last element" (non-randomized) pivot rule and watch it crawl to $\Theta(n^2)$. Then turn the randomization back on and watch the problem vanish. This is the single most convincing argument for why we randomize.
3. Run median of medians on the same inputs. Confirm it never spikes — but also confirm its constant is large, so for everyday work quickselect wins on wall-clock time despite its scarier worst case.

9.6 Exercises

Exercise 9.1. For $A = [\,12, 4, 17, 9, 1, 20, 7, 15\,]$, write the sorted order and give: the minimum, the maximum, the 3rd order statistic, the 6th order statistic, and the (lower) median. For each, state both its *value* and the *index* it occupies in the original (unsorted) A.

Exercise 9.2. Trace RandomizedSelect($[8, 2, 11, 6, 4, 9, 1, 7], 1, 8, 5$) by hand. At each partition, choose the pivot to be the current *first* element of the subarray (so the trace is deterministic and reproducible). Show the array after each partition, the value q, the rank k, and which branch you take. Confirm the final answer equals the 5th smallest element.

Exercise 9.3. Flesh out the walking-question pairing trick: write pseudocode that finds both the minimum and the maximum of n numbers using at most $\frac{3}{2}n$ comparisons. Prove the comparison count carefully, handling the cases n even and n odd separately. (Hint: the parity of n changes how you seed the running min and max.)

Exercise 9.4. You can find the minimum of n numbers in $n - 1$ comparisons. Show that you can find the *second*-smallest in only $n + \lceil \log_2 n \rceil - 2$ comparisons. (Hint: run a knockout tournament to find the minimum; the second-smallest must be one of the $\lceil \log_2 n \rceil$ elements that lost directly to the eventual minimum.)

Exercise 9.5. Describe an input and a (non-randomized) pivot rule under which quickselect performs $\Theta(n^2)$ comparisons while searching for the median. Then explain in one or two sentences why RandomizedPartition makes such an input harmless.

Exercise 9.6. Repeat the median-of-medians analysis with groups of **3** instead of 5. Show that the recurrence becomes $T(n) \le T(\lceil n/3 \rceil) + T(2n/3 + c) + \Theta(n)$ for a constant c, that the two child sizes sum to about n, and argue informally that this fails to guarantee linear time. (This is the precise reason the algorithm uses 5, not 3.)

Exercise 9.7. The **weighted (lower) median** of n distinct elements $x_1, \ldots, x_n$ with positive weights $w_1, \ldots, w_n$ summing to 1 is the element x_k such that the total weight of elements smaller than x_k is less than $1/2$ and the total weight of elements larger than x_k is at most $1/2$. Design a $\Theta(n)$ worst-case algorithm to find it. (Hint: partition around the median-of-medians pivot, but base the recurse-left-or-right decision on accumulated *weight*, not count.)

Exercise 9.8. Generalize selection to the "quantiles" problem: given A and an integer $q \ge 2$, output the $q - 1$ order statistics that divide the sorted data into q groups of as-equal-as-possible size. Give an algorithm running in $\Theta(n \log q)$ time and justify the bound. (Hint: select the overall median to split the work, then recurse on each half for the quantiles that fall in it; write and solve the resulting recurrence.)

Exercise 9.9. Given n distinct numbers, a target value t, and an integer k, give an $\Theta(n)$-time algorithm that outputs the k numbers closest to t (ties broken arbitrarily). The output need not be sorted. (Hint: "closeness to t" is just $|x - t|$; selection works on any key, not only the values themselves.)

Exercise 9.10. Two sorted arrays $X[1 \,..\, n]$ and $Y[1 \,..\, n]$ together hold $2n$ distinct numbers. Give an $\Theta(\log n)$-time algorithm to find the median of the combined $2n$ elements *without merging them.* (Hint: compare the medians of X and Y; whichever is smaller, you can safely discard its lower half and the other array's upper half, halving the problem each step.) Explain why this beats the $\Theta(n)$ selection algorithms for this special, already-sorted case.

Part III

Data Structures

Chapter 10

Elementary Data Structures

So far in this book you have spent most of your energy on *algorithms*: recipes that take some input and grind out an answer. Insertion sort, merge sort, quicksort, the order-statistic selection trick — all of them assumed that the data was just *sitting there*, in an array, ready to be poked at. We never asked the obvious follow-up question:

How is the data actually stored, and what does that storage let us do quickly?

That question is the whole subject of this chapter. A **data structure** is a specific way of organizing data in a computer's memory so that certain operations — inserting a new item, deleting an old one, finding the item you want, asking "what is next?" — become cheap. Choosing the right data structure is often the difference between a program that finishes in a blink and one that never finishes at all. The structures here are called *elementary* not because they are unimportant, but because nearly every fancier structure later in the book (hash tables, balanced trees, heaps, graphs) is built out of these few primitives. Master these and you have the vocabulary for everything that follows.

We will build, from the ground up: the humble **array** and its two-dimensional cousin the **matrix**; three disciplined ways to use an array — the **stack**, the **queue**, and the **deque**; the pointer-and-object machinery that lets us escape the rigidity of arrays; **singly** and **doubly linked lists**; and finally how to represent **rooted trees**, which we will lean on heavily for the rest of the book.

Focus

A data structure is the marriage of two things: a *layout* (how bytes sit in memory) and a *contract* (which operations it promises to support, and how fast). When you compare data structures, you are really comparing the costs of their contracts. Keep a running table in your head: for each structure, what does insert cost? Delete? Search? Access-by-position?

10.1 Memory, Addresses, and the Array

Before any data structure, there is memory. Picture your computer's memory as an enormously long street of identical houses, numbered $0, 1, 2, 3, \ldots$ up into the billions. Each house holds one small fixed-size value (think of it as one byte, or for our purposes one "cell"). The house number is called its **address**. The single most important fact about this street is:

Intuition

Given an address, the hardware can fetch the value living there in *constant time* — one step, no matter how large the address. The machine does *not* walk down the street counting houses. It teleports. This is why it is called *random-access* memory: any house is as cheap to visit as any other.
Everything fast in this chapter is, at heart, an exploitation of this one teleportation power. Everything slow is what happens when you are forced to walk.

An **array** is the most direct possible use of that power. You ask for a contiguous block of n cells — n houses in a row — and you get back the address of the first one, call it *base*. Now suppose each element of your array takes s cells of space (an integer might be $s = 4$ cells, say). Then element number i lives at address


$$base + i \cdot s.$$

That is a single multiplication and a single addition — a constant amount of arithmetic — followed by one teleporting memory fetch. So reading or writing $A[i]$ costs $\Theta(1)$, *regardless of which i you ask for and regardless of how big the array is.*

Focus

The defining superpower of an array: **random access by index in $\Theta(1)$ time**, via the address formula $base + i \cdot s$. This is why we have been able to write $A[i]$ in pseudocode all book long without worrying about cost. Now you know *why* it is free.

Let us nail down the address arithmetic with a concrete picture.



Here $base = 1000$ and each element takes $s = 4$ cells (a typical 32-bit integer). The element $A[3] = 8$ lives at $1000 + 3 \cdot 4 = 1012$, exactly where the picture says. Notice index 3 was no harder to reach than index 0: both are one multiply, one add, one fetch.

Example 10.1 (Addressing by hand)**.** An array of 64-bit floating point numbers ($s = 8$ cells) starts at address $base = 200000$. Where does $A[10]$ live? Plug in:

$$200000 + 10 \cdot 8 = 200000 + 80 = 200080.$$

And $A[11]$ is at 200088, just 8 cells further along. Consecutive elements sit s cells apart — that adjacency is the whole point of "contiguous."


Common trap

Zero-based versus one-based indexing. CLRS and much of this book write arrays as $A[1..n]$, starting at 1. Most real programming languages (C, Java, Python) start at 0, so

the first element is $A[0]$ and the last is $A[n-1]$. The address formula adapts trivially: for one-based, element i is at $base + (i-1) \cdot s$. The danger is the *off-by-one* bug, the most common mistake in all of programming: writing $\leq n$ where you meant $< n$, or forgetting to subtract 1. Whenever you write a loop over an array, pause and check both endpoints explicitly: "Does it touch the very first element? Does it touch the very last? Does it run one too far?"

10.1.1 The price of insertion and deletion

Random access is glorious, but arrays have a hard limit baked into that contiguity. Suppose you have the array $[17, 3, 42, 8, 99]$ and you want to *insert* the value 50 so that it sits at index 2 (pushing $42, 8, 99$ rightward). There is no spare house between index 1 and index 2; the block is packed solid. So you must *shove* every element from index 2 onward one house to the right to make a gap:



In the worst case — inserting at the very front — you have to shift all n elements. So array insertion costs $\Theta(n)$ in the worst case. Deletion is the mirror image: to remove the element at index i, you slide everything after it one house to the left to close the gap, again $\Theta(n)$ in the worst case. The one happy exception is inserting or deleting at the *end*: nothing needs to move, so it is $\Theta(1)$ (provided there is room).

Cost summary

Array, costs. Let n be the number of elements.

Operation	Worst-case time
Access / update $A[i]$	$\Theta(1)$
Search for a value (unsorted)	$\Theta(n)$
Insert / delete at the end	$\Theta(1)$
Insert / delete in the middle	$\Theta(n)$

The array trades flexibility for raw access speed. It is the perfect choice when your data is fixed in size and you mostly read it, and a poor choice when items are constantly being inserted and removed in the middle.

10.2 Matrices: arrays in two dimensions

A **matrix** is just a grid of values with m rows and n columns; we write $A[i, j]$ for the entry in row i, column j. But memory is a one-dimensional street — there is no two-dimensional memory. So we must *flatten* the grid into a single line of houses. There are two standard ways to do it, and they differ only in the order they visit the cells.

Row-major order lays down the entire first row, then the entire second row, and so on:

$$A[1,1],\ A[1,2],\ \ldots,\ A[1,n],\quad A[2,1],\ A[2,2],\ \ldots$$

Column-major order lays down the first column, then the second, and so on. C, Python (NumPy by default), and most languages use row-major; Fortran and MATLAB use column-major. The choice changes only the address formula. For an $m \times n$ matrix in row-major order with one-based indices, the entry $A[i,j]$ sits at offset

$$\mathit{base} + \big[(i-1)\cdot n + (j-1)\big]\cdot s.$$

Example 10.2 (Locating a matrix entry)**.** Take a 3×4 matrix (so $m = 3$, $n = 4$), stored row-major with $s = 1$ cell per entry and $\mathit{base} = 0$. Where is $A[2,3]$? The full row 1 uses indices $0, 1, 2, 3$ (that is $n = 4$ cells). Then within row 2 we step to column 3. The formula gives offset $(2-1)\cdot 4 + (3-1) = 4 + 2 = 6$. Let us verify by laying out the flattened order:

$$\underbrace{A_{11}, A_{12}, A_{13}, A_{14}}_{\text{offsets } 0..3},\ \underbrace{A_{21}, A_{22}, \mathbf{A_{23}}, A_{24}}_{\text{offsets } 4..7},\ \ldots$$

Indeed $A[2,3]$ lands at offset 6. The formula and the picture agree.

Why this matters

Row-major versus column-major is not academic trivia — it can make real programs run several times faster or slower. Modern CPUs fetch memory in chunks ("cache lines"), so reading cells that are *adjacent in memory* is far cheaper than jumping around. If you loop over a row-major matrix row by row, you stride through memory in order and the cache loves you. Loop column by column over that same matrix and you leap n cells on every step, defeating the cache and slowing the loop dramatically. The math is identical; the running time is not. This is why numerical libraries care intensely about memory layout.

10.3 Stacks: last in, first out

Now we take an array and impose a *discipline* on it. A **stack** is a collection where you may only add and remove from *one end*, called the top. The rule is **LIFO**: last in, first out. Think of a stack of dinner plates. You add a clean plate to the top; you take the next plate from the top; you never reach into the middle. The last plate placed is the first one taken.


Intuition

A stack remembers things in reverse order of when they arrived. That sounds restrictive, but it is exactly the memory you want whenever you are working on something, get interrupted by a sub-task, and need to come back to where you were. Reading a book and following a footnote, which itself has a footnote? Your brain is running a stack. Pending function calls in a running program? A stack (literally called *the* call stack). Matching brackets in an expression? A stack.

A stack supports three operations:

- PUSH(S, x) — put x on top.
- POP(S) — remove and return the top element.
- STACK-EMPTY(S) — is the stack empty?

We can implement all three on a plain array $S[1..n]$ plus a single integer $S.top$ that records the index of the current top element. When $S.top = 0$, the stack is empty. PUSH bumps *top* up by one and writes the new element; POP reads the top element and bumps *top* down by one. The array stays put; only *top* moves.



Above, the stack holds $[4, 1, 3]$ with $top = 3$; the next PUSH writes into slot 4 and bumps *top* to 4, while the next POP returns slot 3 and drops *top* to 2. The dashed cells are reserved but unused.

Algorithm 35: Stack operations on an array

```
1  STACK-EMPTY(S)
2      if S.top == 0 then return TRUE
3      else return FALSE

4  PUSH(S, x)
5      if S.top == S.size then
6          return overflow                          // array is full
7      S.top ← S.top + 1
8      S[S.top] ← x

9  POP(S)
10     if STACK-EMPTY(S) then
11         return underflow                         // nothing to pop
12     S.top ← S.top − 1
13     return S[S.top + 1]
```

Every line here is constant-time arithmetic and a single array access, so **push, pop, and empty-test all cost $\Theta(1)$.** That is the whole appeal of a stack: its operations are as cheap as operations get.

Algorithm lab

Let us trace a stack by hand. Start empty. Perform, in order: PUSH(4), PUSH(1), PUSH(3), POP, PUSH(8), POP, POP.
We track the array contents and the value of *top* after each step. Bold is the current top.

Operation	Contents (bottom → top)	*top*
PUSH(4)	[**4**]	1
PUSH(1)	[4, **1**]	2
PUSH(3)	[4, 1, **3**]	3
POP → 3	[4, **1**]	2
PUSH(8)	[4, 1, **8**]	3
POP → 8	[4, **1**]	2
POP → 1	[**4**]	1

Notice the popped values come out $3, 8, 1$ — exactly the reverse of the most recent pushes. Convince yourself that after the last step the stack still holds 4 at the bottom, untouched since the very first push.

Common trap


Two errors to guard against. **Underflow**: popping an empty stack. Always check STACK-EMPTY first, or you will read garbage at $S[0]$. **Overflow**: pushing onto a full fixed-size array. In the pseudocode above we return an error; in practice you would grow the array (more on that in the amortized-analysis chapter, where "doubling" makes the average push cost $\Theta(1)$ even with growth). For now, just remember that a fixed array stack has a ceiling.

10.4 Queues: first in, first out

A **queue** flips the discipline around. You add at one end (the **tail**) and remove from the *other* end (the **head**). The rule is **FIFO**: first in, first out — exactly like a line of people waiting for coffee. The person who has waited longest is served next; newcomers join the back.

- ENQUEUE(Q, x) — add x at the tail.
- DEQUEUE(Q) — remove and return the element at the head.

The implementation is subtler than a stack, because the queue "crawls" down the array: every dequeue advances the head, every enqueue advances the tail, so the live region drifts rightward and would eventually fall off the end of a finite array. The elegant fix is to make the array **circular** (or "wrap around"): when an index reaches the end, it wraps back to the start, as if the array were a ring. We keep two indices, $Q.head$ (where the next dequeue happens) and $Q.tail$ (where the next enqueue will write).

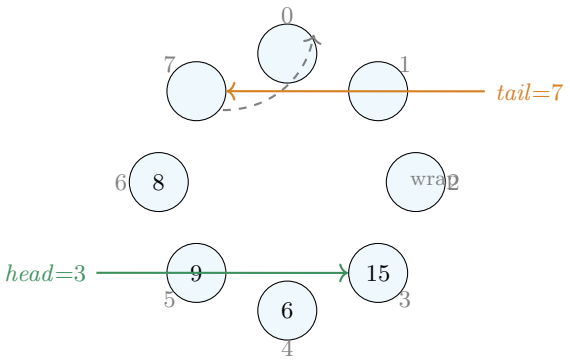

Here the live elements $15, 6, 9, 8$ sit at indices $3, 4, 5, 6$; the next dequeue returns 15 (at $head = 3$), and the next enqueue writes at $tail = 7$. The next index after 7 wraps around to 0. We do the wrap with modular arithmetic: "the index after i" in an array of size m is $(i \bmod m) + 1$ in one-based terms, or simply $(i + 1) \bmod m$ in zero-based terms.

Algorithm 36: Queue operations on a circular array $Q[1..m]$

```
1 ENQUEUE(Q, x)
2     Q[Q.tail] ← x
3     if Q.tail == Q.size then Q.tail ← 1
4     else Q.tail ← Q.tail + 1
5 DEQUEUE(Q)
6     x ← Q[Q.head]
7     if Q.head == Q.size then Q.head ← 1
8     else Q.head ← Q.head + 1
9     return x
```

Both operations are pure constant-time index arithmetic: **enqueue and dequeue cost $\Theta(1)$.**

Algorithm lab

Trace a circular queue of size $m = 4$ (one-based indices 1..4), starting with $head = 1$, $tail = 1$ (empty). Perform: ENQ(7), ENQ(2), ENQ(5), DEQ, ENQ(9), ENQ(1).

Operation	Array (slots 1..4)	head	tail
start	[_,_,_,_]	1	1
ENQ(7)	[7,_,_,_]	1	2
ENQ(2)	[7,2,_,_]	1	3
ENQ(5)	[7,2,5,_]	1	4
DEQ → 7	[7,2,5,_]	2	4
ENQ(9)	[7,2,5,9]	2	**1 (wrapped!)**
ENQ(1)	[**1**,2,5,9]	2	2

Watch the wrap: after writing 9 into slot 4, *tail* jumps back to 1. The final ENQ(1) overwrites slot 1 — which is legal because slot 1's old value (7) had already been dequeued. The live queue is now $2, 5, 9, 1$ reading from head. Notice slot 1 got reused without ever moving any data: that is the magic of the circular layout.

Common trap

Full versus empty ambiguity. A subtle classic: in a circular array of size m, both a completely full queue and a completely empty queue can have $head == tail$. You cannot distinguish them from the indices alone! The standard fixes are (a) keep a separate count of live elements, or (b) never let the queue hold more than $m - 1$ elements so $head == tail$ unambiguously means "empty." Pick one and be consistent, or you will dequeue from an empty queue or silently overwrite live data.

10.5 Deques: open at both ends

A **deque** (pronounced "deck," short for *double-ended queue*) is the natural generalization: you may insert and delete at *either* end. It subsumes both the stack and the queue — use only one end and you have a stack; insert at one end and remove at the other and you have a queue. With a circular array and two indices it supports all four operations — push-front, push-back, pop-front, pop-back — in $\Theta(1)$ time each. We will meet deques again when we need a "sliding window" over a sequence; for now, just file away that "open at both ends, still constant time" is achievable.

Walking question

Here is something to chew on while you walk. You are given only a stack (push/pop) as a black box, and you want to build a queue (enqueue/dequeue) out of it. A single stack reverses order, which is the *opposite* of what a queue does — so one stack alone cannot work. But *two* stacks can. Can you figure out the trick? Hint: reversing a reversal gives you back the original order. What happens if you pour elements from one stack into another, one pop-then-push at a time? (This "two stacks make a queue" construction is a famous interview question, and it has a beautiful amortized cost of $\Theta(1)$ per operation — which you will be able to prove after the amortized-analysis chapter.)

10.6 Pointers and objects: escaping contiguity

Every structure so far has leaned on the array's contiguous block. That block is exactly what makes random access fast — and exactly what makes middle-insertion slow, because there is no slack between neighbors. What if we gave up on contiguity? What if each element could live *anywhere* in memory, and simply held a note saying "the next element is over there"?

That note is called a **pointer** (or reference): a value that is itself an address. An **object** is a small bundle of cells holding several named fields, one or more of which may be pointers to other objects. With pointers, data structures stop being rigid blocks and become *webs*: objects scattered across memory, wired together by pointers.

Intuition

A pointer is an arrow. An object is a box with labeled slots, and some slots hold arrows pointing at other boxes. Drawing a data structure becomes literally drawing boxes and arrows. When you "follow a pointer," you teleport (constant time!) to wherever it aims. The cost is that

you can no longer compute where the i-th element lives by arithmetic — there is no $base + i \cdot s$ formula across a web of scattered boxes. To reach the i-th element you must *follow* i *arrows*, one box at a time.


We will write `x.next` for "the field named *next* inside the object that x points to," and we use the special value **nil** (sometimes written $\perp$ or `null`) for "a pointer that points at nothing." NIL is how we mark the end of a chain or an empty structure — it is the period at the end of the sentence.

Common trap

The **null pointer** (NIL) is the single most prolific source of crashes in real software — so notorious its inventor, Tony Hoare (who also gave us quicksort), called it his "billion-dollar mistake." The trap: trying to follow a pointer that is NIL, i.e. asking for `x.next` when x itself is NIL. There is no box there to look inside. Every single time you follow a pointer in a loop, you must first ask: "Could this be NIL?" The loop condition `while x != NIL` exists precisely to guard against this.

10.7 Linked lists

A **linked list** is the simplest pointer structure: a chain of objects, each called a **node**, where every node holds a *key* (the actual data) and a pointer *next* to the following node. The list as a whole is identified by a pointer *head* to its first node. The last node's *next* is NIL, marking the end.



This is a **singly linked list**: each arrow points only forward. There is also the **doubly linked list**, where each node additionally carries a *prev* pointer to its predecessor, letting you walk backward as well as forward. Doubly linked lists make deletion much cleaner, as we will see, at the cost of one extra pointer per node.

10.7.1 Searching a list

How do you find a key in a linked list? There is no address arithmetic to jump to the middle — you have no choice but to start at the head and follow *next* pointers one node at a time until you find the key or hit NIL.

Algorithm 37: LIST-SEARCH(L, k) — find the first node with key k

Input: a linked list L and a key k
Output: a pointer to a node with key k, or NIL if none exists

```
1 x ← L.head
2 while x ≠ NIL and x.key ≠ k do
3 |   x ← x.next
4 return x
```

In the worst case (the key is absent, or sits at the very end) you visit all n nodes, so search costs $\Theta(n)$ — the same as an unsorted array, but *slower in practice* because you are following scattered pointers instead of striding through contiguous cache-friendly memory. Linked lists buy their advantage elsewhere, in insertion and deletion.

Formal

Loop invariant for List-Search. *At the start of each iteration of the while loop, none of the nodes strictly before x in the list have key k.*
Initialization. Before the first iteration $x = L.head$, so there are no nodes before x at all; the claim holds vacuously.
Maintenance. Suppose the invariant holds at the top of an iteration and the loop body runs. The body runs only when $x \neq \text{NIL}$ and $x.key \neq k$, so the current node also fails to hold k. We then set $x \leftarrow x.next$, advancing past the current node. Now *every* node before the new x — those before the old x (by hypothesis) plus the old x itself (just checked) — fails to hold k. The invariant is restored.
Termination. The loop ends either because $x = \text{NIL}$ (we walked off the end; by the invariant no earlier node held k, and there are no later ones, so k is absent — correctly returning NIL) or because $x.key = k$ (we found it, and return that node). Either way the output is correct.

10.7.2 Inserting into a list


Here is where linked lists shine. To insert a new node at the *front* of the list, you do not shift anything — you just rewire two pointers. Make the new node point at the old head, then make *head* point at the new node:

Algorithm 38: LIST-PREPEND(L, x) — insert node x at the front

Input: a linked list L and a fresh node x to insert

```
1 x.next ← L.head
2 L.head ← x
```

Two pointer assignments, no shifting, no matter how long the list is: **front insertion is $\Theta(1)$.** Contrast that with an array, where front insertion was $\Theta(n)$ because everything had to slide. This is the linked list's whole reason to exist.




The dashed gray arrow shows where *head* used to point; the two green arrows are the rewiring. Nothing else in the list moved a single byte.

10.7.3 Deleting from a list

To delete a node, we splice it out: make its predecessor's *next* skip over it and point straight at its successor (and, in a doubly linked list, make the successor's *prev* point back at the predecessor). In a

doubly linked list this is wonderfully direct, because every node knows its own predecessor through *prev* — no searching required.



The gray arrows are the original links through x; the two bold green arrows are the new links that bypass x. Once nothing points at x, it is gone from the list.

Algorithm 39: LIST-DELETE(L, x) — remove node x from a doubly linked list

Input: a doubly linked list L and a pointer to the node x to remove

```
1 if x.prev ≠ NIL then x.prev.next ← x.next
2 else L.head ← x.next                                  // x was the head
3
4 if x.next ≠ NIL then
5     x.next.prev ← x.prev
```

Given the pointer x to the doomed node, deletion is a handful of pointer rewires — $\Theta(1)$ **time**, again independent of list length. (The IF/ELSE branches just handle the boundary cases where x is the first node, which has no predecessor, or the last, which has no successor.) Compare the array, where deletion in the middle forced an $\Theta(n)$ slide.

Common trap

That last paragraph hid an assumption: "*given the pointer* x." If you only know the *key* you want to delete, you must first LIST-SEARCH for it — which is $\Theta(n)$ — and *then* splice it out in $\Theta(1)$. So delete-by-key is $\Theta(n)$ overall; only delete-by-pointer is truly $\Theta(1)$. People love to claim "linked list deletion is $O(1)$" and forget the fine print. In a *singly* linked list it is worse still: even with a pointer to x you cannot reach $x.prev$ to rewire it, so you must walk from the head to find the predecessor — $\Theta(n)$ again. This single fact is the best argument for paying the extra pointer per node and going doubly linked.

10.7.4 The sentinel trick

All those NIL-checking IF/ELSE branches in LIST-DELETE are ugly and bug-prone. A beautiful simplification is the **sentinel**: a single dummy node, $L.nil$, that has no real key but sits permanently in the list as both the node *after* the last real node and the node *before* the first. The list becomes *circular*, with the sentinel stitching the two ends together. Now there are no boundaries: every real node always has a genuine predecessor and successor (possibly the sentinel itself), so the special cases vanish and LIST-DELETE collapses to just two lines:

$$x.prev.next \leftarrow x.next; \qquad x.next.prev \leftarrow x.prev.$$

The cost is one wasted node's worth of memory and a little care during initialization. For lists where you do many insertions and deletions, the cleaner, branch-free code is well worth it.

Cost summary

Doubly linked list, costs. Let n be the number of nodes.

Operation	Worst-case time
Access i-th element	$\Theta(n)$
Search for a key	$\Theta(n)$
Insert at front / back†	$\Theta(1)$
Delete a node (given its pointer)	$\Theta(1)$
Delete by key	$\Theta(n)$

†Back insertion is $\Theta(1)$ if you keep a *tail* pointer; otherwise you must walk to the end, $\Theta(n)$. The list is the array's complement: it gives up $\Theta(1)$ random access to gain $\Theta(1)$ structural edits.

Why this matters

When should you actually reach for a linked list over an array? When your workload is dominated by inserting and deleting at known positions and you rarely need to jump to the i-th element. The textbook real-world example is a music or video *playlist* with constant reordering, or the list of free memory blocks an operating system splices in and out as programs allocate and free memory. But heed a modern caveat: because array elements sit contiguously and linked-list nodes are scattered, arrays are so much friendlier to the CPU cache that in practice a simple array often beats a linked list *even for tasks the list is supposedly better at*, until n gets quite large. Asymptotics tell you the trend; they do not always tell you the winner at the sizes you care about. Measure.


10.8 Representing rooted trees

We close with the structure that will dominate the rest of the book: the **rooted tree**. A tree is a collection of nodes connected so that there is exactly one special node, the **root**, at the top, and every other node has exactly one *parent* (the node just above it) and any number of *children* (the nodes just below). No node is its own ancestor; there are no cycles. A node with no children is a **leaf**.

The pointer-and-object idea generalizes perfectly: a tree node is just an object holding a key plus pointers to its relatives. The only question is *which* relatives to store pointers to, and that choice depends on how many children a node may have.

10.8.1 Binary trees

The cleanest case is the **binary tree**, where every node has at most two children, named *left* and *right*. Each node x stores three pointers: $x.p$ to its parent, $x.left$ to its left child, $x.right$ to its right child. Any missing relative is NIL — the root's parent is NIL, and a leaf's children are NIL.



Here 18 is the root. Its left child is 7, its right child is 26. Node 7 has two children, 3 and 12 (both leaves). Node 26 has *no* left child (that pointer is NIL) and one right child, 31. Reading the tree from the top, each node points down to up to two children and up to one parent.

10.8.2 When the number of children is unbounded


Binary trees are tidy because "at most two children" means a fixed two pointer slots. But many trees let a node have *arbitrarily* many children — think of a file system folder that may contain hundreds of items, or a company org chart. We cannot give each node a fixed pointer for "child 1, child 2, child 3, ..." because we do not know in advance how many there will be, and reserving a huge fixed number would waste enormous memory on nodes with few children.

The clever, space-frugal answer is the **left-child, right-sibling** representation. Each node stores only *two* pointers, regardless of how many children it has:

- *left-child*: a pointer to its *first* child (or NIL if it is a leaf);
- *right-sibling*: a pointer to its *next sibling* — the next child of the same parent (or NIL if it is the last child).

Intuition

Picture each parent reaching down with a single arrow to its *eldest* child. The siblings then hold hands left to right in a chain. To visit *all* the children of a node, you drop down to the first child, then walk the sibling chain to the right until it runs out. You have turned "a list of children of unknown length" into exactly the linked list from the previous section — so it costs only two pointers per node, no matter how lopsided or bushy the tree.

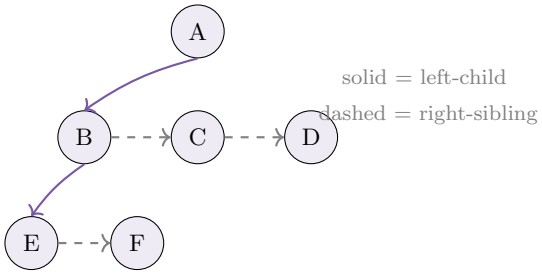

Read it as a conventional tree: A is the root with three children B, C, D; B in turn has two children E, F. But in memory, A holds only one downward pointer (to B, its first child), and B, C, D are linked left-to-right by sibling pointers. Likewise E points sideways to F. To list A's children you go down to B, then follow dashed arrows: $B \to C \to D \to$ NIL. A node with 500 children still needs only its two pointers; the 500 children form a sibling chain among themselves.

Focus

The big idea of this section: **any rooted tree, no matter how many children per node, can be stored with just two pointers per node** via left-child/right-sibling. Trees do not require fancy variable-length nodes. This same two-pointer node is exactly the binary-tree node from before — so deep down, an arbitrary tree and a binary tree share one representation. That unity is why binary trees are studied so intensely: they are secretly general.

10.8.3 Other tree representations

Two more variations are worth naming. If you happen to know an upper bound k on the number of children (a "k-ary tree"), you can simply give each node an array $child[1..k]$ of child pointers — direct and fast, at the cost of wasting slots on nodes with fewer than k children. And for the special, beautiful case of a *complete* binary tree — one filled level by level with no gaps — you can drop pointers entirely and store the whole tree in a plain array, using arithmetic to find relatives: the children of the node at index i live at indices $2i$ and $2i+1$, and its parent at $\lfloor i/2 \rfloor$. That arithmetic trick is the secret engine of the *heap*, which gets its own chapter. Hold that thought.

History and connection

This chapter corresponds to **CLRS Chapter 10, "Elementary Data Structures."** CLRS covers stacks and queues in §10.1, linked lists in §10.2, pointers and objects in §10.3, and rooted trees in §10.4. The material is ancient by computing standards — stacks and the call-stack discipline date to the 1940s–50s and the dawn of subroutines; linked lists were introduced by Newell, Shaw, and Simon around 1955–56 in their early artificial-intelligence work (the IPL language), precisely to manipulate structures whose size was not known in advance. The null reference that bedevils us all was introduced by Tony Hoare in ALGOL W in 1965; he publicly apologized for it decades later. When you read CLRS Chapter 10 next, it will feel like review — which is exactly the point of reading this book first.

10.9 Putting it together

Step back and notice the single thread running through everything. There were really only *two* primitive ideas in this entire chapter:

1. The **contiguous block** (the array), which gives $\Theta(1)$ random access by index via address arithmetic, but pays $\Theta(n)$ to insert or delete in the middle because neighbors have no slack.
2. The **pointer-linked object** (the node), which gives $\Theta(1)$ structural edits by rewiring a few arrows, but pays $\Theta(n)$ to reach the i-th element because there is no arithmetic shortcut — you must walk.

Stacks, queues, and deques are arrays (or lists) under a discipline about *which end* you may touch, and they are all $\Theta(1)$ per operation. Linked lists are pure pointer webs. Trees are pointer webs with a parent-child shape, and even the bushiest tree collapses to two pointers per node. Every advanced structure later in the book — hash tables, balanced search trees, heaps, graphs — is some artful combination of these two primitives, chosen to make the operations *you* care about cheap.

Pause

Before moving on, make sure you can answer these without peeking. Why is array random access $\Theta(1)$ but array middle-insertion $\Theta(n)$? Why is linked-list insertion $\Theta(1)$ but linked-list random access $\Theta(n)$? What does a stack's LIFO discipline buy you, and a queue's FIFO? Why does a circular array stop a queue from crawling off the end? And how do you store a tree where a node might have a thousand children using only two pointers per node? If those five answers feel solid, you are ready for what comes next.

Exercises

Exercise 10.1 (Address arithmetic)**.** An array of 64-bit integers ($s = 8$ cells per element) begins at base address 4096 and uses zero-based indexing. (a) At what address does $A[0]$ live? $A[5]$? $A[5]$ if the array were instead one-based? (b) An element is found at address 4216; what is its index (zero-based)? Show the arithmetic in both directions.

Exercise 10.2 (Stack trace)**.** Starting from an empty stack, perform: PUSH(5), PUSH(8), PUSH(2), POP, PUSH(11), POP, POP, POP. List the value returned by each POP, in order, and state the contents of the stack after every operation. What goes wrong on the final operation, and what should the implementation do about it?

Exercise 10.3 (Balanced brackets)**.** Describe an algorithm using a single stack that decides whether a string of brackets such as `([]{()})` is properly balanced (every opener has a matching closer, correctly nested). Trace your algorithm on `([)]` and explain precisely where and why it reports an error. What is the running time on a string of length n?

Exercise 10.4 (Circular queue)**.** Using a circular array of size $m = 5$ (one-based) with $head = tail = 1$, trace: ENQ(1), ENQ(2), ENQ(3), DEQ, DEQ, ENQ(4), ENQ(5), ENQ(6), ENQ(7). Show the array contents and both indices after each step, and mark exactly where a wrap-around occurs. Then explain the "full vs. empty" ambiguity in your own words and propose a fix.

Exercise 10.5 (Reverse a singly linked list)**.** Write pseudocode that reverses a singly linked list *in place*, returning the new head, using only a constant number of extra pointers (no second list, no recursion). Hint: walk the list maintaining three pointers — *prev*, *curr*, *next* — and at each node flip its *next* pointer to aim at *prev*. Trace it on the list $9 \to 16 \to 4 \to$ NIL, drawing the pointers after each step. Argue that it runs in $\Theta(n)$ time and $\Theta(1)$ extra space.

Exercise 10.6 (Two stacks make a queue)**.** Implement a queue using two stacks S_{in} and S_{out}, supporting only PUSH and POP on each. ENQUEUE pushes onto S_{in}. DEQUEUE: if S_{out} is empty, pop *everything* from S_{in} and push it onto S_{out}, then pop from S_{out}. Trace ENQ(1), ENQ(2), ENQ(3), DEQ, ENQ(4), DEQ, DEQ and verify that values come out in FIFO order $1, 2, 3, 4$. Why does pouring from S_{in} to S_{out} produce the correct order? (You will analyze its amortized cost in a later chapter.)

Exercise 10.7 (Doubly linked delete)**.** Given a doubly linked list with a sentinel, write the two-line LIST-DELETE and argue it correctly handles deleting (a) the only node, (b) the first node, (c) the last node, (d) a middle node — all without any IF statements. Why does the sentinel make all four cases identical?

Exercise 10.8 (Array vs. list, in practice)**.** For each scenario, decide whether a dynamic array or a doubly linked list is the better fit, and justify in one or two sentences: (a) storing the pixels of

an image you will read millions of times but never resize; (b) a text editor's buffer where the user constantly inserts and deletes characters in the middle; (c) a to-do list where you mostly append at the end and occasionally read the k-th item; (d) the "undo history" of an editor.

Exercise 10.9 (Left-child, right-sibling traversal)**.** A rooted tree is stored in left-child, right-sibling form: each node x has $x.child$ (first child or NIL) and $x.sibling$ (next sibling or NIL). Write a recursive procedure COUNT-NODES(x) that returns the number of nodes in the subtree rooted at x (counting x itself). Then explain why the procedure, despite the tree being arbitrary-arity, only ever follows two kinds of pointer. What is its running time on a tree of n nodes?

Exercise 10.10 (Heap-as-array preview, challenge)**.** A complete binary tree is stored in a one-based array, where the node at index i has children at $2i$ and $2i+1$ and parent at $\lfloor i/2 \rfloor$. (a) Draw the tree for the array $[16, 14, 10, 8, 7, 9, 3]$. (b) Which array index holds the parent of the node at index 6? Its sibling? (c) If the array has n elements, which indices are leaves? (Hint: a node is a leaf exactly when it has no left child, i.e. when $2i > n$.) Verify your answer on the 7-element example.

Chapter 11

Hash Tables

Imagine you run a small library, and someone walks in and asks, "Do you have the book with catalog number 4173?" You could walk the shelves one by one, reading every spine until you find it – that is searching a list. Or you could have built the library so that book 4173 simply *lives* at position 4173 on a very long shelf: you walk straight there, no scanning. That second idea – compute the location from the key, then go directly to it – is the entire soul of this chapter.

The catch, of course, is that "a shelf with one slot for every possible catalog number" may be absurdly long. If catalog numbers are nine digits, that is a billion slots for maybe ten thousand books. Hash tables are what you get when you keep the "compute the location" magic but *refuse* to pay for a billion slots. You take a giant space of possible keys and squash it down into a small array, and then you deal – cleverly, and provably – with the collisions that squashing causes.

By the end of this chapter you will understand why a well-built hash table answers "is x in here?", "insert x", and "delete x" in *constant expected time*, what "expected" is doing in that sentence, and how to build hash functions that earn that guarantee instead of just hoping for it.

Focus

A hash table is a dictionary: it stores a set of *(key, value)* pairs and supports Insert, Search, and Delete. Its trick is a *hash function* h that maps each key into a slot of a small array. The whole game is making h scatter keys evenly so that the array stays sparse and operations stay fast.

11.1 The dictionary problem

Step back and name what we actually want. We have a universe U of possible keys – maybe all 32-bit integers, maybe all strings up to length 100, maybe all possible employee IDs. At any moment we are storing some *subset* of those keys, a dynamic set we will call K, and K is usually *tiny* compared to U. We want three operations:

- Search(T, k): return the element with key k, or report that it is absent.
- Insert(T, x): add element x (whose key is $x.key$) to the set.
- Delete(T, x): remove element x from the set.

We do *not* need the keys sorted, we do *not* need to ask "what is the smallest key larger than k", we do *not* need predecessors or successors. We just need membership and retrieval. That modest wish list is exactly why hash tables can be so fast: by giving up order, they buy speed.

Why this matters

This is one of the most-used data structures on Earth. Python's `dict` and `set`, Java's `HashMap`, C++'s `unordered_map`, JavaScript objects, Ruby hashes, the symbol tables inside every compiler, the routing tables inside databases, deduplication, caching, and the "have I seen this before?" check in a hundred algorithms – all hash tables underneath. When people say a program "uses a hash map to make it fast," they mean: it turned an $O(n)$ scan into an $O(1)$ lookup.

11.2 Direct-address tables: the honest, wasteful idea

Let us start with the version that has no cleverness at all, just to see the shape of the answer before we economize.

Suppose the universe of keys is small: $U = \{0, 1, 2, \ldots, m-1\}$ for some manageable m, and no two elements share a key. Then we can do the library-shelf thing literally. Allocate an array $T[0\,..\,m-1]$, called a *direct-address table*. Slot $T[k]$ holds the element whose key is k (or a pointer to it), and holds NIL if no such element is present.

Algorithm 40: Direct-address operations

Input: A direct-address table $T[0\,..\,m-1]$, a key k, an element x

1 DIRECT-ADDRESS-SEARCH(T, k): **return** $T[k]$;
2 DIRECT-ADDRESS-INSERT(T, x): $T[x.key] \leftarrow x$;
3 DIRECT-ADDRESS-DELETE(T, x): $T[x.key] \leftarrow$ NIL;

Each operation is three lines, no loops, no comparisons. Every one runs in $O(1)$ time in the *worst* case – not expected, not amortized, just flatly constant. This is the dream we are chasing.

Example 11.1. Say employee IDs run from 0 to 99, and right now we employ people with IDs 4, 17, and 42. The direct-address table is an array of 100 slots. $T[4]$, $T[17]$, $T[42]$ point at their records; the other 97 slots hold NIL. "Is employee 17 here?" is just "look at $T[17]$" – one memory access.

So what is wrong? Two things, and they are the same thing wearing two coats.

Common trap

Direct addressing wastes space when U is large. If keys are 32-bit integers, U has about 4.3 billion values, so T needs 4.3 billion slots even to store ten keys. That is gigabytes of mostly-NIL array. And if keys are strings or 64-bit numbers, a direct-address table is not merely wasteful – it is physically impossible to allocate. The whole point of hashing is to escape this.

Intuition

Direct addressing pays $|U|$ memory to get $O(1)$ time. We are about to pay only $\Theta(|K|)$ memory – proportional to the number of keys we actually store – and *keep* $O(1)$ time, on average. The trade is that "on average" replaces "always." For almost every real program that is a fantastic bargain.

11.3 From direct addressing to hashing

Here is the leap. We have a huge universe U but only ever store $|K| = n$ keys, and we are willing to allocate an array $T[0\,..\,m-1]$ of just m slots, where m is on the order of n, not $|U|$. The problem: a key k might be a nine-digit number, but our array only has, say, $m = 701$ slots. Where does key k go?

We *compute* a slot from the key, using a *hash function*

$$h : U \to \{0, 1, \ldots, m-1\}.$$

The key k "hashes to" slot $h(k)$, and we say $h(k)$ is the *hash value* of k. Instead of storing element x at $T[x.key]$ (impossible – the array is too small), we store it at $T[h(x.key)]$. The array shrinks from $|U|$ slots to m slots. Beautiful.

But you already feel the snag. We are cramming $|U|$ possible keys into $m \ll |U|$ slots. By the pigeonhole principle, *many keys must map to the same slot.* When $h(k_1) = h(k_2)$ for $k_1 \neq k_2$, we call it a *collision*, and we now have two elements wanting the same parking spot. The rest of this chapter is, more or less, the study of how to handle collisions gracefully and how to make them rare.

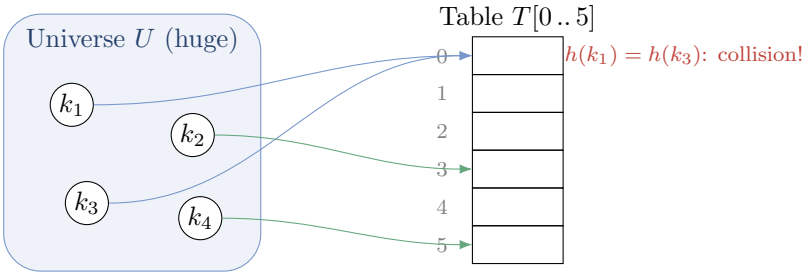


Figure 11.1: A hash function squashes a huge universe into a small table. Keys k_1 and k_3 collide in slot 0.

11.4 Collision resolution by chaining

The simplest, most robust answer to collisions is: if several keys land in the same slot, just *keep a list there.* Slot $T[j]$ holds not a single element but a pointer to a linked list of all elements whose keys hash to j. This is *chaining.*

Intuition

Picture a coat-check with m hooks. The hash function tells you which hook your coat goes on. If two coats get the same hook, you just hang the second one in front of the first – the hook holds a little chain of coats. To find your coat, you go to its hook and look through the (hopefully short) chain hanging there.

The three operations become:

Algorithm 41: Chained hash table operations

Input: Hash table T with m slots, hash function h, element x, key k

1 CHAINED-HASH-INSERT(T, x): insert x at the head of list $T[h(x.key)]$;
2 CHAINED-HASH-SEARCH(T, k): search list $T[h(k)]$ for an element with key k;
3 CHAINED-HASH-DELETE(T, x): delete x from list $T[h(x.key)]$;

INSERT is $O(1)$ worst case: hash the key, splice the new node onto the front of the list – no scanning, because we assume x is not already present (or we do not care if it duplicates). SEARCH must walk the list at slot $h(k)$, so its cost is proportional to that list's length. DELETE, if we are handed a pointer to x and use doubly linked lists, is also $O(1)$: we splice x out without searching for it.

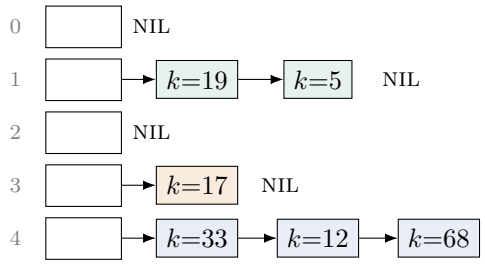


Figure 11.2: A chained hash table with $m = 5$ slots. Keys 19 and 5 both hashed to slot 1; keys 33, 12, 68 all landed in slot 4.

11.4.1 The load factor

How long are these lists, on average? If the table has m slots and currently holds n elements, define the *load factor*

$$\alpha = \frac{n}{m}.$$

It is the average number of elements per slot. If $n = 1000$ and $m = 500$, then $\alpha = 2$: on average two elements per list. A load factor of $\alpha = 0.75$ means the table is about three-quarters full in the "one element per slot" sense. The load factor is the single most important dial on a hash table, and a great deal of our analysis is really analysis of α.

Focus

$\alpha = n/m$ is the average list length under chaining. We will see that search costs $\Theta(1 + \alpha)$. So if we keep α bounded by a constant – say, never let it exceed 1 or 2 – searches are $\Theta(1)$. Keeping α small is why hash tables *resize* (rehash into a bigger array) as they fill.

11.5 Analyzing chaining: simple uniform hashing

We want to prove that search is fast on average. But "on average" over what? There is no randomness in a fixed set of keys and a fixed hash function – if an adversary hands you keys that all collide, every search is slow, period. To get a meaningful average we make an idealizing assumption about *how keys distribute*.

Formal

Simple uniform hashing. Any given key is equally likely to hash into any of the m slots, independently of where the other keys have hashed. Formally, for the keys we store, $\Pr[h(k) = j] = 1/m$ for every slot j, and the slots chosen by distinct keys are independent.

This is an assumption about the *behavior* of h on our particular keys, not something we can prove about an arbitrary function. Later, with *universal hashing*, we will replace this leap of faith with an honest probabilistic guarantee. For now, accept it and see where it leads.

Let n_j denote the length of the list at slot j, so $n = n_0 + n_1 + \cdots + n_{m-1}$. Under simple uniform hashing, each of the n keys lands in slot j with probability $1/m$, so the *expected* length of any list is

$$\mathbb{E}[n_j] = \frac{n}{m} = \alpha.$$

11.5.1 Unsuccessful search

An *unsuccessful* search – looking for a key k that is *not* in the table – walks the entire list at slot $h(k)$ to the end (it has to, to be sure k is absent). Under simple uniform hashing, k is equally likely to hash to any slot, and the expected length of that slot's list is α. Add the constant cost of computing $h(k)$ and indexing into the array, and we get expected time

$$\Theta(1 + \alpha).$$

11.5.2 Successful search

A *successful* search is a touch subtler, because the key we are looking for is somewhere in its list, and on average we walk only *partway* down. The careful count – which we do gently below – also gives $\Theta(1 + \alpha)$.

Theorem 11.1 (Expected cost of search under chaining)**.** *In a hash table with chaining, under the assumption of simple uniform hashing, both a successful and an unsuccessful search take expected time $\Theta(1 + \alpha)$, where $\alpha = n/m$ is the load factor.*

Sketch for successful search. Suppose we search for each of the n stored keys equally often. Number the keys $x_1, x_2, \ldots, x_n$ in the order they were *inserted* (each at the head of its list). When we successfully search for x_i, the number of elements we examine is 1 (for x_i itself) plus the number of elements that appear *before* x_i in its list – which are exactly the keys inserted *after* x_i that happened to land in the same slot.

For $j > i$, let the indicator $X_{ij} = 1$ if x_i and x_j hash to the same slot. Under simple uniform hashing, $\Pr[X_{ij} = 1] = 1/m$, so $\mathbb{E}[X_{ij}] = 1/m$. The expected number of elements examined when searching

for x_i is $1 + \sum_{j>i} \mathbb{E}[X_{ij}]$. Averaging over all i,

$$\frac{1}{n}\sum_{i=1}^{n}\Big(1+\sum_{j=i+1}^{n}\frac{1}{m}\Big) = 1+\frac{1}{nm}\sum_{i=1}^{n}(n-i) = 1+\frac{1}{nm}\cdot\frac{n(n-1)}{2} = 1+\frac{n-1}{2m}.$$

Since $\frac{n-1}{2m} < \frac{n}{2m} = \frac{\alpha}{2}$, the expected number of elements examined is at most $1+\alpha/2$, giving total expected time $\Theta(1+\alpha)$ once we add the constant cost of computing the hash. □ □

Intuition

The two searches give the same big-O for a satisfying reason. An unsuccessful search marches to the end of a length-α list, costing about α. A successful search, on average, stops about halfway, costing about $\alpha/2$. Same order, $\Theta(\alpha)$, differing only by the constant 1 versus 1/2. And the leading "1+" in $\Theta(1+\alpha)$ is just the unavoidable cost of computing the hash and touching the array, which we pay even when a list is empty.

Corollary 11.1. *If $m = \Omega(n)$ – that is, the number of slots grows at least linearly with the number of keys, so $\alpha = O(1)$ – then all dictionary operations take $O(1)$ expected time.*

This is the headline result of the chapter. Keep the load factor bounded by a constant, and a chained hash table does INSERT, SEARCH, and DELETE in expected constant time. Insert and (pointered) delete are already $O(1)$ in the *worst* case; only search carries the "expected."

Cost summary

Chaining, with $\alpha = n/m$:

Operation	Expected	Worst case
INSERT	$O(1)$	$O(1)$
SEARCH	$\Theta(1+\alpha)$	$\Theta(n)$
DELETE (pointer to x)	$O(1)$	$O(1)$

With $\alpha = O(1)$, search is $O(1)$ expected. Worst-case $\Theta(n)$ happens only if every key collides into one slot – which good hashing makes astronomically unlikely.

Algorithm lab

Build a tiny chained table by hand with $m = 5$ and $h(k) = k \bmod 5$. Insert the keys $12, 7, 33, 20, 18, 25, 2$ in that order, always at the *head* of each list. After all insertions, write out the five lists. (Check, reading each list from its head: slot 0 should hold $25, 20$; slot 2 should hold $2, 7, 12$; slot 3 should hold $18, 33$. Slots 1 and 4 empty.) Then count how many nodes a successful search for 7 examines, and an unsuccessful search for 9.

11.6 Hash functions: turning keys into slots

Everything above assumed simple uniform hashing – a magically even spread. Real hash functions are concrete arithmetic, and a bad one clumps keys together and destroys the guarantee. What makes a good hash function?

Focus

A good hash function should (a) be fast to compute, (b) scatter keys so that any clustering or pattern in the keys does *not* translate into clustering in the slots, and (c) ideally satisfy simple uniform hashing. Since we rarely know the exact distribution of keys, we want functions that behave well across many plausible key sets.

Most hash functions first interpret the key as a natural number. A string like `"pt"` becomes a number by treating its characters as digits in base 128: `p`= 112, `t`= 116, so the key is $112 \cdot 128 + 116 = 14452$. Once a key is a non-negative integer k, two classic methods turn it into a slot.

11.6.1 The division method

Pick a table size m and define

$$h(k) = k \bmod m.$$

The hash value is the remainder of k divided by m. It is wonderfully fast – one modulo operation. But the choice of m matters enormously.

Common trap

Do not let m be a power of 2 in the division method. If $m = 2^p$, then $k \bmod m$ is just the low p bits of k – it ignores all the higher bits entirely. If your keys share patterns in their low bits (common with structured data, pointers, aligned addresses), they collide catastrophically. Powers of 10 are similarly dangerous for decimal-structured keys.

The folklore fix: choose m to be a *prime* not too close to a power of 2. A prime modulus mixes all the bits of k into the remainder, so accidental patterns in the keys are far less likely to survive. For example, to store about 2000 keys with load factor near 3, you want $m \approx 700$; the prime 701 is a fine choice.

Example 11.2. Let $m = 701$ and key $k = 1{,}234{,}567$. Then $h(k) = 1{,}234{,}567 \bmod 701$. Compute: $701 \cdot 1761 = 1{,}234{,}461$, and $1{,}234{,}567 - 1{,}234{,}461 = 106$. So the key hashes to slot 106.

11.6.2 The multiplication method

This method does not care about the exact value of m, which frees you to pick $m = 2^p$ for fast indexing. Choose a constant A with $0 < A < 1$. Then

$$h(k) = \lfloor\, m\,(kA \bmod 1)\,\rfloor,$$

where $kA \bmod 1$ means "the fractional part of kA." In words: multiply the key by A, throw away the integer part to keep a fraction in $[0, 1)$, then scale that fraction up to $[0, m)$ and floor it.

Intuition

Think of the fractional parts $\{kA\}$ for $k = 1, 2, 3, \ldots$ as points dropped on the circle of circumference 1. If A is a nicely irrational-looking constant, these points spread out evenly around the circle, never bunching up. We then chop the circle into m equal arcs and read off which arc each key landed in. Even, well-mixed arcs mean even, well-mixed slots.

Knuth suggested $A \approx (\sqrt{5}-1)/2 = 0.6180339887\ldots$, the reciprocal golden ratio, as a value that spreads keys especially well.

Example 11.3. Let $m = 16$ (so $p = 4$), $A = 0.6180339887$, and $k = 100$. Then $kA = 61.80339887$, the fractional part is 0.80339887, times $m = 16$ gives $12.854\ldots$, and the floor is 12. So $h(100) = 12$.

History and connection

This material is CLRS Chapter 11, "Hash Tables." Direct addressing and chaining are sections 11.1–11.2; hash functions (division, multiplication) are 11.3; open addressing is 11.4; and the deeper guarantees – universal and perfect hashing – are 11.3.3 and 11.5. Hashing dates to the early 1950s at IBM (Hans Peter Luhn) and was analyzed and popularized through the 1950s–60s; Knuth's *The Art of Computer Programming*, Volume 3, gives the classic treatment. CLRS proves the same theorems we sketch here, just faster and with less hand-holding – which is exactly what you will be ready for after this chapter.

11.7 Open addressing: no lists at all

Chaining stores collisions in side lists, which means extra pointers and extra memory beyond the array. *Open addressing* takes a different, leaner stance: **every element lives in the array itself**, one element per slot, no lists, no external pointers. The load factor $\alpha = n/m$ therefore never exceeds 1 – you cannot store more elements than you have slots.

But if a key's natural slot is already occupied by a different key, where does it go? It *probes* a sequence of slots until it finds an empty one. The hash function now takes a second argument, the probe number:

$$h : U \times \{0, 1, \ldots, m-1\} \to \{0, 1, \ldots, m-1\}.$$

For a key k, we try slots $h(k,0)$, $h(k,1)$, $h(k,2)$, ... in order. We require that this *probe sequence* $\langle h(k,0), h(k,1), \ldots, h(k,m-1)\rangle$ be a permutation of all m slots, so that probing eventually examines every slot and never gives up while empty slots remain.

Algorithm 42: Open-addressing Insert and Search

Input: Hash table $T[0\,..\,m-1]$, key k (Insert) or sought key k (Search)
Output: Insert: slot index, or table-full error. Search: slot index or NIL.

```
1  HASH-INSERT(T, k):;
2  for i ← 0 to m − 1 do
3  |   j ← h(k, i);
4  |   if T[j] is NIL or DELETED then
5  |   |   T[j] ← k;
6  |   |   return j;
7  return "table overflow";
8  HASH-SEARCH(T, k):;
9  for i ← 0 to m − 1 do
10 |   j ← h(k, i);
11 |   if T[j] = k then return j;
12 |   if T[j] is NIL then return NIL;
13 return NIL;
```

Notice the search-stopping rule: we stop and report "absent" the moment we hit a genuinely empty (NIL) slot, because the key, had it been inserted, would have claimed that slot or an earlier one in its probe sequence. We do *not* stop on an occupied-by-someone-else slot; we keep probing.

Common trap

Deletion in open addressing is tricky. You cannot simply set a deleted slot back to NIL – that would create a false "empty" in the middle of some other key's probe sequence, causing searches for those keys to stop early and wrongly report "absent." The standard fix is a special DELETED marker (a "tombstone"): search treats it as occupied (keep probing past it), but insert treats it as free (reuse it). The cost: with many tombstones, search times no longer depend only on α, which is one reason chaining is often preferred when deletions are frequent.

11.7.1 Linear probing

The simplest probe sequence: if your slot is taken, try the next one, then the next, wrapping around. Given an ordinary hash function $h'(k)$, define

$$h(k, i) = \big(h'(k) + i\big) \bmod m.$$

The probe sequence is $h'(k)$, $h'(k)+1$, $h'(k)+2, \ldots$ marching forward (mod m).

Example 11.4. Let $m = 11$, $h'(k) = k \bmod 11$, and insert $20, 31, 9, 42$ in order.

- 20: $h' = 20 \bmod 11 = 9$. Slot 9 empty → place at 9.
- 31: $h' = 31 \bmod 11 = 9$. Slot 9 taken; try 10 – empty → place at 10.
- 9: $h' = 9$. Slot 9 taken; 10 taken; try 0 (wrap) – empty → place at 0.
- 42: $h' = 42 \bmod 11 = 9$. Slots $9, 10, 0$ taken; try 1 – empty → place at 1.

Four keys that all wanted slot 9 spilled forward into $9, 10, 0, 1$ – a run of four consecutive filled slots, shown in Figure 11.3.




Figure 11.3: Linear probing after inserting $20, 31, 9, 42$ (all with $h' = 9$) into $m = 11$ slots. They form one contiguous run wrapping past the end: slots $9, 10, 0, 1$.

That run is the disease called *primary clustering*: long runs of occupied slots build up, and they grow faster than you would guess, because any key hashing anywhere into the run gets appended to its far end, lengthening it. Long runs mean long probes.

Common trap

Primary clustering. Linear probing creates long contiguous runs of full slots. A slot just after a long run is very likely to be chosen next (any of the run's keys, plus that slot's own keys, feed it), so runs snowball. Linear probing is cache-friendly – it walks contiguous memory – but its clustering makes probe sequences long as α approaches 1.

11.7.2 Quadratic probing

To break up those runs, jump by a quadratically growing offset instead of 1:

$$h(k, i) = \big(h'(k) + c_1 i + c_2 i^2\big) \bmod m,$$

for constants c_1, c_2 (with $c_2 \neq 0$). Now the probe sequence spreads out: $h', h' + c_1 + c_2, h' + 2c_1 + 4c_2, \ldots$. Two keys with the *same* initial slot h' still follow the same probe sequence – a milder defect called *secondary clustering* – but you avoid the long contiguous runs of linear probing. The constants c_1, c_2 and m must be chosen carefully (a common safe choice is m a power of 2 with $c_1 = c_2 = 1/2$) so that the probe sequence actually visits all m slots.

11.7.3 Double hashing

The best of the simple open-addressing schemes uses a *second* hash function to determine the step size, so that different keys with the same starting slot march off in *different* directions:

$$h(k, i) = \big(h_1(k) + i\, h_2(k)\big) \bmod m.$$

The first probe is at $h_1(k)$; thereafter each step jumps by $h_2(k)$, an amount that *depends on the key*. Two keys sharing a starting slot almost surely have different step sizes, so they diverge immediately – no secondary clustering. For the probe sequence to hit every slot, $h_2(k)$ must be relatively prime to m; a clean way to guarantee this is to make m a power of 2 and design h_2 to always produce odd values, or to make m prime and let h_2 return values in $1..m - 1$.

Example 11.5. Let $m = 13$, $h_1(k) = k \bmod 13$, and $h_2(k) = 1 + (k \bmod 11)$. Insert key $k = 14$. $h_1(14) = 1$, $h_2(14) = 1 + (14 \bmod 11) = 1 + 3 = 4$. Probe sequence: $1, 5, 9, 0, 4, 8, 12, 3, 7, 11, 2, 6, 10$ – step 4, wrapping mod 13, visiting all thirteen slots. If slot 1 is taken, we try 5; if that is taken, 9; and so on.

Intuition

Linear probing: everybody who collides walks the same single-file line, so jams pile up. Double hashing: each key, even those starting at the same slot, walks at its own stride, so they fan out across the table instead of queuing behind one another. Double hashing uses $\Theta(m^2)$ distinct probe sequences (one per (h_1, h_2) pair), versus only m for linear or quadratic probing, which is why it comes closest to the idealized behavior.

11.7.4 Cost of open addressing

The clean analysis assumes *uniform hashing*: each key's probe sequence is equally likely to be any of the $m!$ permutations of the slots. (Double hashing approximates this; linear and quadratic probing do not, but the bound is still a useful guide.) Under this assumption one can prove:

Theorem 11.2 (Expected probes in open addressing)**.** *In an open-address table with load factor $\alpha = n/m < 1$, under uniform hashing, the expected number of probes is at most $\dfrac{1}{1-\alpha}$ for an unsuccessful search (and for an insertion), and at most $\dfrac{1}{\alpha} \ln \dfrac{1}{1-\alpha}$ for a successful search.*

Intuition for the unsuccessful bound. A probe sequence of length at least 1 always happens. It continues to a second probe only if the first slot was occupied, which has probability about α (the fraction of full slots). It reaches a third probe only if the first two were both occupied, probability about α^2, and so on. The expected number of probes is therefore about

$$1 + \alpha + \alpha^2 + \alpha^3 + \cdots = \frac{1}{1-\alpha},$$

a geometric series, valid because $\alpha < 1$. □ □

Let us feel those numbers. They are the reason hash tables resize before they get too full.

α	table is	unsuccessful $\frac{1}{1-\alpha}$	successful $\frac{1}{\alpha}\ln\frac{1}{1-\alpha}$
0.5	half full	2.0	1.39
0.75	3/4 full	4.0	1.85
0.9	9/10 full	10.0	2.56
0.99	nearly full	100	4.65

Cost summary

Open addressing. Expected probes blow up like $\frac{1}{1-\alpha}$ as $\alpha \to 1$: at $\alpha = 0.9$ an unsuccessful search averages 10 probes; at $\alpha = 0.99$, a hundred. Practical implementations cap α (often

around 0.5–0.75) and *rehash* into a larger table when the cap is hit. Compared to chaining, open addressing uses no pointer overhead and is cache-friendly, but degrades sharply near full and handles deletion awkwardly.

Walking question

Here is something to chew on while you stretch your legs. Under chaining, the expected search cost is $\Theta(1+\alpha)$ and grows *linearly* in α – doubling the load factor roughly doubles the work. Under open addressing it grows like $\frac{1}{1-\alpha}$, which is fine for small α but *explodes* as $\alpha \to 1$. Why the difference? What is fundamentally happening at $\alpha = 1$ in each scheme? (Hint: in chaining, $\alpha = 1$ just means "one element per list on average" – totally healthy. In open addressing, $\alpha = 1$ means the array is *completely full*, and an unsuccessful search must probe everything.)

11.8 Universal hashing: removing the leap of faith

Everything so far rested on simple uniform hashing – an *assumption* that our keys happen to spread evenly. But that assumption can fail spectacularly, and not just by bad luck. If your hash function is fixed and publicly known, an adversary (or simply an unlucky real-world dataset) can hand you n keys that *all* hash to the same slot. Then chaining degenerates to one list of length n, and every search is $\Theta(n)$. This is not theoretical paranoia: it has been used to mount real denial-of-service attacks on web servers, by sending requests whose parameters all collide in the server's hash table.

Intuition

The fix is delightfully sneaky: *don't commit to one hash function.* At program start, pick a hash function *at random* from a carefully designed family $\mathcal{H}$. Now an adversary, choosing keys, cannot know which function you will use, so they cannot engineer collisions. The randomness lives in *our* choice of h, not in the keys – which means we get a guarantee that holds for *any* input keys, even adversarial ones, in expectation over our coin flips.

What property must the family $\mathcal{H}$ have? Exactly this: any two distinct keys should be unlikely to collide, over the random choice of h.

Formal

Universal family. A finite collection $\mathcal{H}$ of hash functions, each mapping $U \to \{0, \ldots, m-1\}$, is *universal* if for every pair of distinct keys $k \neq \ell$,

$$\Pr_{h \in \mathcal{H}} \left[h(k) = h(\ell) \right] \leq \frac{1}{m},$$

where the probability is over choosing h uniformly at random from $\mathcal{H}$.

In words: two distinct keys collide with probability at most $1/m$ – exactly the collision probability you would get from a perfectly random function. The point is that we get this guarantee while still using a small, efficiently-computable family.

Theorem 11.3 (Universal hashing gives short chains)**.** *If h is chosen from a universal family $\mathcal{H}$ and we store n keys with chaining in a table of m slots, then for any fixed key k, the expected length of the list containing k's slot is at most $1+\alpha$ if k is in the table, and at most α if it is not. Hence expected search time is $O(1+\alpha)$* – for any set of keys, *no assumption required.*

Proof. Fix a key k and any other stored key $\ell \neq k$. Let $X_{k\ell}$ indicate that $h(k) = h(\ell)$. By universality, $\mathbb{E}[X_{k\ell}] = \Pr[h(k) = h(\ell)] \leq 1/m$. The number of keys colliding with k is $\sum_{\ell \neq k} X_{k\ell}$, whose expectation is at most $(n - [k \text{ stored}]) \cdot \frac{1}{m}$. If k is not stored, this is at most $n/m = \alpha$; if k is stored, it is at most $(n-1)/m < \alpha$, and we add 1 for k itself, giving at most $1+\alpha$. Linearity of expectation does all the work. □ □

That is the crucial upgrade: **the same $\Theta(1+\alpha)$ bound as before, but now it holds for every possible input**, because the randomness is in our coin flips, not in an assumption about the keys.

11.8.1 A concrete universal family

It is not obvious such families exist, so here is one you can implement. Pick a prime p larger than every possible key, so $U \subseteq \{0, 1, \ldots, p-1\}$. For any $a \in \{1, 2, \ldots, p-1\}$ and $b \in \{0, 1, \ldots, p-1\}$, define

$$h_{a,b}(k) = \big((ak + b) \bmod p\big) \bmod m.$$

The family $\mathcal{H}_{p,m} = \{\, h_{a,b} : a \in \{1, \ldots, p-1\},\ b \in \{0, \ldots, p-1\} \,\}$ – one function per choice of (a, b) – is universal. We choose a and b at random when the table is created and keep them fixed thereafter. The proof that collisions happen with probability $\leq 1/m$ rests on the fact that, modulo a prime, the map $k \mapsto ak + b$ shuffles the keys around in a way that decouples distinct keys; CLRS section 11.3.3 carries it out in full, and it is a lovely little argument with $\mathbb{Z}_p$ arithmetic.

Example 11.6. Take $p = 17$, $m = 6$, and suppose we randomly drew $a = 3$, $b = 4$. Then $h_{3,4}(8) = ((3 \cdot 8 + 4) \bmod 17) \bmod 6 = (28 \bmod 17) \bmod 6 = 11 \bmod 6 = 5$. And $h_{3,4}(15) = ((45 + 4) \bmod 17) \bmod 6 = (49 \bmod 17) \bmod 6 = 15 \bmod 6 = 3$. A *different* random draw, say $a = 5, b = 2$, would send key 8 to $((42) \bmod 17) \bmod 6 = (8) \bmod 6 = 2$ instead – different function, different slot. That dependence on the secret (a, b) is precisely what foils an adversary.

Why this matters

Universal hashing is not a textbook curiosity. Around 2003 and again around 2011, researchers showed that fixed, predictable hash functions in popular language runtimes let attackers craft HTTP requests whose keys all collided, turning an $O(1)$ lookup into $O(n)$ and freezing servers under a trickle of traffic – "hash-flooding" denial of service. The defense deployed across Python, Ruby, and others was exactly this chapter's idea: seed the hash function with a per-process random key, so collisions cannot be predicted. The math you just saw is the reason that defense works.

11.9 Perfect hashing: $O(1)$ worst case for static sets

Universal hashing gives $O(1)$ *expected* time. Can we ever get $O(1)$ *worst-case* search – a guarantee with no "expected" attached? Yes, in an important special case: when the set of keys is *static* – fixed

and known in advance, never changing afterward. This is the situation for, say, reserved keywords in a programming language, or a fixed dictionary of words. We call the result *perfect hashing*.

Formal

A hash function is *perfect* for a set K of keys if it maps them with *no collisions at all* – every key gets its own slot. Then a search is a single probe: $O(1)$ worst case, guaranteed.

How do we find a perfect, collision-free function? The clever construction is *two levels of universal hashing*.

1. **Top level.** Use a universal hash function h to spread the n keys into $m = n$ slots. There will still be collisions – some slots get several keys – but we don't store them in lists. Instead...
2. **Second level.** For each slot j that received n_j keys, build a *secondary* hash table of size $m_j = n_j^2$ – the square of the number of keys in that slot – using its own universal hash function. Squaring the size is the trick that makes the secondary table collision-free.

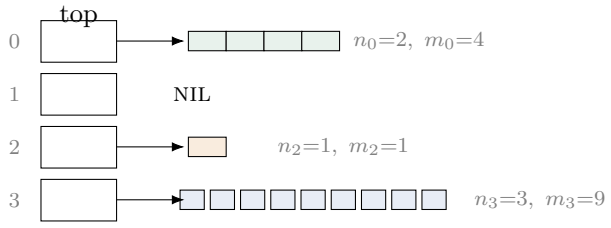


Figure 11.4: Perfect hashing: a top-level table whose slots point to small secondary tables of size n_j^2, each collision-free.

Two questions should be bothering you. First, why does squaring make a slot collision-free? And second, isn't all that squared space enormous?

Lemma 11.1 (Squaring kills collisions, in expectation)**.** *If you hash n_j keys into a table of size $m_j = n_j^2$ using a universal hash function, the expected number of colliding pairs is less than $1/2$. So a single random choice of function is collision-free with probability greater than $1/2$, and after a few tries you are guaranteed to find one.*

Why. There are $\binom{n_j}{2} < n_j^2/2$ pairs of keys. Each pair collides with probability at most $1/m_j = 1/n_j^2$ by universality. By linearity of expectation, the expected number of colliding pairs is less than $\frac{n_j^2}{2} \cdot \frac{1}{n_j^2} = \frac{1}{2}$. A non-negative quantity with expectation below $1/2$ must be 0 more than half the time, so a random universal function gives zero collisions with probability $> 1/2$. Keep drawing until it does. □ □

That answers the first question: each secondary table, sized as the square of its occupancy, is collision-free, so a search there is a single probe. A perfect-hash search is thus: one probe at the top level to find the right secondary table, one probe inside it – two probes total, $O(1)$ *worst case*.

Now the space. Surely $\sum_j n_j^2$ could be huge – if all n keys piled into one slot, it would be n^2. The saving grace is that, by choosing the top-level function from a universal family, that pile-up almost never happens.

Theorem 11.4 (Perfect hashing uses linear space)**.** *If we choose the top-level universal hash function with $m = n$, then the expected total size of all secondary tables is less than $2n$. Hence perfect hashing stores n keys in $O(n)$ space while guaranteeing $O(1)$ worst-case search.*

The key fact behind this is that $\mathbb{E}\big[\sum_j n_j^2\big] < 2n$ when $m = n$ – the expected sum of squared bucket sizes is linear, not quadratic, precisely because universality keeps the buckets balanced. (CLRS section 11.5 proves it; it again comes down to counting colliding pairs.) As with the secondary tables, we simply redraw the top-level function if the total turns out too large; on average a couple of tries suffice.

Focus

Perfect hashing in one breath: two levels of universal hashing. The top level spreads n keys over n slots; each slot's n_j keys get a private secondary table of size n_j^2, which universality makes collision-free. Result: $O(1)$ *worst-case* lookup using $O(n)$ space – but only for a *static* key set, because rebuilding on every insert would be too slow.

History and connection

Perfect hashing as presented here – the two-level, linear-space, $O(1)$-worst-case scheme – is due to Fredman, Komlós, and Szemerédi (1984), often called the "FKS" construction, and is CLRS section 11.5. It was a landmark: it showed that the "expected" in hash-table guarantees can be removed entirely for static data, settling a question that had been open for years.

11.10 Choosing a scheme: a practical recap

You now have several collision strategies. Which to reach for?

- **Chaining** is the safe default. It tolerates load factors above 1, degrades gracefully, and handles deletions cleanly. Its cost is pointer overhead and worse cache behavior. Pair it with a *universal* hash function and you get $O(1)$ expected time with no assumptions on the keys – and protection against hash-flooding.
- **Open addressing** (especially *double hashing*) is leaner and cache-friendlier, with no pointer overhead. Use it when memory is tight and deletions are rare, and keep the load factor well under 1 (resize at, say, 0.7). Watch out for tombstones and clustering.
- **Perfect hashing** is the specialist: a *static*, known-in-advance key set where you want a guaranteed single-probe lookup – compiler keyword tables, immutable lookup sets.

Pause

If the chapter feels like a lot, here is the spine to hold onto. (1) Direct addressing is $O(1)$ but needs $|U|$ space – too much. (2) Hashing shrinks $|U|$ down to m slots, creating collisions. (3) Chaining resolves collisions with lists; expected search is $\Theta(1 + \alpha)$. (4) Open addressing stores everything in the array and probes; expected search is about $\frac{1}{1-\alpha}$. (5) Universal hashing makes the expectation hold for *any* keys by randomizing the function. (6) Perfect hashing achieves $O(1)$ worst-case for static sets via two universal levels. Everything else is detail and

proof.

11.11 Exercises

Exercise 11.1. A direct-address table $T[0\,..\,9]$ starts empty. Show its contents (which slots are non-NIL) after INSERT of keys 3, 7, 1, 7 in order, then DELETE of key 7. (Treat re-inserting 7 as overwriting its slot.) What is the worst-case time of each operation?

Exercise 11.2. A chained hash table has $m = 7$ slots and uses $h(k) = k \bmod 7$. Insert $15, 22, 8, 1, 29, 36$ in order, always at the head of the list. Draw all seven lists. What is the load factor? For a successful search of 22, how many list nodes are examined? For an unsuccessful search of 9?

Exercise 11.3. You expect to store about $n = 10{,}000$ keys and want an average chain length of about 2. What table size m should you choose, and why should it be a prime not near a power of 2 if you use the division method? Give a concrete suitable prime.

Exercise 11.4. Using the multiplication method with $A = (\sqrt{5} - 1)/2 \approx 0.6180339887$ and $m = 8$, compute $h(k)$ for $k = 50$ and $k = 51$. Show the intermediate fractional part each time. Do consecutive keys land in nearby slots or scattered ones?

Exercise 11.5. A table of size $m = 11$ uses linear probing with $h'(k) = k \bmod 11$. Insert $26, 37, 15, 48, 4$ in order and show the final array. Identify the longest run of consecutive occupied slots, and explain in your own words why such runs form (primary clustering).

Exercise 11.6. With $m = 13$, $h_1(k) = k \bmod 13$, and $h_2(k) = 1 + (k \bmod 11)$, write out the first five probe positions for double hashing of key $k = 27$. Verify that $h_2(27)$ is between 1 and 11 and therefore coprime to 13.

Exercise 11.7. Using Theorem 11.2, compute the expected number of probes for an *unsuccessful* search when $\alpha = 0.8$ and when $\alpha = 0.95$. Then explain, in terms of these numbers, why production hash tables resize once the load factor crosses a threshold like 0.7.

Exercise 11.8. Consider the universal family $h_{a,b}(k) = ((ak + b) \bmod p) \bmod m$ with $p = 17$ and $m = 6$. With $a = 2$, $b = 3$, compute $h_{2,3}(k)$ for $k = 0, 5, 11$. Then pick a *different* pair (a, b) and recompute $h(5)$; observe that the slot changes. Why does the randomness in (a, b) defend against an adversary who chooses the keys?

Exercise 11.9. Prove that if a hash function h maps a set of n keys into m slots and $n > m$, then there must be at least one collision. (This is the pigeonhole principle. State it carefully and connect it to why collision resolution is unavoidable when $|K| > m$.)

Exercise 11.10. In perfect hashing, suppose the top level sends $n_j = 4$ keys into some slot j. What size m_j does the secondary table get? Using the collision-pair argument of Lemma 11.1, give an upper bound on the expected number of colliding pairs in that secondary table, and explain why this means a collision-free secondary function is easy to find.

Exercise 11.11. (Challenge.) Explain the "hash-flooding" denial-of-service attack: how can an adversary who knows your fixed hash function force a chained hash table's performance to degrade from $O(1)$ to $O(n)$ per operation? Describe precisely how switching to a randomly chosen universal hash function defeats the attack, referencing Theorem 11.3.

Exercise 11.12. (Challenge.) Compare chaining and open addressing on *deletion*. Explain why deletion is trivially $O(1)$ in a doubly-linked chained table but requires tombstones in open addressing, and describe one concrete failure that occurs if you delete by simply setting the slot to NIL. Then argue why a table full of tombstones can make searches slow even when n is small.

Chapter 12

Binary Search Trees

You have already met a few ways to store a bag of numbers so you can find things in them. An unsorted array lets you add a new item instantly but forces you to scan the whole thing to find anything. A sorted array lets you find things fast with binary search, but inserting a new item means shoving half the array over to make room. Each structure is good at one thing and clumsy at the other.

In this chapter we build a structure that tries to be good at *both*: fast lookup *and* fast insertion and deletion, all at once. It is called the *binary search tree*, or BST. The idea is to take the spirit of binary search – "compare, then go left or right" – and freeze it into the actual shape of the data. Instead of repeatedly cutting a sorted array in half, we build a branching structure whose every fork already encodes a comparison.

By the end you will know how a BST is shaped, how to search it, how to find the smallest and largest elements, how to walk from any element to the "next" one, and how to insert and delete while keeping the shape valid. Then we will do something that surprises almost everyone the first time they see it: we will show that building a BST by inserting items in random order is, secretly, the same process as quicksort. That single observation will hand us the expected height of a random BST almost for free.

12.1 The shape of the idea

12.1.1 From sorted arrays to branching decisions

Picture binary search on the sorted array $[2, 5, 8, 12, 15, 18, 21]$. To find 15, you look at the middle element 12, decide 15 is bigger, and throw away the left half. Now you look at the middle of what remains, 18, decide 15 is smaller, and throw away the right half. One more comparison and you are done. Every step is a single comparison that sends you either left (toward smaller things) or right (toward larger things).


A binary search tree is what you get if you write that decision structure down once and reuse it. Each element becomes a little box called a *node*. Every node holds a key and has at most two children: a *left child* pointing to a subtree of smaller keys and a *right child* pointing to a subtree of larger keys. Searching is then just walking down from the top, going left or right at each node exactly as binary

search would.

Intuition

A BST is binary search turned into furniture. In a sorted array, the "go left or right" decision is recomputed every time from indices. In a BST, that decision is built into the links: standing at a node, "smaller" literally *is* the left pointer and "larger" literally *is* the right pointer. You do not search a shape; the shape *is* the search.

Here is a tree holding those same seven keys. Read it top to bottom.



Notice what is true at *every* node. Look at 12: everything in its left subtree $(5, 2, 8)$ is less than 12, and everything in its right subtree $(18, 15, 21)$ is greater. Look at 5: its left subtree (2) is smaller, its right (8) is larger. The same rule holds locally everywhere. That single rule is the whole definition.

Formal


Definition 12.1 (Binary search tree property)**.** A *binary search tree* is a binary tree in which each node x stores a key $x.key$ and pointers $x.left$, $x.right$, $x.parent$. The tree satisfies the *binary-search-tree property*: for every node x,

- if y is a node in the **left** subtree of x, then $y.key \leq x.key$; and
- if y is a node in the **right** subtree of x, then $y.key \geq x.key$.

The topmost node is the *root*; a node with no children is a *leaf*. A missing child is represented by the special value NIL.

Common trap

The BST property is about *entire subtrees*, not just the immediate children. A common beginner error is to check only that a node's left child is smaller and its right child is larger, and declare victory. That is not enough. In the tree below, every parent-child pair looks locally fine, yet 9 sits in the left subtree of 8 where only keys ≤ 8 are allowed:



The local check at 4 passes ($9 > 4$, fine for a right child). But $9 > 8$, so 9 must not be anywhere left of 8. This is *not* a valid BST.

12.1.2 The magic of the in-order walk

Here is the first payoff, and it is a lovely one. Suppose you visit the whole tree using a very particular rhythm: for each node, first fully visit its *left* subtree, then print the node's own key, then fully visit its *right* subtree. This rhythm is called an *in-order traversal*.

Algorithm 43: IN-ORDER-WALK(x)

Input: A node x (possibly NIL) of a BST.
Output: Prints the keys of x's subtree in sorted order.

```
1 if x ≠ NIL then
2     IN-ORDER-WALK(x.left);
3     print x.key;
4     IN-ORDER-WALK(x.right);
```

Run it on the seven-key tree above. We start at 12, but before printing 12 we must finish its left subtree rooted at 5. Before printing 5 we must finish its left subtree, which is just 2. So 2 prints first. Then back up: 5 prints, then 5's right child 8. Now the left subtree of 12 is done, so 12 prints. Then we dive into 12's right subtree at 18: first its left child 15, then 18, then 21. The output is

$$2,\ 5,\ 8,\ 12,\ 15,\ 18,\ 21,$$

which is *exactly* sorted order. This is not a coincidence; it is the BST property speaking out loud.

Figure 12.1 shows the visiting order as small superscripts: each node is printed only after its entire left subtree, so the keys come out smallest-first.

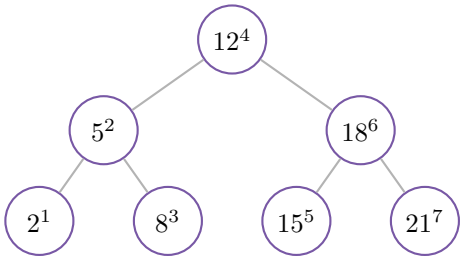


Figure 12.1: The in-order walk of the seven-key tree. Superscripts give the print order: left subtree, then the node, then the right subtree. Reading the superscripts $1, 2, \ldots, 7$ visits the keys $2, 5, 8, 12, 15, 18, 21$ in sorted order.

Focus

An in-order walk of a BST prints the keys in sorted order. So a BST is, among other things, a way of *storing a sorted sequence* that you can also splice into and delete from cheaply. Hold onto this picture: "left subtree, me, right subtree" = "everything smaller, me, everything larger" = sorted.

Lemma 12.1 (Correctness of the in-order walk)**.** IN-ORDER-WALK(x) *prints the keys of the subtree rooted at x in nondecreasing order.*

Proof. We argue by induction on the size n of the subtree rooted at x. If $n = 0$ then $x =$ NIL and nothing is printed; an empty list is trivially sorted, so the base case holds. Now suppose the

claim holds for all subtrees of size less than n, and let x have a subtree of size $n \geq 1$. Its left and right subtrees each have fewer than n nodes, so by the induction hypothesis the call In-Order-Walk($x.left$) prints the left subtree's keys in sorted order, and likewise on the right. By the BST property (Definition 12.1), every left-subtree key is $\leq x.key$ and every right-subtree key is $\geq x.key$. The walk prints (left keys, sorted) then $x.key$ then (right keys, sorted), and these three blocks are already in the correct relative order. The concatenation is therefore sorted. □

Since the walk touches each of the n nodes exactly once and does a constant amount of work per node, it runs in $\Theta(n)$ time.

Walking question

You have just seen that a BST can be flattened into a sorted list in linear time. So here is a question to chew on while you walk: *given* a sorted list, how many different BSTs produce it as their in-order walk? The seven-key tree we drew was nicely balanced, but is it the only tree whose in-order walk is $2, 5, 8, 12, 15, 18, 21$? Try to build a wildly different one by hand. What does that tell you about how much the *shape* of a BST can vary while the *contents* stay fixed?

12.2 Searching, minimum, maximum

12.2.1 Searching for a key

Searching is the operation a BST is named for, and it is exactly the binary-search rhythm. Start at the root. If the node's key equals what you want, stop. If your target is smaller, go to the left child; if larger, go to the right. Repeat until you find the key or fall off the bottom of the tree into a NIL.

Algorithm 44: Tree-Search(x, k)

Input: Root x of a (sub)tree, search key k.
Output: A node with key k, or NIL if absent.

```
1 while x ≠ NIL and k ≠ x.key do
2     if k < x.key then
3         x ← x.left
4     else
5         x ← x.right
6 return x;
```

Let us trace a search for $k = 15$ in the seven-key tree. We start at 12. Since $15 > 12$ we go right to 18. Since $15 < 18$ we go left to 15. Now $k = x.key$, so we stop and return that node. Three comparisons, one per level. A search for $k = 7$ would go: 12 (go left, $7 < 12$) $\rightarrow$ 5 (go right, $7 > 5$) $\rightarrow$ 8 (go left, $7 < 8$) $\rightarrow$ NIL, and we return NIL – 7 is not in the tree. Figure 12.2 highlights both paths: the successful hunt for 15 ending on a node, and the failed hunt for 7 running off the bottom into a missing child.

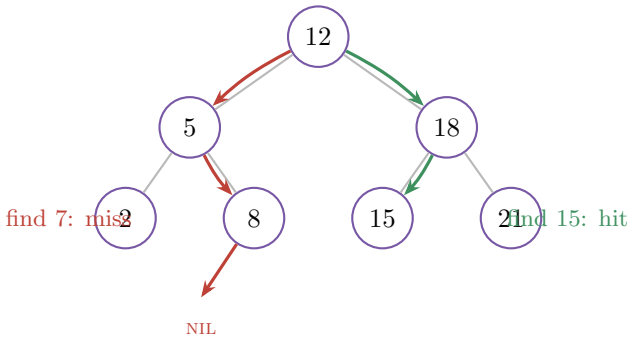


Figure 12.2: Two searches in the seven-key tree. Green: searching for 15 goes right then left and lands on a node. Red: searching for 7 goes left, right, left, then falls off the bottom into NIL, so 7 is absent.

Intuition

A search never wanders. At each node it either finishes or commits to exactly one child and never looks back. So a search traces a single *path* from the root downward. The number of comparisons is at most the length of that path, which is at most the *height* of the tree. This is why height is the number that controls everything in this chapter.

12.2.2 Minimum and maximum

Where is the smallest key? The BST property says everything smaller than a node lives in its left subtree. So to find the minimum, keep following left children until you cannot anymore. The last node you reach has no left child, which means nothing in the tree is smaller. The maximum is the mirror image: follow right children to the end.

Algorithm 45: TREE-MINIMUM(x)

Input: Root $x \neq$ NIL of a (sub)tree.
Output: The node holding the smallest key.

```
1 while x.left ≠ NIL do
2     x ← x.left
3 return x;
```

In our tree the minimum walk is $12 \to 5 \to 2$, and 2 has no left child, so 2 is the minimum. The maximum walk is $12 \to 18 \to 21$, giving 21. Both touch one node per level, so both run in $O(h)$ time where h is the height.

12.3 The successor: finding the next key


Suppose you are standing at a node and you want the node with the *next-largest* key – the one that would come immediately after it in the sorted in-order list. This is the *successor*, and it is the trickiest of the basic queries, so let us build it carefully.

There are two cases, and the picture makes them obvious. Think about where the "next" element hides relative to the in-order walk.

Case 1: the node has a right subtree. Then everything in that right subtree is larger than our node, and the successor is the *smallest* thing in there. So the answer is TREE-MINIMUM of the right child. For example, the successor of 12 is the minimum of the right subtree rooted at 18, which is 15. Check the sorted list: $\ldots, 12, 15, \ldots$ – correct.

Case 2: the node has no right subtree. Then there is nothing larger "below" it, so the next-largest key must be "above" it. We climb upward. As long as we are coming up from a *right* child, our parent is smaller than us, so it cannot be the successor; keep climbing. The first time we come up from a *left* child, that parent is larger than us and is the successor. (If we climb all the way off the top, our node was the maximum and has no successor.)

Figure 12.3 shows both cases on the seven-key tree. On the left, the successor of 12 is found by descending to the minimum of its right subtree. On the right, the successor of 8 (which has no right child) is found by climbing: up through 5 as a right child, then stopping at 12, the first ancestor reached from a left child.

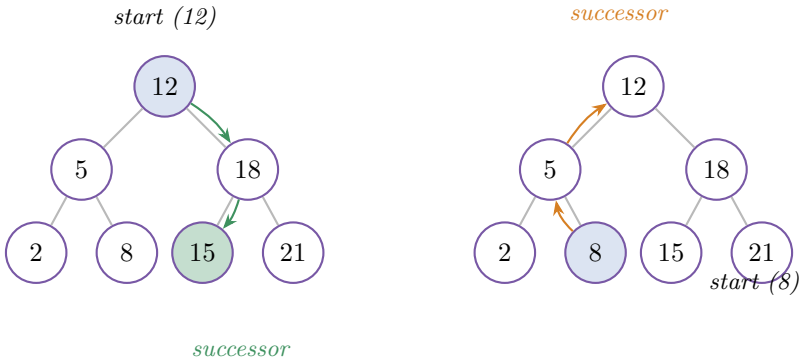

Case 1: go right, then all the way left Case 2: climb until you rise from a left child

Figure 12.3: The two cases of TREE-SUCCESSOR. Left: when a right subtree exists, the successor is its minimum. Right: with no right subtree, the successor is the lowest ancestor whose left subtree contains the node.

Algorithm 46: TREE-SUCCESSOR(x)

Input: A node x in a BST.
Output: The node with the next-larger key, or NIL if x is the maximum.

```
1 if x.right ≠ NIL then
2     return TREE-MINIMUM(x.right);
3 y ← x.parent;
4 while y ≠ NIL and x = y.right do
5     x ← y;
6     y ← y.parent;
7 return y;
```

Algorithm lab

Trace TREE-SUCCESSOR on node 8 in the seven-key tree. Node 8 has no right child, so we are in Case 2. Set $y = 5$ (the parent of 8). Is 8 a right child of 5? Yes, so we climb: now $x = 5$, $y = 12$. Is 5 a right child of 12? No, 5 is the *left* child of 12. The loop stops and we return $y = 12$. And indeed, in $2, 5, 8, 12, \ldots$ the key right after 8 is 12. Now trace it yourself on node 21 (the maximum): you should climb all the way up, fall off the top, and return NIL.

Both cases follow a single path – either straight down the right subtree or straight up the ancestor chain – so TREE-SUCCESSOR runs in $O(h)$ time. The mirror algorithm, TREE-PREDECESSOR, finds the next-*smaller* key by swapping "left" and "right."

Why this matters

Successor and predecessor are what make a BST behave like a navigable, ordered collection rather than a mere lookup table. They are why the ordered maps and sets in standard libraries (C++ `std::map`, Java's `TreeMap`) can answer "give me the smallest key $\geq x$" or iterate keys in sorted order. A hash table, fast as it is, cannot do any of that: it has no notion of "next." When you need range queries or ordered iteration, you reach for a balanced BST.

12.4 Insertion

To insert a new key, we want to find the spot where a *search* for that key would have fallen off the tree into a NIL, and hang the new node there. That placement automatically preserves the BST property, because we walked down using the very comparisons the property demands.

We keep two pointers as we descend: x races ahead looking for the empty slot, and a trailing pointer y remembers x's parent so we know what to attach the new node to.

Algorithm 47: TREE-INSERT(T, z)

Input: Tree T and a new node z with $z.key$ set, $z.left = z.right =$ NIL.
Output: T with z inserted.

```
1  y ← NIL;
2  x ← T.root;
3  while x ≠ NIL do
4  |   y ← x;
5  |   if z.key < x.key then
6  |   |   x ← x.left
7  |   else
8  |   |   x ← x.right
9  z.parent ← y;
10 if y = NIL then
11 |   T.root ← z ;                                   // tree was empty
12 else if z.key < y.key then
13 |   y.left ← z
14 else
15 |   y.right ← z
```

Example 12.1 (Building a tree by hand)**.** Start with an empty tree and insert the keys $12, 5, 18, 2, 8, 15, 21$ in that order.


- Insert 12: tree is empty, so 12 becomes the root.
- Insert 5: at root 12, $5 < 12$, go left into NIL. Attach 5 as the left child of 12.
- Insert 18: at 12, $18 > 12$, go right into NIL. Attach 18 as right child.
- Insert 2: $12 \to$ left to $5 \to (2 < 5)$ left into NIL. Attach under 5.
- Insert 8: $12 \to$ left to $5 \to (8 > 5)$ right into NIL. Attach under 5.
- Insert 15: $12 \to$ right to $18 \to (15 < 18)$ left into NIL. Attach under 18.
- Insert 21: $12 \to$ right to $18 \to (21 > 18)$ right into NIL. Attach under 18.

The result is exactly the balanced seven-key tree from the start of the chapter. Notice that the root is whatever you inserted *first*. We will lean on that fact heavily later.

Insertion walks one root-to-leaf path and then does constant work to attach the node, so it costs $O(h)$.

Common trap

The order you insert keys determines the shape you get. Insert $2, 5, 8, 12, 15, 18, 21$ – already sorted – and every key is larger than the last, so each one becomes the right child of the previous one. You get a "tree" that is really a straight line slanting to the right:



This is a valid BST, but its height is $n-1$, so searching it is no better than scanning a linked list: $\Theta(n)$ per operation. Same keys, catastrophically worse shape. The whole next chapter (red-black trees) exists to prevent exactly this.

12.5 Deletion

Deletion is the fussiest BST operation because removing a node can leave a hole in the middle of the structure, and we have to fill that hole without breaking the BST property. The good news is there are only three cases, and the third reduces to the others.

Suppose we want to delete node z.

Case A: z has no children. It is a leaf. Just detach it – replace the pointer from its parent with NIL. Nothing else can break.

Case B: z has exactly one child. Lift that child up to take z's place, reconnecting it to z's parent. Because the single child subtree was already entirely on the correct side of z's ancestors, sliding it up one level keeps everything ordered.

Case C: z has two children. This is the interesting one. We cannot just lift a child, because z has two of them and only one slot. Instead we find a key that can sit in z's position without disturbing the order: the *successor* of z, call it y. The successor is the smallest key in z's right subtree, so it is larger than everything in z's left subtree and smaller than everything else in z's right subtree – precisely the property z's key had. We splice y out of its current spot and let it stand in for z.

Intuition

Why the successor specifically? Because we need a replacement that is $\geq$ all of z's left subtree and $\leq$ all the rest of z's right subtree. The successor – the next key up in sorted order – is the unique tightest fit on the right side. And crucially, the successor of a two-child node lives in its right subtree and has *no left child* (it is the minimum there), so plucking it out is easy: it falls under Case A or B.

To keep the code clean, we use a small helper, TRANSPLANT, that replaces the subtree rooted at u with the subtree rooted at v by fixing up exactly one parent pointer.

Algorithm 48: TRANSPLANT(T, u, v)

```
Input: Tree T; node u to be replaced; node v (possibly NIL) to put in its place.
if u.parent = NIL then
    T.root ← v
else if u = u.parent.left then
    u.parent.left ← v
else
    u.parent.right ← v
if v ≠ NIL then
    v.parent ← u.parent
```

Algorithm 49: TREE-DELETE(T, z)

```
Input: Tree T and a node z to remove.
if z.left = NIL then
    TRANSPLANT(T, z, z.right) ;                  // 0 or 1 child:  lift the right
else if z.right = NIL then
    TRANSPLANT(T, z, z.left) ;                  // exactly 1 child:  lift the left
else
    y ← TREE-MINIMUM(z.right) ;                                  // y = successor of z
    if y.parent ≠ z then
        TRANSPLANT(T, y, y.right);
        y.right ← z.right;
        y.right.parent ← y;
    TRANSPLANT(T, z, y);
    y.left ← z.left;
    y.left.parent ← y;
```

The first two branches cover Cases A and B together (if the left child is NIL, lifting the right child handles both a leaf and a one-right-child node; the *else if* handles a lone left child). The final branch is Case C: we find the successor y, detach it from its old location, and slot it in where z was, inheriting both of z's subtrees.

Example 12.2 (Deleting a two-child node)**.** Delete 12 (the root) from the balanced seven-key tree. Node 12 has two children, so we are in Case C. Its successor is the minimum of the right subtree rooted at 18: follow left from 18 to 15, which has no left child. So $y = 15$.

Since y's parent is 18, not 12, we first transplant y out: 15 has no right child, so 18's left pointer becomes NIL, and we set 15's right child to be z's old right subtree (18). Then we transplant 15 into 12's place at the root and give it 12's left subtree (5). Figure 12.4 shows the tree just before and just after the surgery.

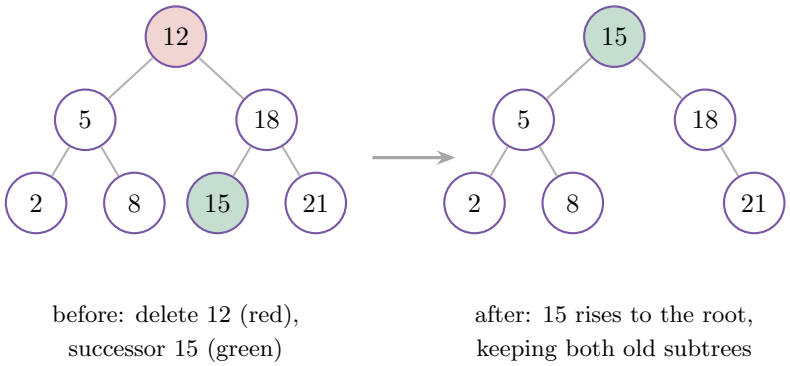


Figure 12.4: Deleting the two-child node 12. Its successor 15 (the minimum of the right subtree) is spliced out of its old spot and lifted into 12's place, inheriting both of 12's subtrees. The in-order order is preserved.

Read the in-order walk of the result: $2, 5, 8, 15, 18, 21$. Still sorted, with 12 gone. The property survived.

Like every operation in this chapter, deletion does a constant amount of pointer surgery plus at most one TREE-MINIMUM call, so it runs in $O(h)$.

Cost summary

Every dynamic-set operation on a BST – search, minimum, maximum, successor, predecessor, insert, delete – runs in $O(h)$ time, where h is the height of the tree.

Operation	Balanced	Worst (degenerate)
SEARCH/MIN/MAX	$\Theta(\log n)$	$\Theta(n)$
SUCCESSOR/PREDECESSOR	$\Theta(\log n)$	$\Theta(n)$
INSERT/DELETE	$\Theta(\log n)$	$\Theta(n)$
IN-ORDER-WALK (all keys)	$\Theta(n)$	$\Theta(n)$

Everything hinges on h. A balanced tree has $h = \Theta(\log n)$; a degenerate one has $h = \Theta(n)$. The rest of the chapter is about which one you should *expect*.


12.6 BSTs and quicksort are the same algorithm

12.6.1 The first surprise

Look again at Example 12.1, where we built a tree by inserting $12, 5, 18, 2, 8, 15, 21$. The very first key, 12, became the root. Then every later key got compared against 12 on its way down: the smaller ones $(5, 2, 8)$ drifted into the left subtree and the larger ones $(18, 15, 21)$ into the right subtree.

Now recall quicksort. You pick a *pivot*, then partition the rest of the array into "everything smaller than the pivot" and "everything larger," and recurse on each side.

Do you see it? *The root of a BST plays the exact role of the first pivot in quicksort.* The first inserted key splits all the others into a smaller group and a larger group, just like a pivot. The root of the left subtree is then the pivot for the smaller group, the root of the right subtree is the pivot for the larger group, and so on, recursively. The set of comparisons quicksort makes is, key for key, the set of comparisons that BST insertion makes.

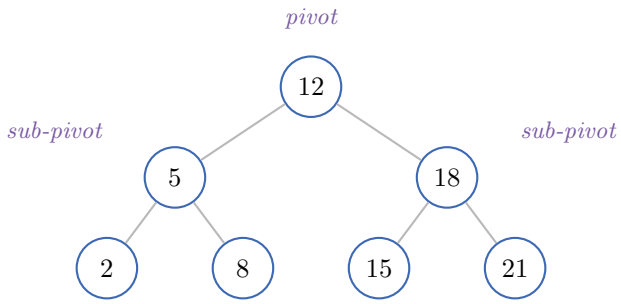

Focus

Building a BST by inserting keys in some order, and running quicksort using those same keys as pivots in that same order, perform *exactly the same comparisons between the same pairs of keys*. The BST is a recording of quicksort's recursion tree; the in-order walk of the BST replays quicksort's final sorted output.

History and connection

This correspondence is one of the small jewels of algorithm analysis, and it is why CLRS places the expected-height analysis of randomly built BSTs in Chapter 12, leaning directly on the quicksort analysis of Chapter 7. If you have read our quicksort chapter, the indicator-variable machinery here will feel like an old friend. The deep point – that two algorithms which look completely different (a sorting routine and a data structure) are secretly the same process – is the kind of unification that makes the subject beautiful. See CLRS, "Binary Search Trees," Section 12.4, and compare with Section 7.4.2 on quicksort's expected running time.

12.6.2 Why we randomize

We saw in the deletion section's trap that inserting keys in sorted order yields a height-$(n-1)$ disaster. The quicksort connection explains *why*: feeding sorted keys to BST insertion is exactly feeding quicksort the worst possible pivots (always the smallest remaining element), the case that makes quicksort take $\Theta(n^2)$ time.

So we do what we did for quicksort: we randomize. A *randomly built binary search tree* on n distinct keys is the tree you get by starting empty and inserting the keys in an order chosen uniformly at random from all $n!$ orderings. We now ask the natural question: how tall should we *expect* such a tree to be?

12.7 The expected height of a random BST

12.7.1 Why depth is just counting ancestors

The height of a tree is the depth of its deepest node, so let us understand the depth of a single node first. The *depth* of a node is the number of edges from the root down to it – equivalently, the number of *ancestors* it has. So if we can count, on average, how many ancestors a key ends up with, we can get a handle on the tree's shape.

Here is the beautiful fact that powers the whole analysis. Sort the keys and rename them $1, 2, \ldots, n$ by rank (so key 1 is the smallest, key n the largest). Consider two keys i and j with $i < j$.

Lemma 12.2 (Ancestor criterion)**.** *In a BST built by insertions, keys i and j end up in an ancestor relationship (one is an ancestor of the other) if and only if, among all the keys with rank between i and j inclusive – that is, $i, i{+}1, \ldots, j$ – the* first one inserted *is i or j itself.*

Intuition

Think about who gets to be the "pivot" separating i and j. Consider the block of keys $i, i{+}1, \ldots, j$. The first of these to be inserted becomes the highest of them in the tree; it is the pivot that all the others in the block fall around. If that first-inserted key is some k strictly between i and j, then i slides into k's left subtree and j into k's right subtree – they are separated forever and neither can be the other's ancestor. But if the first-inserted key of the block is i or j itself, then no key ever comes between them to split them, and one of them ends up as an ancestor of the other. Only the keys *between* i and j can separate them, because any key outside the block is too small or too large to land between them in any comparison.

12.7.2 Counting with an indicator variable

The block $\{i, i+1, \ldots, j\}$ contains exactly $j - i + 1$ keys. Because the insertion order is uniformly random, every one of these keys is equally likely to be the first of the block to be inserted. Two of them (i and j) are "good." So

$$\Pr[\, i \text{ and } j \text{ are in an ancestor relationship}\,] \;=\; \frac{2}{j - i + 1}.$$

Let us turn this into a count of ancestors. Fix a key j and define, for each $i \neq j$, the indicator

$$A_{ij} = \begin{cases} 1 & \text{if key } i \text{ is an ancestor of key } j, \\ 0 & \text{otherwise.} \end{cases}$$

The depth of key j – its number of ancestors – is exactly $\sum_{i \neq j} A_{ij}$. By linearity of expectation, the *expected* depth of key j is $\sum_{i \neq j} \Pr[A_{ij} = 1]$. For any pair, at most one of "i ancestor of j" or "j ancestor of i" can hold, and by symmetry each is equally likely; so the probability that i is specifically the ancestor of j is half of $\frac{2}{|i-j|+1}$, namely $\frac{1}{|i-j|+1}$.

12.7.3 The harmonic numbers appear

Now sum over all $i \neq j$ to get the expected depth of key j. The keys ranked at distance d from j each contribute $\frac{1}{d+1}$, and there are at most two such keys (one of smaller rank, $j - d$, and one of larger

rank, $j+d$), with d ranging from 1 up to at most $n-1$. Splitting the sum into the smaller-ranked ancestors and the larger-ranked ancestors, each half is bounded by a harmonic sum:

$$\mathbb{E}[\text{depth of } j] \;=\; \sum_{i \neq j} \frac{1}{|i-j|+1} \;\le\; 2\sum_{d=1}^{n-1} \frac{1}{d+1} \;<\; 2\sum_{k=1}^{n} \frac{1}{k} \;=\; 2H_n,$$

where H_n is the *n-th harmonic number*,

$$H_n \;=\; \sum_{k=1}^{n} \frac{1}{k} \;=\; 1 + \tfrac{1}{2} + \tfrac{1}{3} + \cdots + \tfrac{1}{n}.$$

The harmonic number is the fingerprint of "randomly chosen pivots," and it is the same quantity that governs quicksort's expected comparison count. And H_n is famously close to a logarithm:

$$\ln n \;<\; H_n \;\le\; \ln n + 1, \qquad \text{so} \qquad H_n = \Theta(\log n).$$

Focus

Each pairwise probability $\frac{2}{j-i+1}$ is a piece of a harmonic sum, and harmonic sums grow like $\ln n$. That is the entire reason a random BST is short: the same $H_n \approx \ln n$ that makes quicksort fast makes the random tree's nodes shallow on average.

So the expected depth of every individual node is $O(\log n)$, and summing over all n nodes, the expected total path length of a random BST is $\Theta(n \log n)$; the *average* node sits at depth $\Theta(\log n)$. But the *height* is the depth of the single deepest node, which could in principle be larger than the average. Controlling it needs one more idea.

Theorem 12.1 (Expected height of a random BST)**.** *The expected height of a randomly built binary search tree on n distinct keys is $O(\log n)$. More precisely, as $n \to \infty$ it is asymptotic to $\alpha \ln n$ with $\alpha \approx 4.311$ (equivalently about $2.99 \log_2 n$), and in particular it is $\Theta(\log n)$.*

The proof in CLRS is a small gem: instead of analyzing the height h directly, it analyzes the *exponential height* $Y_n = 2^h$, because expectations of products behave nicely under the random split into left and right subtrees. One sets up a recurrence for $\mathbb{E}[Y_n]$ – the root falls at a uniformly random rank, splitting the keys into a left subtree and a right subtree – solves it to get $\mathbb{E}[Y_n] = O(n^3)$, and then uses Jensen's inequality to pull the conclusion back down to h itself. We will not grind through every line here; the point we want you to carry is the *shape* of the argument and the inevitable appearance of $\log n$.

Formal

Lemma 12.3 (The convexity step)**.** *Because $f(x) = 2^x$ is convex, for any random variable h we have $2^{\mathbb{E}[h]} \le \mathbb{E}\big[2^h\big]$ (this is Jensen's inequality). So if we can bound the expected exponential height $\mathbb{E}[2^h]$ by a polynomial cn^3, then $2^{\mathbb{E}[h]} \le cn^3$, and taking logarithms,*

$$\mathbb{E}[h] \;\le\; \log_2(cn^3) \;=\; 3\log_2 n + O(1) \;=\; O(\log n).$$

Why this matters

Theorem 12.1 is genuinely good news for practice, but with a sharp caveat. "Expected $O(\log n)$" assumes the insertion order is random. Real data is rarely random – it arrives sorted by timestamp, alphabetized, or clustered – and an adversary who feeds you sorted input gets the $\Theta(n)$ disaster every time. That is why production systems do not bet on randomness; they use *balanced* trees (red-black trees, AVL trees, B-trees) that *guarantee* $O(\log n)$ height no matter the input. The next chapter builds the most famous of these. Think of the random-BST result as the reason balanced trees are worth the trouble: it shows $O(\log n)$ is achievable, and balancing makes it dependable.

Walking question

Here is a question to mull on a walk. We proved the random tree is short *on average*. But "on average" hides the spread. Could a random BST occasionally be tall – say height $\Theta(\sqrt{n})$ – with non-negligible probability, even though the average is $\Theta(\log n)$? If you inserted a million random keys, would you ever expect to see a path of length, say, 200? (Hint: the expected height is about $4.31 \ln(10^6) \approx 60$, while the average *depth* is only about $\ln(10^6) \approx 14$. How far above the mean do random heights stray?) What would you have to prove to sleep soundly using an unbalanced BST on random data?

12.8 Putting it together: a worked lab

Algorithm lab

Work this entire scenario with pencil and paper before reading the answers, then check yourself. Start with an empty BST and insert, in order: 50, 30, 70, 20, 40, 60, 80, 35.

1. Draw the tree. (You should get 50 at the root with two full levels below it, and 35 dangling as the left child of 40.)
2. Write the in-order walk. (Answer: $20, 30, 35, 40, 50, 60, 70, 80$ – check it is sorted.)
3. Find the successor of 40 by the algorithm. (40 has no right child, so climb: 40 is the right child of 30, climb to 30; 30 is the left child of 50, stop – successor is 50.)
4. Find the successor of 50. (50 has a right child, so take the minimum of the right subtree rooted at 70: that is 60.)
5. Delete 30 (a two-child node). Its successor is 35 (minimum of the subtree rooted at 40). Splice 35 into 30's place; 35 inherits 30's children 20 and 40. Redraw and confirm the in-order walk is now $20, 35, 40, 50, 60, 70, 80$.
6. This insertion order gave a short tree. Now imagine inserting the *same eight keys* in sorted order $20, 30, 35, 40, 50, 60, 70, 80$. What height do you get, and why? (A right-leaning chain of height 7 – the worst case.)

Chapter summary

A binary search tree stores keys so that, at every node, the left subtree holds smaller keys and the right subtree holds larger ones. That single invariant makes an in-order walk emit the keys in sorted order, and it makes search, minimum, maximum, successor, predecessor, insertion, and deletion all run by tracing a single root-to-leaf (or leaf-to-root) path – hence all cost $O(h)$, the height. Insertion hangs a new node where a search would have failed; deletion has three cases, the hardest replacing a doomed two-child node with its successor. The shape, and thus the height, depends entirely on insertion order: sorted input degenerates to a height-n chain. Building the tree from a random insertion order is identical to running quicksort with those keys as pivots, and that correspondence – through harmonic numbers and a convexity argument – yields an expected height of $O(\log n)$. Because real input is not random, the next chapter trades expectation for a guarantee with balanced trees.

12.9 Exercises

Exercise 12.1 (Warmup: build and walk)**.** Insert the keys $15, 6, 18, 3, 7, 17, 20, 2, 4, 13, 9$ into an initially empty BST in the given order. Draw the resulting tree and write out its in-order walk. Confirm that the walk is sorted.

Exercise 12.2 (Search paths)**.** Using your tree from the previous exercise, list the exact sequence of nodes visited by Tree-Search when searching for (a) 13, (b) 9, and (c) 16 (which is absent). How many comparisons does each search make?

Exercise 12.3 (Successor and predecessor by hand)**.** In the same tree, find the successor of 7 and the predecessor of 13 using the algorithms, showing each climb or descent. Verify your answers against the in-order walk.

Exercise 12.4 (Deletion cases)**.** Starting from your tree, delete 6 (a two-child node), then delete 2 (a leaf), then delete 18. Redraw after each deletion and confirm the in-order walk stays sorted throughout.

Exercise 12.5 (Why local checking fails)**.** Give a binary tree with at least five nodes in which every node's left child is smaller and every node's right child is larger than the node itself, yet the tree is *not* a valid BST. Explain precisely which node violates Definition 12.1 and why the local check missed it.

Exercise 12.6 (Counting tree shapes)**.** How many *structurally different* BSTs can hold the three keys $\{1, 2, 3\}$? Draw them all. Then argue that the count for n keys is the n-th Catalan number $C_n = \frac{1}{n+1}\binom{2n}{n}$. (Hint: which key is the root, and how does that split the rest?)

Exercise 12.7 (The pivot correspondence)**.** Take the keys $4, 1, 3, 2, 5$ and insert them in that order into a BST. Separately, run quicksort on the array $[4, 1, 3, 2, 5]$ choosing the *first* element of each subarray as the pivot. Show that the set of pairwise comparisons made by quicksort equals the set of comparisons made by BST insertion, pair for pair.

Exercise 12.8 (Expected depth of the smallest key)**.** Using the ancestor criterion (Lemma 12.2), show that in a randomly built BST the expected number of ancestors of the smallest key (rank 1) is exactly $H_n - 1 = \sum_{k=2}^{n} \frac{1}{k}$. (Hint: key 1 has key j as an ancestor exactly when j is the first inserted among ranks $1, \ldots, j$.) Conclude that the expected depth of the minimum is $\Theta(\log n)$.

Exercise 12.9 (Sorting via a BST)**.** Describe an algorithm that sorts n numbers by inserting them all into a BST and then doing an in-order walk. What is its worst-case running time, and on what kind of input is that worst case achieved? What is its expected running time on a random permutation, and which classic sorting algorithm does this expected cost match – and why is that no accident?

Exercise 12.10 (Challenge: in-order without recursion or parent pointers)**.** The TREE-SUCCESSOR algorithm needs parent pointers. Suppose your nodes have only $left$ and $right$ (no *parent*). Design an in-order traversal that uses an explicit stack and prints all keys in sorted order in $\Theta(n)$ time and $O(h)$ extra space. Trace it on the seven-key tree from the chapter opening.

Exercise 12.11 (Challenge: tightening the height intuition)**.** We claimed the expected height is about $4.31 \ln n$, yet the average *depth* is about $\ln n$ (roughly H_n). Explain in words why the *maximum* depth (the height) should be a constant factor larger than the *average* depth, and why that constant is finite rather than growing with n. (You do not need the full proof; argue from the fact that very deep paths require an unlucky chain of pivot choices, each independently unlikely.)

Chapter 13

Red-Black Trees

In the previous chapter you met the binary search tree (BST): a delightfully simple idea where every key sits to the left of bigger keys and to the right of smaller ones, so searching feels like a game of higher-or-lower. The catch, you may recall, was painful. A plain BST is only fast *if it stays bushy*. Feed it keys in sorted order and it quietly degenerates into a linked list, and your beautiful $\Theta(\log n)$ search collapses into a sluggish $\Theta(n)$ crawl.

This chapter is about fixing that, permanently, with a structure that *refuses* to get tall and stringy no matter what you throw at it. The red-black tree is a binary search tree wearing a small amount of bookkeeping – one bit of color per node – and that single bit, governed by five quiet rules, guarantees the tree's height never exceeds roughly $2\log_2 n$. Every operation stays $\Theta(\log n)$, forever, in the worst case. No randomization, no luck, no "well, on average." Just a guarantee.

It is also, let us be honest, one of the first algorithms in a beginner's life that feels genuinely intricate. There are cases. There are sub-cases. There are rotations that swing whole subtrees around. So we are going to go very slowly, draw a lot of pictures, and make sure that by the end you do not merely *believe* red-black trees work – you can *see* why they must.


13.1 Why Balance Matters

Let us re-feel the problem from the ground up, because everything that follows is in service of escaping it.

Intuition


A binary search tree is a sorted structure you walk *down* to find things. Each step of the walk should cut the remaining possibilities roughly in half – that is what makes search logarithmic. But "cut in half" only happens if, at each node, the two subtrees hanging below are about the same size. If one side is always tiny and the other always huge, you barely make progress per step. The whole speed of a BST lives or dies on this one question: *is it balanced?*

Concretely, suppose you insert the keys $1, 2, 3, 4, 5$ in that order into an ordinary BST. The first key, 1, becomes the root. Then 2 is bigger, so it goes right. Then 3 is bigger than both, so it goes right again. And so on. You get this:



That is not a tree in any useful sense; it is a list drawn diagonally. Searching for 5 visits all five nodes. With a million sorted keys you would visit a million nodes. The $\Theta(\log n)$ dream is dead.

Now compare it to the *balanced* arrangement of the same five keys:



Here finding 5 takes two steps. Finding anything takes at most three. The keys are identical; only the *shape* differs, and shape is everything.

Focus

The height of a BST is the length of the longest root-to-leaf path, and the cost of search, insert, and delete is $\Theta(\text{height})$. A balanced tree on n keys has height $\Theta(\log n)$; a degenerate one has height $\Theta(n)$. The entire goal of this chapter is to keep the height $O(\log n)$ *automatically*, after every single insertion and deletion, without ever rebuilding the tree.

Why this matters

Why should you care beyond passing a course? Because balanced search trees are *everywhere* the moment a system needs ordered, dynamic data with hard worst-case guarantees. The C++ `std::map` and `std::set`, Java's `TreeMap`, the Linux kernel's process scheduler (which once used a red-black tree to pick the next task to run), the data structures inside databases that answer range queries, virtual-memory region trackers – all lean on red-black trees or close cousins. The reason engineers reach for them over a hash table is precisely the *ordering*: a hash table can tell you whether 42 is present, but a red-black tree can also tell you the smallest key larger than 42, walk the keys in sorted order, and do it all with a guaranteed worst case rather than a hopeful average.

The naive fix would be to rebalance from scratch whenever the tree gets lopsided, but rebuilding costs $\Theta(n)$ and we cannot afford that on every insert. We need *local* surgery: small, $O(1)$ adjustments near the point of change that keep the whole tree balanced. That surgery has two ingredients – a set

of color rules that *certify* balance, and an operation called a rotation that lets us *restore* the rules cheaply. Let us meet both.

13.2 The Red-Black Properties

A red-black tree is a binary search tree in which every node carries one extra attribute: a color, either red or black. We also adopt one small but important convention that will save us endless case-fiddling later.

Focus

The sentinel. Instead of having children pointers that are sometimes `NIL`, every "missing" child and the parent of the root all point to a single shared dummy node we call *the sentinel*, written $T.nil$. The sentinel is colored *black* and its key is irrelevant. Treating every leaf as this one black node means we never have to ask "but what if this pointer is null?" in the middle of a delicate argument. Every real (internal) node thus has exactly two children, each either a real node or the sentinel.

Now the rules. A binary search tree is a *red-black tree* if it satisfies all five of the following *red-black properties*.

Formal

The five red-black properties.

1. Every node is either red or black.
2. The root is black.
3. Every leaf (the sentinel $T.nil$) is black.
4. If a node is red, then both of its children are black. (No red node has a red child – equivalently, "no two reds in a row" down any path.)
5. For each node, all simple paths from that node down to descendant leaves contain the same number of black nodes.

Properties 1, 2, and 3 are mostly housekeeping. The two that do the real work are 4 and 5, so let us build intuition for them.


Intuition

Think of black nodes as the structure's "load-bearing" nodes and red nodes as "free" decoration squeezed in between. Property 5 says: *measured in black nodes only, the tree is perfectly balanced* – every path from a node to a leaf crosses exactly the same number of black nodes. That is a very strong balance condition. On its own, though, property 5 would let you pad one path with a long run of red nodes and make it much longer than another. Property 4 forbids that: since no two reds may touch, the reds on any path can at most *double* its length compared to the blacks alone. Put the two together and you get: the longest path is at most twice the shortest. That "at most twice" is the whole ballgame.

This motivates a piece of vocabulary we will use constantly.

Definition 13.1 (Black-height)**.** The *black-height* of a node x, written $\mathrm{bh}(x)$, is the number of black nodes on any simple path from x down to a leaf, *not counting x itself* but counting the leaf sentinel. Property 5 guarantees this number is the same no matter which downward path you take, so it is well-defined.

Here is a small valid red-black tree. Black nodes are drawn as solid dark circles, red nodes as lighter circles with a red border. The little squares are the sentinel leaves.

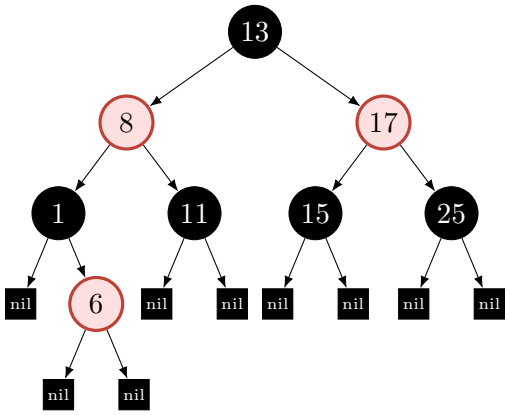

Walk through the properties on this tree to convince yourself it is legal. The root 13 is black (property 2). No red node has a red child – 8 is red and its children 1 and 11 are both black; 17 is red and its children 15 and 25 are both black; 6 is red and both its children are the black sentinel (property 4). And property 5: pick the root and count black nodes (including sentinels) on each downward path. Down through $8, 1, 6$ to a sentinel you cross blacks $\{1, \text{sentinel}\}$ – wait, let us count carefully, since this is exactly the kind of counting people botch.

Algorithm lab

Lab: count the black-height by hand. Take the root 13. Trace the path $13 \to 8 \to 1 \to 6 \to$ nil. The nodes *below* 13 on this path are 8 (red), 1 (black), 6 (red), and the sentinel (black). Black nodes, not counting 13 itself: 1 and the sentinel, so 2. Now trace $13 \to 17 \to 15 \to$ nil: below 13 we have 17 (red), 15 (black), sentinel (black) – again 2 blacks. Try every downward path from 13 you can find; you will always get 2. So $\mathrm{bh}(13) = 2$. Do the same starting from node 8: every path below it hits exactly 1 black plus its sentinel, giving $\mathrm{bh}(8) = 2$ as well (paths through 1 cross 1 then sentinel; path to 11 crosses 11 then sentinel). The discipline of counting sentinels is what keeps property 5 honest – skip them and you will miscount.

Common trap

Three beginner snares with the properties:

- **Forgetting the sentinel counts.** Property 5 counts the black leaf at the bottom of every path. Many off-by-one errors come from omitting it.
- **Thinking "balanced" means equal subtree sizes.** It does not. Red-black balance is about *black-height equality*, not node counts. The left subtree can hold more nodes than the right; that is fine.

- **Reading property 4 as "red children must be black."** It is the other direction: a *red parent* forces *black children*. A black node is free to have children of either color.

13.3 The Height Bound

Before we touch insertion or deletion, let us cash in the properties and prove the payoff: a red-black tree on n internal nodes has height at most $2\log_2(n+1)$. This is the theorem that makes the whole structure worth its trouble, and the proof is a small, friendly induction.

Lemma 13.1 (Subtree size from black-height)**.** *The subtree rooted at any node x contains at least $2^{\mathrm{bh}(x)} - 1$ internal nodes.*

Intuition

The claim says: "a node with black-height b is sitting on top of at least a full black tree of height b." A perfectly full binary tree of height b has $2^b - 1$ internal nodes, and red nodes can only *add* to that count, never subtract. So the black-height alone forces a minimum population. The bigger the black-height, the more nodes you are guaranteed to have crammed underneath.

Proof. We induct on the height of x (the ordinary height, longest path down to a leaf).

Base case. If x has height 0, then x is the sentinel itself. Its black-height is 0, and the formula demands at least $2^0 - 1 = 0$ internal nodes. The sentinel's subtree has zero internal nodes. True.

Inductive step. Let x be an internal node of positive height with two children. Each child has height strictly less than x, so the induction hypothesis applies to both. Now, what is each child's black-height? A child is either red or black. If the child is black it contributes 1 to the black count on paths through it, so its own black-height is $\mathrm{bh}(x) - 1$. If the child is red it contributes 0, so its black-height is $\mathrm{bh}(x)$. Either way, each child has black-height *at least* $\mathrm{bh}(x) - 1$. By the induction hypothesis, each child's subtree holds at least $2^{\mathrm{bh}(x)-1} - 1$ internal nodes. Adding the two children's subtrees plus x itself,

$$\left(2^{\mathrm{bh}(x)-1} - 1\right) + \left(2^{\mathrm{bh}(x)-1} - 1\right) + 1 = 2 \cdot 2^{\mathrm{bh}(x)-1} - 1 = 2^{\mathrm{bh}(x)} - 1,$$

which is exactly what we wanted to show. □

Theorem 13.1 (Height of a red-black tree)**.** *A red-black tree with n internal nodes has height at most $2\log_2(n+1)$.*


Proof. Let h be the height of the tree, that is, the length of the longest path from the root down to a leaf. Property 4 (no two reds in a row) means that at least half the nodes on that longest path are black: as you walk down, you cannot take two red steps back to back, so reds are at most every other node. Hence the black-height of the root is at least $h/2$:

$$\mathrm{bh}(\mathrm{root}) \geq \frac{h}{2}.$$

By Lemma 13.1 applied at the root, the whole tree has at least $2^{\mathrm{bh}(\mathrm{root})} - 1 \geq 2^{h/2} - 1$ internal nodes. So

$$n \geq 2^{h/2} - 1 \quad \Longrightarrow \quad n + 1 \geq 2^{h/2} \quad \Longrightarrow \quad \log_2(n+1) \geq \frac{h}{2} \quad \Longrightarrow \quad h \leq 2\log_2(n+1). \qquad \square$$

The picture below makes the "black-height pins the height" idea concrete. Two paths leave the same root. The left one is the densest a path can be: black and red strictly alternating, which property 4 permits but cannot exceed. The right one is the sparsest: all black. Both must carry the *same* number of black nodes (property 5), so the alternating path can be at most twice as long.

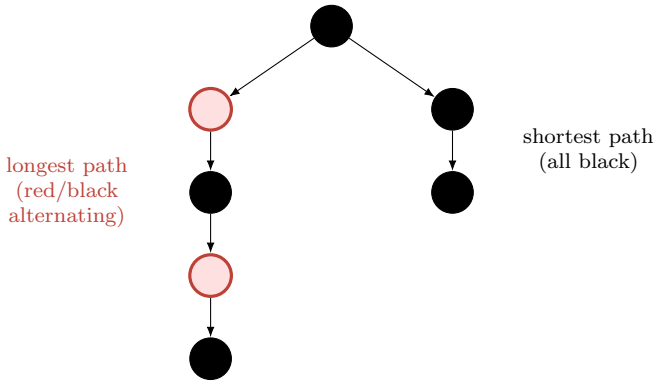

both paths cross the same number of *black* nodes (property 5);
the alternating path is at most twice as long (property 4).

Focus

That is the prize. Because the height is $O(\log n)$, every operation that runs in time proportional to the height – search, minimum, maximum, successor, predecessor, insert, delete – runs in $O(\log n)$ *worst case*. Searching a red-black tree is identical to searching an ordinary BST (the colors are invisible to a search); it just so happens that the tree you are searching is guaranteed to be short.

Walking question

Here is something to chew on while you stretch your legs. The bound says the longest path is at most twice the shortest. Could you build a *valid* red-black tree where the longest root-to-leaf path is exactly twice the shortest? What would it have to look like – where do the red nodes go, and where are they forbidden? Try to sketch the smallest such tree. (Hint: alternate red and black down the long path, and keep the short path all black.)

13.4 Rotations


Searching never changes the tree, so it never breaks a property. Insertion and deletion *do* change the tree, and they will temporarily break the rules. To repair them we need a tool that restructures the tree locally while preserving the binary-search-tree ordering. That tool is the *rotation*.

Intuition

A rotation grabs an edge between a parent and a child and "pivots" it, swapping which of the two is on top – like rotating a seesaw. The magic is that it can be done while keeping all the keys in valid search-tree order, because there is exactly one subtree caught in the middle that has to change hands, and it lands in a spot that respects the ordering. A left rotation makes

the right child rise; a right rotation makes the left child rise. Each touches only a constant number of pointers, so it costs $O(1)$.

Picture a left rotation around node x, whose right child is y. We want y to rise above x. The subtree β (which sits between x and y in key order) is the one that has to move.

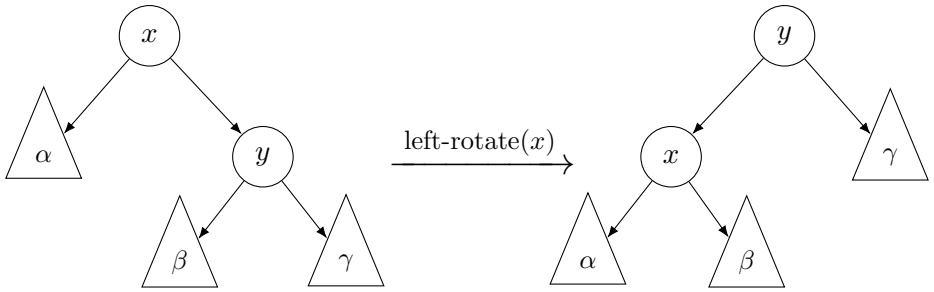

Read the key ordering off both pictures. Before: $\alpha < x < \beta < y < \gamma$. After: $\alpha < x < \beta < y < \gamma$. *Identical.* The rotation slid β from being y's left child to being x's right child, which is exactly where it still belongs, because everything in β is greater than x and less than y in both pictures. The in-order traversal is unchanged; only the shape moved.

A right rotation is the mirror image: it is the inverse operation, taking the right picture back to the left. Here is the code for a left rotation, written against the sentinel convention so we never test for null.

Algorithm 50: LEFT-ROTATE(T, x)


Input: A red-black tree T and a node x whose right child is not the sentinel.
Output: The tree, restructured so x's former right child rises above it.

```
1  y ← x.right;
2  x.right ← y.left ;                          // β becomes x's right subtree
3  if y.left ≠ T.nil then
4  |  y.left.parent ← x;
5  y.parent ← x.parent ;                       // link y to x's old parent
6  if x.parent = T.nil then
7  |  T.root ← y;
8  else if x = x.parent.left then
9  |  x.parent.left ← y;
10 else
11 |  x.parent.right ← y;
12 y.left ← x ;                                // put x on y's left
13 x.parent ← y;
```

RIGHT-ROTATE is obtained by swapping every *left* with *right* in the code above. Notice there are no loops: a fixed handful of pointer writes, so each rotation is firmly $O(1)$.

Algorithm lab

Lab: rotate by hand. Take this little tree (all colors ignored for the moment; we are just practicing the mechanics):



Left-rotate around the root 7. Here $x = 7$, $y = 11$, and the subtree β is the node 9 (it lies between 7 and 11). After the rotation, 11 becomes the root, 7 becomes its left child, 9 moves to be the *right* child of 7, and 18 stays as 11's right child. Draw it and read the in-order traversal of both: you should get $4, 7, 9, 11, 18$ both times. If your before-and-after in-orders disagree, you moved the wrong subtree.

Common trap

The single most common rotation bug is forgetting to reattach *three* parent pointers: the moved subtree's parent (β now points up to x), y's parent (now x's old parent), and x's parent (now y). Miss any one and the tree's downward pointers will look fine while the upward ones lie – and the fixup code that walks *up* the tree will wander off into the weeds.

13.5 Insertion

We now have everything we need. Insertion happens in two acts. In Act One we drop the new key in exactly where an ordinary BST would put it, and we paint it *red*. In Act Two we walk back up the tree fixing any property the red paint job may have violated.

Intuition

Why color the new node red rather than black? Because red is the "cheap" color: a red node does not change anybody's black-height. If we inserted a black node, we would instantly break property 5 along that one path (it now has one more black than its siblings) and the repair would be ugly. By inserting red, the only property we can possibly violate is property 4 (a red node with a red parent) – and property 2 if the new node happens to be the root. Those are far gentler to fix. So we always start red and only darken nodes as the fixup demands.

The first act is just BST insertion with the sentinel bookkeeping; here it is.

Algorithm 51: RB-INSERT(T, z)

Input: Tree T and a fresh node z holding the key to insert.
Output: T with z inserted and all five properties restored.

```
1  y ← T.nil;   x ← T.root;
2  while x ≠ T.nil do
3  |   y ← x;
4  |   if z.key < x.key then
5  |   |   x ← x.left;
6  |   else
7  |   |   x ← x.right;
8  z.parent ← y;
9  if y = T.nil then
10 |   T.root ← z;
11 else if z.key < y.key then
12 |   y.left ← z;
13 else
14 |   y.right ← z;
15 z.left ← T.nil;   z.right ← T.nil;   z.color ← RED;
16 RB-INSERT-FIXUP(T, z);
```


Everything interesting is in the fixup. Let us name the cast of characters near z: its parent, and its parent's sibling, which we call the *uncle*. The uncle's color is the hinge on which the whole case analysis turns.

Focus

After Act One, the only thing that can be wrong is a *red-red* violation: z is red, and its parent might also be red. (If the parent is black we are already done; if z is the root we just paint it black.) So the fixup loop's job is: "as long as z has a red parent, push the violation upward or rotate it away." Because each pass either moves the problem two levels closer to the root or ends with a rotation, the loop runs $O(\log n)$ times.

There are three cases, and they come in a left-leaning flavor and a mirror-image right-leaning flavor. We describe the version where z's parent is a *left* child of the grandparent; the other side is symmetric (swap left and right throughout). Let $z.p$ be the parent, $z.p.p$ the grandparent, and y the uncle.


Case 1: the uncle y is red. Both the parent and the uncle are red, sitting under a (necessarily black) grandparent. The fix is pure recoloring, no rotation: paint the parent and the uncle black, paint the grandparent red, then move our attention up to the grandparent and continue. We have "pushed" the red-red conflict up two levels.

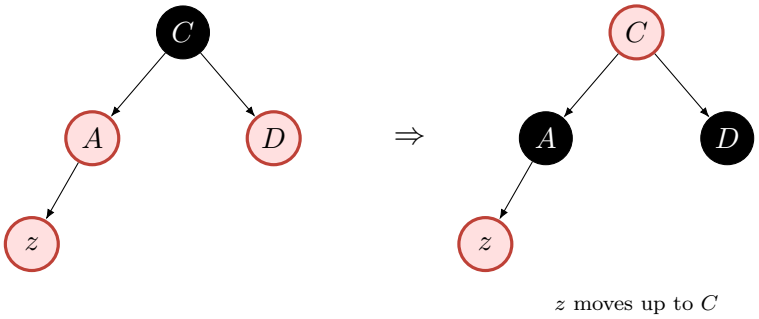

Why does this preserve property 5? The grandparent went from black to red and its two children went from red to black. Any path passing through this little cluster used to cross the black grandparent and then one of the now-black children – the total black count along every such path is unchanged, because we removed one black (the grandparent) and added one back (a child). The black-height is conserved exactly. We may have created a new red-red conflict higher up (if the grandparent's own parent is red), which is why we loop with z now pointing at the grandparent.

Case 2: the uncle y is black, and z is a "zig-zag" (an inner grandchild). That is, z is the right child of a left-child parent. A single rotation will not straighten this; we first do a *left rotation on the parent* to turn the zig-zag into a straight line, converting it into Case 3. After this rotation we relabel so that z points at what is now the lower node.

Case 3: the uncle y is black, and z is a straight line (an outer grandchild). Now z is the left child of a left-child parent – parent and grandparent and z all lean the same way. Recolor the parent black and the grandparent red, then *right-rotate the grandparent*. This lifts the parent into the grandparent's old slot, with the (formerly red, now black) parent on top and the grandparent and z as its red children – no two reds touch, and the loop terminates.

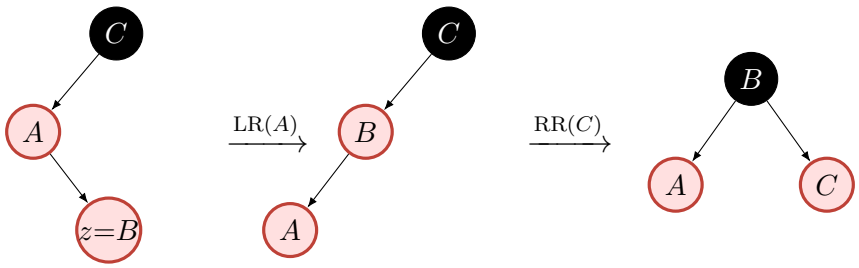

Here is the whole fixup, both sides.

Algorithm 52: RB-INSERT-FIXUP(T, z)

Input: Tree T where the only possible violation is a red-red edge at z.
Output: T with all five properties restored.

```
1  while z.parent.color = RED do
2      if z.parent = z.parent.parent.left then
3          y ← z.parent.parent.right ;                          // the uncle
4          if y.color = RED then                                  // Case 1
5              z.parent.color ← BLACK;
6              y.color ← BLACK;
7              z.parent.parent.color ← RED;
8              z ← z.parent.parent;
9          else
10             if z = z.parent.right then                         // Case 2
11                 z ← z.parent;
12                 LEFT-ROTATE(T, z);
13             z.parent.color ← BLACK ;                           // Case 3
14             z.parent.parent.color ← RED;
15             RIGHT-ROTATE(T, z.parent.parent);
16     else
17         same as above with LEFT and RIGHT exchanged;
18 T.root.color ← BLACK;
```

Focus

The very last line – forcibly painting the root black – quietly handles two situations at once: the new node was inserted into an empty tree and became the root, or Case 1 propagated a red all the way up to the root. Painting the root black can never violate property 5 (it adds one black to *every* path equally) and it restores property 2. It is the tidy bow on top.

13.5.1 A fully worked insertion

Let us build a red-black tree from empty by inserting $10, 20, 30, 15, 25, 5, 35$ and watch the fixups fire. We will narrate the interesting moments.

1. **Insert** 10**.** Empty tree, so 10 becomes the root, inserted red, then the final line paints it black. Tree: black 10.

2. **Insert** 20**.** Goes right of 10, red. Its parent 10 is black, no violation. Tree: black 10 with red right child 20.


3. **Insert** 30**.** Goes right of 20, red. Now 20 (red) has a red child 30: a red-red violation, and 20's uncle is the sentinel (black). $z = 30$ is an outer (right-right) grandchild, so this is Case 3 on the right side: recolor 20 black, 10 red, and left-rotate the root 10. Now 20 is the black root with red children 10 and 30. Balanced and legal.

4. **Insert** 15**.** From 20 go left to 10, then right of 10, red. Parent 10 is red – violation. The uncle here is 30, which is *red*. Case 1: paint 10 and 30 black, paint 20 red, move z up to 20. But 20

is the root, and its parent (the sentinel) is black, so the loop stops. The final line paints the root 20 black again. Tree now: black 20; black 10 (with red right child 15); black 30.

5. **Insert 25.** From 20 right to 30, then left of 30, red. Parent 30 is black – no violation. Easy.
6. **Insert 5.** From 20 left to 10, left of 10, red. Parent 10 is black – no violation.
7. **Insert 35.** From 20 right to 30, right of 30, red. Parent 30 is black – no violation.

The final tree:

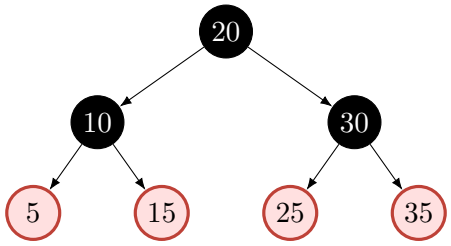

Notice how the sorted-order insertion that destroyed a plain BST in Section 13.1 would, here, have been quietly rebalanced at every step. That is the whole point.

Cost summary

Insertion cost. Act One (the BST descent) is $O(\log n)$ because the tree's height is $O(\log n)$. The fixup loop runs $O(\log n)$ iterations in the worst case (Case 1 climbs two levels per iteration), and crucially it performs *at most two rotations* total – Cases 2 and 3 each end the loop. So insertion is $O(\log n)$ time with $O(1)$ rotations. The low rotation count is what makes red-black trees attractive in practice: restructuring is cheap.

13.6 Deletion

Deletion is the harder sibling. Searching never breaks anything and insertion can only create a too-light splash of red; but deletion can *remove* a black node, and removing a black node punches a hole in property 5 – suddenly one path has fewer black nodes than its peers. Repairing that hole is the delicate part.

Intuition

Removing a *red* node is harmless: red nodes do not count toward black-height, so plucking one out leaves every path's black count unchanged, and no red-red pair can be newly created in the spot it vacated. The trouble is removing a *black* node. Imagine the missing black node leaves behind a "debt" of one black on its path. We model this with a colorful fiction: the node that moves into the gap is said to carry an *extra black* – it becomes "doubly black" – and the entire fixup is the process of *discharging that extra black*, either by shoving it onto a red node nearby (which can simply absorb it by turning black) or by sliding it upward until it reaches the root or a red node that can swallow it.

As with ordinary BST deletion, the node we physically remove is not always the node holding the key we asked to delete. If the target has two children, we splice out its *successor* (the smallest key

in its right subtree, which has at most one child) and move that key up. So we track two things: the node y actually spliced out, and the node x that moves into y's position. The rule is: *the fixup is needed exactly when the spliced-out node y was black.*

We will lean on a helper, RB-Transplant, that replaces one subtree with another by rewiring the parent's pointer – the same plumbing used in plain BST deletion, adjusted for the sentinel.

Algorithm 53: RB-Transplant(T, u, v)

Input: Replace the subtree rooted at u with the subtree rooted at v.

```
1  if u.parent = T.nil then
2  |  T.root ← v;
3  else if u = u.parent.left then
4  |  u.parent.left ← v;
5  else
6  |  u.parent.right ← v;
7  v.parent ← u.parent;
```

Algorithm 54: RB-Delete(T, z)

Input: Tree T and the node z to delete.
Output: T with z removed and all five properties restored.

```
1  y ← z;   y-orig-color ← y.color;
2  if z.left = T.nil then
3  |  x ← z.right;   RB-Transplant(T, z, z.right);
4  else if z.right = T.nil then
5  |  x ← z.left;   RB-Transplant(T, z, z.left);
6  else
7  |  y ← Tree-Minimum(z.right) ;                          // the successor
8  |  y-orig-color ← y.color;
9  |  x ← y.right;
10 |  if y.parent = z then
11 |  |  x.parent ← y;
12 |  else
13 |  |  RB-Transplant(T, y, y.right);
14 |  |  y.right ← z.right;   y.right.parent ← y;
15 |  RB-Transplant(T, z, y);
16 |  y.left ← z.left;   y.left.parent ← y;   y.color ← z.color;
17 if y-orig-color = BLACK then
18 |  RB-Delete-Fixup(T, x);
```

Focus


The key bookkeeping: y is the node that physically leaves the tree's structure (either z itself, or z's successor when z has two children). x is the node that moves into y's old spot. We remember y's *original* color. If it was red, no property broke and we are done. If it was black, x inherits an *extra black* and we call the fixup to discharge it.

Now the fixup. We describe the case where x is a *left* child; the right-child cases are mirror images.

Let w be x's sibling. Because x carries an extra black (its path is one black short), w's subtree must be "black-heavy" relative to x's – and that asymmetry is what we exploit. There are four cases.

Case 1: the sibling w is red. We cannot reason cleanly while w is red, so we first convert it away. Recolor w black and x's parent red, then left-rotate the parent. Now x has a new, black sibling, and we have reduced to one of the next three cases.


Case 2: w is black and both of w's children are black. Here neither side of w can absorb the extra black by rotation, so we "move the debt up." Recolor w red – this lightens w's side by one black, rebalancing w's subtree against x's – and pass the extra black up to the parent by setting $x \leftarrow x.parent$. The loop continues from there. If we ever reach a red node (or the root), it absorbs the extra black and we stop.

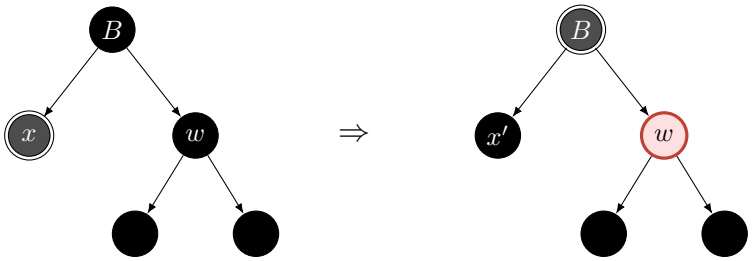

recolor w red; the extra black rises to B, which becomes the new x.

Case 3: w is black, w's left child is red, and w's right child is black. This is the "wrong-side red" situation; we rotate it into Case 4. Recolor w's left child black and w red, then right-rotate w. Now x's new sibling is black with a red *right* child, which is Case 4.

Case 4: w is black and w's right child is red. This is the terminal case that actually discharges the debt. Color w with the parent's color, color the parent black, color w's red right child black, and left-rotate the parent. This single rotation restores the missing black on x's path without disturbing any other path's count, so we set $x \leftarrow T.root$ to end the loop.

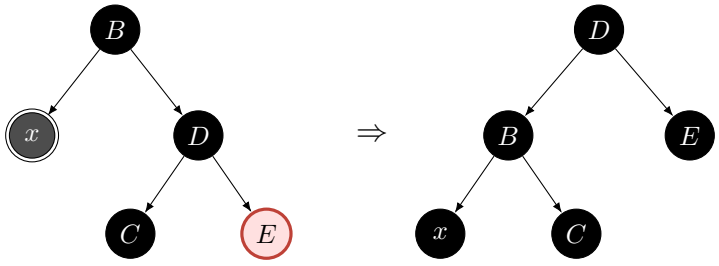

The doubly-black x on the left has shed its extra black on the right; the red node E paid the debt by turning black, and the rotation rebalanced the black-heights.

Algorithm 55: RB-DELETE-FIXUP(T, x)

Input: Tree T where x carries an extra black.
Output: T with the extra black discharged and all properties restored.

```
1  while x ≠ T.root and x.color = BLACK do
2      if x = x.parent.left then
3          w ← x.parent.right;
4          if w.color = RED then                                          // Case 1
5              w.color ← BLACK;   x.parent.color ← RED;
6              LEFT-ROTATE(T, x.parent);   w ← x.parent.right;
7          if w.left.color = BLACK and w.right.color = BLACK then         // Case 2
8              w.color ← RED;   x ← x.parent;
9          else
10             if w.right.color = BLACK then                              // Case 3
11                 w.left.color ← BLACK;   w.color ← RED;
12                 RIGHT-ROTATE(T, w);   w ← x.parent.right;
13             w.color ← x.parent.color ;                                 // Case 4
14             x.parent.color ← BLACK;   w.right.color ← BLACK;
15             LEFT-ROTATE(T, x.parent);   x ← T.root;
16     else
17         same as above with LEFT and RIGHT exchanged;
18 x.color ← BLACK;
```

Focus

A map of the four cases, so they stop feeling arbitrary:

- **Case 1** is a *setup* move: it gets rid of a red sibling so the others can reason about a black one. It always falls through into 2, 3, or 4.
- **Case 2** is the only case that *loops*. It cannot fix the debt locally (both nephews are black), so it pushes the extra black up one level and tries again. Every other case terminates.
- **Case 3** is a *setup* move for Case 4: it rotates a red nephew to the far side.
- **Case 4** is the *terminating* fix: a red nephew on the far side lets one rotation pay off the debt for good.

Only Case 2 repeats, and it climbs one level each time, so the loop is $O(\log n)$. The total number of rotations is at most *three* (Case 1, then 3, then 4 in the worst chain).

Common trap

The notorious confusion in deletion is the "extra black" fiction. The node x does not literally hold two colors; the doubling is a way of saying "this path is one black short, and we are pinning the deficit to x until we find a place to pay it." If you try to picture a node that is somehow black-and-a-half, you will tie yourself in knots. Picture instead a debt token sitting on x, which the fixup either hands to a red node (paid) or carries one step up the tree.

Walking question

On your next walk, reason about *why Case 2 is the only one that loops.* Cases 1, 3, and 4 each either end the loop or set up a strictly later case, but Case 2 fires when both of the sibling's children are black – the one situation where there is no red node anywhere nearby to absorb the debt. With nothing to pay the debt locally, the only move is to carry it up to the parent and try the whole analysis again one level higher. Convince yourself that the debt can climb at most to the root, where the final line of the algorithm simply forgives it.

Cost summary

Deletion cost. Finding z and its successor is $O(\log n)$. The fixup loop iterates only via Case 2, which ascends one level per iteration, so at most $O(\log n)$ iterations, with at most three rotations total. Hence deletion is $O(\log n)$ time, $O(1)$ rotations – matching insertion.

13.7 Putting It All Together

Let us step back and admire what one bit per node bought us.

Cost summary

Red-black tree operations, all worst case.

Operation	Time	Rotations
Search / Minimum / Maximum	$O(\log n)$	0
Successor / Predecessor	$O(\log n)$	0
Insert	$O(\log n)$	≤ 2
Delete	$O(\log n)$	≤ 3

The height is at most $2\log_2(n+1)$, so nothing is ever worse than logarithmic – no matter the order of operations. There is no bad input.


Why this matters

Red-black trees are the workhorse balanced BST of the standard library era, but they are not the only way to win this game. AVL trees keep an even tighter height bound (about $1.44\log_2 n$) and so search a touch faster, at the cost of doing more rotations on update – a good trade when you read far more than you write. B-trees (the subject of a later chapter) generalize the idea to fat nodes that hold many keys, which is exactly what you want when each node access is a slow disk read. Skip lists reach the same guarantees with randomization and simpler code. The red-black tree sits at a sweet spot: a strict worst-case guarantee, few rotations per update, and a structure that maps neatly onto a single color bit you can often hide inside an already-present pointer.

History and connection

Red-black trees were introduced by Leonidas Guibas and Robert Sedgewick in 1978 as a "symmetric binary B-tree" reframed with colors; the red/black coloring made the invariants and case analysis dramatically easier to state and verify. They are in fact a 1-to-1 disguise for 2-3-4 trees (a B-tree of order 4): a black node together with its red children corresponds to one fat B-tree node holding up to three keys, which is the cleanest way to *understand* where the five properties come from. For the rigorous treatment, the precise pseudocode this chapter is built on, and the deletion proof in full, see CLRS Chapter 13 ("Red-Black Trees"), with the binary-search-tree groundwork in Chapter 12 and the 2-3-4 / B-tree connection in Chapter 18. The original idea traces back through Rudolf Bayer's 1972 symmetric binary B-trees.

The correspondence is worth seeing once. A black node with one or two red children collapses into a single 2-3-4 node holding two or three keys; a lone black node is a 2-node holding one key. Property 5 (equal black-height) is just the statement that a B-tree keeps all its leaves on the same level, and property 4 (no two reds in a row) is what stops a B-tree node from overflowing past three keys.



Focus

What to hold onto from this chapter.

1. Balance is everything: BST operations cost $\Theta(\text{height})$, so a tree that stays $O(\log n)$ tall is fast forever.
2. Five properties enforce balance, and the two that matter are "no two reds in a row" (property 4) and "equal black-height on all paths" (property 5). Together they force the longest path to be at most twice the shortest.
3. Rotations are $O(1)$ local restructurings that preserve search order; they are the only tool we have for changing shape.
4. Insert red, then fix up the at-most-one red-red violation with three cases and ≤ 2 rotations.
5. Delete, and if a black node left, discharge the "extra black" with four cases and ≤ 3 rotations.

Exercises

Exercise 13.1 (Warmup: legal or not)**.** For each of the following, decide whether it can be a valid red-black tree and justify with the specific property that fails if not. (a) A tree whose root is red. (b) A black root with two red children, each of which has two black children. (c) A path from the root that reads black, red, red, black going downward.

Exercise 13.2 (Black-height counting)**.** In the worked example tree at the end of Section 13.5.1 (root 20), compute the black-height $\mathrm{bh}(x)$ for every node x, remembering to count the sentinel leaves. Verify property 5 holds at the root by listing the black count of three distinct root-to-leaf paths.

Exercise 13.3 (Rotations preserve order)**.** Take the tree from the rotation lab in Section 13.4. Perform a left rotation around the root, then a right rotation around the new root. You should recover the original tree. Write out the in-order traversal after each step to confirm the key order never changes, and explain in one sentence why RIGHT-ROTATE is the exact inverse of LEFT-ROTATE.

Exercise 13.4 (Insert and trace)**.** Starting from an empty tree, insert the keys $41, 38, 31, 12, 19, 8$ one at a time. For each insertion, name which case of RB-INSERT-FIXUP fires (if any) and draw the resulting tree with colors. (Several of these will trigger rotations – this sequence is designed to.)

Exercise 13.5 (Why red, not black?)**.** Suppose you modified RB-INSERT to color the new node *black* instead of red. Which of the five properties would be violated immediately upon insertion into a non-empty tree, and why would the repair be more involved than in the red case? Argue in terms of black-height.

Exercise 13.6 (Maximum and minimum reds)**.** Among all valid red-black trees on $n = 7$ internal nodes, what is the largest possible number of red nodes? The smallest? Sketch a tree achieving each extreme. (Hint: think about property 4 for the maximum and property 5 for the minimum.)

Exercise 13.7 (Delete and trace)**.** Build the red-black tree by inserting $5, 10, 15, 20, 25, 30, 35$ (this gives a nicely balanced tree). Then delete 10. Identify the spliced-out node y, its original color, the node x that moves up, and which deletion-fixup case (if any) runs. Draw the final tree.

Exercise 13.8 (The extra-black invariant)**.** Explain, in your own words and in at most six sentences, the loop invariant maintained by RB-DELETE-FIXUP: what is true about the tree at the top of each iteration, in what sense is property 5 "violated only at x," and why does terminating the loop (either reaching a red x or the root) restore all five properties when we finally paint x black?

Exercise 13.9 (AVL versus red-black, conceptually)**.** An AVL tree guarantees height at most about $1.44 \log_2 n$, tighter than the red-black bound of $2 \log_2(n + 1)$. Without looking anything up, argue from the balance conditions why an AVL tree should generally perform *more* rotations per insertion/deletion than a red-black tree, and describe one workload where each structure would be the better choice.

Exercise 13.10 (Challenge: join two trees)**.** Suppose you have two red-black trees T_1 and T_2 together with a key k such that every key in T_1 is less than k and every key in T_2 is greater than k. Describe an $O(\log n)$ algorithm to combine them into a single red-black tree containing all the keys of T_1, all of T_2, and k. (Hint: the black-heights of the two trees are the lever. Walk down the taller tree's appropriate spine until you reach a node whose black-height matches the shorter tree, then splice in k as a red node joining the two and run a single insert-style fixup.)

Chapter 14

Augmenting Data Structures

You have spent the last few chapters building a beautiful machine. A red-black tree gives you `INSERT`, `DELETE`, `SEARCH`, `MINIMUM`, `MAXIMUM`, `SUCCESSOR`, and `PREDECESSOR`, every one of them in $O(\lg n)$ time, even in the worst case, because the tree promises never to get lopsided. That is a lot of power for very little money.

But real problems are rude. They almost never ask exactly the question your textbook data structure answers. A bank wants to know, "how many of my customers have a balance below this one?" A scheduler wants to know, "does any meeting on the calendar overlap the slot 2:00–3:00?" A median-tracking dashboard wants to know, "what is the 90th-percentile latency *right now*, as requests stream in?" None of these is plain `SEARCH`.

You have two options. You could invent a brand-new data structure from the ground up for each new question — exhausting, error-prone, and wasteful. Or you could take a structure you already trust and *teach it a new trick* by storing a little extra information at each node. That second path is the subject of this chapter. It is called *augmenting* a data structure, and once you see how it works, you will start to see opportunities for it everywhere.

Intuition

Augmenting a data structure is like adding a mileage counter to a car you already own. You do not rebuild the engine. You bolt on one small gauge, wire it to something the car already does (turning the wheels), and make sure it stays accurate as you drive. The hard part is never the gauge itself — it is keeping it honest every time the car moves.

We will work through two flagship examples — *order-statistic trees*, which answer ranking and percentile questions, and *interval trees*, which answer overlap questions — and in between them we will pull out the general recipe: a short theorem that tells you exactly when augmentation is cheap and how to do it without breaking what you already had.

14.1 Warming Up: What Question Are We Even Asking?

Suppose you have n distinct numbers and you store them in a balanced binary search tree. The tree already answers "is x present?" and "what is the smallest element?" Now imagine someone hands

you these two new requests:

- `SELECT`(i)**:** return the element with the ith smallest key. If $i = 1$ you want the minimum; if $i = n$ you want the maximum; if $i = \lceil n/2 \rceil$ you want the median.
- `RANK`(x)**:** given a node x in the tree, return its position in sorted order. If x holds the smallest key, its rank is 1.

These two are inverses of each other. `SELECT` goes from a *position* to an *element*; `RANK` goes from an *element* to its *position*. Together they are called *order-statistic* queries, because the ith smallest element is also called the ith *order statistic* of the set. (You met order statistics back in the chapter on medians; there we found a single one in linear time on a static array. Here we want a *dynamic* set that supports insert and delete *and* answers order-statistic queries fast.)

Focus

Hold onto this distinction: `SELECT`(i) = "give me the ith smallest" (position $\to$ element), `RANK`(x) = "where does x sit in sorted order?" (element $\to$ position). Everything in the first half of this chapter is about answering both in $O(\lg n)$ time on a set that keeps changing.

A first, honest attempt: walk the tree in sorted order (an in-order traversal), counting as you go, and stop at the ith node. That works, but it costs $\Theta(n)$ in the worst case — you might walk the whole tree. We did all that work to get $O(\lg n)$ operations, and now a single query throws it away. We can do much better, and the trick is to store one extra number per node.

14.2 Order-Statistic Trees: The Idea

Take an ordinary red-black tree. At every node x, add one new field, x`.size`, defined as the number of nodes in the subtree rooted at x, *including x itself*. To make the bookkeeping uniform, we let the sentinel `NIL` (the stand-in leaf at the bottom) have size 0. Then for every real node the field obeys a clean local rule:


$$x.size \;=\; x.left.size \;+\; x.right.size \;+\; 1.$$

In words: the size of your subtree is the size of your left subtree, plus the size of your right subtree, plus one for yourself. That "+1" is you.

Intuition

Think of `size` as each node knowing the headcount of the family living beneath it (itself included). The root knows the whole population, n. A leaf knows just itself, 1. Crucially, a node can compute its own headcount knowing *only* the headcounts of its two children — it never has to look further down. That "I only need my kids" property is what will make updates cheap.

Here is a small tree of seven keys, with each node labelled *key / size*. Spend a moment checking the rule at every node.

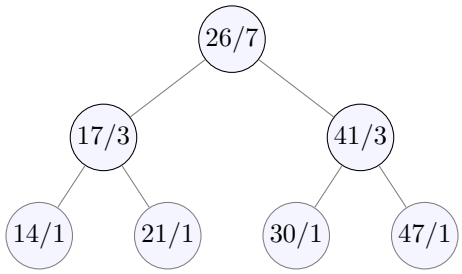

Check the root: its left subtree (rooted at 17) has size 3, its right subtree (rooted at 41) has size 3, plus itself makes $3+3+1=7$. Good. Check node 17: $1+1+1=3$. Good. Every leaf has two `NIL` children of size 0, so $0+0+1=1$. The rule holds everywhere.

14.2.1 `SELECT`: finding the ith smallest

Now watch how that one number lets you home in on the ith smallest element without ever scanning. Stand at a node x. Let

$$r \;=\; x.left.size + 1.$$

This r is the rank of x *within the subtree rooted at* x: everything in x's left subtree is smaller than x, and there are $x.left.size$ of them, so x itself is the rth smallest in its own subtree. Three cases:

- If $i = r$, then x *is* the element you want. Done.
- If $i < r$, the element you want is smaller than x, so it lives in the left subtree. Recurse left, still looking for the ith smallest (the count is unchanged — everything to the left is still to the left).
- If $i > r$, the element is bigger than x. Recurse right. But now you must *subtract* the r elements you have skipped over (everything in the left subtree, plus x itself): in the right subtree you are now hunting for the $(i-r)$th smallest.

Algorithm 56: OS-Select(x, i) — the ith smallest in the subtree at x

Input: a subtree root x, and an index i with $1 \le i \le x.size$
Output: the node holding the ith smallest key in x's subtree


```
r ← x.left.size + 1;
if i = r then
    return x;
if i < r then
    return OS-Select(x.left, i);
else
    return OS-Select(x.right, i − r);
```

To answer a query on the whole tree, you call OS-Select$(root, i)$.

Algorithm lab

Let us find the **3rd smallest** in the seven-node tree above, by hand. Call OS-Select$(root = 26,\ i = 3)$.

Step 1. At node 26: left subtree (rooted at 17) has size 3, so $r = 3 + 1 = 4$. We want $i = 3$. Since $3 < 4$, the answer is to the left. Recurse into node 17 with $i = 3$.
Step 2. At node 17: left subtree (node 14) has size 1, so $r = 1 + 1 = 2$. We want $i = 3$. Since $3 > 2$, go right and subtract: recurse into node 21 with $i = 3 - 2 = 1$.
Step 3. At node 21: left subtree is `NIL`, size 0, so $r = 0 + 1 = 1$. We want $i = 1$. Since $1 = 1$, **return node** 21.
Sanity check: the sorted keys are $14, 17, 21, 26, 30, 41, 47$. The 3rd smallest is indeed 21. We touched exactly 3 nodes — the height of the tree — not all seven.

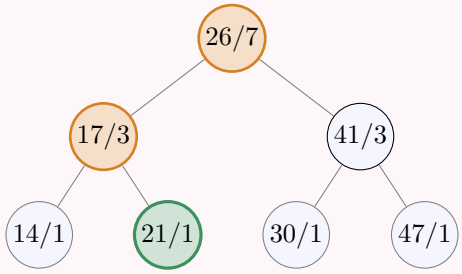

The shaded path is the only part of the tree OS-Select ever looks at: 26 (steer left), then 17 (steer right), then 21 (the green answer). The four unshaded nodes are never visited.

Common trap

The single most common bug is forgetting to subtract when you go right. If you recurse right still asking for the ith smallest, you are now asking for the ith smallest *of the right subtree*, which is a completely different element. You must shrink the target to $i - r$, because by stepping right you have left r smaller elements (the whole left subtree, plus x) behind you. Trace the example again and watch where the $3 \to 1$ happens.

Because the tree is balanced, its height is $O(\lg n)$, and OS-Select descends one level per call, so a query costs $O(\lg n)$.

14.2.2 `RANK`: where does this node sit?

Now the inverse. Given a pointer to a node x, what is its position in the sorted order of the *whole* tree? Start with the rank of x inside its own subtree, namely $x.left.size + 1$, and then climb toward the root. Each time you step up, ask: did I just come up from a right child? If so, everything in that sibling-and-parent's left side, plus the parent itself, is smaller than x and has not yet been counted — so add it in. If you came up from a left child, you are still on the small side of that parent, so add nothing.

Algorithm 57: OS-RANK(T, x) — the position of node x in sorted order

Input: an order-statistic tree T and a node x in it
Output: the rank of x among all keys of T (so 1 means smallest)

```
r ← x.left.size + 1;
y ← x;
while y ≠ T.root do
    if y = y.parent.right then
        r ← r + y.parent.left.size + 1;
    y ← y.parent;
return r;
```

Algorithm lab

Let us compute OS-RANK of node 21 in the same tree, and confirm we get 3 back (the inverse of the previous lab).
Start. $x = 21$. Its left child is `NIL` (size 0), so $r = 0 + 1 = 1$. Set $y = 21$.
Climb 1. $y = 21$ is the *right* child of its parent 17. So add the parent's left subtree (node 14, size 1) plus 1 for the parent: $r \leftarrow 1 + 1 + 1 = 3$. Move up: $y = 17$.
Climb 2. $y = 17$ is the *left* child of its parent 26. Left child means add nothing. Move up: $y = 26 = root$, loop ends.
Return $r = 3$. It matches: 21 is the 3rd smallest. `SELECT` and `RANK` really are inverses.

The `while` loop runs once per level on the path from x to the root, so OS-RANK is $O(\lg n)$ as well.

Walking question

Here is something to chew on while you walk. `SELECT` starts at the root and walks *down*; `RANK` starts at a node and walks *up*. Why the opposite directions? (Hint: `SELECT` is given a number and must find a place, so it can only steer using information at the current node on the way down. `RANK` is given a place and must accumulate a number, gathering up all the smaller elements that hang off to its left as it rises.) Convince yourself that you could not easily swap the directions.

14.3 Keeping `size` Honest Through Insert and Delete

A gauge that lies is worse than no gauge. The whole scheme depends on every `size` field being exactly right at all times — including the instant *after* an insertion or deletion, when red-black trees do their famous rotations and recolorings. So we must check two things:

1. When we add or remove a key, we update the `size` fields cheaply.

2. When the tree rebalances itself with rotations, the `size` fields survive.


14.3.1 Insertion and deletion: the downward pass

A red-black insertion happens in two phases. First you walk down from the root to a leaf to find the spot for the new key. Every node on that path gains exactly one descendant — the new node — so as you walk down, just do $x.size \mathrel{+}= 1$ at each step. That is $O(\lg n)$ extra work on a walk you were doing anyway. Deletion is symmetric: every node on the path from the root to the spliced-out node loses exactly one descendant, so decrement along the way.

14.3.2 Rotations: the local fix-up

The subtle part is the *second* phase. After the simple insert, a red-black tree may perform rotations to restore balance. A rotation rearranges three nodes and a couple of subtrees. It changes which subtrees hang where, so it can change `size` fields — but, and this is the lovely part, only at the two nodes directly involved, and only using information those nodes can already see.

Look at a left rotation about x, which promotes its right child y:

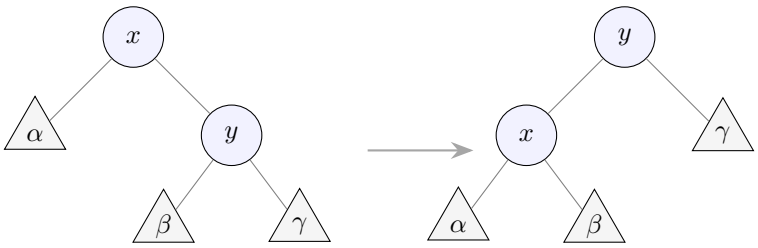

before: left-rotate at x after

Before the rotation, y was the root of a subtree containing x. After it, y sits where x was, so y inherits x's old size, and x must recompute its own from its (new) children. Only x and y change, and each fix uses only the sizes of its immediate children:

Algorithm 58: Size maintenance inside LEFT-ROTATE(T, x)

Input: a node x whose right child y is being rotated up

```
// ...  perform the ordinary pointer surgery of a left rotation first ...
```

1 $y.size \leftarrow x.size$; `// y now governs x's old subtree`

2 $x.size \leftarrow x.left.size + x.right.size + 1$;

Algorithm lab

Let us watch the numbers move. Suppose before a left rotation at x the subtree sizes are: α has 4 nodes, β has 2, γ has 3.

Before. $y.size = \beta + \gamma + 1 = 2 + 3 + 1 = 6$. And $x.size = \alpha + y.size + 1 = 4 + 6 + 1 = 11$.

After. Now y is on top with children x and γ. Apply the two lines: first $y.size \leftarrow x.size = 11$ (the whole subtree still has 11 nodes — a rotation never adds or drops a node). Then $x.size \leftarrow \alpha + \beta + 1 = 4 + 2 + 1 = 7$.

Verify independently. x's new subtree is α, β, and x: $4 + 2 + 1 = 7$. ✓ And y's subtree is x's subtree, γ, and y: $7 + 3 + 1 = 11$. ✓ The total stayed 11, which is exactly what should happen — you only moved nodes around, you did not create or destroy any.

Because a red-black insert or delete performs at most a constant number of rotations ($O(1)$ of them, as you proved last chapter), the rotation fix-ups add only $O(1)$ total work. The downward size bumps add $O(\lg n)$. So the grand total is still $O(\lg n)$: augmenting cost us nothing asymptotically.

Cost summary

Order-statistic tree (red-black base, n keys):

Operation	Worst-case time
`INSERT`, `DELETE`	$O(\lg n)$ (size bumps absorbed)
`SEARCH`, `MIN`, `MAX`	$O(\lg n)$
`OS-SELECT`(i)	$O(\lg n)$
`OS-RANK`(x)	$O(\lg n)$
extra space	$O(n)$ (one integer per node)

The augmentation is "free": same asymptotics as the plain tree, brand-new queries.

Why this matters

Where does this actually earn its keep? Anywhere you need *live percentiles*. A trading system ranks an incoming order against millions of resting orders to decide priority. A leaderboard in a game must answer "what is my global rank?" the instant your score changes. A monitoring dashboard reports the median and 99th-percentile request latency as a stream of measurements pours in. Each of these is `INSERT` plus `RANK/SELECT` on a set that never stops changing — precisely the order-statistic tree's home turf.

14.4 The General Recipe: A Theorem for Augmenting

We just augmented a red-black tree with a `size` field and got order statistics almost for free. The natural question is: *when* is it that cheap, and what do we actually have to check? Beautifully, there is a short, reusable answer. Augmentation always follows the same four-step ritual.

Formal

Augmenting in four steps.

1. *Choose* an underlying data structure (here, a red-black tree).
2. *Decide* what extra information to store (here, `size`).
3. *Verify* the extra information can be *maintained* during the structure's basic modifying operations (insert, delete, rotate).
4. *Develop* the new operations the extra information enables.

The steps are a checklist, not a straitjacket — in practice you iterate, often discovering at step 3 that you must enrich what you store in step 2. The work that needs real care is step 3, and the next theorem makes step 3 almost mechanical for red-black trees.

The key insight is about *locality*. Our `size` field had a magic property: a node could compute its field from *only its own data and the fields of its two children*. It never needed to look down into the

depths or out across the tree. That is exactly the property that makes rotations cheap, because a rotation only rearranges a node and its children — so if a field depends only on children, only the rotated nodes can possibly need a fresh value.

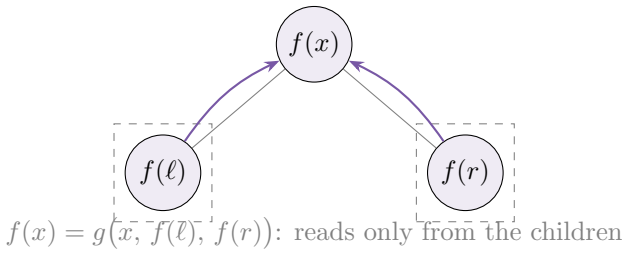


Figure 14.1: The locality condition. A node's augmented field $f(x)$ is a function of the node itself and the f values of its two children only — never of anything deeper. The whole subtrees below ℓ and r are invisible to x except through those two summaries.

Theorem 14.1 (Maintaining augmentation, CLRS Theorem 14.1)**.** *Let f be a field added to every node of a red-black tree of n nodes. Suppose that for each node x, the value $f(x)$ can be computed using only the information in x itself together with the f values of x's two children, $x.left$ and $x.right$ (Figure 14.1). Then we can maintain f at every node during* `INSERT` *and* `DELETE` *without changing their $O(\lg n)$ asymptotic running time.*

Remark 14.1 (Why the locality condition is the whole game). Read the hypothesis slowly: $f(x)$ depends only on x, $f(x.left)$, and $f(x.right)$. Our `size` field qualifies, because $x.size = x.left.size + x.right.size + 1$ — only the children's f values appear. So does, say, a field storing the *minimum* key in a subtree, or the *sum* of subtree keys, or (as we are about to see) the *maximum endpoint* of a set of intervals.

Here is the gentle proof. It is really just the argument we already ran for `size`, stated once and for all.

Sketch, with all the moving parts named. A red-black `INSERT` or `DELETE` changes the tree in two ways: a *structural change* on the root-to-leaf path (one node added or removed), and a constant number of *rotations*.

The path. When a node is added or removed, the only subtrees whose contents changed are those on the path from the root down to the affected spot. By hypothesis, each node's f depends only on its children's f. So after fixing the bottom of the path, we recompute f one node at a time as we walk back up: each recomputation is $O(1)$, and there are $O(\lg n)$ nodes on the path. Total: $O(\lg n)$.

The rotations. A single rotation changes the parent-child relationships of only $O(1)$ nodes (the two pivots and the one subtree that swaps sides). Every *other* node still has the same children with the same f values, so its f is automatically still correct — nothing to do. Only the two pivot nodes need their f recomputed, each in $O(1)$ time using the formula. Since a red-black operation does $O(1)$ rotations, the rotation fix-ups cost $O(1)$ total.

Adding $O(\lg n)$ for the path and $O(1)$ for the rotations leaves the running time at $O(\lg n)$. □

Intuition

The theorem is really saying: *if your gauge reads off of its own children and nothing farther, then rebalancing can never invalidate more than the handful of nodes it physically touched.* Local information stays local. That single idea is why augmentation is usually free, and it is the reason you should always reach for a field defined by "my value = some combination of my children's values."

Common trap

The condition has teeth. Suppose you tried to store at each node its *rank* in the whole tree (its global position in sorted order) directly. Inserting one tiny element at the front shifts *every* node's rank by one — that field depends on the entire tree, not just on children, so it fails the hypothesis and costs $\Theta(n)$ to maintain. The fix is exactly what we did: store the *local* `size` instead, and *derive* rank on demand by combining sizes along a path. Always prefer a field that reads only from your children.

History and connection

This material is Chapter 14 of CLRS, "Augmenting Data Structures." The order-statistic tree is CLRS §14.1, the maintenance theorem (their Theorem 14.1) is §14.2, and interval trees — coming up next — are §14.3. The deeper ideas trace back to the 1970s study of balanced trees and to computational geometry, where storing summary information in tree nodes (segment trees, interval trees, range trees) became a workhorse for geometric search. If you go on to CLRS, you will find their treatment terse where ours is leisurely; the shapes are identical.

14.5 Interval Trees: Augmenting for Overlap

Let us prove the recipe is reusable by solving a genuinely different problem with it. Instead of numbers, our data are now *closed intervals* on the real line, like $[15, 23]$ or $[6, 10]$. Think of them as time slots on a calendar, or as ranges of IP addresses, or as line segments. We want a dynamic set of intervals supporting:

- `INTERVAL-INSERT` / `INTERVAL-DELETE`, and
- `INTERVAL-SEARCH`(i): given a query interval i, return *some* interval in the set that overlaps i, or report that none does.

Definition 14.1 (Overlap)**.** Two closed intervals $i = [i.low, i.high]$ and $i' = [i'.low, i'.high]$ *overlap* when they share at least one point, that is, when

$$i.low \le i'.high \quad \text{and} \quad i'.low \le i.high.$$

Focus

That double inequality is worth memorizing, because it is cleaner than the mistake people reach for first. *Two intervals overlap iff each one starts before the other ends.* The negation is just as clean and often easier to reason about: they *miss* each other exactly when one ends

before the other starts, i.e. $i.high < i'.low$ or $i'.high < i.low$.

Figure 14.2 shows the two ways intervals can sit relative to each other: sharing at least one point (overlap) or sitting wholly apart (miss).



overlap: $i.low \le i'.high$ *and* $i'.low \le i.high$ miss: $i.high < i'.low$ (a gap between them)

Figure 14.2: Two closed intervals overlap exactly when neither ends before the other begins. On the left they share the shaded band; on the right a gap separates them.

Step 1 (choose the base): a red-black tree, keyed on the *low* endpoint of each interval. So the tree is sorted by where intervals start.

Step 2 (extra info): at each node x store


$$x.max \;=\; \text{the largest } high \text{ endpoint of any interval in } x\text{'s subtree.}$$

Does this field satisfy the locality condition of Theorem 14.1? Yes, perfectly:

$$x.max \;=\; \max\big(x.int.high,\; x.left.max,\; x.right.max\big).$$

The maximum high endpoint in your subtree is the biggest of three things: your own interval's high endpoint, and the maxes already computed by your two children. Only children's f values appear — so by the theorem, `INTERVAL-INSERT` and `INTERVAL-DELETE` maintain `max` for free, in $O(\lg n)$, including through rotations. **Step 3** is done before we even start, courtesy of the theorem. (We let the sentinel `NIL` have $max = -\infty$ so the formula needs no special cases.)

Here is a set of five intervals in the tree, each node labelled $[low, high]$ on top and its `max` below.

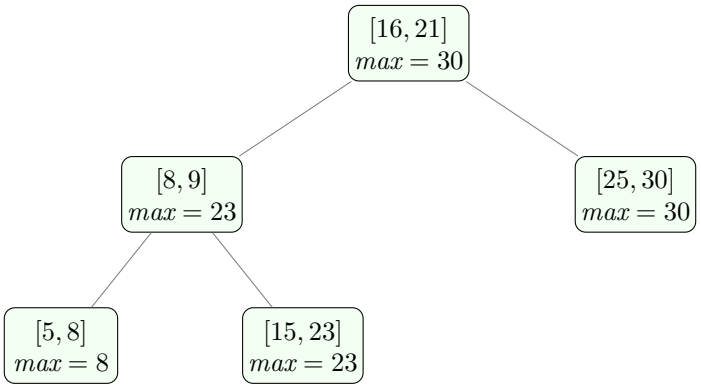

Check the root: the high endpoints in the whole tree are $21, 9, 30, 8, 23$; the biggest is 30, and indeed the root's `max` is 30. Check node $[8, 9]$: its subtree holds $[8, 9], [5, 8], [15, 23]$, high endpoints $9, 8, 23$, max $= 23$. ✓

14.5.1 `INTERVAL-SEARCH`: the one clever step

Now **step 4**, the new operation. We want to find any interval overlapping a query i. Start at the root and, at each node x, decide whether to go left or right. Here is the rule, and it is the whole trick:

Algorithm 59: INTERVAL-SEARCH(T, i) — find an interval overlapping i

Input: interval tree T and a query interval i
Output: a node whose interval overlaps i, or `NIL` if none does

```
1 x ← T.root;
2 while x ≠ T.NIL and i does not overlap x.int do
3     if x.left ≠ T.NIL and x.left.max ≥ i.low then
4         x ← x.left;                          // a left interval might still reach i
5     else
6         x ← x.right;
7 return x;
```


Read the branch carefully. At node x, if x's own interval overlaps i we are done and the loop stops. Otherwise we go *left* exactly when the left subtree exists and its `max` (the farthest-right endpoint anywhere on the left) is at least $i.low$ — meaning some interval down the left *might* reach far enough right to touch i. If even the leftmost, farthest-reaching interval cannot reach $i.low$, there is no point looking left; go right instead.

Intuition

The `max` field is acting like a periscope. Standing at x, you cannot see the individual intervals buried in the left subtree, but `max` lets you see the *rightmost reach* of the entire left subtree in one glance. If that rightmost reach falls short of where your query begins ($x.left.max < i.low$), the entire left subtree is hopeless and you can discard it without looking. That is how one number prunes half the tree.

Algorithm lab

Let us run INTERVAL-SEARCH for the query $i = [22, 25]$ on the tree above. (i starts at 22, so $i.low = 22$, $i.high = 25$.)
At root $[16, 21]$**.** Overlap? We need $16 \le 25$ (yes) *and* $22 \le 21$ (no). Not overlapping. Now the branch: the left child is $[8, 9]$ with $max = 23$. Is $23 \ge i.low = 22$? Yes — so something on the left *might* reach 22. Go left to $[8, 9]$.
At node $[8, 9]$**.** Overlap with $[22, 25]$? Need $8 \le 25$ (yes) and $22 \le 9$ (no). No overlap. Branch: left child is $[5, 8]$ with $max = 8$. Is $8 \ge 22$? No. So abandon the left subtree — nothing there reaches 22 — and go right to $[15, 23]$.
At node $[15, 23]$**.** Overlap with $[22, 25]$? Need $15 \le 25$ (yes) and $22 \le 23$ (yes). **Overlap! Return** $[15, 23]$**.**
And indeed $[15, 23]$ and $[22, 25]$ share the points 22 and 23. Notice the periscope at work: at node $[8, 9]$ we threw away the entire left subtree using a single comparison $8 \ge 22$, never inspecting $[5, 8]$ directly.

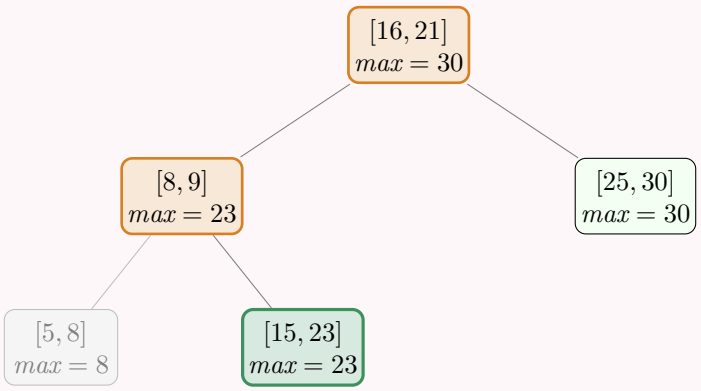

Orange marks the nodes the search visits for $i = [22, 25]$; green is the overlap it returns; the grayed-out $[5, 8]$ is pruned by the periscope ($max = 8 < 22$) and never touched.

14.5.2 Why the periscope never lies

It is not obvious that this greedy left/right choice can never miss an existing overlap. What if we go left and the only overlapping interval was actually on the right? The following lemma rules that out, and its proof is a small gem worth sitting with.

Lemma 14.1 (Interval search is correct, CLRS Theorem 14.2)**.** *In* INTERVAL-SEARCH*, if the algorithm steps to a child, then that child's subtree contains an interval overlapping* i whenever the whole tree does*. Consequently, if some interval in* T *overlaps* i*, the algorithm returns one; otherwise it returns* `NIL`*.*

Gentle proof. Each iteration that does not stop sends us either left or right. We show that in each case, we never abandon an overlap that exists.

Case 1: we go right. We only go right when the left child is missing, or $x.left.max < i.low$. Take the interesting subcase, $x.left.max < i.low$. By definition, $x.left.max$ is the largest high endpoint anywhere in the left subtree. So *every* interval i' in the left subtree has $i'.high \le x.left.max < i.low$, i.e. $i'.high < i.low$ — it ends strictly before i begins. By Definition 14.1, no such i' can overlap i. The left subtree is genuinely empty of overlaps, so discarding it loses nothing. Going right is safe.

Case 2: we go left. We go left when $x.left.max \ge i.low$. So the left subtree contains *some* interval i' with $i'.high \ge i.low$ (the one achieving the max). That is half of the overlap condition. We must rule out the danger that, despite a promising left subtree, the only true overlap was sitting on the *right*, and by going left we walk away from it.

Here is where the tree's sorting saves us. The tree is keyed on *low* endpoints. Consider that left-subtree interval i' with $i'.high \ge i.low$. If i' overlaps i, we are home — the left subtree contains an overlap and going left is correct. If i' does *not* overlap i, then since $i'.high \ge i.low$ already holds, the other half of overlap must fail: $i.high < i'.low$. But i' is in the left subtree, and the tree is sorted by low endpoint, so *every* interval i'' to the right of i' (which includes the entire right subtree of x, and x itself) has $i''.low \ge i'.low > i.high$. Such an i'' starts *after* i ends, so it cannot overlap i either (Figure 14.3). Hence no overlap lives on the right; if one exists at all it must be in the left subtree. Going left is safe.

In both cases we move toward a subtree that still contains an overlap whenever one exists. Since the loop also stops the moment x itself overlaps, by the time we reach `NIL` we have correctly concluded no overlap exists. □

Walking question

Take the crucial line of Case 2 on your walk: "if i' does not overlap but $i'.high \geq i.low$, then $i.high < i'.low$, and so everything to the right of i' starts even later and also misses i." Draw two intervals on a number line where $i'.high \geq i.low$ yet they do not overlap. What must be true of their starts? Now slide a third interval even farther right. See why it cannot rescue the overlap? That picture *is* the proof.

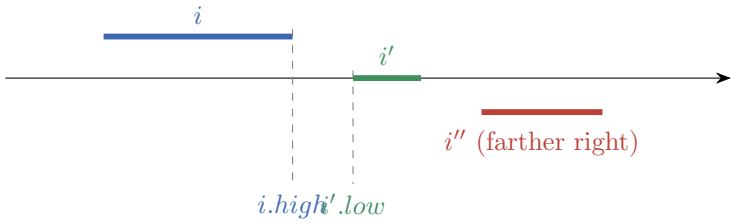


Figure 14.3: Case 2 of the correctness proof. If i' does not overlap i yet $i'.high \geq i.low$, then $i.high < i'.low$: i' begins to the right of where i ends. Any i'' sorted after i' begins even farther right, so it cannot overlap i either. No overlap can hide on the right.

Since each iteration descends one level and the tree has height $O(\lg n)$, INTERVAL-SEARCH runs in $O(\lg n)$ time. Insert and delete are $O(\lg n)$ by the maintenance theorem. We have built a second, completely different data structure with the same four-step recipe and the same locality trick.

Cost summary

Interval tree (red-black base, n intervals):

Operation	Worst-case time
`INTERVAL-INSERT`, `INTERVAL-DELETE`	$O(\lg n)$
`INTERVAL-SEARCH`(i) (find one overlap)	$O(\lg n)$
report *all* k overlaps	$O((k+1)\lg n)$
extra space	$O(n)$ (one `max` per node)

"Find all k overlaps" is just: find one, delete it from a copy, repeat — each round is $O(\lg n)$, there are k successful rounds plus one final round that reports "no more," giving $O((k+1)\lg n)$; or, better, recurse using the `max` fields to prune (Exercise 14.8).

Why this matters

Interval trees are everywhere there is a notion of "range" and a need to detect clashes fast. Calendar apps check whether a proposed meeting collides with any existing one. Network routers and firewalls match a packet's address against ranges of allowed addresses. Genome browsers find which genes overlap a region of a chromosome — a query that runs millions of

times over datasets with hundreds of millions of features, where the difference between $O(\lg n)$ and $O(n)$ per query is the difference between interactive and useless.

14.6 A Field Guide to Augmentation

Step back and look at what made both stories work. In each case we found a field that summarizes a subtree and is computable from a node plus its children's fields. Once you have that, the theorem hands you maintenance for free, and your job shrinks to designing the clever query (`SELECT`/`RANK`, or the left/right periscope). Here is a small catalog of fields that pass the locality test, to train your eye:

Field at node x	Local formula	Buys you
`size`	$\ell.size + r.size + 1$	rank, select, percentile
`sum`	$\ell.sum + r.sum + x.key$	subtree / prefix sums
`min`	$\min(x.key, \ell.min, r.min)$	range minimum
`max-high`	$\max(x.high, \ell.max, r.max)$	interval overlap
`height`	$1 + \max(\ell.height, r.height)$	subtree height

Each one reads only off the node and its two children, so each one is free to maintain. The art is matching the field to the question.

Common trap

A subtle failure: not every useful field is local, and you must check rather than hope. "Number of nodes within distance d of x in key-value" or "the median of my subtree" do *not* obey the locality condition — a child's median tells you almost nothing about the parent's median. When a field fails the test, you have two moves: enrich it into something that *is* local (store a sorted summary, a count, a histogram), or accept that this particular field will cost more than $O(\lg n)$ to keep current. Never assume; write down the formula and see whether only the children appear.

Pause

If your head is full, here is the one sentence to keep. **To augment a balanced tree, add a field that each node can compute from itself and its two children; the rebalancing machinery will then maintain it for free, and you spend your cleverness only on the query.** Order-statistic trees and interval trees are two instances of that one sentence.

A Closing Picture

It is worth naming what we have really done in this chapter. We did not invent two new data structures. We took *one* structure we already trusted — the red-black tree — and, twice, taught it to answer a new family of questions by storing a single extra number per node and writing one

clever query. The maintenance theorem is the reason this is a repeatable craft rather than a stroke of luck each time: as long as your extra information is *local* — readable from a node and its children — the expensive part (keeping it correct under insertion, deletion, and rebalancing) is handled for you, automatically, at no asymptotic cost.

That is a powerful stance to carry into the rest of the book and into real systems. When a problem looks like it needs a bespoke structure, pause and ask: *is there a balanced tree underneath, and a small local summary I could bolt on to answer this?* Surprisingly often, the answer is yes.

14.7 Exercises

Exercise 14.1 (Warm-up: trace by hand)**.** Build an order-statistic tree (you may draw any balanced shape) on the keys $\{3, 8, 12, 19, 22, 27, 35\}$, labelling each node with its `size`. Then run OS-Select$(root, 5)$ step by step, and separately compute OS-Rank of the node holding key 22. Confirm the two answers are consistent (i.e. `SELECT` and `RANK` invert each other on this key).

Exercise 14.2 (The forgotten subtraction)**.** A classmate writes OS-Select but recurses right with the unchanged index i instead of $i - r$. On the seven-node tree from Section 14.2, trace their buggy code for the query $i = 6$ and show that, because the inflated index is never shrunk on a right turn, the recursion walks off the right end of the tree (it reaches a `NIL` child asking for an index larger than any subtree can hold). What is the correct answer? Explain in one sentence why dropping the subtraction breaks the meaning of i.

Exercise 14.3 (Maintaining size through a rotation)**.** Suppose a left rotation is performed at a node x whose subtrees have sizes $\alpha = 6$ (left of x), $\beta = 3$, $\gamma = 5$ (with β, γ the subtrees of x's right child y, as in the figure). Compute every `size` field before and after the rotation, and verify the total node count is unchanged.

Exercise 14.4 (Counting smaller elements)**.** Using an order-statistic tree, give an $O(\lg n)$ algorithm `COUNT-LESS`(k) that returns how many keys in the tree are strictly less than a given value k (where k need not be present in the tree). Sketch the algorithm and argue its running time.

Exercise 14.5 (Does the field stay local?)**.** For each proposed node field, write down its formula in terms of the node and its children, and state whether it satisfies the locality hypothesis of Theorem 14.1. (a) the number of *red* nodes in the subtree; (b) the depth of the node (its distance from the root); (c) the sum of all keys in the subtree; (d) the second-smallest key in the subtree.

Exercise 14.6 (Overlap by hand)**.** On the five-interval tree of Section 14.5, run Interval-Search for the query $i = [11, 14]$. Show which node you visit at each step, which branch you take and why (cite the `max` comparison), and the final result.

Exercise 14.7 (The point-stabbing query)**.** Specialize interval search to a single point: given a number p, find any interval in the tree that contains p. Show that this is just Interval-Search with the degenerate query interval $[p, p]$, and rewrite the overlap test for this case. What does the `max` pruning rule become?

Exercise 14.8 (Report all overlaps)**.** Modify interval search to return *all* k intervals overlapping a query i, not just one. Argue that a careful recursion (descending left only when $x.left.max \geq i.low$, and right only when $x.int.low \leq i.high$) finds all of them, and that its running time is $O((k+1) \lg n)$.

Exercise 14.9 (A new augmentation: subtree sum)**.** Augment a balanced BST so that each node stores the `sum` of all keys in its subtree. (a) Give the local formula and confirm it passes Theorem 14.1. (b) Give an $O(\lg n)$ operation `SUM-LESS`(k) returning the sum of all keys strictly less than k. (c) Explain how `sum` is fixed up during a left rotation.

Exercise 14.10 (Challenge: dynamic minimum-gap)**.** You maintain a dynamic set of distinct numbers in a balanced tree and want to support `MIN-GAP`, returning the smallest difference between any two adjacent numbers (in sorted order) currently in the set. Design an augmentation that supports `INSERT`, `DELETE`, and `MIN-GAP` in $O(\lg n)$. *Hint: at each node store three local summaries — the minimum key, the maximum key, and the minimum adjacent gap within the subtree — and write the formula combining a node with its two children. Check it is local.*

Exercise 14.11 (Challenge: why not store rank directly?)**.** Argue carefully that storing each node's global rank (its position in sorted order) as a field cannot be maintained in $o(n)$ time per insertion in the worst case. Then explain in one paragraph how the `size` field sidesteps this exact difficulty while still answering rank queries in $O(\lg n)$.

Part IV

Advanced Design and Analysis

Chapter 15

Dynamic Programming

So far in this book you have met two great strategies for designing algorithms. Divide and conquer chops a problem into *independent* pieces, solves each, and glues the answers together. Greedy methods (which get their own chapter next) make one locally best choice at a time and never look back. Dynamic programming sits between them, and it is, honestly, one of the most beautiful ideas in the whole subject. It is the technique you reach for when a problem can be broken into subproblems, but the subproblems *overlap* – the same little question gets asked again and again – and when the best overall answer is built out of best answers to those smaller questions.

The name is historical and a little misleading; we will untangle it later. For now, hold on to a single sentence: dynamic programming is the art of *not solving the same subproblem twice*. Everything else in this chapter is a refinement of that sentence.

Intuition

Imagine you are climbing a staircase and someone asks, "how many distinct ways can you reach step 30?" You realize that the number of ways to reach step 30 is just the number of ways to reach step 29 plus the number of ways to reach step 28 (you arrive by a final hop of one or two). The same is true for step 29, which leans on 28 and 27, and so on down. If you computed this by blind recursion you would recompute the answer for step 25 thousands of times. Dynamic programming says: compute the answer for each step *once*, write it in a little notebook, and look it up forever after. That notebook – a table of solved subproblems – is the soul of the method.

We will build the whole machine slowly, on four classic problems: cutting a steel rod into pieces, multiplying a chain of matrices, finding the longest common subsequence of two strings, and building an optimal binary search tree. By the end you will recognize the shape of a dynamic-programming problem on sight, and you will know the two mechanical ways to turn that recognition into working code.

15.1 A First Problem: Cutting a Rod

A company buys long steel rods and cuts them into shorter rods to sell. A rod of integer length n inches can be cut into pieces of integer lengths, and a piece of length i sells for a known price p_i. The prices are not proportional to length – there are wholesale and scarcity effects – so a short piece

can be surprisingly valuable. The question is simple to state and genuinely not obvious: *given a rod of length n and the price table, what is the maximum revenue r_n you can earn by cutting it up (or leaving it whole)?*

Here is the price table we will use for the entire section.

length i	1	2	3	4	5	6	7	8	9	10
price p_i	1	5	8	9	10	17	17	20	24	30

Let us warm up with tiny cases, by hand. A rod of length 1 can only be left alone: $r_1 = 1$. A rod of length 2 can be left whole for $p_2 = 5$, or cut into $1 + 1$ for $1 + 1 = 2$; the best is $r_2 = 5$. Length 3: whole gives 8; $1 + 2$ gives $1 + 5 = 6$; $1 + 1 + 1$ gives 3. Best is $r_3 = 8$. Length 4 is the first surprise: whole gives $p_4 = 9$, but $2 + 2$ gives $5 + 5 = 10$. So $r_4 = 10$, and the optimal solution is *not* to leave it whole even though a length-4 price exists. That is the whole reason the problem is interesting.

15.1.1 Finding the recursive structure

How would you reason about a rod of length n in general? Picture making the cuts left to right. Whatever the optimal cutting is, it begins with some *first* piece, of length i for some $1 \le i \le n$. That first piece earns exactly p_i. The rest of the rod, length $n - i$, is then a smaller copy of *the very same problem*: cut a rod of length $n - i$ for maximum revenue. We do not know which first length i is best, so we try them all and keep the winner.

Focus

This gives the central recurrence for rod cutting:

$$r_n \;=\; \max_{1 \le i \le n} \big(p_i + r_{n-i} \big), \qquad r_0 = 0.$$

In words: the best revenue for length n equals the best, over all choices of first-piece length i, of "sell the first piece for p_i, then optimally cut the remaining $n - i$ inches." The base case $r_0 = 0$ says an empty rod earns nothing.

This recurrence already exposes the two properties that make a problem suitable for dynamic programming. The first we call *optimal substructure*: the optimal solution to the whole problem contains within it optimal solutions to subproblems (the leftover rod is cut optimally, never wastefully). The second is *overlapping subproblems*: when you expand the recurrence you find that r_{n-i} for the same small value shows up over and over. We will make both ideas precise in Section 15.2.

15.1.2 The naive recursion and why it explodes


If you translate the recurrence directly into code, you get this.

Algorithm 60: CUT-ROD(p, n) – naive recursion

Input: price array $p[1\,..\,n]$, rod length n
Output: maximum revenue r_n

```
if n = 0 then
    return 0
q ← −∞;
for i ← 1 to n do
    q ← max(q, p[i] + CUT-ROD(p, n − i));
return q;
```

This is correct, and for $n = 4$ it is fine. But watch what happens for larger n. To solve length 4 we call lengths 3, 2, 1, 0. To solve length 3 we again call 2, 1, 0. The same subproblems are re-solved in completely separate branches of the recursion. The recursion tree below shows the calls for $n = 4$; notice how often each node reappears.

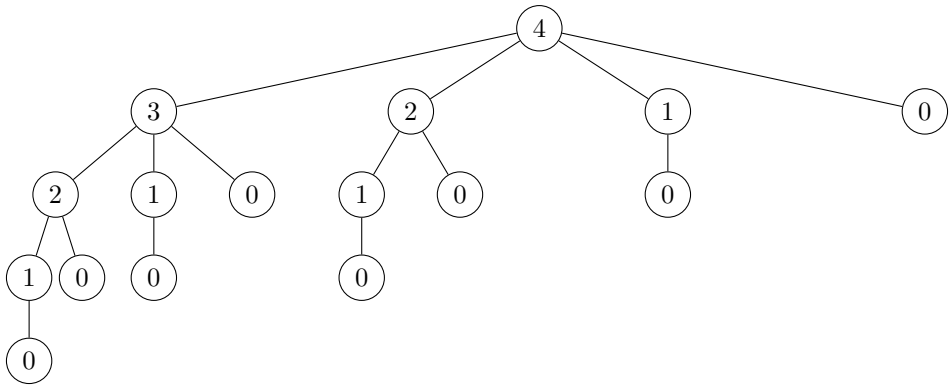

Let $T(n)$ count the number of calls CUT-ROD makes (including itself) when solving length n. The root makes one call to itself plus one call for each of $n-0, n-1, \ldots, 1$, i.e. to lengths 0 through $n-1$:

$$T(n) = 1 + \sum_{j=0}^{n-1} T(j), \qquad T(0) = 1.$$

A little unrolling shows $T(n) = 2^n$. (Check: $T(0) = 1$, $T(1) = 1+T(0) = 2$, $T(2) = 1+T(0)+T(1) = 4$, $T(3) = 8$.) The work doubles with every extra inch. That is catastrophic – length 40 would take a trillion calls – and the cause is pure waste: we keep re-deriving answers we already found.

Common trap

A natural first reaction is "this exponential blowup is fundamental to the problem." It is not. The blowup is an artifact of the *recursion*, not of the *problem*. There are only $n + 1$ distinct subproblems (r_0 through r_n). Any algorithm that solves each distinct subproblem once is already polynomial. Dynamic programming is precisely the discipline of arranging that.

15.1.3 Memoization: the notebook fix

The smallest possible change repairs the disaster. Keep an array $r[0\,..\,n]$, initialized to "unknown" (we use $-\infty$ as a sentinel). Before solving a subproblem, check the array; if the answer is already

there, return it. After solving it, store it. This top-down caching is called *memoization* (yes, no "r" – as in writing a *memo*).


Algorithm 61: MEMOIZED-CUT-ROD(p, n)

Input: price array $p[1..n]$, length n
Output: maximum revenue r_n

```
1  let r[0..n] be a new array, all entries ← −∞;
2  return MCR-AUX(p, n, r);
3  procedure MCR-AUX(p, n, r);
4  if r[n] ≥ 0 then
5      return r[n] ;                                   // already solved
6  if n = 0 then
7      q ← 0
8  else
9      q ← −∞;
10     for i ← 1 to n do
11         q ← max(q, p[i] + MCR-AUX(p, n − i, r));
12 r[n] ← q;
13 return q;
```

Now each subproblem is genuinely solved once; subsequent requests are one-line lookups. There are $n+1$ subproblems, and solving subproblem j does $O(j)$ work in its loop, so the total is $\sum_{j=0}^{n} O(j) = O(n^2)$. We went from 2^n to n^2 by adding one array and one early-return.

The picture below makes the saving visible. On the left is the exploding recursion tree of the naive call; on the right is what memoization (or tabulation) actually computes – the *subproblem graph*, with one node per distinct length and an edge $j \to j'$ whenever solving j consults j'. The tree has 2^n nodes; the graph has only $n + 1$.



The subproblem graph for $n = 4$: five nodes, a handful of edges. Each node is solved once. Compare the 16-node recursion tree above.

15.1.4 Tabulation: filling the table bottom-up

There is a second, often tidier way to get the same effect. Instead of recursing top-down and caching, go *bottom-up*: solve the smallest subproblem first, then the next, building up. This is called *tabulation*. For rod cutting, solve r_0, then r_1, then r_2, and so on; by the time you reach r_n every value you need is already sitting in the table.

Algorithm 62: BOTTOM-UP-CUT-ROD(p, n)

Input: price array $p[1..n]$, length n
Output: maximum revenue r_n

```
let r[0..n] be a new array;
r[0] ← 0;
for j ← 1 to n do
    q ← −∞;
    for i ← 1 to j do
        q ← max(q, p[i] + r[j − i]);
    r[j] ← q;
return r[n];
```

The two nested loops make the $O(n^2)$ cost transparent: the inner loop runs j times for each j, and $\sum_{j=1}^{n} j = \frac{n(n+1)}{2} = \Theta(n^2)$.

Algorithm lab

Let us run BOTTOM-UP-CUT-ROD on the price table, by hand, for $n = 8$. We fill $r[0]$ through $r[8]$, each time trying every first-piece length i from 1 to j and recording the best $p_i + r[j-i]$.

j	best split tried	value	$r[j]$
0	—	—	0
1	$p_1 + r_0 = 1 + 0$	1	1
2	$p_2 + r_0 = 5 + 0$	5	5
3	$p_3 + r_0 = 8 + 0$	8	8
4	$p_2 + r_2 = 5 + 5$	10	10
5	$p_2 + r_3 = 5 + 8$	13	13
6	$p_6 + r_0 = 17 + 0$	17	17
7	$p_1 + r_6 = 1 + 17$ or $p_6 + r_1 = 17 + 1$	18	18
8	$p_2 + r_6 = 5 + 17$	22	22

Trace $j = 7$ carefully, since it has a tie. We try $p_1 + r_6 = 18$, $p_2 + r_5 = 5 + 13 = 18$, $p_3 + r_4 = 8 + 10 = 18$, $p_4 + r_3 = 9 + 8 = 17$, $p_5 + r_2 = 10 + 5 = 15$, $p_6 + r_1 = 17 + 1 = 18$, $p_7 + r_0 = 17$. The maximum is 18, and several splits achieve it. The table does not care which – it stores only the value 18. Reconstructing *a* set of cuts is the next subsection.

15.1.5 Reconstructing the actual cuts

The table gives you the best *revenue*, but a customer wants to know *where to cut*. The standard trick is to record, alongside each $r[j]$, the first-piece length that achieved the maximum. We store it in a second array $s[j]$.

Algorithm 63: EXTENDED-BOTTOM-UP-CUT-ROD(p, n)

Input: price array $p[1..n]$, length n
Output: revenue array r and choice array s

```
let r[0..n] and s[1..n] be new arrays;   r[0] ← 0;
for j ← 1 to n do
    q ← −∞;
    for i ← 1 to j do
        if q < p[i] + r[j − i] then
            q ← p[i] + r[j − i];
            s[j] ← i;
    r[j] ← q;
return (r, s);
```

To print the cuts for a rod of length n, peel off $s[n]$, then recurse on the remainder $n - s[n]$:

Algorithm 64: PRINT-CUT-ROD-SOLUTION(p, n)

```
let (r, s) ← EXTENDED-BOTTOM-UP-CUT-ROD(p, n);
while n > 0 do
    print s[n];
    n ← n − s[n];
```

For our table, s comes out as $s = [1, 2, 3, 2, 2, 6, 1, 2]$ for $j = 1..8$. For $n = 8$: $s[8] = 2$, print 2, go to 6; $s[6] = 6$, print 6, go to 0. So the cut list is $2 + 6$, earning $5 + 17 = 22$. Confirmed against the table.

Why this matters

Rod cutting is a toy, but its skeleton – "the best first move plus the best solution to what remains" – is exactly the structure of resource-allocation problems that run the world: how to slice a fixed advertising budget across channels, how to pack a knapsack of cargo, how to break a paragraph into lines of justified text (the algorithm behind TEX's beautiful line breaking is dynamic programming), and how to schedule jobs for maximum profit. Learn the skeleton once and you see it everywhere.

15.2 The Elements of Dynamic Programming

Step back. We solved one problem; now let us name the parts so we can find them in the next problem fast. Every dynamic-programming algorithm is built from the same four moving pieces.

Focus

The four-step recipe for designing a DP:

1. **Characterize the structure** of an optimal solution: what is the "last choice" that splits a problem into subproblems?
2. **Define the value** of an optimal solution recursively (write the recurrence, including

base cases).

3. **Compute that value**, usually bottom-up into a table (or top-down with memoization).
4. **Reconstruct** an optimal solution from recorded choices (only if you need the solution itself, not just its value).

For step 3 to be possible at all, the problem must have two properties. They are the litmus test for "can I use DP here?"

15.2.1 Optimal substructure

Definition 15.1 (Optimal substructure)**.** A problem has *optimal substructure* if an optimal solution to the problem contains within it optimal solutions to subproblems.

In rod cutting, once you commit to a first piece of length i, the rest of the rod *must* be cut optimally – if it were not, you could replace that part with a better cutting and improve the whole, contradicting optimality. This cut-and-paste argument is how you prove optimal substructure in general: *assume* the subpart is suboptimal, *paste* in a better subpart, and derive a better global solution than the supposedly optimal one. A contradiction means the subpart was optimal all along.

Common trap

Not every problem has optimal substructure, and the failures are instructive. Consider *unweighted longest simple path* in a graph. A longest simple path from u to v need not decompose into a longest simple path from u to some intermediate w plus one from w to v – stitching two longest paths can revisit a vertex and break simplicity. (Shortest paths, by contrast, do have optimal substructure, which is why Dijkstra and friends exist.) Always *check* the property; do not assume it.

15.2.2 Overlapping subproblems

Definition 15.2 (Overlapping subproblems)**.** A problem has *overlapping subproblems* if a recursive solution revisits the same subproblem repeatedly, rather than always generating fresh ones.

This is what divide-and-conquer problems usually *lack*: when you split an array for merge sort, the left and right halves are disjoint and never share sub-instances, so caching buys nothing. Dynamic programming pays off precisely when the subproblem space is small but the recursion keeps wandering back into it. For rod cutting the space had size $n+1$ yet the naive recursion made 2^n calls; that gap of "few distinct subproblems, many repeated visits" is the signature you are hunting for.

Intuition

A clean way to see whether DP applies: draw the *subproblem graph*. Put one node per distinct subproblem, and an edge from A to B if solving A directly needs the answer to B. For rod cutting this is a little chain $r_n \to r_{n-1} \to \cdots \to r_0$ with extra forward edges. The number of nodes is the number of distinct subproblems; the number of edges bounds the total work. Bottom-up tabulation is just a topological-order sweep of this graph. Memoization is a depth-

first traversal that caches. If the graph is small and acyclic, you win.

15.2.3 Memoization versus tabulation

We have now seen both implementation styles. They compute the same answers and have the same asymptotic cost; the choice is about taste and a few practical trade-offs.

	Memoization (top-down)	**Tabulation (bottom-up)**
Control flow	recursion + cache	loops fill a table
Order solved	on demand, lazily	every subproblem, in order
Skips unused subproblems	yes	no (unless you are clever)
Recursion overhead	yes (stack frames)	none
Easy to add "window" space saving	harder	easier
Best when	subproblem space sparse, or recurrence awkward	all subproblems needed, order clear

Focus

A useful default: *think* with the top-down recurrence (it mirrors how you reason), then *write* bottom-up tabulation when every subproblem is needed (it is faster and avoids deep recursion). Reach for memoization when only a sparse slice of the table is actually visited, or when figuring out the correct bottom-up filling order is genuinely fiddly.

History and connection

The term "dynamic programming" was coined by Richard Bellman in the 1950s at RAND. "Programming" meant planning/tabulation (as in "linear programming"), not coding; "dynamic" was chosen, by Bellman's own amused account, partly because it sounded impressive and was hard for a budget-skeptical Secretary of Defense to object to. The underlying idea – Bellman's *principle of optimality* – is exactly our optimal substructure. This chapter maps to CLRS Chapter 15 in the 3rd edition and Chapter 14 in the 4th edition; the rod-cutting opener, matrix-chain, LCS, and optimal BST examples all follow CLRS, which you should read next for the rigorous treatment and additional problems.

15.3 Matrix-Chain Multiplication

Here is a problem where the DP is not over "length" but over *parenthesizations*, and it shows off optimal substructure beautifully.

You are given a chain of matrices $A_1, A_2, \ldots, A_n$ to multiply together. Matrix multiplication is associative – you may group the product any way you like and get the same matrix – but the *cost* of computing it depends enormously on the grouping. Multiplying a $p \times q$ matrix by a $q \times r$ matrix using the standard algorithm costs $p \cdot q \cdot r$ scalar multiplications. So the question is: *how should you parenthesize the chain to minimize the total number of scalar multiplications?*

Example 15.1 (Why grouping matters)**.** Take three matrices with dimensions $A_1 : 10 \times 100$, $A_2 : 100 \times 5$, $A_3 : 5 \times 50$. Two groupings:

$$((A_1A_2)A_3): \quad 10 \cdot 100 \cdot 5 + 10 \cdot 5 \cdot 50 = 5000 + 2500 = 7500,$$

$$(A_1(A_2A_3)): \quad 100 \cdot 5 \cdot 50 + 10 \cdot 100 \cdot 50 = 25000 + 50000 = 75000.$$

Same answer matrix, but one grouping is *ten times* cheaper. With a long chain the gap can be astronomical.

We describe the chain by its dimension sequence $p_0, p_1, \ldots, p_n$, where matrix A_k has dimensions $p_{k-1} \times p_k$. (Consecutive matrices share a dimension, which is what makes them multipliable.) In the example, $p = \langle 10, 100, 5, 50 \rangle$.

15.3.1 The recurrence

What is the "last choice" here? Any full parenthesization of $A_i \cdots A_j$ splits, at the very top level, into a left group $A_i \cdots A_k$ and a right group $A_{k+1} \cdots A_j$ for some split point k with $i \le k < j$. The two groups produce a $p_{i-1} \times p_k$ matrix and a $p_k \times p_j$ matrix, and the final multiply costs $p_{i-1}\, p_k\, p_j$. Let $m[i, j]$ be the minimum number of scalar multiplications to compute $A_i \cdots A_j$. Then:

Focus

$$m[i,j] = \begin{cases} 0 & \text{if } i = j, \\ \min\limits_{i \le k < j} \Big(m[i,k] + m[k+1,j] + p_{i-1}\, p_k\, p_j \Big) & \text{if } i < j. \end{cases}$$

A single matrix costs nothing. Otherwise, try every split point k, pay for the best way to build each side plus the cost of the final multiply, and keep the minimum.


Optimal substructure: if the optimal parenthesization splits at k, then its left subchain must itself be optimally parenthesized (cut-and-paste again: a cheaper left grouping would cheapen the whole, contradiction). And the subproblems overlap massively – $m[2, 4]$, say, is needed by many different larger chains.

How many distinct subproblems are there? One for each pair $i \le j$, which is $\binom{n}{2} + n = \Theta(n^2)$. Solving each tries up to n split points, so the total is $\Theta(n^3)$. (For comparison, the number of distinct parenthesizations is the Catalan number, which grows like $4^n/n^{1.5}$ – so brute force is hopeless, and DP turns it polynomial.)

15.3.2 Filling the table by chain length

The base cases ($i = j$) sit on the diagonal of the table. Each $m[i, j]$ depends on entries with *shorter* chains ($m[i, k]$ and $m[k + 1, j]$ each span fewer matrices). So the safe filling order is by increasing chain length $\ell = j - i + 1$, from 2 up to n.

Geometrically, we fill the upper-triangular table one *diagonal* at a time, starting from the main diagonal of zeros and moving toward the lone top-right corner that holds the final answer. The diagram shows the order for $n = 6$: the shaded cell $m[i, j]$ pulls from the row to its left ($m[i, k]$) and the column below it ($m[k + 1, j]$), both of which lie on already-completed diagonals.

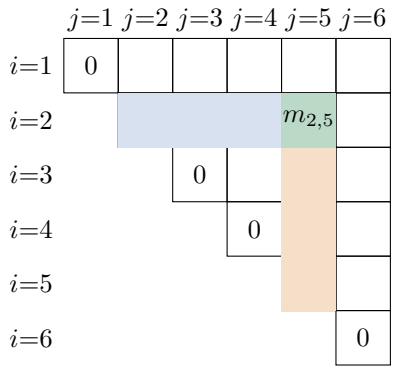

Computing $m_{2,5}$ (green): the minimum scans split points $k = 2, 3, 4$, each combining a blue cell from row 2 ($m_{2,k}$) with an orange cell from column 5 ($m_{k+1,5}$). Both lie on shorter-chain diagonals, hence already known.

Algorithm 65: MATRIX-CHAIN-ORDER(p)

Input: dimension sequence $p[0\,..\,n]$ (so there are n matrices)
Output: cost table m and split table s

```
for i ← 1 to n do
    m[i, i] ← 0
for ℓ ← 2 to n do
    for i ← 1 to n − ℓ + 1 do
        j ← i + ℓ − 1;
        m[i, j] ← ∞;
        for k ← i to j − 1 do
            q ← m[i, k] + m[k + 1, j] + p[i − 1] · p[k] · p[j];
            if q < m[i, j] then
                m[i, j] ← q;
                s[i, j] ← k;
return (m, s);
```

The three nested loops each run $O(n)$ times, giving $O(n^3)$ time, and the two tables use $\Theta(n^2)$ space.

Algorithm lab

Let us trace a real chain of six matrices, the classic CLRS instance, with

$$p = \langle 30,\ 35,\ 15,\ 5,\ 10,\ 20,\ 25 \rangle,$$

so $A_1 : 30 \times 35$, $A_2 : 35 \times 15$, $A_3 : 15 \times 5$, $A_4 : 5 \times 10$, $A_5 : 10 \times 20$, $A_6 : 20 \times 25$. We fill $m[i, j]$ diagonal by diagonal.

Length 1 (the diagonal): all $m[i, i] = 0$.

Length 2: each is a single multiply.

$$m[1,2] = p_0 p_1 p_2 = 30 \cdot 35 \cdot 15 = 15750,$$
$$m[2,3] = 35 \cdot 15 \cdot 5 = 2625,$$
$$m[3,4] = 15 \cdot 5 \cdot 10 = 750,$$
$$m[4,5] = 5 \cdot 10 \cdot 20 = 1000,$$
$$m[5,6] = 10 \cdot 20 \cdot 25 = 5000.$$

Length 3: try both split points. For $m[1,3]$: k=1 gives $0 + 2625 + 30 \cdot 35 \cdot 5 = 2625 + 5250 = 7875$; k=2 gives $15750 + 0 + 30 \cdot 15 \cdot 5 = 15750 + 2250 = 18000$. Minimum 7875 at k=1. Working out the rest of this diagonal the same way gives $m[2,4] = 4375$ (k=3), $m[3,5] = 2500$ (k=3), $m[4,6] = 3500$ (k=5).
Length 4 and up: continuing the sweep produces $m[1,4] = 9375$, $m[2,5] = 7125$, $m[3,6] = 5375$, then $m[1,5] = 11875$, $m[2,6] = 10500$, and finally the answer $m[1,6] = 15125$. The full lower-triangular table:

	j=1	2	3	4	5	6
i=1	0	15750	7875	9375	11875	**15125**
2		0	2625	4375	7125	10500
3			0	750	2500	5375
4				0	1000	3500
5					0	5000
6						0

The optimal cost is $m[1,6] = 15125$ scalar multiplications.

15.3.3 Reconstructing the parenthesization

The split table $s[i,j]$ records the best top-level split for each subchain. For the trace above, $s[1,6] = 3$, meaning the best top split of $A_1 \cdots A_6$ is $(A_1A_2A_3)(A_4A_5A_6)$. Recursing with s inside each side ($s[1,3] = 1$, $s[4,6] = 5$) yields the full grouping

$$\big((A_1(A_2A_3))\,((A_4A_5)A_6)\big).$$

Algorithm 66: PRINT-OPTIMAL-PARENS(s, i, j)

```
1 if i = j then
2 |   print "A_i"
3 else
4 |   print "(";
5 |   PRINT-OPTIMAL-PARENS(s, i, s[i, j]);
6 |   PRINT-OPTIMAL-PARENS(s, s[i, j] + 1, j);
7 |   print ")";
```

Walking question

Here is something to chew on while you walk. We filled the matrix-chain table by increasing chain length. Could we instead have filled it by, say, increasing i then increasing j? Try to articulate exactly which earlier entries $m[i, j]$ depends on, and convince yourself that *any* ordering that computes all shorter chains before longer ones works – but column-by-column left-to-right does *not*. The lesson generalizes: in a DP, the legal filling orders are exactly the topological orders of the subproblem dependency graph.

15.4 Longest Common Subsequence

Switch domains entirely: from numbers to strings. A *subsequence* of a string is what you get by deleting zero or more characters without reordering the rest. So `ace` is a subsequence of `abcde` (delete `b` and `d`), but `aec` is not (wrong order). Given two sequences X and Y, the *longest common subsequence* (LCS) problem asks for the longest string that is a subsequence of *both*.

Why this matters

This is not academic. The Unix `diff` utility, the "changes" view in every code review tool, and Git's merge machinery all rest on a close cousin of LCS: to show how two files differ, find their longest common subsequence of lines and call everything else an insertion or a deletion. Bioinformatics uses the same idea to align DNA or protein sequences and measure how related two organisms are. When you see a green-and-red diff, you are looking at dynamic programming.

15.4.1 The recurrence

Let $X = \langle x_1, \ldots, x_m \rangle$ and $Y = \langle y_1, \ldots, y_n \rangle$. Write X_i for the prefix $\langle x_1, \ldots, x_i \rangle$. Define $c[i, j]$ as the length of an LCS of the prefixes X_i and Y_j. Think about the *last* characters x_i and y_j.

- If $x_i = y_j$, that shared character can end an LCS. Use it, and the problem reduces to the LCS of the shorter prefixes X_{i-1} and Y_{j-1}, plus one. So $c[i, j] = c[i-1, j-1] + 1$.
- If $x_i \neq y_j$, the two last characters cannot both be the final character of a common subsequence. At least one of them is unused, so the answer is the better of dropping x_i (use $c[i-1, j]$) or dropping y_j (use $c[i, j-1]$): $c[i, j] = \max(c[i-1, j],\ c[i, j-1])$.

Focus

$$c[i,j] = \begin{cases} 0 & \text{if } i = 0 \text{ or } j = 0, \\ c[i-1, j-1] + 1 & \text{if } i, j > 0 \text{ and } x_i = y_j, \\ \max\big(c[i-1, j],\ c[i, j-1]\big) & \text{if } i, j > 0 \text{ and } x_i \neq y_j. \end{cases}$$

The base case says: the LCS of anything with an empty prefix is empty.

The subproblems are all pairs (i, j) with $0 \leq i \leq m$, $0 \leq j \leq n$: that is $(m+1)(n+1) = \Theta(mn)$ of them, each solved in $O(1)$, giving $\Theta(mn)$ time and space.

15.4.2 Filling the table and tracking arrows

We fill c row by row. Alongside, we keep a direction array $b[i, j]$ recording which case won – a diagonal arrow $\nwarrow$ when characters matched, an up arrow $\uparrow$ when we took $c[i-1, j]$, a left arrow $\leftarrow$ when we took $c[i, j-1]$. These arrows let us walk back and read off the actual subsequence.

Algorithm 67: LCS-Length(X, Y)

Input: sequences $X[1\,..\,m]$ and $Y[1\,..\,n]$
Output: length table c and direction table b

```
for i ← 0 to m do
    c[i, 0] ← 0
for j ← 0 to n do
    c[0, j] ← 0
for i ← 1 to m do
    for j ← 1 to n do
        if x_i = y_j then
            c[i, j] ← c[i − 1, j − 1] + 1;    b[i, j] ← " ↖ ";
        else
            if c[i − 1, j] ≥ c[i, j − 1] then
                c[i, j] ← c[i − 1, j];    b[i, j] ← " ↑ ";
            else
                c[i, j] ← c[i, j − 1];    b[i, j] ← " ← ";
return (c, b);
```

Algorithm lab

Let us compute the LCS of $X =$ `ABCBDAB` and $Y =$ `BDCABA` ($m = 7$, $n = 6$), the textbook example. Here is the completed c table with the winning arrows shown inside matched cells. Rows are indexed by X, columns by Y; row/column 0 are the all-zero borders.

		B	D	C	A	B	A
	j=0	1	2	3	4	5	6
i=0	0	0	0	0	0	0	0
A 1	0	0	0	0	↖1	1	↖1
B 2	0	↖1	1	1	1	↖2	2
C 3	0	1	1	↖2	2	2	2
B 4	0	↖1	1	2	2	↖3	3
D 5	0	1	↖2	2	2	3	3
A 6	0	1	2	2	↖3	3	↖4
B 7	0	↖1	2	2	3	↖4	4

The bottom-right cell $c[7, 6] = 4$ is the length of the LCS. Let us read *one* such subsequence by tracing arrows backward from $c[7, 6]$.

15.4.3 Reading the subsequence backward


Starting at (m, n), follow b: on a $\nwarrow$ (match) record the character and step diagonally to $(i-1, j-1)$; on $\uparrow$ step to $(i-1, j)$; on $\leftarrow$ step to $(i, j-1)$. Stop when you fall off the table. Because we collect characters from the back, reverse the collected string at the end.

Algorithm 68: PRINT-LCS(b, X, i, j)

```
if i = 0 or j = 0 then
    return
if b[i, j] = "↖" then
    PRINT-LCS(b, X, i − 1, j − 1);
    print x_i;
else if b[i, j] = "↑" then
    PRINT-LCS(b, X, i − 1, j);
else
    PRINT-LCS(b, X, i, j − 1);
```

Tracing our table from $(7, 6)$ with the $\geq$ tie-break baked into LCS-LENGTH: the cell $(7, 6)$ is an $\uparrow$, so we step to $(6, 6)$, which is a $\nwarrow$ match emitting $x_6 =$ `A`; continuing, the $\nwarrow$ cells we meet emit, in back-to-front order, $x_6 =$ `A`, then $x_4 =$ `B`, then $x_3 =$ `C`, then $x_2 =$ `B`. Reversed, that is `BCBA` – a length-4 common subsequence of both strings.

The backward walk is easiest to see as a staircase through the grid. Diagonal steps (on a $\nwarrow$) emit a character; up and left steps just move without emitting. The four diagonal steps below are the four characters of the LCS.



Reconstructing the LCS: the red path walks backward from the bottom-right corner; green cells are the $\nwarrow$ matches. Collected back-to-front they give `A`,`B`,`C`,`B`; reversed into forward order this spells `BCBA`.

(Other LCSs of length 4 exist, e.g. `BDAB` and `BCAB`; ties in the max are broken by our $\geq$ choice, so the algorithm prints one specific witness.)

Common trap

A subsequence is not a substring. `BCBA` need not appear as a contiguous block in either string – and indeed it does not. Students routinely conflate the two. "Subsequence" allows gaps; "substring" (also called factor) does not. The longest common *substring* problem is a different,

also-DP problem with a slightly different recurrence.

Cost summary

Longest common subsequence.

- Subproblems: $(m+1)(n+1)$, one per prefix pair.
- Time: $\Theta(mn)$ (constant work per cell).
- Space: $\Theta(mn)$ for the full table; reducible to $\Theta(\min(m,n))$ if you only need the *length* (keep two rows), though reconstructing the subsequence itself in linear space needs the cleverer Hirschberg divide-and-conquer trick.

15.5 Optimal Binary Search Trees

Our last example combines DP with a data structure you met earlier, and it introduces a twist: we optimize not for the worst case but for the *expected* case, given how often each key is searched.

Suppose you are building a binary search tree to hold n keys $k_1 < k_2 < \cdots < k_n$ that will be searched many times. You know the *probability* p_i that a search is for key k_i. (We will also allow "misses" – searches for values between the keys – with probabilities $q_0, \ldots, q_n$, where q_j is the chance of a search landing in the gap just after k_j; the d_j "dummy" leaves represent these gaps. All the p's and q's together sum to 1.) A search for a key costs one comparison per node visited, i.e. its depth plus one. So the *expected search cost* of a tree T is

$$E[\text{cost}] = \sum_{i=1}^{n} \big(\text{depth}_T(k_i) + 1\big) p_i \; + \; \sum_{j=0}^{n} \big(\text{depth}_T(d_j) + 1\big) q_j .$$

We want the tree – the shape – that minimizes this. A balanced tree is *not* always best: if one key is searched 90% of the time, you want it at the root even if that unbalances everything.

Intuition

Frequency should pull popular keys toward the root, the way a well-organized toolbox keeps the tools you grab constantly right on top, even if that means a lopsided layout. A balanced BST minimizes the worst-case depth; an *optimal* BST minimizes the average depth weighted by how often you actually reach for each key. Those are different goals, and the gap between them is exactly what this section computes.

15.5.1 The recurrence

What is the last choice? The *root*. In an optimal BST for keys $k_i, \ldots, k_j$, some key k_r (with $i \le r \le j$) sits at the root; its left subtree holds $k_i, \ldots, k_{r-1}$ and its right subtree holds $k_{r+1}, \ldots, k_j$, and – optimal substructure! – each subtree must itself be an optimal BST for its keys.

Here is the subtlety that makes this more than a copy of matrix-chain. When you make k_r the root, every key and dummy in both subtrees drops *one level deeper*, so each of their costs increases by its

own probability. The total extra cost when you combine subtrees over the key range $i..j$ is the sum of all probabilities in that range. Define

$$w(i,j) = \sum_{\ell=i}^{j} p_\ell + \sum_{\ell=i-1}^{j} q_\ell,$$

the total weight of subtree $i..j$. Let $e[i,j]$ be the expected cost of an optimal BST built on keys $k_i, \ldots, k_j$. Then:

Focus

$$e[i,j] = \begin{cases} q_{i-1} & \text{if } j = i-1 \text{ (empty range, just a dummy leaf)}, \\ \min\limits_{i \le r \le j} \Big(e[i,r-1] + e[r+1,j] + w(i,j) \Big) & \text{if } i \le j. \end{cases}$$

Choose each possible root r; pay for the optimal left and right subtrees and add $w(i,j)$ for sinking every node one level. The $w(i,j)$ term does *not* depend on r, but it must be added once for whichever root you pick.

Notice w obeys an easy recurrence of its own: $w(i,j) = w(i,j-1) + p_j + q_j$, so we can tabulate all the weights cheaply rather than re-summing.

15.5.2 The algorithm

The structure mirrors matrix-chain exactly: fill by increasing range length, try every root, keep the minimum, record the chosen root in $root[i,j]$ for reconstruction.

Algorithm 69: OPTIMAL-BST(p, q, n)

Input: key probabilities $p[1\,..\,n]$, dummy probabilities $q[0\,..\,n]$
Output: expected-cost table e and $root$ table

```
for i ← 1 to n + 1 do
    e[i, i − 1] ← q_{i−1};   w[i, i − 1] ← q_{i−1};
for ℓ ← 1 to n do
    for i ← 1 to n − ℓ + 1 do
        j ← i + ℓ − 1;
        e[i, j] ← ∞;
        w[i, j] ← w[i, j − 1] + p_j + q_j;
        for r ← i to j do
            t ← e[i, r − 1] + e[r + 1, j] + w[i, j];
            if t < e[i, j] then
                e[i, j] ← t;   root[i, j] ← r;
return (e, root);
```

Three nested loops over $O(n)$ ranges and $O(n)$ roots give $\Theta(n^3)$ time and $\Theta(n^2)$ space – same budget as matrix-chain. (A clever observation by Knuth that the optimal root moves monotonically lets you shave this to $O(n^2)$, but we leave that as a pointer.)

Algorithm lab


Take the small CLRS instance with $n = 5$ keys:

$$p = \langle 0.15,\ 0.10,\ 0.05,\ 0.10,\ 0.20\rangle, \quad q = \langle 0.05,\ 0.10,\ 0.05,\ 0.05,\ 0.05,\ 0.10\rangle.$$

(Check: the p's sum to 0.60, the q's to 0.40, total 1.00.)
Start with the empty ranges: $e[i, i-1] = q_{i-1}$, so $e[1,0]$=0.05, $e[2,1]$=0.10, $e[3,2]$=0.05, $e[4,3]$=0.05, $e[5,4]$=0.05, $e[6,5]$=0.10.
Length 1. For a single key k_i the only root is $r = i$, so $e[i,i] = e[i,i-1] + e[i+1,i] + w[i,i]$ with $w[i,i] = p_i + q_{i-1} + q_i$. For k_1: $w[1,1] = 0.15 + 0.05 + 0.10 = 0.30$, and $e[1,1] = 0.05 + 0.10 + 0.30 = 0.45$. Doing all five: $e[1,1]$=0.45, $e[2,2]$=0.40, $e[3,3]$=0.25, $e[4,4]$=0.30, $e[5,5]$=0.50.
Longer ranges. Sweeping $\ell = 2, 3, 4, 5$, trying every root and keeping the minimum, fills out the upper triangle. The final answer for the whole set of keys is

$$e[1,5] = 2.75,$$

the expected number of comparisons per search in the optimal tree, with $root[1,5] = 2$. Recursing on the *root* table ($root[1,1] = 1$, $root[3,5] = 5$, $root[3,4] = 4$, $root[4,4] = 4$, ...) reconstructs the optimal shape: k_2 at the root, with k_1 as its left child and k_5 heading the right subtree.



The optimal BST for the lab instance: heavy keys k_2, k_5 ride high.

Formal

Correctness of the optimal-BST recurrence. We claim $e[i,j]$ as defined equals the minimum expected cost over all BSTs on keys $k_i, \ldots, k_j$. Proof sketch by induction on the range length $j - i + 1$. *Base:* an empty range is a single dummy leaf d_{i-1} at depth 0 within the subtree, contributing q_{i-1}; the formula gives exactly that. *Step:* any BST on $k_i, \ldots, k_j$ has *some* root k_r; its subtrees are BSTs on $k_i, \ldots, k_{r-1}$ and $k_{r+1}, \ldots, k_j$. By optimal substructure (cut-and-paste), an optimal overall tree uses optimal subtrees, whose costs are $e[i, r-1]$ and $e[r+1, j]$ by the induction hypothesis. Rooting at k_r deepens every node of both subtrees by one, adding $w(i,j)$ to the cost. Minimizing over all valid roots r gives exactly the recurrence, so the computed $e[i,j]$ is optimal. ■

15.6 Stepping Back: The Shape of a DP

You have now seen four dynamic programs, and they rhyme. In each, you found a "last choice" (first piece, top-level split, last character, root) that broke the problem into independent optimal subproblems; you wrote a recurrence over a small, structured space of subproblems; you filled a table in an order respecting the dependencies; and you stored side information to reconstruct an actual solution. Internalize that rhythm and most "hard" optimization problems become a matter of *finding the right last choice*.

Cost summary

Costs at a glance.

Problem	Subproblems	Time	Space
Rod cutting	$\Theta(n)$	$\Theta(n^2)$	$\Theta(n)$
Matrix-chain	$\Theta(n^2)$	$\Theta(n^3)$	$\Theta(n^2)$
LCS	$\Theta(mn)$	$\Theta(mn)$	$\Theta(mn)$
Optimal BST	$\Theta(n^2)$	$\Theta(n^3)$	$\Theta(n^2)$

In every row the time is (number of subproblems) $\times$ (work per subproblem), where "work per subproblem" is the cost of evaluating the min/max over all choices.

Walking question

One last walk. Pick any optimization puzzle you have met – making change with fewest coins, the longest increasing subsequence of a list, the minimum number of edits to turn one word into another. For each, ask the three diagnostic questions: (1) What is the last choice that splits it? (2) Does an optimal solution force its subparts to be optimal (optimal substructure)? (3) Do the subproblems overlap? If all three answer yes, you can write the recurrence and the table on the spot. Try it for "fewest coins to make 47 cents with denominations $\{1, 5, 10, 25\}$" before you read the exercises.

Exercises

Exercise 15.1 (Rod cutting by hand)**.** Using the price table of Section 15.1, compute r_9 and r_{10} by extending the lab table. For each, give both the maximum revenue and an optimal list of cuts. (Hint: you already have r_0 through r_8.)

Exercise 15.2 (A cheaper-is-better price table)**.** Suppose every price equals the length: $p_i = i$ for all i. Argue that for any n the optimal revenue is exactly n and that *every* way of cutting is optimal. What does the choice array s look like, and why does that match your argument?

Exercise 15.3 (Memoization order)**.** In Memoized-Cut-Rod, suppose you call it once for $n = 6$. List the subproblems in the order their final values are *stored* in r. How does this order compare to the bottom-up order $0, 1, 2, \ldots, 6$? Explain the difference in one sentence.

Exercise 15.4 (Matrix-chain grouping)**.** For the dimension sequence $p = \langle 5, 10, 3, 12, 5, 50, 6\rangle$ (six matrices), fill the m and s tables and state the optimal cost and parenthesization. Show at least the

length-2 and length-3 diagonals in full.

Exercise 15.5 (Why not greedy?)**.** A tempting greedy heuristic for matrix-chain is "always first multiply the adjacent pair whose product is cheapest." Find a chain of three or four matrices where this greedy rule produces a *suboptimal* parenthesization, and explain which DP principle it violates.

Exercise 15.6 (LCS trace)**.** Compute an LCS of $X = \texttt{10010101}$ and $Y = \texttt{010110110}$ (treat each digit as a character). Build the full c table, then read off one LCS by tracing arrows. State its length.

Exercise 15.7 (LCS and edit distance)**.** The *edit distance* between two strings is the minimum number of single-character insertions and deletions (no substitutions) to turn one into the other. Show that if X and Y have lengths m and n and an LCS of length L, then this edit distance equals $m + n - 2L$. (Hint: characters not in the common subsequence must be deleted from X or inserted into Y.)

Exercise 15.8 (Counting subsequences)**.** Modify the LCS recurrence to instead *count* the number of distinct longest common subsequences. Write the recurrence for a table $N[i, j]$ that stores this count alongside $c[i, j]$, being careful about the case $c[i-1, j] = c[i, j-1]$.

Exercise 15.9 (Optimal BST sanity check)**.** For the lab instance in Section 15.5, verify by hand that the single-key cost $e[3, 3] = 0.25$ is correct: write out $w[3, 3]$ and the empty-range costs it combines, and confirm the arithmetic. Then explain in words why the optimal tree places k_2 (probability 0.10) at the root rather than the more probable k_5 (probability 0.20).

Exercise 15.10 (Balanced is not optimal)**.** Construct probabilities p_1, p_2, p_3 (with all $q_j = 0$) for three keys so that the optimal BST is a degenerate "stick" (each node has at most one child) rather than the balanced tree with k_2 at the root. State your probabilities and the expected costs of both trees to justify it.

Exercise 15.11 (Subproblem graph)**.** Draw the subproblem dependency graph for LCS of two length-3 strings (a 4×4 grid of nodes $c[i, j]$). Put an edge from each node to every node it directly depends on. How many edges leave a typical interior node, and how does that number explain the $\Theta(mn)$ running time?

Exercise 15.12 (Coins, challenge)**.** Given coin denominations $d_1 < d_2 < \cdots < d_k$ and a target amount A, design a DP that computes the fewest coins summing to exactly A (or reports impossibility). State the recurrence, the table size, the running time, and how to reconstruct which coins to use. Then run it for $A = 47$ and denominations $\{1, 5, 10, 25\}$.

Chapter 16

Greedy Algorithms

In the previous chapter you learned to be patient. Dynamic programming is a philosophy of distrust: it never commits to a choice until it has quietly considered all the alternatives, stored their answers in a table, and compared them. It is thorough, careful, and – let us be honest – a little slow. This chapter is about the opposite temperament. A *greedy* algorithm is impatient. At every step it grabs the choice that looks best *right now*, locks it in forever, and never looks back. No table. No reconsideration. No hedging.

The astonishing thing is that, for certain problems, this reckless-sounding strategy produces a provably *optimal* answer. Not "pretty good." Not "good enough." Optimal – as good as the exhaustive, table-building dynamic program would have found, but in a fraction of the time and memory. The hard and beautiful part of this chapter is learning to tell *when* greed works and when it quietly betrays you, because greed is also one of the easiest ways in all of algorithms to write something that is fast, plausible, and wrong.

We will build the intuition slowly. We will solve a scheduling problem twice – once the greedy way and once the dynamic-programming way – and watch them agree. We will distill the two structural properties every greedy proof leans on. We will build Huffman's optimal compression code from scratch, byte by byte. And at the end we will peek at *matroids*, the deep abstraction that explains, in one clean theorem, an entire family of problems where greed is guaranteed to win.

16.1 A first taste: choosing activities

Let us start with a problem you can feel in your bones. You have a single shared resource – a lecture hall, a tennis court, a telescope – and a pile of requests to use it. Each request is an *activity* with a fixed start time and a fixed finish time. Two activities are *compatible* if they do not overlap in time; you cannot run two things in the hall at once. Your goal is to schedule as *many* activities as possible.

That last word matters: you are maximizing the *count* of activities, not the total time used, not anyone's preference. Just the number of non-overlapping talks you can squeeze in.

Here is a concrete set. I will give each activity an index i, a start s_i, and a finish f_i, and – this will matter shortly – I have sorted them by *finish time*.

i	1	2	3	4	5	6	7	8	9	10	11
s_i	1	3	0	5	3	5	6	8	8	2	12
f_i	4	5	6	7	9	9	10	11	12	14	16

This is the exact instance CLRS uses, and it is worth keeping on a sticky note. Activity 1 runs during the time interval $[1, 4)$, activity 2 during $[3, 5)$, and so on. Activities 1 and 2 overlap (both want the room around time 3.5), so they are *not* compatible. Activities 1 and 4 do not overlap ($[1, 4)$ and $[5, 7)$), so they are.

Intuition

Picture the day as a long horizontal timeline and each activity as a horizontal bar laid across it from its start to its finish. "Compatible" just means "these two bars do not touch." You want to lay down as many bars as you can without any two overlapping. Stack them on a single shelf; how many fit?

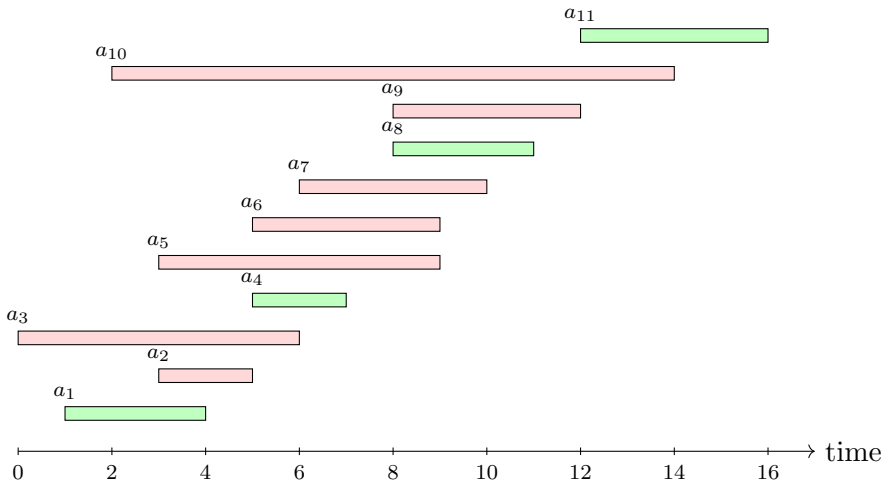


Figure 16.1: The eleven activities as bars. Highlighted in green is one optimal selection $\{a_1, a_4, a_8, a_{11}\}$ of four mutually non-overlapping activities. No selection of five exists.

16.1.1 The greedy guess

Faced with this, your instinct might be to try several rules of thumb. "Pick the shortest activity first, to leave room for others." "Pick the activity that overlaps the fewest others." "Pick the one that starts earliest." Some of these sound reasonable. Most of them are *wrong* – we will break them in a moment. But one rule, almost suspiciously simple, is provably right:

Focus

The greedy rule for activity selection. Among all activities still compatible with what you have chosen, always pick the one that *finishes earliest*. Then throw away everything that conflicts with it and repeat.

Why finish-earliest? Because finishing early is exactly the property that leaves *the most room* for everything that comes after. When you commit to the activity with the smallest finish time, you

free up the resource as soon as possible, maximizing the remaining open timeline for future choices. That is the whole idea in one sentence. The rest of this section makes it precise.

Because we sorted by finish time, the greedy rule becomes almost trivial to execute: scan left to right, and grab an activity whenever it does not collide with the last one you grabbed.

Algorithm lab

Let us trace it on the table. We pick a_1 (finish 4) – it is first, so take it. Now scan for the next activity whose *start* is ≥ 4. Activity 2 starts at 3: too early, skip. Activity 3 starts at 0: skip. Activity 4 starts at $5 \geq 4$: **take it**. Last finish is now 7. Scan on: a_5 starts 3, a_6 starts 5, a_7 starts 6 – all < 7, skip. a_8 starts $8 \geq 7$: **take it**. Last finish 11. a_9 starts 8, a_{10} starts 2 – skip. a_{11} starts $12 \geq 11$: **take it**. We end with $\{a_1, a_4, a_8, a_{11}\}$ – four activities. Go back to Figure 16.1 and confirm the green bars never touch.

16.1.2 The algorithm

Here is the routine. We assume the activities arrive already sorted so that $f_1 \leq f_2 \leq \cdots \leq f_n$; if they are not, sorting first costs an extra $O(n \log n)$, which we will fold into the analysis.

Algorithm 70: GREEDY-ACTIVITY-SELECTOR(s, f, n)

Input: Start times $s[1\,..\,n]$ and finish times $f[1\,..\,n]$, with f nondecreasing.
Output: A maximum-size set A of mutually compatible activities.

```
1 A ← {a_1} ;                          // the first to finish is always safe to take
2 k ← 1 ;                              // k = index of the last activity we added
3 for m ← 2 to n do
4     if s[m] ≥ f[k] then
5         A ← A ∪ {a_m} ;              // a_m starts after a_k finishes
6         k ← m ;                      // a_m is now the most recent
7 return A
```

The loop runs once per activity and does a constant amount of work each time, so the loop is $\Theta(n)$. The only state it carries between iterations is k, the index of the last chosen activity – a single integer. That economy of state is a hallmark of greedy algorithms.

Cost summary

If the input is already sorted by finish time, GREEDY-ACTIVITY-SELECTOR runs in $\Theta(n)$ time and $\Theta(1)$ extra space (beyond the output). If you must sort first, the total is $\Theta(n \log n)$, dominated by the sort. Contrast this with a dynamic-programming solution to the same problem, which fills an $n \times n$ table in $\Theta(n^3)$ or, carefully, $\Theta(n^2)$ time. Greed is not just simpler here – it is asymptotically faster.

16.1.3 Why is it correct? The exchange argument

A fast wrong answer is worthless, so we owe you a proof. The standard tool for greedy correctness is the *exchange argument*: take any optimal solution, and show you can edit it – swap one element for

the greedy choice – without making it worse. If the greedy choice can always be substituted in, then there is an optimal solution that *contains* the greedy choice, so greed loses nothing by taking it.

Theorem 16.1 (Greedy is optimal for activity selection)**.** *Let a_1 be the activity with the earliest finish time. Then some maximum-size set of mutually compatible activities includes a_1.*

Formal

Proof. Let A be any maximum-size compatible set, and let a_j be the activity in A with the earliest finish time. If $a_j = a_1$ we are done. Otherwise, form $A' = (A \setminus \{a_j\}) \cup \{a_1\}$: throw out a_j, throw in a_1. We claim A' is still a valid set of the same size.
Same size: we removed one activity and added one, so $|A'| = |A|$.
Still compatible: every activity in A other than a_j starts no earlier than a_j finishes (since a_j finishes earliest in A and they are all pairwise compatible). But a_1 finishes *no later* than a_j, because a_1 has the globally earliest finish time, i.e. $f_1 \leq f_j$. So everything that did not conflict with a_j cannot conflict with a_1 either – a_1 vacates the room even sooner. Hence A' is compatible.
So A' is a maximum-size compatible set containing a_1. ■

The theorem handles the *first* choice. What about the rest? Once a_1 is fixed, every remaining activity that conflicts with it is useless, and the problem shrinks to "select a maximum set among the activities that start at or after f_1." That is a smaller instance of the *exact same problem*. So we apply the theorem again to the subproblem, and again, and again. This is an induction: each greedy choice is safe, and what remains is a smaller version of the original. That structure – *a greedy choice plus one subproblem* – is the skeleton of every argument in this chapter.

Common trap

It is tempting to "prove" greedy works by checking it on a few examples and declaring victory. Do not. The whole danger of greed is that wrong greedy rules *also* pass small examples. The shortest-first rule, for instance, gives the right answer on plenty of inputs – and then quietly fails. Only an exchange argument or an explicit counterexample settles the question.

16.1.4 Breaking the wrong rules

To respect how subtle this is, let us actually *kill* two plausible alternative rules with counterexamples.

Shortest-duration-first. Consider three activities: $[1, 5)$, $[4, 6)$, $[5, 9)$. The shortest is $[4, 6)$ (length 2), so a shortest-first greedy grabs it – and now *both* other activities conflict with it, so it ends with one activity. But $[1, 5)$ and $[5, 9)$ are compatible: the optimal answer is two. Shortest-first loses.

Fewest-conflicts-first. You can build instances (CLRS Exercise 16.1-3 walks you through one) where always taking the activity that overlaps the fewest others also fails. The earliest-finish rule is special; near-misses are not good enough.

Walking question

Take a walk and try to *break* the earliest-finish rule. Sketch activities on a timeline and hunt for a case where finishing earliest leads you astray. You will not find one – but the act of failing to find one, and feeling *why* it always leaves the most room behind, will cement the

proof better than reading it twice.

16.2 Greedy versus dynamic programming

You have now met two paradigms that both solve optimization problems by combining solutions to subproblems. They look similar on the page. When do you reach for which? The honest answer is that greedy is a *special case* of dynamic programming that you are allowed to use only when the problem is unusually well-behaved. Let us pin down what "well-behaved" means.

Both paradigms require **optimal substructure**: an optimal solution to the whole contains optimal solutions to its subproblems. That is shared. The thing greedy demands *on top* is the **greedy-choice property**.

Focus

Greedy-choice property. You can assemble a globally optimal solution by making a *locally* optimal (greedy) choice and then solving the *one* subproblem that remains. Crucially, the greedy choice is made *before* the subproblem is solved – it does not depend on the answers to any subproblems.

That last sentence is the whole difference. In dynamic programming, the choice at the top *depends* on having already computed the subproblem answers – you compare alternatives and pick the best, which is why you need the table. In a greedy algorithm, you can decide the top-level move *up front*, with no table at all, because a simple local rule ("earliest finish") is guaranteed to be part of some optimal solution.

16.2.1 Two coins, one lesson

The cleanest way to feel the boundary is the *coin-change* problem. You owe someone n cents and want to pay with the fewest coins.

With U.S. denominations $\{1, 5, 10, 25\}$, the greedy rule – "hand over the largest coin that fits, repeat" – is optimal. To make 30 cents: a quarter (25), then a nickel (5). Two coins. You cannot do better.

Now change the coin system to $\{1, 3, 4\}$ and make 6 cents. Greedy grabs the 4, then needs 2 more, which costs two 1s: total *three* coins $(4 + 1 + 1)$. But the optimal answer is $3 + 3$: *two* coins. Greed failed. Nothing about the algorithm changed – only the data did – and the greedy-choice property silently evaporated.

Common trap

The coin-change lesson is the most important warning in this chapter: whether greed is correct depends on the *structure of the input*, not on the shape of the algorithm. The same greedy code is optimal on $\{1, 5, 10, 25\}$ and wrong on $\{1, 3, 4\}$. You must *prove* the greedy-choice property for your specific problem; you cannot inherit it.

For the bad coin system, dynamic programming saves you. Let $C(n)$ be the fewest coins to make n

cents. Then

$$C(n) = \min_{d \in \{1,3,4\},\ d \le n} \big(1 + C(n-d)\big), \qquad C(0) = 0,$$

which tries *every* first coin and keeps the best – exactly the "distrust" DP buys you. Tracing $\{1, 3, 4\}$ at $n = 6$: $C(6) = \min(1 + C(5), 1 + C(3), 1 + C(2))$. With $C(3) = 1$ (one 3-coin), the middle option gives $1 + 1 = 2$. DP finds the $3 + 3$ answer that greed missed.

Filling the table from $n = 0$ upward makes the rescue concrete. Each cell is one plus the smallest reachable cell a single coin away, and Figure 16.2 shows the row in full.

n	0	1	2	3	4	5	6
$C(n)$	0	1	2	1	1	2	2

Figure 16.2: The coin-change DP table for the system $\{1, 3, 4\}$. Cell $C(6) = 2$ (green) is reached from $C(3) = 1$ (blue) by adding a single 3-coin, recovering the $3 + 3$ solution that greedy never considers.

Dynamic programming	**Greedy**
Choice depends on subproblem solutions; must compute them first.	Choice is made first, by a local rule, before any subproblem is solved.
Considers many choices, keeps the best (a min or max).	Commits to one choice and never revisits it.
Needs a table of size proportional to the subproblems.	Needs $O(1)$ extra state.
Always correct when there is optimal substructure.	Correct only when the greedy-choice property *also* holds.

Table 16.1: Greedy is DP with the freedom to choose first and never look back – a freedom you only earn by proving the greedy-choice property.

Why this matters

This distinction is not academic. A router deciding which packet to forward next, an operating system picking which job to run, a cache deciding what to evict – these systems make *millions* of decisions per second and cannot afford to build a DP table each time. They run greedy rules. Knowing when a greedy rule is provably optimal (and when it is merely a fast heuristic you must test) is the difference between a system that is correct by design and one that is correct by luck.

16.2.2 A recipe for designing greedy algorithms

CLRS distills the design process into a sequence of steps; here it is in plain language.

1. **Cast the problem as a choice.** Reframe "find the optimal solution" as "make one choice now, then you are left with a single subproblem to solve."
2. **Guess a greedy choice.** Propose a local rule – earliest finish, largest coin, smallest weight – that seems to make the most progress.

3. **Prove the greedy-choice property.** Show, usually by an exchange argument, that there is an optimal solution containing your greedy choice.
4. **Prove optimal substructure.** Show that after the greedy choice, an optimal solution to the rest combines with the choice to give a global optimum.
5. **Stitch it together by induction.** Greedy choice plus optimal subproblem, repeated, yields a global optimum.

Steps 3 and 4 are where the real work and the real danger live. Skip them and you have a fast algorithm of unknown correctness.

16.3 Huffman codes: compression by greed

Now we earn the chapter. Huffman coding is the greedy algorithm you have used today without knowing it – it sits inside ZIP, JPEG, MP3, PNG, and the deflate that compresses half the web. It answers a deceptively simple question: given how often each symbol appears in a file, what is the *shortest* possible way to encode it?

16.3.1 Why variable-length codes

Suppose a file uses only six characters, a through f, with these frequencies (in thousands of occurrences):

character	a	b	c	d	e	f
frequency (thousands)	45	13	12	16	9	5

A *fixed-length* code gives every character the same number of bits. With six characters you need 3 bits each ($2^3 = 8 \geq 6$). Total cost: $(45 + 13 + 12 + 16 + 9 + 5) \times 3 = 100{,}000 \times 3 = 300{,}000$ bits.

But that is wasteful. The character a appears nine times as often as f, yet both get three bits. Surely a deserves a *shorter* codeword and f can afford a longer one. This is the idea of a *variable-length* code: frequent symbols get short codes, rare symbols get long ones. The catch is that the decoder, reading a stream of bits with no separators, must never get confused about where one codeword ends and the next begins.

Focus

Prefix-free codes. A code is *prefix-free* (CLRS just says "prefix code") if no codeword is a prefix of another. This single property lets the decoder parse the stream unambiguously: read bits until they spell a codeword, emit that character, and start fresh. No codeword can be the start of another, so there is never a fork in the road.

For example, if $a =$ `0` and $b =$ `101` and $c =$ `100`, then reading `0101100` is unambiguous: `0` is a, then `101` is b, then `100` is c. There was never a moment of doubt, because no codeword began with another.

16.3.2 Codes as binary trees

The clean way to picture a prefix-free code is as a *binary tree*. Each leaf is a character. The path from the root to a leaf spells its codeword: go left, write `0`; go right, write `1`. Because characters live only at *leaves*, no character's path can pass *through* another character – which is exactly the prefix-free condition, drawn as a picture.

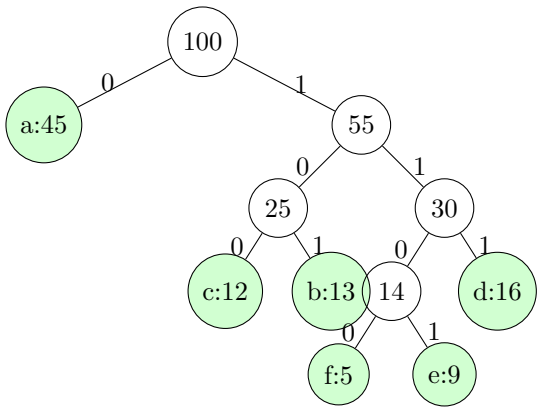


Figure 16.3: The optimal Huffman tree for the six-character file. Internal nodes show the combined frequency of their subtree; leaves (green) show character and frequency. Codewords: $a =$ `0`, $c =$ `100`, $b =$ `101`, $f =$ `1100`, $e =$ `1101`, $d =$ `111`.

The number of bits to encode the whole file is the sum, over all characters x, of (frequency of x) $\times$ (depth of x's leaf), because the depth is exactly the codeword length. Define the cost of a tree T as

$$B(T) = \sum_{x} f(x)\, d_T(x),$$

where $f(x)$ is the frequency and $d_T(x)$ is the leaf depth. Minimizing $B(T)$ over all prefix-free codes is precisely the compression problem. For the tree in Figure 16.3:

$$B = 45(1) + 13(3) + 12(3) + 16(3) + 9(4) + 5(4) = 45 + 39 + 36 + 48 + 36 + 20 = 224.$$

So this code uses 224,000 bits versus the fixed code's 300,000 – a 25% saving, conjured purely by giving a one bit and exiling f to four.

16.3.3 Huffman's greedy idea

How do we *find* the cheapest tree? Huffman's insight, from a 1951 term paper, is greedy and gorgeous. Build the tree *bottom-up*. The two rarest characters should sit deepest in the tree (longest codewords), so *merge them first*: make them siblings under a new internal node whose frequency is the sum of theirs. Now treat that merged node as a single "character" with the combined frequency, and repeat. Each step fuses the two lowest-frequency items into one, until a single tree remains.

Intuition

Think of it as a tournament run in reverse. The two *weakest* (rarest) players are knocked out first – buried deepest in the bracket – by being paired off and replaced by a team carrying their

combined weight. You keep pairing the two weakest survivors. The last team standing is the root, and the depth at which a character was eliminated is the length of its codeword. Rare characters get eliminated early (deep), frequent ones survive late (shallow). Exactly what you want.

The natural data structure for "repeatedly extract the two smallest" is a *min-priority queue* (a min-heap, from the chapter on heaps and priority queues). Here is the algorithm.

Algorithm 71: HUFFMAN(C)

Input: A set C of n characters, each with a frequency $f(c)$.
Output: The root of an optimal prefix-free coding tree.

```
n ← |C|;
Q ← a min-priority queue on C, keyed by frequency;
for i ← 1 to n − 1 do
    allocate a new node z;
    x ← EXTRACT-MIN(Q) ;                          // rarest remaining
    y ← EXTRACT-MIN(Q) ;                          // second rarest
    z.left ← x;   z.right ← y;
    f(z) ← f(x) + f(y);
    INSERT(Q, z) ;                    // the merged node rejoins the pool
return EXTRACT-MIN(Q) ;                  // the one node left is the root
```

16.3.4 A full build, traced

Let us run HUFFMAN on our six characters by hand. Start with the queue holding all six, sorted by frequency:

$$Q = [\, f{:}5,\ e{:}9,\ c{:}12,\ b{:}13,\ d{:}16,\ a{:}45 \,].$$

Step 1. Extract the two smallest: f:5 and e:9. Merge them under a new node z_1 with frequency $5 + 9 = 14$. Reinsert:

$$Q = [\, c{:}12,\ b{:}13,\ z_1{:}14,\ d{:}16,\ a{:}45 \,].$$

Step 2. Extract c:12 and b:13. Merge under z_2 with frequency 25. Reinsert:

$$Q = [\, z_1{:}14,\ d{:}16,\ z_2{:}25,\ a{:}45 \,].$$

Step 3. Extract z_1:14 and d:16. Merge under z_3 with frequency 30. Reinsert:

$$Q = [\, z_2{:}25,\ z_3{:}30,\ a{:}45 \,].$$

Step 4. Extract z_2:25 and z_3:30. Merge under z_4 with frequency 55. Reinsert:

$$Q = [\, a{:}45,\ z_4{:}55 \,].$$

Step 5. Extract a:45 and z_4:55. Merge under z_5 with frequency 100. This is the root.

$$Q = [\, z_5{:}100 \,].$$

Five merges for six leaves – exactly the $n-1=5$ iterations the loop predicts. And the tree we just built, with z_5 as root, a hanging off it at depth 1, and f, e buried at depth 4, is *precisely* Figure 16.3. The greedy "merge the two rarest" rule reconstructed the optimal code without ever comparing it to an alternative.

Figure 16.4 lays the five steps out as a queue that shrinks by one item per merge: read each row left to right, watch the two smallest keys disappear and their sum reappear, until a single root key of 100 remains.

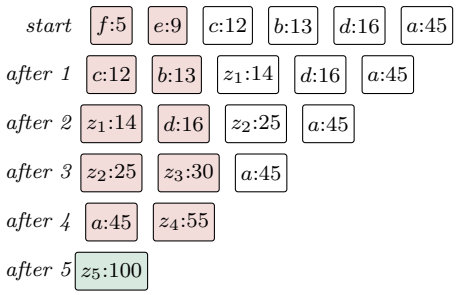


Figure 16.4: The priority queue across the five Huffman merges, one row per state. In each row the two red nodes are the smallest keys; they are extracted and merged, and their sum appears in the next row in sorted position (e.g. f:5 and e:9 become z_1:14). The queue shrinks by one each step until only the root z_5:100 (green) remains.

Algorithm lab

Re-trace the build but keep a running list of codewords. After step 1, f and e each have a tentative last bit ($f = \texttt{0...}$, $e = \texttt{1...}$); every later merge *prepends* a bit to everything in the merged subtree. Watch a stay a lone leaf until the very last merge, earning it the single bit `0`. This "prepend on merge" view is why the rarest characters accumulate the most bits.

16.3.5 Complexity

The loop runs $n-1$ times. Each iteration does two Extract-Mins and one Insert on a heap of size at most n, and each heap operation costs $O(\log n)$. Building the initial heap costs $O(n)$. So the recurrence is just a sum:

$$T(n) = \underbrace{O(n)}_{\text{build heap}} + (n-1) \cdot \underbrace{O(\log n)}_{\text{per merge}} = O(n \log n).$$

Cost summary

Huffman runs in $O(n \log n)$ time using a binary min-heap, where n is the number of distinct characters. With a more clever structure (keeping the input pre-sorted and using two queues), it can be done in $O(n \log n)$ for the sort plus $O(n)$ for the merging – but the heap version is the one to remember. The output tree has n leaves and $n-1$ internal nodes, so it uses $O(n)$ space.

16.3.6 Why Huffman is optimal

We must prove that greed wins here too. The proof rests on two lemmas, and both are exchange arguments in disguise – the same move that worked for activity selection.

Lemma 16.1 (The greedy choice is safe)**.** *Let x and y be the two characters with lowest frequency. Then there is an optimal prefix-free code in which x and y have codewords of the same length that differ only in the last bit – that is, x and y are sibling leaves at the* maximum depth *of the tree.*

Formal

Proof sketch. Take any optimal tree T. Let b and c be two sibling leaves at maximum depth (a deepest internal node has two leaf children – it must, or the tree could be improved). Without loss of generality $f(b) \le f(c)$, and since x, y are the two least frequent overall, $f(x) \le f(b)$ and $f(y) \le f(c)$.
Now *swap* x with b to form T', then swap y with c to form T''. The change in cost from the first swap is

$$B(T) - B(T') = \big(f(b) - f(x)\big)\big(d_T(b) - d_T(x)\big) \ge 0,$$

because $f(b) \ge f(x)$ (the swapped-in character is rarer) and $d_T(b) \ge d_T(x)$ (b was at maximum depth). So the swap does not *increase* cost. The same holds for the second swap. Hence $B(T'') \le B(T)$, but T was optimal, so $B(T'') = B(T)$ and T'' is also optimal – and in it, x and y are deepest siblings. ■

The intuition behind that inequality is the heart of the whole algorithm: *putting a rarer character deeper never costs more.* If a frequent character sits deep and a rare one sits shallow, swapping them can only help, because you pay the deep (long) codeword on fewer occurrences. The least frequent characters *belong* at the bottom.

Lemma 16.2 (Optimal substructure)**.** *Let z be the merged node replacing siblings x and y, with $f(z) = f(x) + f(y)$. If T' is an optimal tree for the reduced alphabet (with z in place of x, y), then the tree T obtained from T' by re-splitting z into its children x and y is optimal for the original alphabet.*

Formal

Proof idea. The two trees' costs differ by a fixed, choice-independent amount. When we split z at depth d into x and y at depth $d+1$, the cost changes by

$$B(T) - B(T') = \big(f(x) + f(y)\big)(d{+}1) - \big(f(x) + f(y)\big)d = f(x) + f(y),$$

a constant. So minimizing $B(T')$ is the same as minimizing $B(T)$: an optimal reduced tree gives an optimal full tree. Combining this with Lemma 16.1 (the merge was a safe choice) and inducting on the alphabet size proves HUFFMAN optimal. ■

History and connection

David Huffman invented this in 1951 as a graduate student at MIT, when his professor Robert Fano offered students a choice between a final exam and a term paper on finding the most efficient code. Fano and Shannon themselves had only a *top-down* heuristic (Shannon–Fano coding) that was not always optimal. Huffman's bottom-up greedy idea was provably best –

and he nearly gave up and took the exam before it struck him. This material is CLRS Chapter 16 in the third edition and Chapter 15 in the fourth (Greedy Algorithms); activity selection and Huffman codes are its two centerpieces.

16.4 Why does greed work? A glimpse of matroids

You now have two greedy success stories and one greedy failure (the $\{1, 3, 4\}$ coins). It would be wonderful to have a *single* theorem that says, "If your problem has this abstract shape, greed is guaranteed optimal – proof not required." Remarkably, such a theorem exists for a large family of problems. The abstraction is called a *matroid*, and it is one of the most satisfying ideas in combinatorics.

16.4.1 The pattern behind the proofs

Look back at activity selection and Huffman. Both proofs had the same two moving parts: a notion of a partial solution you can *extend* (a compatible set you can add to; a tree you can keep merging), and an *exchange* step (swap the greedy choice in without loss). A matroid is the algebraic skeleton that guarantees exactly those two parts behave.

Definition 16.1 (Matroid)**.** A *matroid* is a pair $M = (S, \mathcal{I})$ where S is a finite set and $\mathcal{I}$ is a collection of subsets of S – the *independent* sets – satisfying:

1. **(Nonempty)** $\emptyset \in \mathcal{I}$.
2. **(Hereditary)** If $A \in \mathcal{I}$ and $B \subseteq A$, then $B \in \mathcal{I}$. Every subset of an independent set is independent.
3. **(Exchange)** If $A, B \in \mathcal{I}$ and $|A| < |B|$, then there is some element $x \in B \setminus A$ such that $A \cup \{x\} \in \mathcal{I}$. A smaller independent set can always be grown using an element from any larger one.

The word "independent" is borrowed from linear algebra, and that is the canonical example: let S be a set of vectors and let $\mathcal{I}$ be the collection of *linearly independent* subsets. Property 2 holds (a subset of independent vectors is independent), and property 3 is a classic fact of linear algebra (a smaller independent set can be extended toward any basis). That is where the whole vocabulary – "independent," "rank," "basis" – comes from.

Intuition

Forget the formal axioms for a second. A matroid is a setting where "a valid partial solution" (an independent set) has two friendly properties: you can always shrink it and stay valid (hereditary), and if your partial solution is smaller than someone else's, you can always borrow one of their elements to grow yours (exchange). Those are exactly the two things an exchange-argument correctness proof needs. The matroid is the proof, pre-packaged.

16.4.2 The theorem that earns greed

In a *weighted* matroid, each element $x \in S$ carries a positive weight $w(x)$, and we want a *maximum-weight* independent set. The greedy algorithm is the obvious one: sort elements by weight, heaviest first, and add each to your set if it keeps the set independent.

Algorithm 72: GREEDY(M, w)

Input: A matroid $M = (S, \mathcal{I})$ and a weight function w.
Output: A maximum-weight independent set A.

```
A ← ∅;
sort S into nonincreasing order by weight w;
for each x ∈ S taken in that order do
    if A ∪ {x} ∈ I then
        A ← A ∪ {x};
return A
```

Theorem 16.2 (Greedy is optimal on any matroid)**.** *If $M = (S, \mathcal{I})$ is a matroid with positive weights w, then* GREEDY(M, w) *returns a maximum-weight independent set.*

We will not grind through the full proof – it is essentially the exchange argument from the activity-selection section, lifted to the abstract setting, and CLRS gives it in full. But notice what this theorem *buys* you. Activity selection, minimum spanning trees (the next chapter's Kruskal algorithm is greedy on the *graphic matroid* of a graph), and a host of scheduling problems are all *instances* of weighted matroids. For each, you do not need to invent a new exchange argument: you check the three matroid axioms once, and Theorem 16.2 hands you optimality for free.

Why this matters

This is the payoff of abstraction. The first time you prove a greedy algorithm correct, it feels like a clever, problem-specific trick. The matroid theorem reveals that it was never a trick – it was an instance of a structural law. When you later meet Kruskal's minimum-spanning-tree algorithm and someone says "it's just greedy on the graphic matroid," you will understand both *why* it is correct and why you do not have to re-derive its proof from scratch. Good abstractions turn many proofs into one.

Remark 16.1. Not every greedy success is a matroid. Huffman coding, for instance, is not most naturally phrased as a weighted matroid; its optimality genuinely needs the two lemmas we proved. Matroids capture a *large* class of greedy-friendly problems, not *all* of them. A broader generalization (greedoids, and the theory of submodular functions) pushes further, but those are stories for a later book. The honest summary: matroids explain a great deal of greed, and where they apply, they apply cleanly.

Walking question

Here is a matroid to verify on your walk. Let S be the edges of a connected graph, and let $\mathcal{I}$ be all subsets of edges that contain *no cycle* (the "forests"). Convince yourself the hereditary property holds – remove an edge from a forest and it is still a forest. The exchange property is subtler: if forest A has fewer edges than forest B, why must some edge of B extend A without making a cycle? Sketch a small graph and feel it out. You will have discovered the *graphic*

matroid, the structure that makes Kruskal's algorithm correct – a full chapter early.

16.5 Summary

Greed is the strategy of committing to the locally best choice and never looking back. It is dramatically faster and simpler than dynamic programming *when it works* – and it works exactly when a problem has the greedy-choice property on top of optimal substructure. The recurring proof technique is the *exchange argument*: show any optimal solution can be edited to contain the greedy choice without getting worse.

We saw greed succeed for activity selection (earliest finish wins, $\Theta(n)$ after sorting) and for Huffman coding (merge the two rarest, $O(n \log n)$), and we saw it fail for coin change under the $\{1, 3, 4\}$ system, where dynamic programming was required. Finally, matroids gave us a glimpse of *why* greed works at all: for a whole family of problems, three abstract axioms guarantee optimality, turning many separate exchange proofs into a single theorem you can reuse. Keep that lens; you will meet matroids again, in disguise, when minimum spanning trees arrive in the next chapter.

Exercises

Exercise 16.1. Run Greedy-Activity-Selector by hand on the activities (given as (s, f) pairs) $(1, 3)$, $(2, 5)$, $(4, 7)$, $(1, 8)$, $(5, 9)$, $(8, 10)$, $(9, 11)$. List the chosen set and its size. (Remember to sort by finish time first.)

Exercise 16.2. Give a concrete counterexample showing that the "pick the activity with the earliest *start* time" greedy rule can be suboptimal. Three activities are enough.

Exercise 16.3. For U.S. coins $\{1, 5, 10, 25\}$, prove that the greedy "largest coin first" rule is optimal for making any amount n. (Hint: argue about how many of each smaller coin an optimal solution can contain before it would be cheaper to use a larger one.)

Exercise 16.4. Find the smallest amount n for which greedy coin change fails under the system $\{1, 4, 6\}$, and exhibit both the greedy answer and a strictly better one.

Exercise 16.5. Build the Huffman tree for the frequencies a:10, b:15, c:30, d:16, e:29. Show the priority queue after each merge, draw the final tree, and compute the total encoded length $B(T)$.

Exercise 16.6. Suppose all n characters have *equal* frequency. What shape does the Huffman tree take, and what are the codeword lengths? Relate your answer to the fixed-length code. (Consider separately the cases where n is and is not a power of two.)

Exercise 16.7. Prove that in any optimal prefix-free code, the character with the highest frequency has a codeword of length 1 *or* shares the minimum codeword length with at least one other character. (Hint: exchange argument, mirroring Lemma 16.1.)

Exercise 16.8. A Huffman tree is built greedily; suppose instead you (wrongly) always merge the two *most* frequent items. On the six-character file of this chapter, build that tree and compute its cost. By how many bits does it lose to the optimal 224,000?

Exercise 16.9 (Matroid check)**.** Let S be a finite set and let $\mathcal{I}$ consist of all subsets of S of size at most k, for a fixed integer k. Verify that $(S, \mathcal{I})$ satisfies the three matroid axioms. (This is the *uniform matroid*; greedy on it just picks the k heaviest elements.)

Exercise 16.10 (Challenge)**.** You have n tasks; task i takes time t_i on a single machine. If you run them in some order, the *completion time* of a task is when it finishes, and you want to minimize the *sum* of all completion times. Propose a greedy rule, and prove it optimal with an exchange argument. (Hint: think about which task you would never want to schedule last.)

Exercise 16.11 (Challenge)**.** Prove the optimal-substructure direction for activity selection rigorously: if A_{ij} denotes a maximum-size compatible set drawn entirely from the activities that start after a_i finishes and finish before a_j starts, and if $a_k \in A_{ij}$, show that $A_{ij} = A_{ik} \cup \{a_k\} \cup A_{kj}$ where A_{ik} and A_{kj} are themselves optimal for their sub-ranges. Use a cut-and-paste argument.

Chapter 17

Amortized Analysis

Here is a puzzle that has tripped up many a careful student. You build a data structure. You measure one operation on it and find that, every so often, that operation is *slow* – it does a big burst of work, touching a large chunk of the structure. Naively, you write down "worst case per operation: expensive" and conclude the whole sequence of operations must be expensive. And yet, when you actually run a long sequence of these operations and divide the total time by the number of operations, the average comes out *cheap* – often constant. The slow operations are real, but they are so rare, and the cheap ones so common, that the expensive bursts are paid for by everything around them.

Amortized analysis is the toolkit for making that intuition precise. It lets you charge a sequence of operations honestly – not by pretending the slow ones do not happen, but by spreading their cost over the many cheap operations that surround them. The remarkable payoff is that you can prove a tight bound on the *total* cost of a sequence without ever invoking probability. There is no "on average over random inputs" here. The bound holds for *every* sequence, in the worst case. That is what makes amortized analysis so trustworthy, and so beautiful.

This chapter slows the whole idea down. We will meet three techniques – the *aggregate*, *accounting*, and *potential* methods – and we will run each of them on the same three running examples until they feel like old friends: a stack with a bulk-pop operation, a binary counter you increment, and a dynamic table that doubles itself when it fills up. By the end you will be able to look at a bursty data structure and say, calmly, "yes, but amortized it's constant time, and here is the proof."

17.1 Worst case per operation versus worst case per sequence

Let us be very careful about what question we are even asking, because the whole subject lives or dies on this distinction.

When we analyzed sorting, we asked: what is the worst-case running time of *one call* to this algorithm on an input of size n? That is a perfectly good question. But data structures are different. You rarely call a data structure once. You hammer it with a long *sequence* of operations – push, push, pop, push, search, insert, delete – and what you actually care about is the total time for the whole sequence.

Intuition

Think about your monthly expenses. Most days you spend almost nothing. But once a month the rent comes due, and that single day is enormous. If a visitor watched you on rent day, they would scream "you can't afford this lifestyle!" But you can, because you have all those cheap days to balance it out. Your *average daily spend* is modest. Amortized cost is exactly this average daily spend, computed honestly across the whole month – and crucially, computed so that it is an honest *upper bound* no matter which days the visitor happens to look at.

Here is the key definition, stated plainly.

Definition 17.1 (Amortized cost)**.** Suppose a sequence of n operations runs on a data structure and the total actual cost of the whole sequence is $T(n)$. We say each operation has *amortized cost* at most $\hat{c}$ if, for *every* such sequence,

$$T(n) \;\le\; \hat{c} \cdot n.$$

More generally we may assign different amortized costs $\hat{c}_i$ to different operations i, and the requirement is that the sum of amortized costs is an upper bound on the total actual cost: $\sum_{i=1}^{n} c_i \le \sum_{i=1}^{n} \hat{c}_i$, where c_i is the actual cost of the ith operation.

Read that last inequality slowly, because it is the heart of everything. The amortized costs are *bookkeeping numbers we invent*. We are free to choose them however we like, as long as one rule holds: their running sum must always be at least the running sum of the real costs. If we can do that, then the total amortized cost is a genuine upper bound on the total real cost, and we have permission to use the amortized cost as if it were the per-operation cost.

Focus

Amortized cost is not a measured quantity. It is an *accounting choice* that you must *justify*. The justification always reduces to one inequality: across any prefix of the sequence, total amortized cost $\ge$ total actual cost. Get that inequality and you may quote the amortized cost freely.

Common trap

Amortized is *not* average-case, and it is *not* expected. There is no randomness anywhere in this chapter. An amortized bound is a worst-case guarantee about a *sequence*; an average-case bound is a probabilistic statement about a *single* operation over random inputs. A randomized algorithm can have a great expected cost and still, on one unlucky run, blow up. An amortized bound never blows up over the sequence: it holds for every sequence, every time, with no luck involved.

We will now develop three methods that all establish bounds of this form. They are not three different facts – they prove the same kinds of theorems. They are three different *styles of argument*, and different examples feel natural in different styles. A good engineer keeps all three in the toolbox.

17.2 The aggregate method: just add it all up

The aggregate method is the bluntest and most honest of the three. You do not try to be clever about individual operations. You simply ask: across the whole sequence of n operations, what is the

total work $T(n)$? Then you divide by n and call the result the amortized cost per operation. That is it.

Intuition

The aggregate method is the "total the receipt, then split the bill evenly" approach. You do not care who ordered the lobster and who ordered the salad. You sum the entire tab and divide by the number of diners. If the total is small, the per-person share is small, even if one dish was expensive.

It sounds too simple to be useful, but for many structures the total $T(n)$ has a clean closed form that is much smaller than (worst-case-per-operation) $\times n$. Let us see this on our first running example.

17.2.1 Example: the stack with Multipop

Start with an ordinary stack. It supports two cheap operations: PUSH(S, x) puts x on top, and POP(S) removes and returns the top. Each costs 1 unit (one object moved). Now we add a third, bulkier operation.

Algorithm 73: MULTIPOP(S, k)

Input: A stack S and a count $k \geq 0$.
Output: The top $\min(k, |S|)$ elements are popped off.

```
1 while S is not empty and k > 0 do
2     POP(S);
3     k ← k − 1;
```

MULTIPOP just pops repeatedly until either it has popped k items or the stack runs dry. Its actual cost is the number of POP calls it makes, which is $\min(k, |S|)$.

Now here is the trap a naive analysis falls into. A single MULTIPOP can be expensive: if the stack holds n items and you call MULTIPOP(S, n), it does n units of work. So the worst-case cost of one operation is $\Theta(n)$. A sequence of n operations, naively bounded, looks like it could cost $n \cdot \Theta(n) = \Theta(n^2)$.

Common trap

That $\Theta(n^2)$ bound is correct – it is a valid upper bound – but it is wildly loose. It assumes *every* operation can be the expensive one. It cannot. A MULTIPOP that pops 100 items requires that 100 items were pushed earlier, and pushing them already cost 100 units. You cannot pop what you never pushed. The naive bound double-counts a constraint that the structure enforces for free.

Let us total it up honestly. Consider any sequence of n operations, each one a PUSH, POP, or MULTIPOP, starting from an empty stack. Here is the decisive observation:

Focus

Every object can be popped *at most once for each time it is pushed.* The total number of pops (counting each pop inside a MULTIPOP individually) can therefore never exceed the total

number of pushes.

How many pushes can there be in a sequence of n operations? At most n, since each operation is a single PUSH at most. So the total number of pushes is $\leq n$, and therefore the total number of pops – across all POP and MULTIPOP calls combined – is also $\leq n$. Each push costs 1 and each pop costs 1, so:

$$T(n) \;=\; (\text{total pushes}) + (\text{total pops}) \;\leq\; n + n \;=\; 2n \;=\; O(n).$$

Divide by n: the amortized cost per operation is at most $2n/n = 2 = O(1)$.

Why this matters

Stare at how much the bound improved: from a naive $\Theta(n^2)$ down to a tight $\Theta(n)$ total, just by counting pushes and pops globally instead of bounding each operation separately. The expensive MULTIPOPs are real, but they are *funded* by the pushes that came before them. This same "you can only take out what you put in" accounting underlies the analysis of countless real systems: memory allocators, log compaction, garbage collectors. Whenever work is bounded by some resource that had to be created earlier, amortization is lurking.

Algorithm lab

Trace it yourself. Start with an empty stack and run this exact sequence of 8 operations, writing down the stack and the actual cost after each: PUSH(a), PUSH(b), PUSH(c), MULTIPOP(2), PUSH(d), PUSH(e), MULTIPOP(5), PUSH(f). Add the actual costs (you should get 3 pushes then a 2-pop, 2 pushes, a 3-pop because only 3 items are present, then 1 push: $1+1+1+2+1+1+3+1 = 11$). Confirm $11 \leq 2 \cdot 8 = 16$. Notice the 5-multipop only cost 3: it could not pop what was not there.

17.2.2 Example: the binary counter

Our second running example will follow us through all three methods, so meet it now. We keep a k-bit binary counter in an array $A[0\,..\,k-1]$, where $A[0]$ is the lowest-order bit. The only operation is INCREMENT, which adds 1.

Algorithm 74: INCREMENT(A)

Input: A binary counter stored in bits $A[0\,..\,k-1]$, low bit first.
Output: A holds the value increased by 1 (modulo 2^k).

```
1 i ← 0;
2 while i < k and A[i] = 1 do
3 |   A[i] ← 0 ;                          // a carry:  flip a 1 down to 0
4 |   i ← i + 1;
5 if i < k then
6 |   A[i] ← 1 ;                            // set the lowest 0 bit to 1
```

This is just grade-school carrying in base two. To add 1, you flip the trailing run of 1s to 0s, then set the next 0 to a 1. The cost of one INCREMENT is the number of bits it flips.

How bad can one INCREMENT be? When the counter reads $0111\cdots1$ (all low bits set), incrementing flips *all* of them: up to k bit-flips. So the worst case of a single operation is $\Theta(k)$, and a naive bound on n increments is $n \cdot \Theta(k) = \Theta(nk)$. Let us see how loose that is.

The aggregate insight is to ask not "how many bits does one increment flip?" but "how many times, total, does each *individual bit* flip across n increments?" Watch the bits.

- Bit $A[0]$ flips on *every* increment: $1, 0, 1, 0, \ldots$. So it flips n times.
- Bit $A[1]$ flips on every *second* increment: it changes once for every two ticks of $A[0]$. So it flips $\lfloor n/2 \rfloor$ times.
- Bit $A[2]$ flips every *fourth* increment: $\lfloor n/4 \rfloor$ times.
- In general, bit $A[i]$ flips $\lfloor n/2^i \rfloor$ times.

Figure 17.1 makes this halving-per-column pattern visible for a small counter.

Intuition

A binary counter is a row of toggle switches geared like an odometer. The ones digit spins fast and flips constantly. The tens digit barely moves. The highest-order switch flips only on the rare grand rollover. Most of the bits are lazy. The total flipping work is dominated entirely by the fast, cheap low bits – and those are *cheap*.

value	A_3	A_2	A_1	A_0
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0

Figure 17.1: A 4-bit counter climbing $0 \to 8$. Shaded cells are the bits that flipped on that increment. The low bit A_0 flips every step; A_1 every two steps; A_2 every four; A_3 only on the big rollover at $7 \to 8$. Each column flips half as often as the one to its right – the geometric series $n + n/2 + n/4 + \cdots < 2n$ made visible.

Now add up the total number of flips across all bits:

$$T(n) \;=\; \sum_{i=0}^{k-1} \left\lfloor \frac{n}{2^i} \right\rfloor \;<\; \sum_{i=0}^{\infty} \frac{n}{2^i} \;=\; n \sum_{i=0}^{\infty} \frac{1}{2^i} \;=\; n \cdot 2 \;=\; 2n.$$

That geometric series $1 + \frac{1}{2} + \frac{1}{4} + \cdots = 2$ is doing all the heavy lifting. The total flip count over n increments is less than $2n$, so:

$$T(n) = O(n), \qquad \text{amortized cost per INCREMENT} = \frac{T(n)}{n} < 2 = O(1).$$

Why this matters

The naive bound was $\Theta(nk)$; the truth is $\Theta(n)$. The factor of k simply evaporates, because the high bits almost never move. This is the same reason that incrementing a 64-bit loop counter is effectively free even though, once in a great while, an increment ripples through dozens of carries. The geometric series is nature's way of saying "rare expensive events, summed up, cost no more than the cheap common ones."

Algorithm lab

Build the table by hand. Start at 0000 and increment a 4-bit counter 16 times back to 0000. After each increment, write the counter value and the number of bits that flipped. You should see the cost pattern $1, 2, 1, 3, 1, 2, 1, 4, 1, 2, 1, 3, 1, 2, 1, 4$. Sum it: you get 30. Check that this is the total flips $\lfloor 16/1 \rfloor + \lfloor 16/2 \rfloor + \lfloor 16/4 \rfloor + \lfloor 16/8 \rfloor = 16+8+4+2 = 30$, and that $30 < 2 \cdot 16 = 32$. Notice the "4" costs appear only at the rollovers $7 \to 8$ and $15 \to 0$ – exactly twice.

The aggregate method is wonderful when a clean global total exists. But sometimes you want to assign *different* amortized costs to different operations, or you want a more local, more flexible argument. That is where the next two methods come in.

17.3 The accounting method: prepay and bank the credit

The accounting method introduces a charming fiction: we charge each operation an amortized cost that may differ from its real cost, and we treat the difference as *currency*. If we charge an operation more than it actually costs, the surplus is stored in the data structure as *credit*. If an operation costs more than we charge it, it pays the difference by spending stored credit.

Intuition

Imagine each object in your structure carries a little prepaid debit card. When you do a cheap operation, you overcharge it slightly and load the extra onto the card. Later, when an expensive operation happens, it does not reach into your wallet – it swipes the cards that were prepaid earlier. As long as no card ever goes negative, you know the prepaid charges covered all the real work. The total you charged is then a valid upper bound on the total real cost.

The single rule that makes this rigorous:

Focus

The bank balance – total credit stored in the structure – must *never go negative*. Equivalently, at every prefix of the sequence, the total amount charged (amortized) must be at least the total real cost. If credit can never go negative, then total charged $\geq$ total spent, which is exactly Definition 17.1. The credit you store represents prepaid future work, so it makes physical sense that it cannot be negative – you cannot prepay a debt you have not funded.

The art of the accounting method is *choosing the charges*. You want simple, constant charges that nevertheless keep the bank solvent. Let us pick charges for our two examples.

17.3.1 Accounting for the stack

We assign amortized charges as follows:

- PUSH: charge 2. Real cost is 1. The extra 1 stays as credit *on the pushed object*.
- POP: charge 0. Real cost is 1. Pay the 1 with the credit sitting on the object being popped.
- MULTIPOP: charge 0. Real cost is the number of items it pops; each pop is paid by the credit on the object it removes.

Here is the invariant that keeps us honest: *every object currently on the stack carries exactly* \$1 *of credit*. Why is this maintained? When you push an object, you charged \$2: \$1 pays the real push cost, and \$1 rides onto the object. So freshly pushed objects satisfy the invariant. When you pop an object (whether via POP or inside MULTIPOP), the object carries exactly the \$1 needed to pay for its own removal. The credit is consumed precisely when the object leaves. Figure 17.2 shows the coins in action across a push burst followed by a MULTIPOP.

Intuition

Every object walks onto the stack already holding the coin it will need to walk back off. PUSH hands it that coin. Whenever it is popped – now, later, in bulk, it does not matter – it pays its own way out. No pop ever finds an empty pocket, so the bank never goes negative.

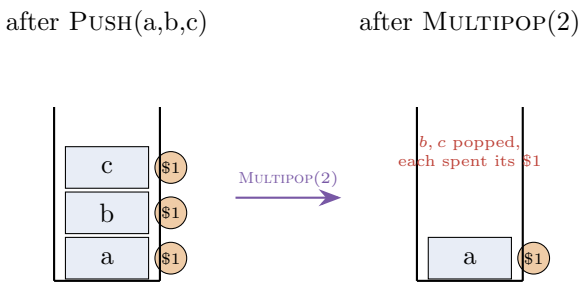


Figure 17.2: The accounting view of the stack. Each PUSH overcharges by \$1 and parks that coin on the object (left). When MULTIPOP(2) removes c and b, each pays for its own removal out of the coin it has been carrying (right). The bank – the total of all parked coins – equals the number of items on the stack and never dips below zero.

Since the bank never goes negative, the total charged is an upper bound on total real cost. The amortized cost of each operation is at most 2 (the most we ever charge), so n operations cost at most $2n = O(n)$. Same bound as the aggregate method, reached by a completely different argument – and notice this argument is more *local*: it never needed to know the length of the sequence.

17.3.2 Accounting for the binary counter

For the counter, the trick is to ask: which bit-flips are expensive, and which can prepay them? An INCREMENT flips a run of 1s down to 0, then sets one 0 up to 1. The flips $1 \to 0$ can be arbitrarily numerous (that is the carry chain), but a $0 \to 1$ flip – setting a bit – happens *exactly once* per INCREMENT. That asymmetry is the whole game.

We charge:

- Setting a bit ($0 \to 1$): charge \$2. One dollar pays the real flip; the other dollar rides onto the bit as credit.
- Clearing a bit ($1 \to 0$): charge \$0. Pay its real flip with the \$1 credit that the bit has been carrying since it was set.

Invariant: *every bit that currently equals* 1 *carries exactly* \$1 *of credit.* When we set a bit to 1, we loaded \$1 onto it. When a carry later clears that bit to 0, the stored dollar pays for the clear. Because every INCREMENT sets at most one bit to 1, every INCREMENT is charged at most \$2. Therefore n increments cost at most $2n = O(n)$, and the amortized cost per INCREMENT is at most $2 = O(1)$.

Focus

Notice the shape repeating: charge \$2 for the one cheap, guaranteed, once-per-operation action (a push, a bit-set), and let the prepaid dollar fund the unbounded-looking burst later (a multipop, a carry chain). The structure of the argument is identical even though the structures are different.

Walking question

Take this on a walk. In the counter argument we charged the *set* and let the *clears* be free. Could we instead charge each clear and make sets free? Try to define such a scheme and find where the bank goes negative. What is special about "at most one set per increment" that makes the set the right thing to charge? When you see why one direction works and the other fails, you understand the accounting method.

17.4 The potential method: bottle the credit into a single number

The accounting method spread credit across individual objects – a dollar on each stacked item, a dollar on each set bit. The *potential method* is the same idea, viewed from orbit. Instead of tracking who holds which coin, we summarize the *entire* stored credit as one number: the *potential* Φ of the whole data structure. As the structure evolves, Φ rises and falls, and that rise and fall is exactly the bookkeeping.

Intuition

Think of potential energy in physics. Lift a weight and you store energy; the storing costs you effort now. Let it drop and that stored energy does work for free later. The data structure's potential Φ is precisely this: a measure of "stored-up future work." Cheap operations that build up structure raise Φ (you pay a little extra now); the rare expensive operation that tears that structure down releases Φ (it pays for itself out of the reservoir).

Here is the precise machinery. Let D_0 be the starting state and D_i the state after the ith operation. We pick a *potential function* Φ mapping each state to a real number. The amortized cost of the ith operation is *defined* as its actual cost plus the change in potential it causes:

$$\boxed{\hat{c}_i \;=\; c_i \;+\; \Phi(D_i) - \Phi(D_{i-1}).}$$

Why is this the right definition? Sum the amortized costs over the whole sequence and watch the

potentials telescope:

$$\sum_{i=1}^{n} \hat{c}_i = \sum_{i=1}^{n} \big(c_i + \Phi(D_i) - \Phi(D_{i-1})\big) = \left(\sum_{i=1}^{n} c_i\right) + \Phi(D_n) - \Phi(D_0).$$

Every intermediate $\Phi(D_i)$ cancels: $+\Phi(D_1)$ from the first term against $-\Phi(D_1)$ from the second, and so on. Only the endpoints survive. Rearranging, the total *actual* cost is

$$\sum_{i=1}^{n} c_i \;=\; \sum_{i=1}^{n} \hat{c}_i \;-\; \Phi(D_n) + \Phi(D_0).$$

Formal

If we choose Φ so that $\Phi(D_0) = 0$ and $\Phi(D_i) \geq 0$ for all i, then $-\Phi(D_n) + \Phi(D_0) = -\Phi(D_n) \leq 0$, and therefore

$$\sum_{i=1}^{n} c_i \;\leq\; \sum_{i=1}^{n} \hat{c}_i.$$

So the total amortized cost is an upper bound on the total actual cost – exactly the requirement of Definition 17.1. The two conditions "Φ starts at 0" and "Φ never goes negative" are the potential-method analogue of "the bank never goes negative."

Focus

The potential is just the bank balance from the accounting method, packaged as a single function of the state. Conditions $\Phi(D_0) = 0$ and $\Phi \geq 0$ say exactly "start with no credit, and never go into debt." Once you internalize this, the potential method stops feeling like magic: it is accounting with the ledger collapsed into one number.

17.4.1 Potential for the stack

Define $\Phi(D)$ = the number of objects currently on the stack. Initially the stack is empty so $\Phi(D_0) = 0$, and a count of objects is never negative, so $\Phi \geq 0$ always. Both conditions hold. Now compute the amortized cost of each operation as "actual cost plus change in Φ."

Push. Actual cost 1. The stack grows by one object, so Φ goes up by 1. Amortized cost $= 1 + 1 = 2$.

Pop. Actual cost 1. The stack shrinks by one, so Φ drops by 1. Amortized cost $= 1 + (-1) = 0$.

Multipop popping $m = \min(k, |S|)$ items. Actual cost m. The stack shrinks by m, so Φ drops by m. Amortized cost $= m + (-m) = 0$.

Every operation has amortized cost at most 2. So n operations cost at most $2n = O(n)$. Notice this reproduces the accounting result – "\$1 on each stacked object" is literally "Φ = number of objects." The potential method just did the same accounting without ever naming an individual coin.

17.4.2 Potential for the binary counter

Define $\Phi(D) = b_i$, the number of 1-bits currently in the counter after operation i. Start at 0, so $\Phi(D_0) = 0$, and a bit count is never negative, so $\Phi \geq 0$. Both conditions hold.

Now analyze a single INCREMENT. Suppose it clears a run of t trailing 1-bits to 0 (those are the t carries) and then sets one 0-bit to 1 – unless the counter overflowed, but let us take the typical, non-overflow case first.

- **Actual cost** $c_i = t + 1$: it flipped t ones down and one zero up.
- **Change in potential**: we lost t ones (the cleared bits) and gained 1 one (the set bit), so $b_i = b_{i-1} - t + 1$, giving $\Phi(D_i) - \Phi(D_{i-1}) = (b_{i-1} - t + 1) - b_{i-1} = 1 - t$.
- **Amortized cost** $\hat{c}_i = c_i + (\Phi(D_i) - \Phi(D_{i-1})) = (t + 1) + (1 - t) = 2$.

Look at that cancellation. The t – the entire unbounded carry chain – vanishes. The amortized cost is a flat 2 no matter how long the carry ripples. The expensive carries are paid for exactly by the drop in potential they cause: each cleared bit was a unit of stored potential, released to fund its own flip.

Intuition

Φ counts the 1-bits – the "loaded springs" of the counter. A long carry chain is a long line of springs releasing at once: lots of actual work, but each release hands back the potential that was stored when that bit was set. The set bit at the end is a new spring loaded, costing the one unit that does not cancel. Amortized: 2, always.

Therefore n increments cost at most $2n + \Phi(D_0) - \Phi(D_n) \leq 2n = O(n)$, matching the aggregate and accounting analyses a third time.

Remark 17.1. What about overflow – when the counter is all 1s and INCREMENT wraps it to all 0s? Then it clears all k bits and sets none, so $c_i = k$ and Φ drops from k to 0, a change of $-k$. The amortized cost is $k + (-k) = 0 \leq 2$, still bounded. The telescoping bound still holds because $\Phi(D_n) \geq 0$ regardless. If you forbid overflow (start at 0, do at most $2^k - 1$ increments), Φ never even reaches the wrap and the clean "$\leq 2n$" holds outright.

Common trap

A potential function can be *wrong* – it just has to satisfy $\Phi(D_0) = 0$ and $\Phi \geq 0$ to give a *valid* bound, but it gives a *tight* bound only if you chose it well. Picking $\Phi \equiv 0$ always satisfies the conditions and makes amortized cost equal actual cost – useless. The skill is choosing a Φ that rises during cheap operations (so their amortized cost absorbs a little extra) and plunges during expensive ones (so the plunge pays the bill). If your Φ does not drop when the expensive operation fires, you chose the wrong Φ.

17.5 The headline example: dynamic tables

Everything so far has been a warm-up for the example that matters most in practice. You want an array-backed structure – a list, a hash table, a stack – that you can keep inserting into, but you do not know in advance how big it will get. Arrays have fixed size. So what do you do when the array fills up?

You allocate a bigger one, copy everything over, and keep going. The question is: *how much bigger?* The answer, and the reason it is the right answer, is one of the cleanest results amortized analysis

delivers.

17.5.1 The setup and the naive disaster

A *dynamic table* stores items in an array of some capacity. It tracks two numbers: *size* (how many items are stored) and *capacity* (how many the current array can hold). The *load factor* is $\alpha = size/capacity$. We INSERT one item at a time. When the array is full ($size = capacity$), an insert must first *expand*: allocate a new array, copy all existing items in, free the old one, and only then store the new item.

Common trap

The tempting, terrible idea: when the table fills, grow it by a *fixed* amount – say one extra slot, or a constant c slots. Then *every* insert (or every cth insert) triggers a full copy. If you grow by one slot each time, inserting n items copies $0 + 1 + 2 + \cdots + (n-1) = \Theta(n^2)$ items total. That is a quadratic catastrophe hiding inside an innocent-looking "just make it a bit bigger." Growing additively is the classic performance bug.

The fix is to grow *multiplicatively*: when the table fills, *double* its capacity. This is called *table doubling*. Here is the insert operation.

Algorithm 75: TABLE-INSERT(T, x)

Input: A dynamic table T with fields $T.size$, $T.cap$, and array $T.A$.
Output: x appended; the table is doubled first if it was full.

```
1 if T.size = T.cap then
2     newcap ← max(1, 2 · T.cap);
3     allocate new array B of capacity newcap;
4     for j ← 1 to T.size do
5         B[j] ← T.A[j] ;            // copy every existing item:  the expensive part
6     free T.A;   T.A ← B;   T.cap ← newcap;
7 T.size ← T.size + 1;
8 T.A[T.size] ← x ;                  // store the new item:  always cheap
```

We charge 1 unit per item stored or copied. A non-expanding insert costs 1 (it just stores x). An expanding insert that copies m existing items costs $m + 1$. Let us watch the cost of the ith insert, starting from an empty table.

The expansions happen exactly when the table is full and one more item arrives. With doubling from capacity 1, the table expands on inserts numbered $1, 2, 3, 5, 9, 17, \ldots$. After the first three (which walk the capacity through $1, 2, 4$), the pattern settles down: for $j \geq 2$, insert number $2^j + 1$ is the one that fills capacity 2^j and forces the doubling to 2^{j+1}. (Insert 1 fills capacity 1; insert 2 forces capacity to 2; insert 3 forces capacity to 4; insert 5 forces capacity to 8; insert 9 to 16; and so on.)

17.5.2 Aggregate analysis of doubling

Consider n inserts into an initially empty table. Each insert pays 1 for storing its own item: that is n total. On top of that, the expanding inserts pay for *copies*. How many copies happen in total?

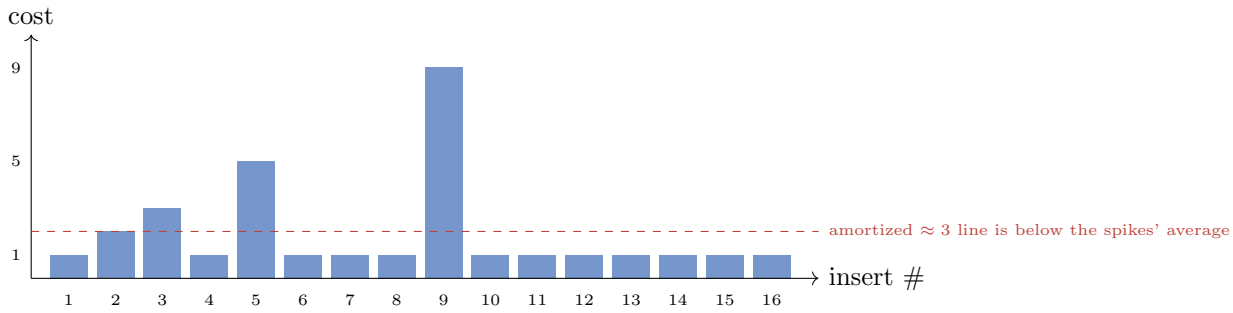


Figure 17.3: Cost of each insert into a doubling table, $i = 1 \ldots 16$. Almost every insert costs 1. The spikes at $i = 2^j + 1$ (heights $2, 3, 5, 9, \ldots$) are the doublings. Tall but rare – and as we will prove, their total is bounded by a geometric series.

The jth expansion copies 2^{j-1} items (it copies everything in the table just before doubling capacity from 2^{j-1} to 2^j). The expansions that occur during n inserts copy

$$1 + 2 + 4 + 8 + \cdots + 2^{\lfloor \log_2(n-1) \rfloor} \;<\; 2n.$$

Let us be exact rather than hand-wavy. The copies form the geometric sum $\sum_{j=0}^{J} 2^j$ where $2^J < n$, and a geometric sum of powers of two is just under twice its largest term:

$$\sum_{j=0}^{J} 2^j \;=\; 2^{J+1} - 1 \;<\; 2 \cdot 2^J \;<\; 2n.$$

So total copies $< 2n$, and the total cost is

$$T(n) \;=\; \underbrace{n}_{\text{stores}} + \underbrace{(\text{copies})}_{<\,2n} \;<\; n + 2n \;=\; 3n \;=\; O(n).$$

The amortized cost per insert is at most $3n/n = 3 = O(1)$.

Why this matters

This is the result that makes growable arrays – C++ `vector`, Java `ArrayList`, Python `list`, Go slices – practical. Each one of those doubles (or grows by a constant factor like $1.5\times$) precisely so that the amortized cost of appending is $O(1)$. Without amortized analysis you might believe appending is sometimes $O(n)$ and panic; with it, you can promise users "`append` is constant time on average over any sequence," and mean it as a hard guarantee. The geometric series is, once again, the hero: rare doublings, summed, cost no more than a constant times the cheap appends.

17.5.3 Potential analysis of doubling: choosing Φ

The aggregate argument is clean, but the potential method shines here because it gives a per-operation account and extends gracefully to deletion. We need a Φ that is 0 on an empty table, never negative, and – crucially – that has built up to a large value exactly when the table is full, so that the expansion can drain it.

Intuition

When is a doubling table about to do expensive work? When it is *full*. So we want potential to be near zero right after a doubling (the table is half empty, lots of room) and to climb to its peak right before the next doubling (the table is packed). The potential should measure "how dangerously full are we?"

The classic choice that achieves this:

$$\Phi(T) \;=\; 2 \cdot T.\mathit{size} \;-\; T.\mathit{cap}.$$

Let us sanity-check the two required conditions. Right after a genuine doubling (capacity at least 2), the table is half full: $\mathit{size} = \mathit{cap}/2$, so $\Phi = 2(\mathit{cap}/2) - \mathit{cap} = 0$. As we insert without expanding, *size* rises while *cap* stays fixed, so Φ climbs. When the table becomes full, $\mathit{size} = \mathit{cap}$, so $\Phi = 2\mathit{cap} - \mathit{cap} = \mathit{cap}$ – a big reservoir, exactly equal to the number of items the next expansion will have to copy. The potential has saved up precisely enough.

We also need $\Phi \geq 0$ throughout. Because doubling keeps the load factor $\alpha = \mathit{size}/\mathit{cap}$ at least $\frac{1}{2}$ at all times after the first item (right after a double it is exactly $\frac{1}{2}$, and it only rises until the next double), we have $\mathit{size} \geq \mathit{cap}/2$, hence $2\,\mathit{size} - \mathit{cap} \geq 0$. And the empty table has $\Phi = 0$. Good – both conditions hold.




Figure 17.4: Potential $\Phi = 2\,\mathit{size} - \mathit{cap}$ filling and draining. Right after a doubling the array is half full and Φ is small. Each cheap insert raises Φ by 2, building a reservoir. When the array fills, $\Phi = \mathit{cap}$ – exactly the number of items the next doubling must copy. The expensive copy then drains Φ back down, and the cycle repeats.

Now compute the amortized cost of the ith insert. Write $s = T.\mathit{size}$ and $c = T.\mathit{cap}$ for the values *just before* this insert. Figure 17.4 previews the arithmetic: watch Φ climb on cheap inserts and crash on the doubling.

Case 1: no expansion ($s < c$). Actual cost $c_i = 1$. After insert, size is $s + 1$, capacity unchanged at c. So

$$\Delta\Phi = \big(2(s+1) - c\big) - \big(2s - c\big) = 2.$$

Amortized cost $\hat{c}_i = 1 + 2 = 3$.

Case 2: expansion ($s = c$, with $c \geq 1$). The insert copies all c items and stores 1 new one, so actual cost $c_i = c + 1$. Capacity becomes $2c$; size becomes $c + 1 = s + 1$. The potential goes from $\Phi_{\text{before}} = 2c - c = c$ to $\Phi_{\text{after}} = 2(c+1) - 2c = 2$. So

$$\Delta\Phi = 2 - c.$$

Amortized cost $\hat{c}_i = (c+1) + (2 - c) = 3$.

Focus

Both cases give amortized cost exactly **3**. In Case 2 the brutal $+c$ of copying is annihilated by the $-c$ drop in potential: the reservoir we patiently filled during the cheap inserts is spent, all at once, to pay for the copy. That is the entire trick, made arithmetic. Amortized cost per insert is $3 = O(1)$, so n inserts cost $\leq 3n = O(n)$, confirming the aggregate result with a tidy per-operation story.

Remark 17.2. One genuine edge case hides at the very start. The Case 2 algebra assumed $c \geq 1$. The first insert into a fresh table has $s = c = 0$, and our algorithm grows the capacity to $\max(1, 2 \cdot 0) = 1$ rather than to $2c = 0$. That insert copies nothing, so its actual cost is 1, and the potential moves from 0 to $2(1) - 1 = 1$, giving amortized cost $1 + 1 = 2$ – not 3. This is harmless: 2 is still at most 3, so the bound $\leq 3n$ holds for every n. From the second insert onward the clean "always exactly 3" story takes over. (You can see the first insert costing 2 in the lab below.)

Algorithm lab

Verify the telescoping by hand. Insert 5 items into an empty doubling table and track, after each insert: actual cost c_i, size, capacity, $\Phi = 2\,\mathit{size} - \mathit{cap}$, and amortized $\hat{c}_i = c_i + \Delta\Phi$. You should find: insert 1 (expand to cap 1): $c = 1$, $\Phi = 1$, $\hat{c} = 2$; insert 2 (expand to 2): $c = 2$, $\Phi = 2$, $\hat{c} = 3$; insert 3 (expand to 4): $c = 3$, $\Phi = 2$, $\hat{c} = 3$; insert 4: $c = 1$, $\Phi = 4$, $\hat{c} = 3$; insert 5 (expand to 8): $c = 5$, $\Phi = 2$, $\hat{c} = 3$. Total actual $= 1 + 2 + 3 + 1 + 5 = 12$. Total amortized $= 2 + 3 + 3 + 3 + 3 = 14$. Confirm $12 \leq 14$, and that the gap $14 - 12 = 2$ equals the final $\Phi = 2$ – exactly the leftover reservoir, as the telescoping formula predicts.

17.5.4 Why constant-factor growth, and not additive

We can now say precisely why doubling – or any constant-factor growth – works and additive growth fails. With multiplicative growth by a factor $r > 1$, the copy costs across all expansions form a geometric series with ratio r, which sums to a constant times its largest term, giving $O(n)$ total. With additive growth, the copy costs form an arithmetic series $0 + c + 2c + \cdots$, which sums to $\Theta(n^2)$.

Cost summary

Dynamic table, doubling growth (factor 2):

- Single INSERT, worst case: $\Theta(n)$ (when it triggers a copy).
- INSERT, *amortized*: $\Theta(1)$ (we proved ≤ 3).
- n inserts, total: $\Theta(n)$.
- Wasted space: at most a factor of 2 (load factor $\geq \frac{1}{2}$).

Additive growth (by c each time): single insert $\Theta(n)$, but amortized $\Theta(n)$ as well – n inserts cost $\Theta(n^2)$. Never do this.

Walking question

On your walk, weigh the trade-off. Growing by $2\times$ wastes up to half the array but appends in amortized $O(1)$. Growing by $1.5\times$ wastes at most a third and is still amortized $O(1)$ –

the geometric series still converges. Where is the line? Show yourself that *any* growth factor $r > 1$ gives amortized $O(1)$, with the constant depending on r as roughly $r/(r-1)$. What happens to that constant as $r \to 1^+$? That limit is exactly why additive growth (morally $r \to 1$) explodes.

17.5.5 A word on deletion and shrinking

If a table can grow, you may want it to shrink when it empties out, to reclaim memory. The naive idea – halve the array as soon as it drops below half full – contains a beautiful trap.

Common trap

Suppose you double when full and halve when the table falls to exactly half full. Now sit right at the boundary $size = cap/2$ and alternate: insert (table fills, double, copy $\Theta(n)$ items), delete (table drops to half, halve, copy $\Theta(n)$ items), insert (double again), delete (halve again)... *Every single operation* now triggers a full copy. The amortized cost rockets back up to $\Theta(n)$. The structure "thrashes" at the threshold.

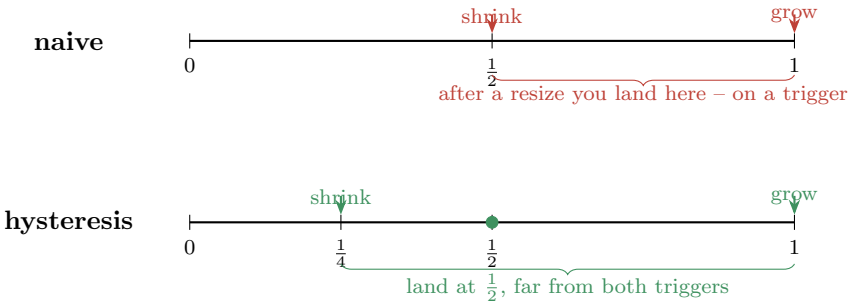


Figure 17.5: Load-factor thresholds. Top: shrinking at $\frac{1}{2}$ and growing at 1 leaves the table sitting on the shrink trigger right after a doubling, so a single insert–delete pair thrashes. Bottom: shrinking at $\frac{1}{4}$ instead leaves every resize at load factor $\frac{1}{2}$, a comfortable distance from both triggers, so $\Omega(cap)$ operations must pass before the next resize.

The cure is *hysteresis*: separate the grow and shrink thresholds so the table must change substantially before either fires (Figure 17.5). The standard fix is to double when full but only halve when the load factor drops to $\frac{1}{4}$ (not $\frac{1}{2}$). After either resize the table sits at load factor $\frac{1}{2}$, comfortably between the $\frac{1}{4}$ and 1 triggers, so $\Omega(cap)$ operations must occur before the next resize. A suitable potential – something like $\Phi = |\,2\,size - cap\,|$ when $\alpha \geq \frac{1}{2}$ and $\Phi = \frac{1}{2}\,cap - size$ when $\alpha < \frac{1}{2}$ – then yields amortized $O(1)$ for *both* insert and delete. We leave the careful case analysis to the exercises and to CLRS, but the moral is portable.

Focus

Whenever you have a structure that resizes at a threshold, separate the grow and shrink triggers so a resize leaves you far from *both*. The gap (hysteresis) guarantees many cheap operations between expensive ones, which is precisely the condition amortization needs. Resize-at-the-same-threshold is a recurring real-world bug – in hash tables, buffers, thread pools.

17.6 Choosing the right method

You now have three lenses on the same phenomenon. They are interchangeable in power – anything one proves, the others can prove – but they differ in convenience.

- **Aggregate** is best when a clean global total $T(n)$ has an obvious closed form (a geometric series, a count of bit-flips). It is the least flexible: it gives every operation the *same* amortized cost, namely $T(n)/n$.
- **Accounting** is best when you can point at a concrete, local unit of "stored work" – a coin on each stacked object, a dollar on each set bit – and you want different operations to carry different charges.
- **Potential** is best for the trickiest structures, and it is the method that scales: it gives a per-operation bound, it composes when a structure supports several operations, and choosing a clever Φ often cracks problems the other two struggle with (Fibonacci heaps, splay trees, and union-find by rank all lean on potential functions).

History and connection

Amortized analysis was crystallized by Robert Tarjan in his influential 1985 paper "Amortized Computational Complexity," which named and unified the techniques – especially the potential method – that researchers had been using informally for years. The ideas power the analysis of many of the field's most elegant data structures: splay trees, Fibonacci heaps, and the union-find structure with its near-constant inverse-Ackermann bound. In CLRS this material is **Chapter 16 of the 4th edition** (and Chapter 17 of the 2nd/3rd editions), "Amortized Analysis," which presents the same three methods – aggregate, accounting, potential – and the same canonical examples (stack with multipop, binary counter, dynamic tables) that we built here. Read this chapter first, then CLRS will feel like a crisp review rather than a first encounter.

Why this matters

Why does a working programmer care? Because amortized bounds are the only honest way to advertise the performance of growable, self-adjusting structures, and those are everywhere: every dynamic array, every hash table that rehashes, every rope or gap buffer in a text editor, every memory allocator that occasionally compacts. "Worst case per call" would force you to quote terrifying, useless numbers. Amortized analysis lets you make a true, strong promise – "constant time over any sequence" – and back it with a proof that no adversary can break.

17.7 Exercises

Exercise 17.1 (Multipop by hand)**.** Starting from an empty stack, execute: PUSH(1), PUSH(2), PUSH(3), PUSH(4), MULTIPOP(3), PUSH(5), MULTIPOP(10). Write the stack contents and actual cost after each operation, sum the actual costs, and verify the total is at most 2 times the number of operations. Why did the final MULTIPOP(10) cost only 2? (Warmup.)

Exercise 17.2 (Aggregate the counter exactly)**.** For a 5-bit counter starting at 0, list the cost

(number of bit-flips) of each of the first 16 increments. Sum them, and check your sum against the formula $\sum_{i\geq 0}\lfloor 16/2^i \rfloor$. By what factor does the true total beat the naive bound $16 \cdot 5$? (Warmup.)

Exercise 17.3 (Accounting charges must stay solvent)**.** A student proposes charging PUSH a flat \$1 and POP a flat \$1, with MULTIPOP charged \$1 total (not per item). Exhibit a short sequence of operations on which this charging scheme lets the "bank balance" go negative – i.e. total charged falls below total real cost – thereby proving the scheme invalid. (Medium.)

Exercise 17.4 (A reset operation)**.** Augment the binary counter with a RESET operation that sets the entire counter back to 0 (cost equal to the number of 1-bits cleared). Using the potential $\Phi =$ (number of 1-bits), show that a sequence of n operations, each an INCREMENT or a RESET, still costs $O(n)$. Identify the amortized cost of RESET under this potential. (Medium.)

Exercise 17.5 (Telescoping leftover)**.** Prove, directly from the telescoping identity $\sum c_i = \sum \hat{c}_i - \Phi(D_n) + \Phi(D_0)$, that for the doubling table the difference between total amortized and total actual cost after n inserts equals exactly $\Phi(D_n) = 2\,\mathit{size} - \mathit{cap}$ of the final table. Verify this against the 5-insert lab earlier in the chapter, where the gap was 2. (Medium.)

Exercise 17.6 (Tripling instead of doubling)**.** Suppose the dynamic table *triples* its capacity when full instead of doubling. Redo the aggregate analysis: show the total copy cost over n inserts is still $O(n)$, and find the constant (the amortized cost per insert). Then find a potential function Φ analogous to $2\,\mathit{size} - \mathit{cap}$ that proves the same bound per operation. (Medium-to-hard.)

Exercise 17.7 (General growth factor)**.** Show that growing the table by a factor $r > 1$ on each expansion gives amortized insert cost at most $1 + \frac{r}{r-1}$. Evaluate this for $r = 2$, $r = 1.5$, and $r = 1.1$. Explain, using your formula, why the amortized cost diverges as $r \to 1^+$, connecting this to why additive growth is $\Theta(n^2)$. (Hard.)

Exercise 17.8 (Why halving at $\frac{1}{2}$ thrashes)**.** Consider a table that doubles when full and halves the moment size drops to $\mathit{cap}/2$. Construct an explicit sequence of n insert/delete operations on which *every* operation triggers a full copy, so the total cost is $\Theta(n^2)$ and the amortized cost is $\Theta(n)$. Then explain precisely how moving the shrink threshold to $\mathit{cap}/4$ breaks your construction. (Hard.)

Exercise 17.9 (Insert and delete with $\frac{1}{4}$ hysteresis)**.** For the dynamic table that doubles when full and halves when the load factor drops to $\frac{1}{4}$, consider the potential

$$\Phi(T) = \begin{cases} 2\,\mathit{size} - \mathit{cap}, & \alpha \geq \frac{1}{2}, \\ \frac{1}{2}\,\mathit{cap} - \mathit{size}, & \alpha < \frac{1}{2}. \end{cases}$$

Verify $\Phi \geq 0$ and $\Phi = 0$ on an empty table, then show that both INSERT and DELETE have amortized cost $O(1)$ by checking the four cases: insert with/without expansion, delete with/without contraction. (Challenge.)

Exercise 17.10 (Designing a potential from scratch)**.** You maintain a sorted dynamic structure that occasionally performs a global "rebuild" costing $\Theta(m)$ when m items have accumulated since the last rebuild, and rebuilds happen every time the count of pending items reaches the current *size*. Propose a potential function and prove the amortized cost per insert is $O(1)$. (This is the seed of the "rebuild when you double" idea behind many real structures.) (Challenge.)

Part V

Advanced Data Structures

Chapter 18

B-Trees

Up to now, every search structure in this book has lived in a comfortable fantasy: that all your data fits in fast memory, and that reaching one node costs the same as reaching any other. A red-black tree happily chases pointers around RAM, and we counted each pointer-follow as one unit of work because, on real hardware, it more or less is. But the moment your data outgrows memory and spills onto a disk – a spinning platter, or even a solid-state drive – that fantasy shatters. Suddenly *where* a node lives matters enormously, and the cost of a search is dominated not by how many comparisons you do but by how many times you have to go fetch a chunk of data from far away.

This chapter is about the search tree that takes that brutal cost asymmetry seriously. The B-tree is, at heart, a binary search tree that got tired of being tall and skinny and decided to get *short and fat* on purpose. Instead of one key and two children per node, a B-tree node holds dozens or hundreds of keys and hundreds or thousands of children. The result is a tree so shallow that you can index billions of records and still reach any one of them in a handful of disk visits. Every serious database and every modern filesystem you have ever touched is, underneath, organized by a B-tree or a close relative. Let us build one from the ground up.

18.1 Why Disks Change Everything

Let us begin by feeling the problem in our bones, because the entire design of the B-tree is a direct response to one physical fact about machines.

Intuition

Imagine your data is a giant library. Fast memory (RAM) is the desk in front of you: tiny, but anything on it is instantly available. The disk is the warehouse across town: enormous, but every trip to fetch a box takes ages compared to reading something already on your desk. Crucially, the warehouse does not hand you *one page* per trip – it hands you a whole *box*, because the trip itself is the expensive part, not the box. So the smart move is: design your data so that each warehouse trip brings back a box stuffed with exactly the things you will need next, and so that you need as few trips as possible.

That "box" has a name. Disks (and the operating system on top of them) move data in fixed-size blocks called *pages* – typically something like 4 kilobytes, sometimes much larger. You cannot read

a single byte from disk; you read a whole page. And the cost of reading that page is dominated by the *seek*: physically moving a read head, or waiting out the latency of a flash lookup. Once the page is on its way, the difference between grabbing 8 bytes from it and grabbing 4000 bytes from it is negligible.

Let us put numbers on it so the asymmetry is undeniable.

Why this matters


A modern CPU performs a few billion simple operations per second, so one comparison costs on the order of a nanosecond (10^{-9} seconds). A single random read from a spinning disk costs on the order of 10 milliseconds (10^{-2} seconds). That is a factor of roughly *ten million*. One disk access is worth about ten million in-memory comparisons. Solid-state drives shrink the gap, but even there a random read costs tens of microseconds – still tens of thousands of comparisons. The lesson is the same: when your data lives on disk, the number you must minimize is *disk accesses*, and you should be willing to do a ridiculous amount of in-memory computation to save even one of them.

Now reconsider a balanced binary search tree holding $n = 10^9$ keys (a billion). Its height is about $\log_2(10^9) \approx 30$. If the tree lives on disk and each node sits on its own page, a single search touches about 30 different pages, and in the worst case that is 30 disk seeks. At 10 milliseconds each, that is about a third of a second to find *one* record. A database answering thousands of queries per second cannot possibly afford this.

Focus

The binary in "binary search tree" is the enemy here. A binary tree spends a whole expensive disk access just to make *one* comparison and then branch one of two ways. We have already paid for an entire page; we should extract far more than one bit of decision from it. The fix is to cram many keys into a single page so that one disk access lets us branch one of *many* ways. Fewer, fatter nodes means a shorter tree means fewer disk accesses. That is the whole idea of a B-tree in a single sentence.

Here is the picture of the trade we are making. On the left, the binary tree: deep, and each level is a separate disk trip. On the right, a B-tree: each node is a full page packed with keys, so the tree is only a few levels tall.

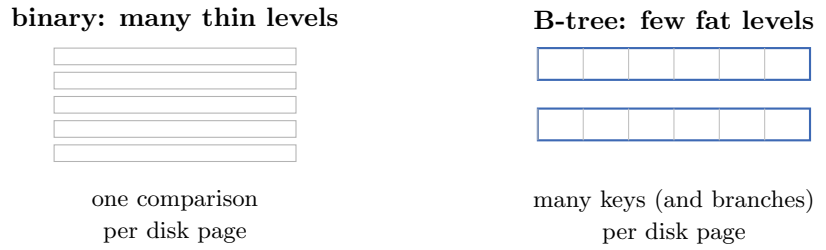

History and connection

B-trees were invented by Rudolf Bayer and Edward McCreight in 1970 while they were at Boeing Research Labs, precisely to organize large indices stored on disk. (No one has ever

fully settled what the "B" stands for – Bayer, Boeing, balanced, broad; Bayer himself was coy about it.) The structure was an immediate, enduring success: it underlies essentially every relational database index, and filesystems such as NTFS, HFS+, ext4's directories, and Btrfs (whose very name nods to it). In CLRS this is **Chapter 18, "B-Trees."** That chapter assumes you are comfortable with binary search trees (our Chapter 12) and with the general spirit of balanced trees (our Chapter 13 on red-black trees); if those feel shaky, revisit them, because a B-tree is best understood as "a balanced search tree, re-derived for a world where width is cheap and height is murder."


18.2 What a B-Tree Is

Let us now pin down the object precisely. A B-tree is a rooted tree, but unlike a binary search tree its nodes are wide. Each node stores a sorted run of keys, and between and around those keys hang child pointers, one more child than there are keys.

Intuition

Picture a single B-tree node as a row of k keys laid out in increasing order, with $k+1$ "gaps" – one before the first key, one between each adjacent pair, and one after the last key. Each gap holds a pointer to a child subtree, and that subtree contains exactly the keys that belong in that gap. So if a node has keys $[20, 50, 80]$, it has four children: one for keys < 20, one for keys strictly between 20 and 50, one for keys strictly between 50 and 80, and one for keys > 80. The keys in the node are the *signposts* that tell you which gap – which child – to descend into next.

Here is a node with three keys and its four children drawn explicitly. Notice how each child's allowed range is fenced in by the keys on either side.



To keep the tree shallow and balanced we impose limits on how empty or how full a node may be. The key parameter is a fixed integer $t \geq 2$ called the *minimum degree* of the tree. It is chosen once, when you build the tree, usually so that a full node exactly fills one disk page.

Formal

Definition (B-tree). Let $t \geq 2$ be a fixed integer, the *minimum degree*. A *B-tree* is a rooted tree with the following properties.

1. Every node x stores a number of keys $x.n$, held in nondecreasing sorted order $x.key_1 \leq x.key_2 \leq \cdots \leq x.key_{x.n}$, and a boolean $x.leaf$ saying whether x is a leaf.
2. An internal (non-leaf) node with $x.n$ keys has exactly $x.n + 1$ children, pointed to by $x.c_1, \ldots, x.c_{x.n+1}$. Leaves have no children.

3. The keys separate the subtrees: if k_i is any key stored in the subtree rooted at child $x.c_i$, then
$$k_1 \le x.key_1 \le k_2 \le x.key_2 \le \cdots \le x.key_{x.n} \le k_{x.n+1}.$$
4. **Every leaf is at the same depth**, which equals the tree's height h. (B-trees grow and shrink only at the root, which is how they stay perfectly height-balanced.)
5. **Occupancy bounds.** Every node other than the root has at least $t-1$ keys, and therefore at least t children if it is internal. Every node has at most $2t-1$ keys, and therefore at most $2t$ children if it is internal. The root may have as few as one key (or zero, if the tree is empty), but obeys the same upper bound.

A node with the maximum $2t-1$ keys is called *full*.

That occupancy rule – between $t-1$ and $2t-1$ keys – is the heart of the balancing discipline, so let us make sure it feels right rather than arbitrary.


Intuition

The upper bound ($2t-1$ keys) is so a node fits in one disk page; you pick t to make a full node fill the page. The lower bound ($t-1$ keys) is so nodes are never too *empty*. If we let nodes dwindle to one key each, the tree would drift back toward being binary and tall, defeating the whole purpose. Forcing every node at least half-full guarantees the branching factor stays large, which keeps the height tiny. The two bounds together say: *every node is between half-full and completely full.* The factor-of-two slack between $t-1$ and $2t-1$ is exactly the room we need to absorb insertions and deletions cheaply, as you will see.

Common trap

A frequent confusion: "minimum degree" t counts *children*, not keys. A non-root node has *at least* t children and *at most* $2t$ children; correspondingly it has between $t-1$ and $2t-1$ keys (always one fewer key than children, for internal nodes). Do not mix up t (a per-node minimum) with the *order* of a B-tree, a competing piece of terminology some textbooks use for the maximum number of children. We will stick exclusively with CLRS's minimum degree t to avoid the muddle. The smallest legal B-tree has $t = 2$: nodes hold 1 to 3 keys and have 2 to 4 children. Such a tree is sometimes called a *2-3-4 tree*, and it is the close cousin of the red-black tree from Chapter 13.

Example 18.1. Let $t = 2$. Then nodes may hold 1, 2, or 3 keys and (if internal) have 2, 3, or 4 children. Here is a legal B-tree of height 2 on the keys $1, 2, \ldots, 16$. The root holds two keys; each leaf is at the same depth.

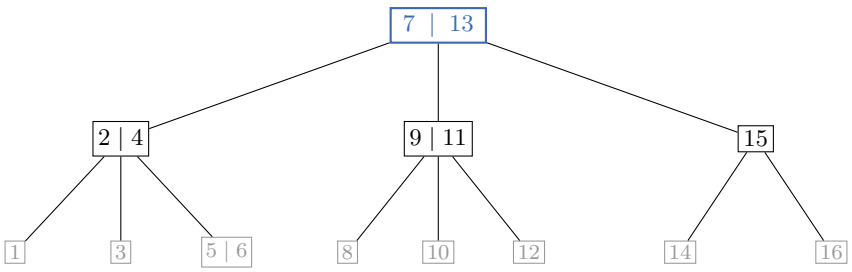

Read the separators: the root's keys 7 and 13 split everything into three ranges – "below 7," "between 7 and 13," "above 13" – and the three child subtrees hold exactly those ranges. Within the leftmost child, its keys 2 and 4 split its range further. Every path from root to a leaf has the same length.

18.3 How Tall Can a B-Tree Get?

The entire promise of the B-tree is that it is short. Let us prove it. We want an upper bound on the height h in terms of the number of keys n, and we want that bound to be logarithmic with a *large base* – the larger the base, the shorter the tree.

The strategy is the one you always use to bound the height of a balanced tree: count how few nodes a tree of height h can possibly contain. If even the *sparsest* legal tree of height h must hold a lot of keys, then a tree holding only n keys cannot be very tall.

Intuition

To make a B-tree as tall as possible for a given number of keys, you make every node as *empty* as the rules allow – because emptier nodes branch less, so it takes more levels to hold the same keys. The emptiest legal tree has the root with a single key (its minimum) and every other node with exactly $t-1$ keys and t children (their minimum). So the number of nodes at least *multiplies by* t at each level down. That geometric explosion is what forces the height to be only about $\log_t n$.

Let us count the nodes level by level in this emptiest tree. The root is 1 node. The root has at least 2 children (one key forces two children). Each of those, and everything below, has at least t children. So the node count is 1 at the root, then 2, and after that it multiplies by at least t at every step down. Figure 18.1 shows that geometric explosion; the table beside it records the per-level minimum.

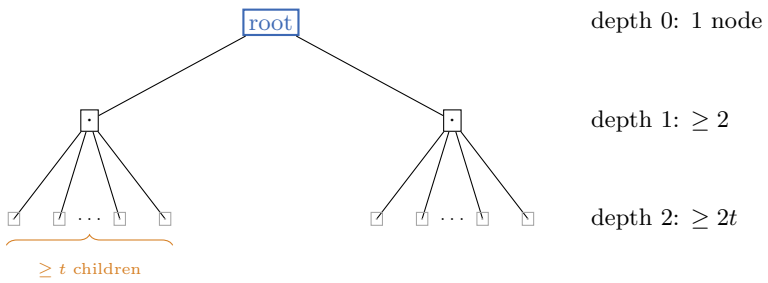


Figure 18.1: The sparsest (tallest) B-tree: the root has ≥ 2 children, and every node below fans out to $\geq t$ children, so each level holds at least t times as many nodes as the level above.

depth	at least this many nodes
0	1
1	2
2	$2t$
3	$2t^2$
$\vdots$	$\vdots$
h	$2t^{h-1}$

Every node except the root holds at least $t-1$ keys. The number of non-root nodes is at least the number of nodes at depths 1 through h, which is at least

$$2 + 2t + 2t^2 + \cdots + 2t^{h-1} = 2\sum_{i=0}^{h-1} t^i = 2 \cdot \frac{t^h - 1}{t-1}.$$

So the total number of keys satisfies

$$n \;\geq\; \underbrace{1}_{\text{root}} + (t-1) \cdot 2 \cdot \frac{t^h - 1}{t-1} \;=\; 1 + 2(t^h - 1) \;=\; 2t^h - 1.$$

Rearranging, $t^h \leq \dfrac{n+1}{2}$, and taking $\log_t$ of both sides gives the result.

Formal

Theorem (Height of a B-tree). If $n \geq 1$, then any B-tree of minimum degree $t \geq 2$ holding n keys has height

$$h \;\leq\; \log_t \frac{n+1}{2}.$$

Focus

The height is logarithmic in n with base t. That base is the whole point. Compared to a red-black tree, whose height is $\log_2 n$, the B-tree's height is $\log_t n = \dfrac{\log_2 n}{\log_2 t}$ – smaller by a factor of $\log_2 t$. With a realistic t of, say, 1000, that factor is about 10, so the B-tree is roughly ten times shorter, meaning ten times fewer disk accesses per search.

Example 18.2. Suppose each disk page holds a node with up to 1000 children, so $2t = 1000$ and $t = 500$. How tall is the tree for a billion keys, $n = 10^9$?

$$h \leq \log_{500} \frac{10^9 + 1}{2} \approx \log_{500}(5 \times 10^8) = \frac{\ln(5 \times 10^8)}{\ln 500} \approx \frac{20.03}{6.21} \approx 3.2,$$

so $h \leq 3$. Three levels! A tree of height 3 has its root, one level of internal nodes, and the leaves. If you keep the root permanently cached in memory (databases always do – it is just one page), then a search costs at most *two* disk accesses to reach any of a billion records. Compare that with the ≈ 30 accesses a binary tree would demand. This is not a small constant-factor win; it is the difference between a usable database and an unusable one.

18.4 Searching a B-Tree

Searching is the gentlest operation and a perfect warm-up, because it does not change the tree at all – it just walks down it, and the structure is practically begging you to do the obvious thing.

Intuition

At each node you have a sorted row of keys. Scan along it (or binary-search it) to find where your target key would sit. Either you land exactly on it – done – or you fall into one of the gaps between two keys, and that gap's child pointer tells you which subtree to descend into. Repeat until you find the key or hit a leaf with no further child to follow, at which point the key simply is not present. It is the same higher-or-lower game as a binary search tree, except at each node you choose among many doors instead of just two.

Algorithm 76: B-Tree-Search(x, k) – find key k in the subtree rooted at x

Input: a node x, a search key k
Output: a pair (y, i) such that $y.key_i = k$, or NIL if absent

```
1  i ← 1;
2  while i ≤ x.n and k > x.key_i do
3  |  i ← i + 1;
4  if i ≤ x.n and k = x.key_i then
5  |  return (x, i);                                  // found it in this node
6  if x.leaf then
7  |  return NIL;                                     // nowhere left to go
8  else
9  |  Disk-Read(x.c_i);                  // the only line that costs a disk access
10 |  return B-Tree-Search(x.c_i, k);
```

The single line that matters for cost is Disk-Read: it is the only place we pay to fetch a page. We perform exactly one disk read per level of descent, so a search does at most $h + 1 = O(\log_t n)$ disk reads. The in-memory work per node is the linear scan over up to $2t - 1$ keys, so the CPU time is $O(t)$ per node and $O(t\,h) = O(t \log_t n)$ in total. We are happily trading a lot of in-memory comparison work for very few disk reads – exactly the bargain disks demand.

Algorithm lab

Trace B-Tree-Search for $k = 12$ on the tree of Example 18.1.

- *At the root* $[7, 13]$: start $i = 1$. Is $12 > 7$? Yes, advance to $i = 2$. Is $12 > 13$? No, stop. Is $12 = 13$? No. The root is not a leaf, so descend into c_2, the child for the range between 7 and 13 – the node $[9, 11]$.
- *At* $[9, 11]$: $12 > 9$, advance; $12 > 11$, advance to $i = 3$. Now $i > x.n = 2$, stop. Not equal to anything here. Not a leaf, so descend into c_3, the child for keys above 11 – the leaf $[12]$.
- *At the leaf* $[12]$: $12 = 12$ at $i = 1$. **Found**, return this node and index 1.

Three nodes visited, one per level – exactly the height plus one. Now repeat the trace for $k = 5$ (you should find it in the leaf $[5, 6]$) and for the absent $k = 10\frac{1}{2}$, i.e. a key between 10

and 11 (you should fall off the bottom and return NIL).


18.5 Splitting a Full Node

Before we can insert, we need one surgical tool. Inserting a new key always ultimately squeezes it into some leaf, but a leaf might already be full ($2t-1$ keys) with no room. The cure is *splitting*: take a full node and break it in two, pushing its middle key up into the parent as a new separator.

Intuition

A full node has $2t-1$ keys. That is an odd number, so it has a unique middle key, the one at position t. Splitting cleaves the node down that middle key: the $t-1$ keys to its left become a new left node, the $t-1$ keys to its right become a new right node, and the middle key itself *floats up* to the parent, slotting in as a brand-new separator between those two new children. Each of the two halves has exactly $t-1$ keys – the legal minimum – so both are valid nodes, and the parent gains one key and one child. Think of it as a cell dividing: one full cell becomes two half-cells plus a signpost handed to the level above.

Here is the picture, with $t=3$ so a full node has $2t-1=5$ keys. The node $[\,p,q,r,s,u\,]$ splits about its middle key r (position $t=3$).

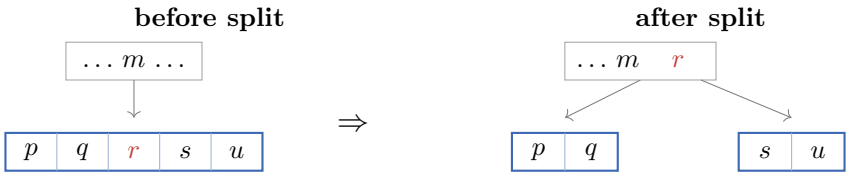

Notice what the parent looked like before and after: it gains exactly one key (the floated-up r) and one child pointer. For this to be safe, **the parent must not itself be full** when we ask it to absorb a new key – otherwise it would overflow. That single requirement is what shapes the entire insertion algorithm, as we will see in a moment. The procedure assumes its caller hands it a non-full parent x and the index i of the full child to split.

Algorithm 77: B-Tree-Split-Child(x, i) – split the full child $x.c_i$

Input: a non-full internal node x and an index i with $x.c_i$ full
Output: $x.c_i$ split in two, its median key moved up into x

```
1  y ← x.c_i;                                          // the full child, with 2t − 1 keys
2  z ← a new node;   z.leaf ← y.leaf;   z.n ← t − 1;
3  for j ← 1 to t − 1 do
4      z.key_j ← y.key_{j+t};                          // copy y's upper t − 1 keys into z
5  if not y.leaf then
6      for j ← 1 to t do
7          z.c_j ← y.c_{j+t};                          // and y's upper t children
8  y.n ← t − 1;                                        // y keeps only its lower t − 1 keys
9  for j ← x.n + 1 to i + 1 (decreasing) do
10     x.c_{j+1} ← x.c_j;                              // shift x's children right to open a slot for z
11 x.c_{i+1} ← z;
12 for j ← x.n to i (decreasing) do
13     x.key_{j+1} ← x.key_j;                          // shift x's keys right to open a slot
14 x.key_i ← y.key_t;                                  // the median floats up into x
15 x.n ← x.n + 1;
16 Disk-Write(y); Disk-Write(z); Disk-Write(x);
```

Every loop runs at most t times, so the whole split is $O(t)$ in-memory work plus three disk writes – a tidy $O(1)$ in disk accesses. Note that splitting never touches anything below y and z; it is purely local surgery at one parent and its one full child.

Common trap

Two off-by-one traps lurk here. First, the median sits at index t, *not* $t-1$ or $t+1$; with $2t-1$ keys indexed $1 \dots 2t-1$, position t has exactly $t-1$ keys on each side. Second, z receives keys $y.key_{t+1}$ through $y.key_{2t-1}$ – that is the loop "$z.key_j \leftarrow y.key_{j+t}$ for $j = 1 \dots t-1$." The lower keys $y.key_1 \dots y.key_{t-1}$ stay in y, and we simply set $y.n = t-1$ to forget the rest. If you accidentally leave the median in one of the halves, that half ends up with t keys and the parent never receives its separator, and the whole structure quietly corrupts.

18.6 Insertion in a Single Downward Pass

Now the clever part. The naive plan would be: walk down to the right leaf, insert there, and if the leaf overflows, split it and push the median up, possibly triggering a cascade of splits all the way back up to the root. That works, but it walks the path *twice* – once down, once back up – which on disk means re-reading pages we already paid for. B-trees use a slicker, *single-pass* strategy that fixes problems on the way down, so it never has to come back up.

Focus

The single-pass insight: split full nodes *before* you enter them. As you descend toward the target leaf, whenever you are about to step into a child that is full, split it first.

Splitting it pushes a key up into the current node – but you guaranteed the current node was non-full before you arrived, so it can safely absorb that key. By induction, every node you stand on during the descent is non-full, so every split you ever need to do has a safe place to put its median. You never overflow, you never recurse upward, and you touch each page on the path exactly once.

There is one node this trick cannot help with: the root, which has no parent to absorb a pushed-up key. So the root gets special handling. If the root is full when we begin, we grow a brand-new empty root above it and split the old root into two children of the new one (Figure 18.2). This is the *only* way a B-tree gains height, and it explains property 4 of the definition – since growth happens at the top, all leaves stay at the same depth automatically.




Figure 18.2: Growing the tree at the root. A full root splits about its median q, which becomes the sole key of a fresh root sitting one level higher; the two halves p and r become its children. Because the new level appears above everything, all leaves still share the same depth.

Algorithm 78: B-Tree-Insert(T, k) – insert key k into B-tree T

Input: a B-tree T and a key k to insert
Output: T updated to contain k, all invariants preserved

```
1 r ← T.root;
2 if r.n = 2t − 1 then
3 |   s ← a new node;   s.leaf ← FALSE;   s.n ← 0;
4 |   s.c_1 ← r;   T.root ← s;                    // new empty root above the old one
5 |   B-Tree-Split-Child(s, 1);                   // split old root; tree grows one level
6 |   B-Tree-Insert-Nonfull(s, k);
7 else
8 |   B-Tree-Insert-Nonfull(r, k);
```

Algorithm 79: B-Tree-Insert-Nonfull(x, k) – insert k into the non-full node x or below it


Input: a node x that is *not* full, and a key k

```
1  i ← x.n;
2  if x.leaf then
3      while i ≥ 1 and k < x.key_i do
4          x.key_{i+1} ← x.key_i;                          // shift keys right to make room
5          i ← i − 1;
6      x.key_{i+1} ← k;   x.n ← x.n + 1;
7      Disk-Write(x);                                      // drop k into the leaf, done
8  else
9      while i ≥ 1 and k < x.key_i do
10         i ← i − 1;
11     i ← i + 1;                                          // x.c_i is the child we must descend into
12     Disk-Read(x.c_i);
13     if x.c_i.n = 2t − 1 then
14         B-Tree-Split-Child(x, i);                       // full child!  split it before descending
15         if k > x.key_i then
16             i ← i + 1;                                  // the pushed-up median may shift which half we want
17     B-Tree-Insert-Nonfull(x.c_i, k);
```

That little "if $k > x.key_i$ then $i \leftarrow i + 1$" is easy to overlook but essential. After a split, the median key has just landed at position i in x, creating a new child at $i + 1$. If our key k is bigger than that median, it belongs in the right half, so we must redirect into $x.c_{i+1}$ instead of $x.c_i$.

18.6.1 A Fully Traced Insertion


Let us watch the machinery run. Take $t = 2$ (so nodes hold 1 to 3 keys, and full means 3 keys). We start from this tree and insert the key 4.



Algorithm lab

Inserting 4 into the tree above ($t = 2$).


1. *Check the root.* The root [10] has 1 key, which is not $2t - 1 = 3$, so the root is not full. We call Insert-Nonfull on it.
2. *At the root, choose a child.* Scanning, $4 < 10$, so we head for the left child $c_1 = [1, 3, 7]$. But that child has 3 keys – it is *full*! We must split it before descending.
3. *Split the full child.* The median of $[1, 3, 7]$ is 3 (position $t = 2$). It floats up into the root, which becomes $[3, 10]$. The child splits into [1] (left) and [7] (right). The tree is now:



4. *Redirect after the split.* Back in the root, the median 3 now sits at position $i = 1$. Is $k = 4 > 3$? Yes, so bump i to 2: we descend into $c_2 = [7]$, the right half.

5. *At the leaf.* Node [7] is a non-full leaf. We slide 4 into place: $4 < 7$, so 4 goes before 7, giving the leaf $[4, 7]$. Disk-write it. Done.

The final tree:



Notice we proactively split $[1, 3, 7]$ even though, in hindsight, it had room for 4 after the split. The single-pass discipline does not gamble: it splits any full node it might pass through, guaranteeing the leaf at the bottom always has room.

Walking question

Here is something to chew on while you stretch your legs. The single-pass insert sometimes splits a node that, it turns out, did not strictly *need* splitting – the eventual insertion happened elsewhere, or the node had spare room. Is that wasteful? Now think about the alternative: an insert that descends first and splits on the way back up only when forced. That avoids "unnecessary" splits but must keep the whole root-to-leaf path of pages in memory and re-walk it. On disk, which cost dominates – a few extra splits, or re-reading the path? And does your answer change if the tree lives entirely in RAM? Sit with which resource is actually scarce in each setting; that is the real lesson of this chapter.

Cost summary

B-tree operations, minimum degree t, n keys, height $h = O(\log_t n)$.

operation	disk accesses	CPU time
search	$O(h) = O(\log_t n)$	$O(t\,h) = O(t \log_t n)$
insert	$O(h) = O(\log_t n)$	$O(t\,h) = O(t \log_t n)$
delete	$O(h) = O(\log_t n)$	$O(t\,h) = O(t \log_t n)$

Each operation visits $O(h)$ nodes, one disk access per node, and does $O(t)$ in-memory work per node (a scan plus at most one split or merge). Since $t \log_t n = t \frac{\log_2 n}{\log_2 t}$, increasing t shortens the tree but adds per-node work; you choose t to make a node fill exactly one page, which minimizes the thing that actually hurts – disk accesses.

18.7 Why Insertion Is Correct

Let us pause to convince ourselves the single-pass insert really does preserve every B-tree property. The argument rests on one clean invariant.

Formal

Descent invariant. Every call B-Tree-Insert-Nonfull(x, k) is made on a node x that is *not full*, i.e. $x.n \leq 2t - 2$.

Why the invariant holds. B-Tree-Insert establishes it for the first call: if the original root was full, we split it so the new root s holds a single key (non-full); if it was not full, we call directly on it. Now suppose we are at a non-full node x and about to recurse into child $x.c_i$. If $x.c_i$ is full, we split it first. After the split, $x.c_i$ (and its new sibling) each hold $t-1$ keys – well below $2t-1$ – so whichever half we descend into is non-full. If $x.c_i$ was not full to begin with, we descend into it unchanged, still non-full. Either way the next call receives a non-full node. By induction the invariant holds all the way down.

Why that makes everything correct. Because the node we land on is always non-full, the leaf at the bottom always has room to absorb k without overflowing, so we never violate the upper bound $2t - 1$. Every split we perform takes a full node to two half-full ($t - 1$-key) nodes and lifts one key into a guaranteed-non-full parent, so no node ever drops below $t - 1$ keys or exceeds $2t - 1$. The sorted order (property 3) is maintained because we always insert k into the gap where it belongs and because a split's median is exactly the correct separator between its two halves. Finally, height grows only when we split the root, and that adds one level uniformly above everything, so all leaves stay at equal depth (property 4). Every property survives. □

18.8 Deletion

Deletion is the fussiest operation, and honestly it is where most first-time implementers get tangled. But the guiding idea is a perfect mirror of insertion, so hold onto that symmetry and the cases will feel less like a thicket.

Intuition

Insertion's enemy was *overflow*: a node getting too full, cured by splitting. Deletion's enemy is the opposite, *underflow*: a node dropping below $t - 1$ keys, cured by either *borrowing* a key from a sibling or *merging* with a sibling. And just as insertion split full nodes on the way *down* so the leaf always had room, deletion will *fatten* thin nodes on the way down so that whenever we finally remove a key, the node we remove it from has a key to spare. We maintain the mirror-image invariant: *never step into a node with only the minimum $t-1$ keys; first top it up to at least t.*

Focus

The deletion descent invariant. Whenever B-Tree-Delete is called recursively on a node, that node has at least t keys (one more than the minimum $t-1$). The root is exempt – it is allowed to be thin – which is why deletion can shrink the tree's height only by emptying

the root.

To enforce that invariant we need two repair moves. Suppose we want to descend into a child c that has only $t-1$ keys (the minimum). Before descending, we fatten it:

- **Borrow (rotate).** If an *adjacent sibling* of c has at least t keys (a key to spare), rotate one key across. The separator key in the parent that sits between c and that sibling moves *down* into c, and the sibling's extreme key (and a child pointer, if internal) moves *up* to take the separator's place. Now c has t keys and the sibling still has at least $t-1$. Everybody is legal.
- **Merge.** If *both* adjacent siblings have only $t-1$ keys (nobody can spare a key), merge c with one of them. Pull the separator key down from the parent and fuse c, that separator, and the sibling into one node. The merged node has $(t-1)+1+(t-1) = 2t-1$ keys – a perfectly full but legal node – and the parent loses one key and one child.

Figure 18.3 shows a borrow and Figure 18.4 a merge; in both, the parent's separator is the hinge the keys rotate around.




Figure 18.3: Borrowing. The thin child c takes the parent separator s, and the donor sibling's smallest key g rises to become the new separator.




Figure 18.4: Merging. When neither sibling can spare a key, the separator s drops down and fuses the two thin children into one full node; the parent shrinks by one key and one child.

With those two moves in hand, the deletion itself splits into a few cases depending on where the key to remove lives and whether it is in a leaf.

Formal

Deleting key k from the subtree rooted at x (sketch). First ensure x has at least t keys (borrow/merge as above, unless x is the root). Then:

Case 1 – k is in x and x is a leaf. Just remove k from x. Since x had $\geq t$ keys it still has $\geq t-1$. Done.

Case 2 – k is in x and x is internal. We cannot leave a hole, so we replace k with a neighboring key that can fill its slot.

2a. If the child y *left* of k has $\geq t$ keys, find k's *predecessor* k' (the largest key in y's subtree), recursively delete k' from that subtree, and overwrite k with k'.

2b. Symmetrically, if the child z *right* of k has $\geq t$ keys, use k's *successor*.

2c. If both flanking children have only $t-1$ keys, *merge* k and the right child into the left child (a full $2t-1$-key node), then recursively delete k from that merged child.


Case 3 – k is not in x. Find the child $x.c_i$ whose subtree must contain k. If $x.c_i$ has only $t-1$ keys, fatten it first (borrow from a sibling, or merge), then recurse into the appropriate child to delete k.

Intuition


Case 2 is the only genuinely new idea, and it is the same trick as deleting from an ordinary binary search tree: to remove an internal key without leaving a gap, replace it with its *predecessor* or *successor*, then delete *that* key from where it lives (always lower down, eventually in a leaf). The predecessor is the rightmost key in the left subtree; the successor is the leftmost key in the right subtree. We prefer whichever side has a key to spare so the recursion lands on a node that is already fat enough – preserving the invariant. If neither side can spare a key, we merge them and the problem shrinks to one level down.

Algorithm lab


A deletion that triggers a merge ($t = 2$). Start from this tree and delete the key 6.



1. *At the root* $[3, 9]$: 6 is not here. It lies between 3 and 9, so it belongs in the middle child $c_2 = [6]$.
2. *Fatten before descending.* Child $[6]$ has only $t - 1 = 1$ key – the minimum. Can it borrow? Its left sibling $[1]$ has 1 key (nothing to spare); its right sibling $[11, 13]$ has 2 keys, but that is across the separator 9, and to keep the example pointed let us suppose we look left first and, finding no donor, *merge* $[6]$ with its left sibling $[1]$. We pull the separator 3 down: the merged node is $[1, 3, 6]$, and the root loses a key, becoming $[9]$.



3. *Delete from the fattened leaf.* Now recurse into $[1, 3, 6]$, a leaf with 3 keys. It is Case 1: simply remove 6, leaving $[1, 3]$. Done.



The merge fixed the underflow *on the way down*, so by the time we removed 6 the leaf had keys to spare. Had the root dropped to zero keys during such a merge, we would discard it and make the merged node the new root – that is the lone way a B-tree loses height.

Common trap

The classic deletion bug is forgetting to fatten *before* you descend, and instead deleting first and patching up underflow afterward. The patch-up-afterward style does work, but it forces you to walk back up the path – exactly the double-pass cost we worked so hard to avoid in insertion – and it is far easier to get the cascade of merges wrong. The disciplined recipe is always: *guarantee the node you are about to enter has $\geq t$ keys, then enter it.* If you maintain that one invariant religiously, every removal you finally perform leaves a legal node behind, and you never recurse upward.

Like search and insert, deletion visits one node per level and does $O(t)$ in-memory work (one borrow or merge) at each, so it costs $O(h) = O(\log_t n)$ disk accesses and $O(t \log_t n)$ CPU time – the same budget as everything else.

18.9 Stepping Back

Why this matters

You now understand the data structure that, more than any other, makes large-scale data storage practical. When PostgreSQL, MySQL/InnoDB, Oracle, or SQLite build an index on a column, that index is a B-tree (often the B^+-tree variant, which stores all real data in the leaves and chains the leaves together for fast range scans – a small twist on what you have just learned). When you query "`WHERE id = 91823`" and it returns in a millisecond from a table of a billion rows, you are watching a height-3 B-tree do its two disk reads. Filesystems use them to map filenames to locations. Key-value stores, time-series databases, and even some in-memory systems use them because the same width-over-height logic that beats disk latency also beats CPU-cache-miss latency: a cache line is just a very small, very fast "page," and the B-tree's instinct to pack many keys into one fetched block is exactly right there too.

Focus

The one idea to carry away: **a B-tree is a balanced search tree re-tuned for a world where each access is expensive, so it maximizes the work done per access by making nodes wide.** Width $\Rightarrow$ low height $\Rightarrow$ few accesses. Every detail – the $t-1$-to-$2t-1$ occupancy band, splitting full nodes on the way down, fattening thin nodes on the way down, growing and shrinking only at the root – is in service of that single principle.

Exercises

Exercise 18.1. For a B-tree with minimum degree $t = 4$, state: (a) the minimum and maximum number of keys in a non-root node; (b) the minimum and maximum number of children of an internal

non-root node; (c) the maximum number of keys in any node. Then state how many keys the *root* is allowed to have at minimum.

Exercise 18.2. Using the height theorem, compute an upper bound on the height of a B-tree with $t = 100$ holding $n = 10^6$ keys, then $n = 10^{12}$ keys. Roughly how many disk accesses does a search cost in each case if the root is kept cached in memory?

Exercise 18.3. Starting from an empty B-tree with $t = 2$, insert the keys F, S, Q, K, C, L, H, T, V, W, M, R, N, P in this order (compare them alphabetically). Draw the tree after every insertion that causes a split. (This is the classic CLRS build-up exercise; doing it by hand cements the single-pass insert.)

Exercise 18.4. Show that a B-tree of minimum degree t and height h holding n keys must satisfy $n \le 2(2t)^h - 1$ as well (the *maximum* number of keys, from the fullest possible tree), and combine it with the chapter's lower bound to sandwich n. What does the upper bound tell you about the *smallest* possible height for n keys?

Exercise 18.5. Let $t = 3$. First check yourself: how many keys does a full node hold? Write that full node's keys as $10, 20, 30, 40, 50$, identify the median that floats up under B-Tree-Split-Child, and write out the two resulting child nodes and the key handed to the parent.

Exercise 18.6. B-Tree-Split-Child requires that the parent be non-full before it is called. Explain concretely what goes wrong if you split a child whose parent is already full, and explain how B-Tree-Insert-Nonfull's descent guarantees the parent is never full at the moment of a split.

Exercise 18.7. Take the final tree from the deletion lab in this chapter (the one with root [9], left child $[1, 3]$, right child $[11, 13]$, with $t = 2$). Delete the key 9. Which deletion case applies, and what does the tree look like afterward? (Hint: 9 lives in an internal node, so you are in Case 2 – decide whether to use its predecessor or successor based on which flanking child can spare a key.)

Exercise 18.8. Argue carefully why the single-pass insertion never needs to revisit a node it has already left on its way down. Phrase your answer in terms of the descent invariant. Then describe a scenario in which a *two-pass* (descend, then split upward) insertion would re-read the same disk page multiple times, and count how many extra disk reads it incurs in the worst case for a tree of height h.

Exercise 18.9. A disk page holds 4096 bytes. Each key plus its associated child pointer occupies 32 bytes, and a node needs an extra 8-byte header. Roughly what is the largest minimum degree t such that a full node still fits in one page? Show your arithmetic, and explain why you would choose t this large rather than, say, $t = 2$.

Exercise 18.10. *(Reading ahead.)* Look up the B^+-tree variant. In a B^+-tree, all real records live in the leaves and internal nodes hold only separator keys, and the leaves are linked in a chain. Explain in one paragraph why this layout makes *range queries* ("give me every key between 40 and 90 in sorted order") faster than in the plain B-tree of this chapter.

Chapter 19

Disjoint Sets and Union-Find

Here is a question that sounds almost too simple to be the subject of a whole chapter. You are given a pile of objects – people, computers on a network, pixels in a photograph, cells in a maze – and from time to time someone tells you that two of them belong together. "Alice and Bob are friends." "Cable runs from router 3 to router 7." "This pixel touches that pixel and they are the same color." As these facts arrive, the objects clump up into groups. And at any moment, someone might stop you and ask: *are these two particular objects currently in the same group?*

That is the entire problem. You maintain a collection of groups, you occasionally merge two groups into one, and you occasionally ask whether two objects share a group. It is called the *disjoint-set* or *union-find* problem, and the reason it deserves a chapter is that the fast solution is one of the small miracles of computer science: a data structure so close to free that we need a function almost nobody has ever heard of just to describe how close to free it is.

Intuition

Picture a room full of strangers. Each begins alone, a group of one. You walk around announcing introductions: "you two know each other now." When two people meet, their entire friend-groups silently merge – if Alice knew Carol and Bob knew Dave, then after Alice meets Bob, all four are one group. At any point I can tap two people on the shoulder and ask, "same group?" To answer instantly, each group elects a single *leader*, and everyone in the group knows (perhaps after a short chain of pointers) who their leader is. Two people are in the same group exactly when they share a leader. That single idea – *a group is named by its leader* – is the whole chapter.

We will start with the slowest reasonable version, watch exactly where it hurts, and add two small tricks. Those two tricks together turn a structure that could cost $\Theta(n)$ per operation into one that costs, for all practical purposes, a constant. Then we will meet the strange, slow-growing function that measures precisely how close to constant we got.

19.1 What We Are Actually Building

Let us pin the problem down. We have a universe of n elements. They are partitioned into *disjoint sets* – "disjoint" meaning no element lives in two sets at once, so every element belongs to exactly

one set. We want to support three operations.

Formal

A **disjoint-set data structure** maintains a collection $\mathcal{S} = \{S_1, S_2, \ldots, S_k\}$ of disjoint dynamic sets. Each set is identified by a *representative*, which is some fixed member of the set. Three operations are supported:

- MAKE-SET(x): create a new set whose only member (and representative) is x. Since x joins no other set, the sets stay disjoint.
- UNION(x, y): replace the two sets containing x and y, say S_x and S_y, by their union $S_x \cup S_y$, and destroy the two originals. The new set gets one representative (often a member of one of the two old sets).
- FIND-SET(x): return the representative of the set containing x.

Notice how cleanly FIND-SET answers our shoulder-tap question. "Are x and y in the same set?" is just the test FIND-SET(x) = FIND-SET(y). We never need a separate "same-set" operation; representatives give it to us for free. The only promise the representative must keep is *stability*: if you call FIND-SET twice on the same element with no intervening UNION, you must get the same answer both times. Which element serves as representative is up to us, and we will exploit that freedom ruthlessly.

Focus

Hold these three operations in your head as the contract. Everything that follows – linked lists, forests, ranks, path compression – is just *implementation* behind that contract. The user only ever sees MAKE-SET, UNION, and FIND-SET.

19.1.1 A motivating use: connected components

Before we build anything, let us see why this contract is worth honoring. A *graph* is a set of vertices and a set of edges joining them; two vertices are in the same *connected component* if you can walk from one to the other along edges. Suppose edges arrive one at a time and, after each, you want to know how many components remain, or whether two given vertices are connected yet. Union-find answers this beautifully.

Algorithm 80: CONNECTED-COMPONENTS(G)

Input: A graph $G = (V, E)$.
Output: A disjoint-set structure where u, v share a set iff they are connected.

```
1 foreach vertex v ∈ V do
2     MAKE-SET(v);
3 foreach edge (u, v) ∈ E do
4     if FIND-SET(u) ≠ FIND-SET(v) then
5         UNION(u, v);
6 return the disjoint-set structure;
```

After this runs, the procedure SAME-COMPONENT(u, v) is just one line: return whether FIND-SET(u) =


FIND-SET(v). We will meet this exact pattern again in the chapter on minimum spanning trees, where Kruskal's algorithm leans entirely on union-find to avoid creating cycles. So this is not a toy: it is a workhorse you will reuse.

Why this matters

Union-find quietly powers a surprising amount of real software. Kruskal's minimum-spanning-tree algorithm uses it to detect whether adding an edge would form a cycle. Image-processing tools use it for *connected-component labeling* – finding the blobs in a black-and-white image. Compilers use it for *unification* in type inference, merging type variables that must be equal. Maze generators carve passages by unioning cells. Even physics simulations of percolation (does water seep through a porous rock?) are, at heart, union-find. It is the data structure you did not know you were already using.

19.2 First Try: a Linked-List Representation

Let us build the simplest thing that could possibly work, so we can feel its weaknesses honestly. Represent each set as a *linked list*. The first object in the list is the representative. Each object stores a pointer to the next object in its list, and – this is the clever part – also a pointer straight back to the representative.



dashed = "back to representative" pointer

The solid arrows chain the list together (so we can walk it); the dashed arrows let every member point home to the representative c. With this layout, MAKE-SET and FIND-SET are both gloriously fast.

- MAKE-SET(x): build a one-element list. Constant time.
- FIND-SET(x): follow x's back-pointer to the representative. Constant time.

The trouble is UNION. To union two lists, we append one onto the other. Appending the list is cheap – splice one tail onto the other. But every object on the appended list now has the *wrong* back-pointer: it still points to its old representative. We must walk the appended list and repoint each one to the new representative. That walk costs time proportional to the length of the list we appended.


Common trap

The expensive part of the linked-list union is not joining the lists – that is one pointer splice. It is *updating every back-pointer* on the list that got absorbed. Beginners often assume union is cheap because "it's just a list append." The back-pointers are the hidden tax, and they are what make this representation slow.

19.2.1 How bad can it get? A worst-case sequence

Naively, UNION(x, y) might always append y's list onto x's. An adversary can exploit this. Suppose we make n singleton sets $x_1, \ldots, x_n$, then perform $n-1$ unions, always appending the long accumulated list onto a fresh singleton:

$$\textsc{Union}(x_2, x_1),\ \textsc{Union}(x_3, x_2),\ \ldots,\ \textsc{Union}(x_n, x_{n-1}).$$

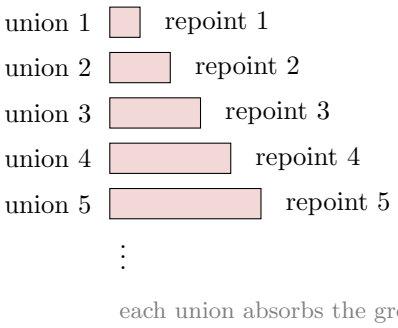

Watch the cost if each union repoints the *growing* side. The first union repoints 1 object, the second repoints 2, the third 3, and so on, so the total update work across all $n-1$ unions is

$$1 + 2 + 3 + \cdots + (n-1) = \frac{(n-1)\,n}{2} = \Theta(n^2).$$

Averaged over the $2n-1$ operations in the sequence, that is $\Theta(n)$ per operation. For a million elements, a single union near the end could touch a million back-pointers. That is the pain point. Now let us fix it.

19.2.2 The weighted-union heuristic

The fix is embarrassingly simple, and it is the first appearance of a theme that will repeat: *when you merge two things, always absorb the smaller into the larger.* Keep, with each list, a count of its length. When you union, append the shorter list onto the longer one, and repoint only the shorter list's back-pointers. This is the *weighted-union heuristic.*

Why does this help so dramatically? Think about a single object x, and ask: how many times can x's back-pointer ever be updated? Its back-pointer is updated only when x is on the *smaller* of two lists being merged. But the moment that happens, x lands in a merged list at least *twice* as big as the one it left. So each time x gets repointed, the size of x's set at least doubles.

Intuition

A quantity that at least doubles each time something happens cannot have that something happen very often. Start at size 1; after k doublings the set has size at least 2^k. Since no set exceeds n, we need $2^k \le n$, so $k \le \log_2 n$. Therefore *any single object's back-pointer is updated at most* $\log_2 n$ *times over the entire history of the structure.*

Summing across all n objects, the total back-pointer work over any sequence of operations is at most $n \log_2 n$. The earlier quadratic blow-up is gone.


Formal

Theorem (weighted union). Using the linked-list representation with the weighted-union heuristic, any sequence of m MAKE-SET, UNION, and FIND-SET operations, of which n are MAKE-SET, takes $O(m + n \log n)$ time in total.

This is a genuinely good result – it is exactly the bound CLRS proves for this representation. But we are going to do better still, because there is a second, sleeker way to picture sets that opens the door to near-constant time. We trade lists for trees.

19.3 The Forest Representation

Here is the idea that carries us the rest of the way. Represent each set not as a list but as a *rooted tree*. Each element has a single pointer to its *parent*. The root of a tree points to itself (a convenient way to say "I am the representative"). The whole structure is therefore a *forest* – a collection of these trees, one per set. The representative of a set is the root of its tree.



Each arrow points from a child *up* to its parent. Note: these are not binary trees and not search trees. There is no ordering, no balance condition yet, and a node may have any number of children. The only thing that matters is *which root you reach by walking up.*

The three operations become:

- MAKE-SET(x): make a one-node tree. Set $x.p = x$ (its parent is itself). Constant time.
- FIND-SET(x): walk up parent pointers from x until you hit a node that is its own parent. That node is the root; return it.
- UNION(x, y): find the two roots, then make one root point to the other. One pointer change (plus two finds).

Here is the bare-bones pseudocode, before any cleverness.

Algorithm 81: Naive forest operations

```
1  function MAKE-SET(x)
2      x.p ← x;
3  function FIND-SET(x)
4      while x ≠ x.p do
5          x ← x.p;
6      return x;
7  function UNION(x, y)
8      LINK(FIND-SET(x), FIND-SET(y));
9  function LINK(u, v)
       // u and v are roots
10     u.p ← v;
```

The cost of everything is the cost of FIND-SET, which is the cost of walking from a node to its root – that is, the *height* of the tree. And here is the catch: nothing yet stops the trees from growing tall and stringy. If LINK always hangs the first root under the second, the same adversarial union chain from before builds a single path of n nodes, and FIND-SET on the deepest node walks all n of them. We are right back to $\Theta(n)$.

Walking question

Before reading on, take this on a walk. The linked-list version had a weighted-union trick: absorb the smaller into the larger. The forest version is stringy because we attach roots carelessly. What is the analogous "attach the smaller thing under the larger thing" rule for trees – and what should "smaller" even mean when the thing is a tree, not a list? There are two natural answers, and they behave almost identically. See if you can invent at least one of them.

19.4 Trick One: Union by Rank


The trees got tall because we attached roots blindly. The cure is the same philosophy as weighted union: *when you link two roots, put the shorter tree under the taller one's root.* If you always hang the shorter tree beneath the taller, the combined tree's height does not grow – the shorter tree's nodes are now one level deeper, but they were shallower to begin with, so they still fit under the old height. The total height only increases when you link two trees of *equal* height, and even then it goes up by just one.

We could track exact heights, but tracking heights exactly becomes a nuisance once we add the second trick (path compression will secretly shrink trees without us updating heights). So instead we track an *upper bound* on the height called the *rank*. Every node carries an integer $x.rank$. A fresh singleton has rank 0. When we link two roots:

- if their ranks differ, hang the lower-rank root under the higher-rank root, and *no rank changes*;
- if their ranks are equal, pick either as the new root and increment its rank by one.

Algorithm 82: Forest with union by rank

```
1  function MAKE-SET(x)
2      x.p ← x;
3      x.rank ← 0;
4  function UNION(x, y)
5      u ← FIND-SET(x);
6      v ← FIND-SET(y);
7      if u = v then return // already in the same set; nothing to do;
8      LINK(u, v);
9  function LINK(u, v)
       // u, v are distinct roots
10     if u.rank > v.rank then
11         v.p ← u;
12     else
13         u.p ← v;
14         if u.rank = v.rank then
15             v.rank ← v.rank + 1;
```

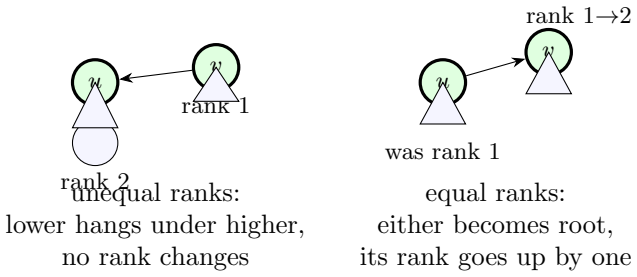

The two cases of LINK: a triangle is the rest of each root's tree. Only the equal-rank case ever raises a rank, and only by one.

19.4.1 Why rank controls height

The payoff is a clean guarantee. Let us argue it gently, because the argument explains exactly *why* rank works.

Lemma 19.1. *With union by rank (and no path compression), any root of rank r is the root of a tree containing at least 2^r nodes.*

Why it is true. We argue by induction on the number of links performed. A fresh node has rank 0 and a tree of $1 = 2^0$ node, so the base case holds. Now consider a link. If two roots of *different* rank are joined, the surviving root's rank does not change, and its tree only grew, so its size still beats 2^r.

The only interesting case is linking two roots of *equal* rank r. By the inductive hypothesis each had at least 2^r nodes, so the merged tree has at least $2^r + 2^r = 2^{r+1}$ nodes – and its new rank is exactly $r + 1$. The bound holds. □

Corollary 19.1. *Every rank is at most $\lfloor \log_2 n \rfloor$, where n is the number of elements. Hence every tree has height at most $\lfloor \log_2 n \rfloor$, and* Find-Set *runs in $O(\log n)$ time.*

Why it is true. A root of rank r owns at least 2^r nodes, and no tree can own more than n nodes, so $2^r \le n$, giving $r \le \log_2 n$. Since rank is an upper bound on height, the height is at most $\log_2 n$ too. □

So union by rank alone already matches the $O(\log n)$ per-operation behavior of weighted lists – but now in a tree, which sets up the second trick. Let us trace it to make it concrete.


Algorithm lab

Trace union by rank. Start with singletons a, b, c, d, e, f, g, h, each rank 0. Execute, in order:

$$\textsc{Union}(a, b),\ \textsc{Union}(c, d),\ \textsc{Union}(a, c),\ \textsc{Union}(e, f),\ \textsc{Union}(a, e).$$

1. $\textsc{Union}(a, b)$: equal ranks 0. Hang a under b; now $b.rank = 1$. Tree: root b, child a.
2. $\textsc{Union}(c, d)$: equal ranks 0. Hang c under d; $d.rank = 1$. Tree: root d, child c.
3. $\textsc{Union}(a, c)$: roots are b (rank 1) and d (rank 1). Equal! Hang b under d; $d.rank = 2$. Now d roots all of a, b, c, d.
4. $\textsc{Union}(e, f)$: equal ranks 0. Hang e under f; $f.rank = 1$.
5. $\textsc{Union}(a, e)$: roots are d (rank 2) and f (rank 1). Different! Hang the lower, f, under d. No rank changes; d stays rank 2.

Final tree rooted at d: children c, b, f; under b is a; under f is e. The deepest node (a or e) is 2 steps from the root – and indeed $rank(d) = 2$. Check that this 8-node tree has height $2 \le \log_2 8 = 3$, as the corollary promises.




The tree the trace builds. Its height is 2, matching $rank(d) = 2$, and comfortably under the $\log_2 8 = 3$ ceiling.

19.5 Trick Two: Path Compression

Now for the genuinely beautiful idea. Every time you call $\textsc{Find-Set}(x)$, you walk a path from x up to the root. That walk is free information: along the way you visited a whole chain of nodes, and

you *now know the root for every one of them*. So why throw that away? On the way back, repoint every node you visited directly at the root. The next FIND-SET on any of them is then a single hop. This is *path compression*.

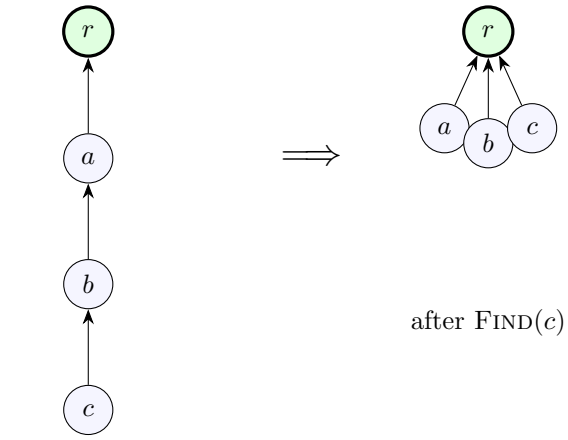

before FIND(c) after FIND(c)

A single FIND(c) walked $c \to b \to a \to r$; afterward a, b, and c *all* point straight at r. The tree got dramatically flatter, and it cost nothing extra – we were walking that path anyway. The implementation is a two-line recursion.

Algorithm 83: FIND-SET with path compression

```
1 function FIND-SET(x)
2     if x ≠ x.p then
3         x.p ← FIND-SET(x.p);
          // recurse to the root, then repoint x straight at it
4     return x.p;
```

Read that recursion carefully. The call FIND-SET($x.p$) returns the root and, as a side effect, compresses everything above x. Then the line $x.p \leftarrow$ (that root) snaps x itself onto the root. By the time the outermost call returns, every node on the original path points directly at the root.

Common trap

Path compression changes node *depths* but we deliberately do *not* update ranks when it happens. After compression a node's rank may be larger than its actual height. That is fine and intentional: rank stays a valid *upper bound* on height, which is all our analysis ever needed, and recomputing exact heights after every find would be slow and pointless. Rank is a budget, not a measurement.

Walking question

Here is something delightful to chew on. Path compression makes FIND-SET *change the structure* even though it is, semantically, a read-only query – you only asked "who is the representative?" yet the tree quietly rearranged. This is the same flavor of self-improvement you saw in amortized analysis: an operation pays a little extra now to make all future operations cheaper. Convince yourself that the answer it returns is never wrong, no matter how much it rearranges – the root of x's tree is the same before and after, because compression never moves a node to a *different* tree.

19.6 Putting It Together, and the Near-Constant Result

Use both tricks – union by rank *and* path compression – on the forest, and something remarkable happens. The bound on a sequence of operations drops from $O(m \log n)$ to something almost, but not quite, linear. Here is the celebrated result, and then we will spend real effort making the strange function in it feel ordinary.

Formal

Theorem (Tarjan). On a forest with union by rank and path compression, any sequence of m disjoint-set operations, of which n are MAKE-SET, runs in total time

$$O\big(m\,\alpha(n)\big),$$

where α is the *inverse Ackermann function*.

The function $\alpha(n)$ grows so slowly that for every n you will ever encounter – every n that could be written down with atoms in the observable universe – $\alpha(n) \le 4$. So the average cost per operation is bounded by a constant that, in any real program, never exceeds 4 or 5. The structure is *effectively* constant-time per operation, even though, famously, it is provably *not* constant in the strict asymptotic sense.

19.6.1 Where does inverse Ackermann come from?

You do not need the full proof – it is intricate, and CLRS devotes a careful section to it. But you deserve to know *why* such a bizarre function shows up at all, because the why is intuitive. The whole effect comes from how violently fast a related function *grows*, and α is its sluggish inverse.

Start with a function that grows absurdly fast. Define a tower of operations where each level is the iterate of the level below:


- Repeated addition is multiplication: $a \cdot b = a + a + \cdots + a$ (b times).
- Repeated multiplication is exponentiation: $a^b = a \cdot a \cdots a$ (b times).
- Repeated exponentiation is *tetration*: a tower $a^{a^{\cdot^{\cdot^{a}}}}$ of height b.

Keep climbing this ladder of operations – each one iterating the previous – and you get the *Ackermann function* $A(k, j)$, which grows faster than any primitive-recursive function. To get a feel for the

violence, the iterated power of two,

$$2, \quad 2^2 = 4, \quad 2^{2^2} = 16, \quad 2^{2^{2^2}} = 65536, \quad 2^{2^{2^{2^2}}} = 2^{65536},$$

reaches a number with about 20,000 digits in just *five* steps. The inverse Ackermann function $\alpha(n)$ asks the reverse question: *how many steps up this tower do I need before I exceed n?* Because the tower explodes so fast, the answer stays tiny forever.



each step raises 2 to the previous value: explosive up, glacial inverse

Reading this strip *left to right* is the tower exploding; reading it *right to left* – "how many boxes back from n to reach 2?" – is α. Five boxes already carry you past anything you could store, so $\alpha(n)$ never climbs past a tiny handful.

Intuition

Think of $\alpha(n)$ as the answer to: "how many times must I apply this ferociously-fast tower-building before I pass n?" Since one application can leap from 65536 to 2^{65536}, you essentially never need more than a handful of applications. The single-variable inverse Ackermann $\alpha(n) \leq 4$ for all n below roughly $2^{2^{2^{2^{16}}}}$ – a number so large it has no name and no physical meaning. For your laptop, your cluster, and every dataset humanity will ever assemble, $\alpha(n)$ is a small constant.

19.6.2 A gentle sketch of why we win

Here is the shape of the argument, without the full machinery. Union by rank alone guarantees that ranks along any root path strictly increase, and that ranks never exceed $\log_2 n$. Path compression then attacks those paths: every time a node is found, it leaps closer to the root, so a node can only be "far from the root" a limited number of times before it is essentially adjacent to the root.

The accounting trick (this is amortized analysis, the previous chapter's tool) groups nodes into rank *blocks* and charges the cost of each step of a find either to the operation itself or to a node whose rank is about to jump it into a higher block. A node can only be charged this way a number of times related to how many rank blocks exist – and because ranks grow only to $\log_2 n$ while the block boundaries are spaced by the tower function, the number of blocks is about $\alpha(n)$. Multiply m operations by $\alpha(n)$ charges each and you get the $O(m\,\alpha(n))$ bound.

Focus

You do not need to reproduce the proof. You need three things: **(1)** both heuristics are needed for the α bound – either one alone gives only $O(\log n)$ per operation; **(2)** α is the inverse of a function that grows faster than any tower, so it is bounded by a tiny constant for all realistic n; **(3)** therefore union-find is, in every practical sense, constant time per operation.

History and connection

The forest idea with union by rank and path compression is due to Bernard Galler and Michael Fischer (1964) and was analyzed by Robert Tarjan, who in 1975 proved the $\Theta(m\,\alpha(n))$ bound and, with van Leeuwen, refined it. Tarjan also showed the bound is essentially tight: *no* pointer-based structure can do disjoint sets in true linear time, so the inverse Ackermann factor is not an artifact of a weak proof – it is real. This is one of the few places in algorithms where an everyday data structure is provably, unavoidably, *not* constant time, yet is constant time for all practical purposes. In CLRS this is **Chapter 19, "Data Structures for Disjoint Sets"** (it was Chapter 21 in the second and third editions, so older references and problem sets may cite it that way). The inverse-Ackermann analysis lives in that chapter's final, starred section.

19.6.3 What each variant costs

Cost summary

For a sequence with n MAKE-SETs and m operations total:

Representation	FIND-SET (worst)	Sequence cost
Linked list, arbitrary union	$O(1)$	$O(n^2)$ in the bad case
Linked list, weighted union	$O(1)$	$O(m + n \log n)$
Forest, naive link	$O(n)$	$O(mn)$ in the bad case
Forest, union by rank only	$O(\log n)$	$O(m \log n)$
Forest, path compression only	—	$O(m \log n)$ (amortized)
Forest, rank *and* compression	—	$\boxed{O(m\,\alpha(n))}$

The last row is what you should actually implement. The two heuristics together cost two extra fields per node (a parent pointer and a small rank) and a few lines of code, and they buy you effectively constant time.

19.7 A Complete Worked Example

Let us run the finished structure – forest, union by rank, path compression – on a small connected-components problem so you see all the pieces move together.

Vertices: $1, 2, 3, 4, 5, 6$. Edges arrive in this order:

$$(1,2),\ (3,4),\ (5,6),\ (1,3),\ (2,5).$$


Every vertex starts as a singleton: parent itself, rank 0.

Algorithm lab

Trace. We write $p[\,]$ for the parent array and $r[\,]$ for ranks. Initially $p[i] = i$ and $r[i] = 0$ for all i.

1. **Edge** $(1, 2)$**.** FIND$(1) = 1$, FIND$(2) = 2$. Equal rank, link 1 under 2: $p[1] = 2$, $r[2] = 1$.
2. **Edge** $(3, 4)$**.** Roots $3, 4$, equal rank: $p[3] = 4$, $r[4] = 1$.
3. **Edge** $(5, 6)$**.** Roots $5, 6$, equal rank: $p[5] = 6$, $r[6] = 1$. Now three components: $\{1, 2\}$, $\{3, 4\}$, $\{5, 6\}$.
4. **Edge** $(1, 3)$**.** FIND(1) walks $1 \to 2$, returns 2 (rank 1). FIND(3) walks $3 \to 4$, returns 4 (rank 1). Equal rank, link 2 under 4: $p[2] = 4$, $r[4] = 2$. Component $\{1, 2, 3, 4\}$ rooted at 4.
5. **Edge** $(2, 5)$**.** FIND(2) walks $2 \to 4$, returns 4 (rank 2). FIND(5) walks $5 \to 6$, returns 6 (rank 1). Different rank: hang the smaller, 6, under 4: $p[6] = 4$. No rank change. Everything is now one component, rooted at 4.

Now watch path compression earn its keep. Call FIND(5). The path is $5 \to 6 \to 4$. Compression repoints: $p[5] = 4$ and $p[6] = 4$ (it already was). Next call FIND(1): path $1 \to 2 \to 4$; afterwards $p[1] = 4$ and $p[2] = 4$. After a few finds, *every* vertex points directly at 4, and all subsequent finds are a single hop. The tree has been ironed flat.



after compression: a flat star, every FIND is one hop

19.8 Implementation Notes

In real code you almost never use explicit node objects with pointers. You use two integer arrays indexed $0 \ldots n - 1$: a `parent` array and a `rank` array. MAKE-SET(i) sets `parent[i] = i` and `rank[i] = 0`. This is cache-friendly and trivially fast.

A common and excellent variant of FIND avoids recursion (and its stack depth) using *path halving*: as you walk up, make every node point to its grandparent. It compresses almost as well as full compression and runs in a single tight loop.

Algorithm 84: FIND-SET with path halving (iterative)

```
1 function FIND-SET(x)
2     while x ≠ parent[x] do
3         parent[x] ← parent[parent[x]];
          // point x at its grandparent, then step up
4         x ← parent[x];
5     return x;
```

Common trap

A subtle but classic bug: comparing the *representatives* but unioning the *original elements* correctly. In UNION(x, y) you must call FIND-SET on both *first*, link the two roots, and never link an element to itself. Linking a root to itself ($u.p \leftarrow u$ when $u = v$) is a silent no-op that wastes a rank increment in some buggy variants; always check that the two roots are distinct before incrementing any rank.

Many implementations replace rank with *size* (the number of nodes in the tree) and link the smaller tree under the larger – "union by size." It achieves the same $O(\alpha(n))$ bound, and size is sometimes useful on its own ("how big is this component?"). Rank and size are two flavors of the same "small under big" idea you have now seen three times: weighted lists, union by rank, union by size. Whenever you merge structures, absorbing the small into the large is almost always the move.

19.9 Summary

You started with a problem so plain it barely seemed to need an algorithm: group objects, merge groups, ask if two objects share a group. You built it four ways, each better than the last.

- **Linked lists** give instant FIND but slow UNION; the weighted-union heuristic (small list onto big) tames it to $O(m + n \log n)$.
- **Forests** name each set by a tree root. Naive linking can build a stringy path of height n.
- **Union by rank** attaches the shorter tree under the taller, keeping height $O(\log n)$.
- **Path compression** flattens the find path on every query, so the structure improves itself as it is used.

Together, rank and compression give $O(m\,\alpha(n))$ – effectively constant time per operation, where α, the inverse Ackermann function, is bounded by a tiny constant for every input you will ever meet. Two integer arrays and a dozen lines of code buy you one of the fastest data structures in existence.

Why this matters

The deep lesson here outlasts the data structure. Twice you saw an operation make *future* operations cheaper – weighted union limited how often a node could be moved, and path compression flattened paths on the fly. That is the heartbeat of amortized analysis: a cheap investment now, repaid many times over. When you meet Fibonacci heaps in the next chapter, you will see the same philosophy at a grander scale. Union-find is the cleanest, smallest place to fall in love with it.

19.10 Exercises

Exercise 19.1. (Warmup: trace it.) Start with singletons 1 through 8. Using the forest with union by rank (no path compression), perform UNION$(1,2)$, UNION$(3,4)$, UNION$(5,6)$, UNION$(7,8)$, UNION$(1,3)$, UNION$(5,7)$, UNION$(1,5)$. Draw the final tree and give the rank of the root. What is the height of the tree?

Exercise 19.2. (Same set?) Explain in one or two sentences why the test FIND-SET$(x) =$ FIND-SET(y) correctly decides whether x and y are in the same set, and why no separate operation is needed. What property of representatives makes this work?

Exercise 19.3. (The weighted-union doubling argument.) In the linked-list representation with weighted union, prove carefully that a single fixed object's back-pointer is updated at most $\lfloor \log_2 n \rfloor$ times over any sequence of operations. Where exactly does the "set at least doubles" step come from?

Exercise 19.4. (Rank versus height.) Give a concrete sequence of operations (using both union by rank and path compression) after which some node's rank is strictly greater than the actual height of its tree. Explain why this does not break the analysis.

Exercise 19.5. (Path compression alone.) Suppose you use path compression but *not* union by rank – LINK always hangs the first root under the second. Argue informally that the amortized cost per operation is still $O(\log n)$, not the bad $O(n)$ of the naive forest. (Hint: compression keeps ironing the trees flat even without rank.)

Exercise 19.6. (Union by size.) Rewrite MAKE-SET, LINK, and the rank logic to use "union by size" instead: store the number of nodes in each tree at its root, and on a link hang the smaller-size tree under the larger. Prove the analogue of Lemma 19.1: a tree of height h contains at least 2^h nodes, so heights stay $O(\log n)$.

Exercise 19.7. (Counting components.) Augment the structure with a global counter so that after any sequence of operations you can report, in $O(1)$ time, how many disjoint sets currently exist. Specify exactly where the counter is initialized, incremented, and decremented, and prove it stays correct.

Exercise 19.8. (Kruskal preview.) You are given a graph whose edges arrive one at a time, and you must print "CYCLE" the first time an edge connects two vertices already in the same component, and "ADD" otherwise. Write pseudocode using union-find, and argue its total running time over m edges and n vertices is $O((m+n)\,\alpha(n))$. You have just written the core of Kruskal's algorithm.

Exercise 19.9. (How big is α, really?) The two-argument Ackermann-style tower satisfies (roughly) $A(2) = 4$, $A(3) = 16$, $A(4) = 65536$, and $A(5) = 2^{65536}$. Using the intuition that $\alpha(n)$ is "the least k with $A(k) \geq n$," explain why $\alpha(n) \leq 4$ for every n that could be stored in the memory of any physically possible computer. Why does this make the "not constant time" result a mathematical curiosity rather than a practical worry?

Exercise 19.10. (Challenge: offline minimum / interval merging.) You process a stream of integers from a fixed range $1 \ldots n$. Some are "insert k" and some are "extract the current minimum." Design a way to use union-find so that each extract finds the next still-present value quickly, by unioning each removed value with its successor. Explain why each value is removed at most once and the whole process is $O((n+q)\,\alpha(n))$ for q operations. (This is the classic "union-find as a pointer to the next free slot" trick.)

Chapter 20

Fibonacci Heaps

You have met heaps already. A binary heap is a tidy little machine: it lives in an array, it keeps the smallest (or largest) thing on top, and it lets you insert and extract-min in $O(\log n)$ time. For most of life that is plenty.

But every now and then you meet an algorithm whose appetite is lopsided. It calls one heap operation *thousands* of times for every time it calls another. And when that happens, you start to wish you could make the popular operation *cheaper*, even if you have to pay a little more somewhere else. That wish is exactly what a *Fibonacci heap* grants. It is the data structure you reach for when you want `decrease-key` to be, on average, nearly free.

This chapter is going to feel different from the binary-heap chapter. There, the structure was rigid and the analysis was direct. Here, the structure is loose, almost messy, and the magic lives entirely in the *amortized* analysis. We will go slowly. By the end you will not just know the operations; you will know *why* the looseness is the point, and why the word "Fibonacci" shows up in the name of a heap.

Focus

The whole chapter is one trade. We let the heap get structurally lazy and messy so that `insert` and `decrease-key` can finish in $O(1)$ amortized time. We pay for that laziness later, all at once, during `extract-min`, which does a big cleanup. Hold onto that image: cheap deposits now, one expensive cleanup later.

20.1 What problem are we actually solving?

Let us start with the customer, not the product. Who needs a fancier heap?

Think about Dijkstra's shortest-path algorithm, or Prim's minimum-spanning-tree algorithm (we will meet both properly in later chapters; for now just trust the shape of their work). Both algorithms keep a priority queue of vertices keyed by a tentative distance. The main loop does this:

- Pull out the closest unfinished vertex. That is one `extract-min`.
- For each edge leaving that vertex, maybe *lower* the key of the neighbor on the other end, because we just found a shorter way to reach it. That is a `decrease-key`.

Now count. Over the whole run of the algorithm on a graph with V vertices and E edges, you do at most V extract-mins (one per vertex) but up to E decrease-keys (one per edge, in the worst case). In a dense graph, E can be as large as V^2. So decrease-key is the operation that gets hammered, and extract-min is comparatively rare.

Intuition

A binary heap charges $O(\log n)$ for *both* extract-min and decrease-key. Dijkstra then costs $O((V + E) \log V)$. The $E \log V$ term dominates, and it is entirely the fault of decrease-key being logarithmic.
A Fibonacci heap charges $O(\log V)$ *amortized* for extract-min but only $O(1)$ *amortized* for decrease-key. Now Dijkstra costs $O(V \log V + E)$. We traded a log factor off the busiest operation. On dense graphs that is the difference between $V^2 \log V$ and V^2 work for the relaxation step.

So the target is set in stone before we design anything:

Focus

We want a *mergeable* priority queue where:

operation	we will achieve	(binary heap was)
`insert`	$O(1)$ amortized	$O(\log n)$
`minimum`	$O(1)$ worst case	$O(1)$
`extract-min`	$O(\log n)$ amortized	$O(\log n)$
`decrease-key`	$O(1)$ amortized	$O(\log n)$
`union`	$O(1)$ worst case	$O(n)$

That `union` row deserves a word. "Mergeable" means you can take two whole heaps and splice them into one. With an array-based binary heap that is expensive — you essentially rebuild. Fibonacci heaps make it trivial, and that trivial-merge ability is the seed from which everything else grows.

20.2 The idea: lazy bags of trees

20.2.1 From one tree to a forest


A binary heap is a single tree, kept perfectly balanced inside an array. The balance is what makes it $O(\log n)$ — but maintaining balance is also what makes every operation *pay* that $O(\log n)$.

A Fibonacci heap throws balance out the window. Instead of one carefully shaped tree, it keeps a *collection* of heap-ordered trees. "Heap-ordered" means the same local rule you already know: in every tree, each node's key is $\leq$ the keys of its children. So the minimum of any one tree is at that tree's root. The minimum of the *whole* heap is therefore the smallest root among all the trees — and we keep a pointer straight to it.

Intuition

Picture a tabletop covered with little trees, each one a heap. The roots are laid out in a circle (a doubly linked list joined at the ends), so you can walk from any root to the next. One special pointer, *min*, always aims at the smallest root. That is a Fibonacci heap: a circle of root-tops, with *min* pointing at the lowest.

Here is a small forest. Each tree is heap-ordered, and *min* points at the overall smallest root, 3.

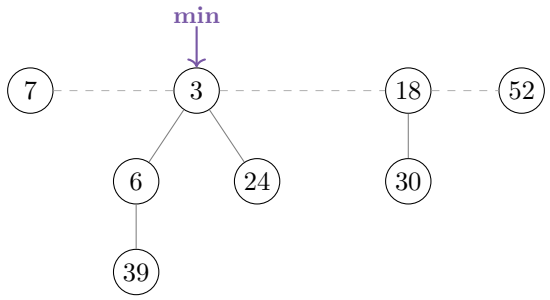

Two things to notice right away. First, the trees can have wildly different shapes and sizes — nobody is enforcing balance. Second, finding the minimum is instant: just read the *min* pointer. We never search for it.

20.2.2 What each node carries

Every node in the forest stores a handful of fields. Keep this list nearby; the operations are just careful manipulations of these pointers.

- **key** — the priority value.
- **parent** — pointer up, or null if this node is a root.
- **child** — pointer to *one* of its children (the rest are reachable from there).
- **left, right** — the node's neighbors in a *circular, doubly linked list.* Roots live in one such list (the root list); siblings under a common parent live in another.
- **degree** — how many children the node currently has.
- **mark** — a single boolean, true or false. This little flag is the secret ingredient that makes the analysis work. We will earn it in Section 20.5.

Focus

Children of a node are kept in a *circular doubly linked list.* That is what makes splicing a node in or out an $O(1)$ pointer dance: no shifting, no searching. Every structural move in this chapter is "unhook here, hook in there," and circular doubly linked lists make both ends of that move constant time.

20.3 The easy operations: make, insert, minimum, union

Three of the five core operations are almost embarrassingly simple, precisely because we have given ourselves permission to be lazy.

20.3.1 Make-heap and minimum

`make-heap` returns an empty heap: $min = \text{null}$ and a node count $n = 0$. Done.

`minimum` reads and returns the key at min. One pointer dereference, $O(1)$ worst case, no surprises.

20.3.2 Insert: just drop it on the table

Here is laziness in its purest form. To insert a new key, we do *not* find where it "belongs." We make a one-node tree out of it and toss it into the root list. Then, if the newcomer is smaller than the current minimum, we swing the min pointer to it. That is the entire operation.

Algorithm 85: FibHeap-Insert(H, x)

Input: a Fibonacci heap H and a new node x with a key
Output: H with x inserted

```
1 x.degree ← 0;  x.parent ← null;  x.child ← null;  x.mark ← false;
2 if H.min = null then
3 |   create a root list containing just x;
4 |   H.min ← x;
5 else
6 |   splice x into H's root list;
7 |   if x.key < H.min.key then
8 |   |   H.min ← x
9 H.n ← H.n + 1;
```

Splicing into a circular doubly linked list is a fixed number of pointer writes, so insert is $O(1)$ in the *worst* case here — even better than the amortized bound we promised. We will see the structure get untidy, and pay for it later.

Common trap

Do not picture insert as "adding a leaf to a tree." There is no single tree. Insert literally creates a brand-new one-node tree sitting beside all the others. After ten inserts into an empty heap, you have ten separate one-node trees in the root list — not one tree of ten nodes. The cleanup that consolidates them happens only when an extract-min forces it.

20.3.3 Union: splice two circles together

Two circular lists can be joined into one in $O(1)$ time — you cut each circle open and stitch the loose ends together. So to union two heaps H_1 and H_2, we concatenate their root lists and keep whichever min is smaller.

Algorithm 86: FibHeap-Union(H_1, H_2)

Input: two Fibonacci heaps
Output: a single heap containing all their nodes

```
H ← a new empty heap;
concatenate the root lists of H1 and H2 into H's root list;
if H1.min = null or (H2.min ≠ null and H2.min.key < H1.min.key) then
    H.min ← H2.min
else
    H.min ← H1.min
H.n ← H1.n + H2.n;
return H;
```

This is why we call the structure *mergeable*. A binary heap cannot do this in $O(1)$; a Fibonacci heap does it without breaking a sweat, because the root list is just a circle and circles join trivially.

Why this matters

Cheap union is not a toy feature. Whenever an algorithm builds many small queues and then merges them — think of certain graph algorithms, event-driven simulations, or some computational-geometry sweeps — the $O(1)$ merge can be the deciding factor. It is the same reason linked lists beat arrays for splicing: you pay in pointers, not in copying.

20.4 Extract-min: the one place we clean up

We have been making a mess. Every insert and every union just dumps trees into the root list and walks away. Sooner or later the bill comes due, and it comes due here, in `extract-min`. This is the only operation that is allowed to be slow, and it spends its time doing the housekeeping everyone else skipped.

20.4.1 The two-step plan

Extract-min has a small first step and a big second step.

Step 1 — remove the minimum. The minimum is a root, so its children are a clump of heap-ordered subtrees hanging off it. We snip those children loose and promote them to be roots in their own right (they are still heap-ordered, just no longer under a parent). Then we delete the old minimum node. After this, the root list may be long and lumpy.

Step 2 — consolidate. Now we tidy. We repeatedly merge trees until no two roots have the same *degree* (same number of children). When two roots have equal degree, we *link* them: compare their keys, make the larger-keyed root a child of the smaller-keyed root. That link raises the survivor's degree by one and removes one tree from the root list. We keep linking until all surviving roots have distinct degrees. Finally we scan the survivors to find the new minimum.

Intuition

Consolidation is like making change with coins, where a "coin" is a tree and its denomination is its degree. You are not allowed to keep two coins of the same denomination: whenever you have two degree-d trees, you fuse them into one degree-$(d{+}1)$ tree (a bigger coin). When the dust settles, you hold at most one tree of each degree — so at most $\lfloor \log_\phi n \rfloor + 1$ trees total. That bound is where the $O(\log n)$ comes from.

20.4.2 Linking two trees

The atomic move inside consolidation is LINK. It takes two roots of equal degree and makes one the child of the other, preserving the heap order by demoting whichever root has the larger key.

Algorithm 87: LINK(H, y, x) // assumes $x.key \le y.key$

Input: two roots x, y of equal degree, with x the smaller key
Output: y becomes a child of x

1 remove y from the root list of H;
2 make y a child of x; insert y into x's child list;
3 $x.degree \leftarrow x.degree + 1$;
4 $y.mark \leftarrow$ false;

(We clear $y.mark$ because y is now a freshly attached child with no history of loss yet — again, that flag will make sense in Section 20.5.)

20.4.3 The consolidation procedure

To consolidate, keep an array A indexed by degree. Walk the root list; for each root w, look at its degree d. If $A[d]$ is empty, park w there. If $A[d]$ already holds some root x, link them (the smaller key wins), clear $A[d]$, and try again with the merged tree at degree $d + 1$ — cascading upward just like carrying in binary addition. Figure 20.1 pictures the carry: two degree-d trees collide in slot d, fuse into one degree-$(d{+}1)$ tree, and that bigger tree then tries slot $d{+}1$ — which may itself be full, propagating the carry.

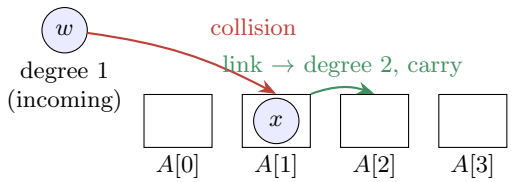


Figure 20.1: Consolidation as binary-addition carry. An incoming degree-1 root w finds slot $A[1]$ already occupied by x. The two are linked into one degree-2 tree, which then carries into slot $A[2]$; if that slot is full too, the carry keeps propagating upward.

Algorithm 88: FibHeap-Extract-Min(H)

Input: a Fibonacci heap H
Output: the node with the smallest key, removed from H

```
z ← H.min;
if z ≠ null then
    foreach child c of z do
        add c to the root list of H;   c.parent ← null;
    remove z from the root list of H;
    if z = z.right (it was the only root) then
        H.min ← null
    else
        H.min ← z.right;   Consolidate(H)
    H.n ← H.n − 1;
return z;
```

Algorithm 89: Consolidate(H)

```
let A[0 .. D(n)] be an array of nulls, where D(n) = ⌊log_φ n⌋;
foreach root w in the root list of H do
    x ← w;   d ← x.degree;
    while A[d] ≠ null do
        y ← A[d];
        if x.key > y.key then
            exchange x ↔ y
        Link(H, y, x);
        A[d] ← null;   d ← d + 1;
    A[d] ← x;
H.min ← null;
foreach slot i with A[i] ≠ null do
    add A[i] to a fresh root list; update H.min if A[i] is smaller;
```

20.4.4 A fully traced example

Let us watch consolidation happen. Suppose extract-min has just removed the old minimum and promoted its children, leaving this root list (degrees written underneath):

root key	23	7	21	3	17
degree	0	1	0	2	0

We process roots left to right, parking them in A by degree.

1. **23**, degree 0. $A[0]$ empty $\Rightarrow$ park: $A[0] = 23$.
2. **7**, degree 1. $A[1]$ empty $\Rightarrow$ park: $A[1] = 7$.

3. **21**, degree 0. $A[0] = 23$ is occupied. Link: compare 21 vs 23; 21 is smaller, so 23 becomes a child of 21. Now 21 has degree 1. Clear $A[0]$, move up to degree 1. But $A[1] = 7$ is occupied. Link: 7 vs 21; 7 is smaller, so 21 (carrying 23 under it) becomes a child of 7. Now 7 has degree 2. Clear $A[1]$, move to degree 2. $A[2]$ empty $\Rightarrow$ park: $A[2] = 7$.
4. **3**, degree 2. $A[2] = 7$ occupied. Link: 3 vs 7; 3 is smaller, so 7 becomes a child of 3. Now 3 has degree 3. Clear $A[2]$, move to degree 3. $A[3]$ empty $\Rightarrow$ park: $A[3] = 3$.
5. **17**, degree 0. $A[0]$ empty $\Rightarrow$ park: $A[0] = 17$.

The survivors are $A[0] = 17$ (degree 0) and $A[3] = 3$ (degree 3). All degrees distinct, as promised. The new minimum is 3. Figure 20.2 shows the resulting forest. Note that 3 already had two children of its own before this extract-min (it entered with degree 2); the consolidation then hung the whole degree-2 tree rooted at 7 underneath it, pushing 3 to degree 3. The newly built part — 7 over 21 over 23 — is fully determined by the trace; the two children 3 carried in from before (drawn as □) had keys we were never told, so we leave them unlabelled.

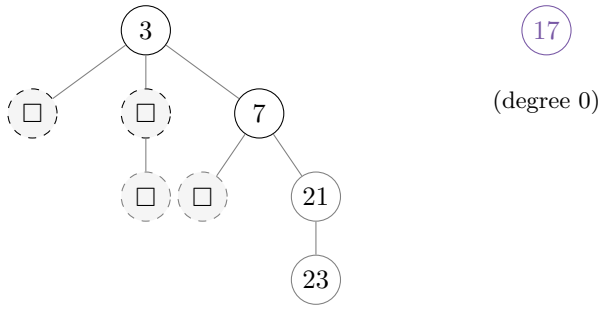


Figure 20.2: Result of the traced consolidation: two survivors, 3 (degree 3) and 17 (degree 0), of distinct degree. Dashed □ nodes are children whose keys the trace never pinned down; the solid nodes $7, 21, 23$ are exactly what the linking built. The new minimum is 3.

(The exact shapes of the unlabelled children depend on the heap's earlier history; what matters is the *degree* structure. A degree-3 root ends up with three children of degrees $0, 1, 2$, the same clean "binomial" shape you get from repeated equal-degree linking. That shape is no accident, and it is the next thing we will explain.)

Algorithm lab

Trace it yourself. Start with an empty heap and insert the keys $5, 2, 9, 1, 7, 4$ in that order. You now have six one-node trees with $min = 1$. Call extract-min once. Carry out CONSOLIDATE by hand using a degree array $A[0..2]$. Track A after each root you process, and draw the final forest. You should finish with $min = 2$ and a small handful of trees with distinct degrees. Then call extract-min a second time and repeat. Watching the degree array "carry" like binary addition is the single best way to make consolidation click.

20.5 Decrease-key: the operation we built all this for

Now the star of the show. We are handed a pointer to a node x and a new, smaller key. We must update x's key and restore heap order — and we want it done in $O(1)$ amortized time.

20.5.1 The naive idea, and why it is not enough

When we lower x's key, the only thing that can break is the relationship with x's *parent*: maybe x is now smaller than its parent. Heap order between x and its children is still fine (we only made x smaller). So the fix is local: if x violates heap order with its parent, *cut* x away from its parent and move x (with its whole subtree) up to the root list, where it has no parent to violate.

That single cut is $O(1)$. So far so good. But there is a danger. If we allow unlimited cutting, a parent can lose child after child after child and become a sad, sparse, spindly tree. Spindly trees ruin our degree bound: the whole $O(\log n)$ story for extract-min rested on trees being "bushy" — a degree-d root having close to ϕ^d descendants. Lose that, and consolidation no longer runs in $O(\log n)$.

Common trap

The tempting bug is to cut a violating node and stop. That keeps decrease-key fast, but over many decrease-keys a single parent can be stripped down to almost nothing, destroying the size-versus-degree guarantee. The trees go limp, and extract-min silently degrades. You must limit how much a node is allowed to lose *before* it too gets cut loose.

20.5.2 The mark bit and cascading cuts

Here is the rule that saves us, and it is delightfully simple. Each non-root node carries a **mark** bit. The marking discipline is:

- A node's mark is cleared whenever it *becomes* a child (during a link).
- The first time a node *loses* a child (because that child was cut away by a decrease-key), we *mark* it. It is now "on notice."
- The *second* time a marked node loses a child, we do not just mark it — we cut *it* loose from its own parent too, sending it up to the root list. And since cutting it counts as its parent losing a child, this can trigger the same rule one level up: a *cascading cut* that ripples toward the root.

Intuition

The mark bit is a "you have lost a child once; lose another and you are out" warning. A node may shed at most one child while staying put. On the second loss it gets evicted to the root list along with everything still hanging off it. This caps how lopsided any tree can get: a node can be missing at most a bounded fraction of its children, so trees stay bushy and the degree bound survives.

Algorithm 90: FibHeap-Decrease-Key(H, x, k)

Input: heap H, node x, new key $k \le x.key$
Output: H with x's key lowered to k and heap order restored

```
1 x.key ← k;
2 y ← x.parent;
3 if y ≠ null and x.key < y.key then
4 |   Cut(H, x, y);
5 |   Cascading-Cut(H, y);
6 if x.key < H.min.key then
7 |   H.min ← x
```

Algorithm 91: Cut(H, x, y)


```
1 remove x from y's child list;   y.degree ← y.degree − 1;
2 add x to the root list of H;
3 x.parent ← null;   x.mark ← false;
```

Algorithm 92: Cascading-Cut(H, y)

```
1 z ← y.parent;
2 if z ≠ null then
3 |   if y.mark = false then
4 |   |   y.mark ← true
5 |   else
6 |   |   Cut(H, y, z);   Cascading-Cut(H, z)
```

20.5.3 A traced decrease-key

Take a tree rooted at 5 with this shape (marks shown as a •):



Both 10 and 18 are marked — each has already lost one child in the past. Now we call decrease-key on 44, lowering it to 2.

1. $44 \to 2$. Its parent is 18, and $2 < 18$, so heap order is violated. Cut 2 from 18: node 2 flies up to the root list, unmarked. Now 18 has lost a child.
2. Cascading-Cut(18): 18 is already marked, so we cut *it* too. Node 18 flies up to the root list (still carrying nothing now, since 44/2 already left), unmarked. Now 10 has lost a child.

3. CASCADING-CUT(10): 10 is already marked, so we cut *it* too. Node 10 flies up to the root list, unmarked. Now 5 has lost a child.
4. CASCADING-CUT(5): 5 is a root (no parent), so we stop.

The single decrease-key triggered a chain of three cuts. Figure 20.3 shows the before-and-after. The root list grew by three trees (2, 18, 10), each now unmarked. One decrease-key, several cuts — and yet we are about to prove that decrease-key still costs only $O(1)$ *amortized*. The magic is that all those cuts were "pre-paid" by the marks.

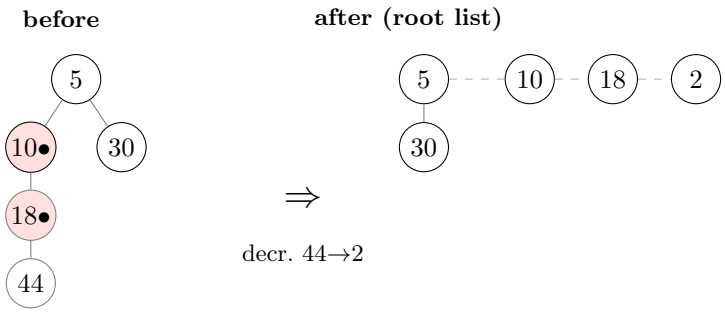


Figure 20.3: A cascading cut. Node 44 drops to 2 and is cut up to the root list; its marked ancestors 18 and 10 are each cut in turn (the cascade), landing in the root list unmarked. The cut stops at the root 5. Four nodes that were one deep tree become four shallow root-list entries.

Walking question

Before you read the analysis, go for a walk with this puzzle. A decrease-key can, in the worst single case, trigger a long cascade of cuts — so its *actual* cost is not constant at all; it can be $\Theta(\log n)$ for one unlucky call. Yet we are going to call the cost $O(1)$ amortized. Where could the "saved up" money for a long cascade have come from? Hint: think about what had to happen, earlier and cheaply, for all those nodes to become marked in the first place.

20.6 The amortized analysis

This is the heart of the chapter. Everything so far was setup; now we make the $O(1)$ and $O(\log n)$ claims precise using the *potential method* you met in the amortized-analysis chapter. If that method is hazy, here is the one-line reminder: we invent a "bank balance" Φ that depends only on the current state, and we define the *amortized* cost of an operation as its real cost plus the change in the balance, $\hat{c} = c + \Delta\Phi$. If the balance never goes below its starting value, the total amortized cost is an honest upper bound on the total real cost.

20.6.1 Choosing the potential

We need a potential that goes *up* cheaply when we are being lazy (so future cleanups are pre-funded), and goes *down* when we finally clean up (refunding the cleanup). Two things accumulate during

laziness: extra trees in the root list, and marked nodes. So we charge for both.

Formal

For a Fibonacci heap H, let $t(H)$ be the number of trees in the root list and $m(H)$ the number of marked nodes. Define the potential

$$\Phi(H) \;=\; t(H) \;+\; 2\,m(H).$$

An empty heap has $\Phi = 0$, and Φ is never negative, so amortized costs sum to an upper bound on real costs.

Why $2m$ and not just m? Because a cascading cut does two jobs at once when it fires: it removes a mark *and* it creates a new tree. We need each mark to have stored enough to pay for both. Two units per mark is exactly the right deposit, as the decrease-key analysis will show.

20.6.2 Insert, minimum, union

Insert. Real cost $O(1)$. It adds one tree, so $\Delta t = +1$; marks unchanged. Thus $\Delta\Phi = +1$ and the amortized cost is $O(1) + 1 = O(1)$.

Minimum and Union. Neither changes t or m in any meaningful way (union just concatenates root lists; the tree count of the combined heap equals the sum). $\Delta\Phi = 0$, amortized cost $O(1)$.

20.6.3 Extract-min

Let $D(n)$ be the maximum possible degree of any node in an n-node Fibonacci heap. We will prove in Section 20.7 that $D(n) = O(\log n)$; take it on loan for now.

Real cost. Step 1 promotes the children of the minimum — at most $D(n)$ of them — to roots: $O(D(n))$. Step 2, consolidation, walks the root list. After step 1 the root list has at most $D(n) + t(H) - 1$ trees (the original trees, minus the extracted root, plus its promoted children). Each LINK reduces the number of roots by one and costs $O(1)$, and the final scan to rebuild the root list and find the new min touches each surviving slot once, of which there are at most $D(n) + 1$. So the real cost is $O(D(n) + t(H))$.

Potential change. Before consolidation, $t(H)$ trees; afterward, at most $D(n)+1$ trees (one per distinct degree). Marks only ever decrease here. So

$$\Delta\Phi \;\le\; \big[(D(n)+1) + 2m(H)\big] - \big[t(H) + 2m(H)\big] \;=\; D(n) + 1 - t(H).$$

Amortized cost.

$$\hat{c} = O(D(n) + t(H)) + \big(D(n) + 1 - t(H)\big) = O(D(n)) = O(\log n).$$

The $t(H)$ terms cancel: the more trees there were to clean up (high real cost), the more potential we release (big refund). That cancellation is the whole point of the potential. Extract-min is $O(\log n)$ amortized.

20.6.4 Decrease-key

Now we cash in the marks. Suppose a single decrease-key triggers c cuts in total (one direct cut, then $c-1$ cascading cuts).

Real cost. The direct cut plus $c-1$ cascading cuts, each $O(1)$: total $O(c)$.

Potential change. Track the two pieces of $\Phi = t + 2m$:

- **Trees.** Every one of the c cuts moves a node to the root list, so t increases by c. That is $\Delta t = +c$.

- **Marks.** Each of the $c-1$ cascading cuts was performed *on a marked node*, and CUT clears that mark: that removes $c-1$ marks. The cascade stops at one node that was unmarked and now becomes marked: that adds back at most 1 mark. Net: m changes by at most $-(c-1)+1 = -(c-2) = 2-c$. So $2\,\Delta m \le 2(2-c) = 4-2c$.

Adding up,

$$\Delta\Phi \;\le\; c + (4-2c) \;=\; 4-c.$$

Amortized cost.

$$\hat{c} \;=\; O(c) + (4-c).$$

Write the $O(c)$ honestly as $a\,c$ for some constant a by choosing the potential units large enough that each cut's real work is at most one unit of potential ($\hat{c} = c + (4-c) = 4 = O(1)$). The c terms cancel exactly: the real cost of a long cascade is paid, unit for unit, by the marks that the cascade releases. What remains is a constant.

Focus

This is the payoff. A single decrease-key might really do $\Theta(\log n)$ work via a long cascade. But every cut in that cascade spends a mark that was *deposited earlier*, one cheap unit at a time, by previous decrease-keys. The bank balance $\Phi = t + 2m$ exactly funds the cascade. So no matter how the work clusters, decrease-key is $O(1)$ amortized. The factor of 2 on m is what lets each mark pay for both the cut's work and the new tree the cut creates.

20.6.5 Delete

To delete an arbitrary node x: decrease its key to $-\infty$ (which floats it up to become the minimum), then extract-min. Amortized cost $O(1) + O(\log n) = O(\log n)$.

Cost summary

With potential $\Phi = t + 2m$, every bound is amortized except where noted:

MAKE-HEAP	$O(1)$	worst case
MINIMUM	$O(1)$	worst case
INSERT	$O(1)$	
UNION	$O(1)$	worst case
EXTRACT-MIN	$O(\log n)$	
DECREASE-KEY	$O(1)$	
DELETE	$O(\log n)$	

Here n is the number of nodes and $D(n) = O(\log n)$ is the maximum degree.

20.7 Why "Fibonacci"? The degree bound

We have leaned twice on the claim $D(n) = O(\log n)$: a node with n descendants cannot have huge degree. Now we earn it, and the proof is where the data structure gets its name.

20.7.1 What the mark rule guarantees

The mark-and-cascade rule has a precise structural consequence. Consider any node x and list its current children in the order they were linked to x: $y_1, y_2, \ldots, y_k$, where y_i was the i-th child attached.

Lemma 20.1 (The size each child must carry)**.** *With the children ordered by time of attachment, the i-th child y_i has degree at least $i - 2$ (for $i \geq 2$); and y_1 has degree at least 0.*

Intuition

Here is why. When y_i was linked to x, that link happened during a consolidation between two roots of *equal* degree. At that moment x already had children $y_1, \ldots, y_{i-1}$, so x's degree was $i - 1$, and therefore y_i's degree was also $i - 1$. Since then, y_i is allowed to lose *at most one* child before it would have been cut away from x entirely (the mark rule!). So y_i's degree now is at least $(i - 1) - 1 = i - 2$. That single subtracted child is exactly what the mark bit is rationing.

20.7.2 Fibonacci numbers fall out

Let s_d be the *minimum* possible number of nodes in a subtree whose root has degree d. We want a lower bound on s_d. The root itself is one node. Its children, by Lemma 20.1, have degrees at least $0, 0, 1, 2, \ldots, d - 2$. So the smallest such subtree satisfies

$$s_d \;\geq\; 1 + 1 + \sum_{i=2}^{d} s_{i-2} \;=\; 2 + \sum_{j=0}^{d-2} s_j,$$

with $s_0 = 1$ and $s_1 = 2$. If you have seen the Fibonacci recurrence $F_k = F_{k-1} + F_{k-2}$, the next line will feel familiar. One can show by induction that

$$s_d \;\geq\; F_{d+2},$$

where F_k are the Fibonacci numbers ($F_0 = 0, F_1 = 1, F_2 = 1, F_3 = 2, \ldots$). The sum-of-all-previous form above collapses, via the identity $F_{d+2} = 1 + \sum_{i=0}^{d} F_i$, into the familiar two-term recurrence. *This is the moment the data structure earns its name:* the worst-case bushiness of its trees is governed by exactly the Fibonacci sequence.

Figure 20.4 draws the smallest possible trees of each degree and counts their nodes; the counts are exactly $s_0, s_1, s_2, s_3 = 1, 2, 3, 5$ — the Fibonacci numbers F_2, F_3, F_4, F_5 marching by.

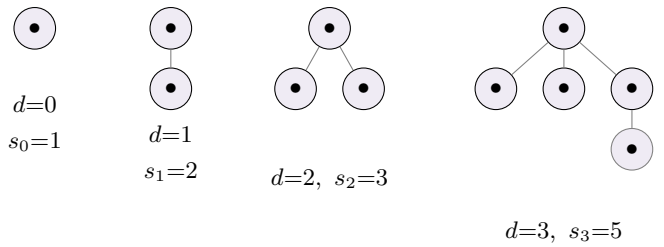


Figure 20.4: The leanest trees a degree-d root can be reduced to under the mark rule, for $d = 0, 1, 2, 3$. Their node counts $1, 2, 3, 5$ are the Fibonacci numbers F_{d+2}. The children are forced to have degrees $0, 0, 1, \ldots, d-2$, and feeding those minimal sizes into $s_d \geq 2 + \sum_{j=0}^{d-2} s_j$ makes the counts satisfy $s_d = s_{d-1} + s_{d-2}$ — the Fibonacci recurrence.

Formal

The size–degree bound. A node of degree d in a Fibonacci heap has at least $F_{d+2} \geq \phi^d$ descendants (including itself), where $\phi = \frac{1+\sqrt{5}}{2} \approx 1.618$ is the golden ratio. Consequently, if a heap has n nodes, the maximum possible degree is

$$D(n) \;\leq\; \log_\phi n \;=\; O(\log n).$$

History and connection

Fibonacci heaps were invented by Michael L. Fredman and Robert E. Tarjan in 1984, precisely to speed up Dijkstra's and Prim's algorithms; the same paper gave the now-classic $O(V \log V + E)$ shortest-paths bound. The name honors the Fibonacci numbers that appear in the degree bound above. In CLRS (4th edition, available online) this is **Chapter 19, "Fibonacci Heaps."** CLRS develops the same operations and the same potential function $\Phi = t(H) + 2m(H)$; if you read this chapter first, the CLRS treatment of the linking lemma and the $F_{d+2} \geq \phi^d$ inequality will read as a tightening of the intuition you already have. The Fibonacci connection itself reaches back to Leonardo of Pisa ("Fibonacci"), c. 1202.

Why this matters

The golden ratio ϕ showing up is not decoration — it is load-bearing. Because each node of degree d is forced to hide at least ϕ^d descendants, degree grows only *logarithmically* in the number of nodes, which is exactly what makes consolidation's tidy-up cost $O(\log n)$. Loosen the mark rule and the base of that logarithm degrades; tighten it and you would pay more per decrease-key. Fredman and Tarjan found the sweet spot, and the golden ratio is nature's receipt for it.

20.8 Putting it back in context: Dijkstra and Prim

Now we can close the loop we opened in Section 20.1. Recall Dijkstra on a graph with V vertices and E edges performs:

- one `insert` per vertex: V inserts, $O(V)$ amortized total;
- one `extract-min` per vertex: V extracts, $O(V \log V)$ amortized total;
- up to one `decrease-key` per edge during relaxation: E decrease-keys, $O(E)$ amortized total.

Add them: $O(V \log V + E)$. Compare with the binary-heap implementation's $O((V + E) \log V) = O(E \log V)$ on a connected graph. On a *dense* graph where $E = \Theta(V^2)$, the Fibonacci version does $O(V^2)$ work for relaxation instead of $O(V^2 \log V)$ — a clean $\log V$ saved, exactly where the algorithm spends most of its time.

Why this matters

A caveat worth its own paragraph, because textbooks sometimes oversell Fibonacci heaps. The constant factors and pointer-chasing overhead are real, and on the *sparse* graphs that dominate practice ($E = O(V)$), a plain binary heap or a d-ary heap is usually faster on the wall clock despite its worse asymptotics. So in everyday code, Fibonacci heaps are rare. Their importance is twofold: they prove what is theoretically *possible* (the best known asymptotic bound for Dijkstra in the comparison model for a long time), and the amortized-analysis techniques they teach — lazy structure plus a potential that pre-funds cleanup — recur all over algorithm design. You are learning a way of *thinking* as much as a specific gadget.

20.9 Summary

Focus

- A Fibonacci heap is a *forest* of heap-ordered trees with a pointer to the minimum root. It is deliberately lazy.
- `insert` and `union` just splice into the root list: $O(1)$. `minimum` reads a pointer: $O(1)$.
- `extract-min` is the one cleanup: promote the min's children, then *consolidate* so that no two roots share a degree. This is $O(\log n)$ amortized.

- `decrease-key` cuts a violating node up to the root list and uses the *mark bit* to bound how lopsided trees can get, via *cascading cuts*. It is $O(1)$ amortized.
- The potential $\Phi = t(H)+2m(H)$ (trees plus twice the marked nodes) funds the cleanups: long cascades are paid for by marks deposited earlier.
- The mark rule forces a degree-d node to hide at least $F_{d+2} \geq \phi^d$ descendants, so $D(n) = O(\log n)$ — which is where "Fibonacci" comes from.
- Net effect: Dijkstra and Prim drop to $O(V \log V + E)$, a real win on dense graphs.

Exercises

Exercise 20.1 (Warmup: insert only)**.** Start from an empty Fibonacci heap and insert the keys $8, 3, 11, 1, 6$ in order. Draw the heap after each insert, showing the root list and the *min* pointer. How many trees are in the root list at the end, and what is Φ?

Exercise 20.2 (Consolidation by hand)**.** Continue from the previous exercise and call EXTRACT-MIN once. Carry out CONSOLIDATE using a degree array, writing down the contents of A after each root is processed. Draw the resulting forest and give the new *min*.

Exercise 20.3 (Cascading cut)**.** Build (or accept as given) a tree rooted at 4 with a chain of children $4 \to 9 \to 15 \to 26 \to 40$, where 9, 15, and 26 are all marked. Call decrease-key on 40, lowering it to 1. List every CUT and CASCADING-CUT that fires, and state how many trees the root list gains.

Exercise 20.4 (Potential bookkeeping)**.** For the decrease-key in the previous exercise, compute the real cost (count the cuts), the change $\Delta\Phi$ in the potential $\Phi = t + 2m$, and the amortized cost $\hat{c} = c + \Delta\Phi$. Confirm it is a constant.

Exercise 20.5 (Why twice the marks?)**.** Redo the decrease-key amortized analysis of Section 20.6.4 using the potential $\Phi' = t(H) + m(H)$ (only *one* unit per mark). Show that the c terms no longer cancel, and identify the exact step that breaks. Explain in one sentence why the coefficient 2 is necessary.

Exercise 20.6 (Degree bound, small cases)**.** Using $s_0 = 1$, $s_1 = 2$, and $s_d \geq 2 + \sum_{j=0}^{d-2} s_j$, compute lower bounds s_2, s_3, s_4, s_5. Compare each to the Fibonacci number F_{d+2} and to ϕ^d. At what degree does a node first guarantee at least 20 descendants?

Exercise 20.7 (Worst-case versus amortized)**.** Construct a sequence of operations on a Fibonacci heap in which a *single* decrease-key really performs $\Theta(\log n)$ cuts. (Hint: you must first arrange a long chain of marked nodes; describe how a sequence of decrease-keys and extract-mins can set that up.) Explain why this does not contradict the $O(1)$ amortized bound.

Exercise 20.8 (Dijkstra accounting)**.** On a graph with $V = 1000$ vertices and $E = 400{,}000$ edges, write the total amortized cost of Dijkstra using (a) a binary heap and (b) a Fibonacci heap, as expressions in V and E. Which wins asymptotically here, and roughly by what factor in the relaxation term? Would your answer change for a sparse graph with $E = 3V$?

Exercise 20.9 (Mergeable advantage)**.** Describe a scenario — a concrete algorithm or workload — where the $O(1)$ UNION of a Fibonacci heap is the deciding advantage over a binary heap. Estimate the asymptotic saving for k merges of heaps with n total elements.

Exercise 20.10 (Challenge: no decrease-key?)**.** Some applications never call decrease-key (for example, certain event-simulation queues). In that restricted setting, the mark bit and cascading cuts are never exercised. Argue what the amortized bounds become, and explain why, in this decrease-key-free world, a simpler "lazy binomial heap" suffices and the Fibonacci machinery buys you nothing.

Chapter 21

van Emde Boas Trees

Every data structure you have met so far for keeping a set of numbers sorted – balanced binary search trees, red-black trees, B-trees – charges you the same toll: $\Theta(\log n)$ per operation, where n is how many keys you are holding. That toll is not an accident, and for a long time it felt like a law of nature. If your keys are arbitrary, abstract, comparable-only-by-$<$ objects, then $\Theta(\log n)$ really is the best you can hope for: there is a comparison lower bound, the same one that forced sorting up to $\Theta(n \log n)$ back in Chapter 8.

But what if your keys are not abstract? What if they are *integers*, drawn from a known, bounded range – say, 32-bit network addresses, or millisecond timestamps within a day, or pixel coordinates? Then you are allowed to do something the comparison model forbids: you can *look at the bits*. You can index into arrays by key value. And once you can do that, a startling speedup becomes possible. The van Emde Boas tree (we will write vEB) supports Insert, Delete, Member, Minimum, Maximum, Successor, and Predecessor all in

$$O(\lg \lg u)$$

time, where u is the size of the *universe* of possible keys – not the number of keys you happen to be storing. For a 32-bit universe, $u = 2^{32}$, and $\lg \lg u = \lg 32 = 5$. Five. Five comparisons-worth of work per operation, no matter how many keys are in the structure, no matter how they are arranged.

This chapter slows that result all the way down. We will not pull the recursion out of a hat. We will start from the dumbest possible idea – a giant array of bits – and improve it in deliberate, motivated steps, each one fixing exactly the flaw the previous step left behind, until the $\lg \lg u$ falls out almost on its own.

21.1 The problem, stated carefully

Fix a universe size u. For this whole chapter we will assume u is a power of two; write $u = 2^k$. The keys we store are integers from the set $\{0, 1, 2, \ldots, u-1\}$. We want a *dynamic set* $S \subseteq \{0, \ldots, u-1\}$ supporting these operations:

- Member(S, x): is $x \in S$?
- Insert(S, x), Delete(S, x): add/remove a key.

- MINIMUM(S), MAXIMUM(S): the smallest/largest key, or NIL if S is empty.
- SUCCESSOR(S, x): the smallest key in S strictly greater than x (or NIL). Note x itself need not be in S.
- PREDECESSOR(S, x): the largest key strictly less than x.

The hard operations are SUCCESSOR and PREDECESSOR. Membership and min/max are easy to make fast in isolation; the art is making *successor* fast *at the same time*. A hash table (Chapter 11) nails MEMBER and INSERT in $O(1)$ expected time but is hopeless at successor: the keys are scattered, so to find the next one above x you would have to scan. A balanced BST (Chapters 12–13) does successor in $O(\log n)$ but pays $O(\log n)$ for everything. We want all of them fast together, and we are willing to "cheat" by exploiting that the keys are small integers.

Focus

The cost is measured against u, the *universe size*, not n, the number of stored keys. This is the whole game. We trade a dependence on how many keys you have for a (much milder) dependence on how big the key values can be.

Why this matters

Where does a bounded-integer universe with fast successor actually show up? Network routers do *longest-prefix matching* on 32- or 128-bit IP addresses – essentially repeated successor/predecessor queries on integer keys. Event simulators and schedulers keep a queue of integer timestamps and repeatedly ask "what is the next event?" Garbage collectors and memory allocators track free blocks by integer address. In all of these, n can be huge but u is fixed by the word size, and shaving $\log n$ down to $\lg \lg u$ is the difference between a structure that keeps up and one that falls behind.

21.2 Idea zero: the bit vector

The simplest structure that can store a subset of $\{0, \ldots, u-1\}$ is a single array of u bits. Call it A, with $A[i] = 1$ exactly when $i \in S$.

Intuition

Picture a long row of u light switches, one per possible key, all initially off. Inserting x flips switch x on; deleting flips it off; membership is just "is switch x on?" To find the successor of x, you stand at switch x and walk to the right until you hit the next lit switch.

MEMBER, INSERT, and DELETE are gloriously $O(1)$: you index straight to bit x. But SUCCESSOR is a disaster. To find the next key after x, you scan $A[x+1], A[x+2], \ldots$ until you hit a 1 or run off the end. In the worst case – say $S = \{0, u-1\}$ and you ask for the successor of 0 – you scan nearly all u bits. So:

Cost summary

Bit vector. MEMBER/INSERT/DELETE: $O(1)$. SUCCESSOR/PREDECESSOR/MINIMUM/MAXIMUM: $O(u)$ worst case. Space: $O(u)$. The $O(u)$ successor is the wound we will spend the rest of the chapter healing.

21.3 Idea one: a tree of summaries (the layered approach)

The bit vector's failing is that successor has to scan a long, flat row with no shortcuts. The classic fix for "I need shortcuts over a flat array" is to build a summary on top. Lay a complete binary tree over the u bits, with the bits as leaves. Each internal node stores the OR of its two children: a node is 1 if *any* leaf beneath it is 1 (i.e. that subtree contains a key). Figure 21.1 shows such a tree for a tiny universe.

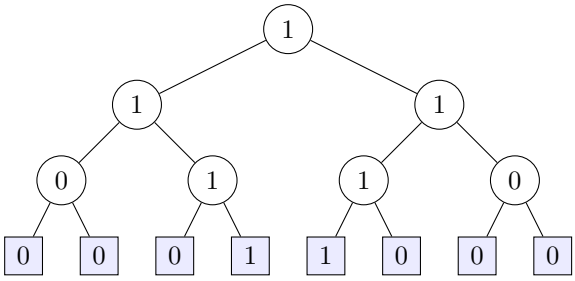


Figure 21.1: A summary tree over $u = 8$ for the set $S = \{3, 4\}$. Leaves are the bit vector; each internal node is the OR of its children. Successor of $x = 3$: climb until you find a node whose right subtree is nonempty, cross over, descend to the leftmost 1.

How does this help successor? To find the successor of x, start at leaf x and *climb*. At each step, look at whether the sibling subtree to your right contains a 1 (its summary node is 1). The moment it does, cross into it and *descend*, always taking the leftmost child that is a 1, until you reach a leaf. That leaf is the successor. Climbing is $O(\log u)$ and descending is $O(\log u)$, so successor is now $O(\log u)$.

That already matches a balanced BST, and we did it without comparisons. But $O(\log u)$ is not our target; we want $O(\lg \lg u)$. The summary tree has $\log u$ levels and we walk all of them. To go faster we need a tree that is *dramatically shallower* – and the way to get a shallow tree is to give each node many children instead of two.

Walking question

Before reading on, sit with this question: the binary summary tree has branching factor 2 and height $\log_2 u$. If instead each node had $\sqrt{u}$ children, how tall would the tree be? Work out the height for $u = 2^{16}$ under branching factor 2 versus branching factor $\sqrt{u} = 2^8$. The gap you find is exactly the gap between $\log u$ and the answer we are chasing.

21.4 Idea two: split the key, build proto-vEB

Here is the move that changes everything. Instead of branching by 2, branch by $\sqrt{u}$. Take a key $x \in \{0, \ldots, u-1\}$ and chop its bit representation exactly in half. The *high half* – the more significant $\frac{1}{2}\lg u$ bits – picks one of $\sqrt{u}$ "clusters." The *low half* picks a position *within* that cluster, again one of $\sqrt{u}$ slots.

Formally, with $u = 2^k$, define

$$\text{high}(x) = \left\lfloor \frac{x}{\sqrt{u}} \right\rfloor, \qquad \text{low}(x) = x \bmod \sqrt{u}, \qquad \text{index}(h, \ell) = h\sqrt{u} + \ell.$$

These three functions are inverses of the obvious chopping: index glues a (high, low) pair back into a full key, and $x = \text{index}\big(\text{high}(x), \text{low}(x)\big)$ always. They are pure bit operations – a shift and a mask – so each costs $O(1)$.

Example 21.1 (Splitting a key)**.** Let $u = 16$, so $\sqrt{u} = 4$ and keys are 4-bit numbers. Take $x = 13$, which in binary is 1101. The high two bits are $11 = 3$ and the low two bits are $01 = 1$. Indeed

$$\text{high}(13) = \lfloor 13/4 \rfloor = 3, \quad \text{low}(13) = 13 \bmod 4 = 1, \quad \text{index}(3, 1) = 3 \cdot 4 + 1 = 13. \checkmark$$

So key 13 lives in cluster 3, at offset 1 inside that cluster.

Intuition

Think of the u keys as the cells of a $\sqrt{u} \times \sqrt{u}$ grid, read row by row (Figure 21.2). The high half of a key is its *row* (which cluster); the low half is its *column* (where in the cluster). Key 13 in a 4×4 grid sits in row 3, column 1. Successor now has a two-part flavor: either the next key is later in the *same row*, or it is the first key of some *later nonempty row*.

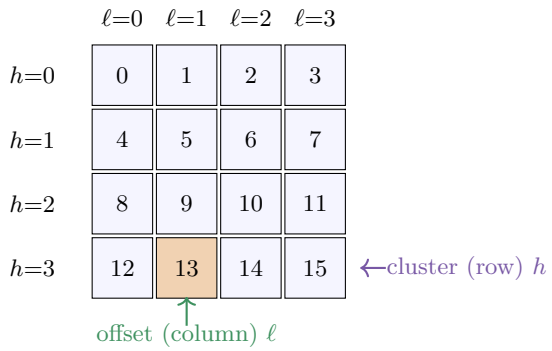


Figure 21.2: The $u = 16$ universe drawn as a $\sqrt{u} \times \sqrt{u} = 4 \times 4$ grid, read row by row. A key's value is high $\cdot \sqrt{u}$ + low. Key 13 (highlighted) sits in row $h = 3$, column $\ell = 1$. Clusters are rows; "successor" means "next filled cell scanning left-to-right, top-to-bottom."

We now build a recursive structure to match. A *proto-vEB* structure of size u, written proto-vEB(u), contains:

- if $u = 2$ (the base case), a tiny 2-bit array $A[0..1]$ holding the set directly;
- otherwise, an array $cluster[0..\sqrt{u}-1]$ of $\sqrt{u}$ pointers, each to a proto-vEB($\sqrt{u}$) holding one cluster's worth of keys, plus one extra proto-vEB($\sqrt{u}$) called *summary*.

The *summary* is the same trick as the layered tree's OR-nodes, but recursive: *summary* records *which clusters are nonempty*. Bit i of the summary is "on" exactly when *cluster*$[i]$ contains at least one key. The summary is itself a proto-vEB over a universe of size $\sqrt{u}$ – one slot per cluster – so it answers "which is the next nonempty cluster?" by its *own* successor query, recursively. Figure 21.3 draws one level of this recursion.

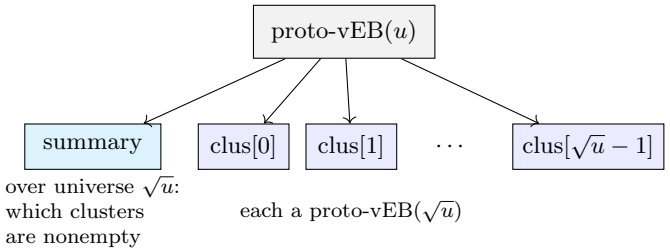


Figure 21.3: One level of the recursion. A proto-vEB over universe u holds $\sqrt{u}$ child clusters (each a proto-vEB over $\sqrt{u}$) plus a summary (also a proto-vEB over $\sqrt{u}$). The recursion bottoms out at $u = 2$.

21.4.1 How tall is this recursion?

Each level shrinks the universe from u to $\sqrt{u}$. So the universe sizes go

$$u, \quad u^{1/2}, \quad u^{1/4}, \quad u^{1/8}, \quad \dots$$

and we stop when the size reaches 2. How many square roots does it take to drive u down to 2? Write $u = 2^k$. One square root sends 2^k to $2^{k/2}$; that is, it *halves the exponent* k. We are done when the exponent reaches 1. Halving k down to 1 takes $\lg k = \lg \lg u$ steps.

Focus

The depth of the recursion is $\lg \lg u$, not $\lg u$. Square-rooting the universe at each level halves the *exponent*, and halving repeatedly is a logarithm. That single observation is the source of every $\lg \lg u$ in this chapter. Make sure it feels obvious before continuing.

Example 21.2 (Counting the levels)**.** Let $u = 2^{32}$, so $k = 32$. The universe sizes down the recursion are

$$2^{32} \to 2^{16} \to 2^8 \to 2^4 \to 2^2 \to 2^1 = 2.$$

That is 5 square-roots, and indeed $\lg \lg u = \lg 32 = 5$. A 32-bit universe is only five levels deep. Figure 21.4 shows this descent beside the contrast: a binary tree of the same universe is 32 levels deep.

21.5 Proto-vEB operations, and why they are not yet fast enough

Let us write the operations on proto-vEB and watch carefully where the time goes. We will find that MEMBER is already perfect, but SUCCESSOR is *almost* good and MINIMUM is a quiet saboteur. Diagnosing exactly why is what tells us how to fix the structure.

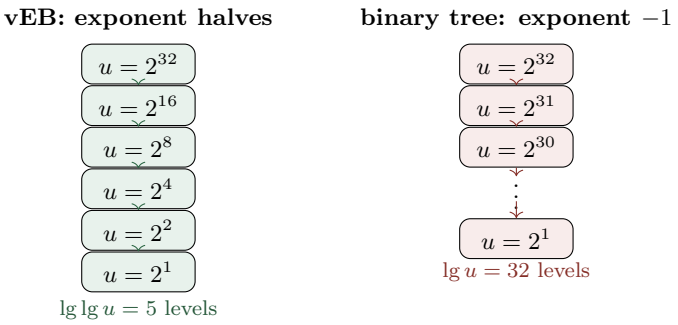


Figure 21.4: Why the recursion is shallow. Square-rooting the universe (left) *halves the exponent* each level, reaching the base in $\lg \lg u$ steps. A binary tree (right) only *decrements* the exponent, taking $\lg u$ steps. For $u = 2^{32}$ that is 5 levels versus 32.

21.5.1 Member

Algorithm 93: PROTO-VEB-MEMBER(V, x)

Input: A proto-vEB V of size u, key x.
Output: TRUE iff $x \in S$.

```
1 if V.u = 2 then
2     return V.A[x] ;                          // base case: read the bit directly
3 return PROTO-VEB-MEMBER(V.cluster[high(x)], low(x));
```

To test membership you peel off the high half to pick the cluster and recurse on the low half. The recursion descends one level each call, so it makes $\lg \lg u$ calls, each $O(1)$. Let $M(u)$ be the time. Then

$$M(u) = M(\sqrt{u}) + O(1).$$

Substitute $m = \lg u$ (so $\lg \sqrt{u} = m/2$) to get $M(2^m) = M(2^{m/2}) + O(1)$, i.e. a function that halves m each step and adds a constant – exactly the merge-sort-style recurrence whose answer is $O(\lg m) = O(\lg \lg u)$. MEMBER is already at the target.

21.5.2 Minimum and Maximum – the slow ones

To find the minimum, you find the first nonempty cluster (using the summary), then recurse to find the minimum within it. Watch the cost.

Algorithm 94: PROTO-VEB-MINIMUM(V)

Input: A proto-vEB V of size u.
Output: The smallest stored key, or NIL if empty.

```
1 if V.u = 2 then
2     if V.A[0] = 1 then return 0;
3     else if V.A[1] = 1 then return 1;
4     else return NIL;
5 c ← PROTO-VEB-MINIMUM(V.summary) ;          // first nonempty cluster
6 if c = NIL then return NIL;
7 o ← PROTO-VEB-MINIMUM(V.cluster[c]) ;              // min within it
8 return index(c, o);
```

Here is the trap. This routine makes *two* recursive calls of size $\sqrt{u}$ on the path to the answer – one into the summary, one into a cluster. That doubling is fatal. The recurrence is

$$T(u) = 2\,T(\sqrt{u}) + O(1).$$

With $m = \lg u$ this is $T(2^m) = 2\,T(2^{m/2}) + O(1)$, and substituting $S(m) = T(2^m)$ gives $S(m) = 2\,S(m/2) + O(1)$, which by the master theorem (Chapter 4) solves to $S(m) = \Theta(m)$. So $T(u) = \Theta(\lg u)$. We are back to logarithmic! The two-calls-per-level pattern multiplies out to $\lg u$, washing away all the benefit of the shallow recursion.

Common trap

The killer is making *more than one* recursive call per level. With one call per level you pay (depth)$\times O(1) = O(\lg \lg u)$. With two calls per level the work *branches*, and a branching recursion of depth $\lg \lg u$ with branching factor 2 does $\Theta(\lg u)$ total work. Every fast operation in the final structure will obey one ironclad rule: **at most one recursive call into a $\sqrt{u}$-sized substructure.** Memorize that rule; the whole design exists to honor it.

21.5.3 Successor – so close

Successor has the same disease, and seeing it makes the cure obvious. To find the successor of x:

1. Look *within x's own cluster* for something bigger than low(x). If found, splice it back with high(x) and return. (One recursive call.)

2. Otherwise the answer is in a *later* cluster. Ask the summary for the next nonempty cluster after high(x). (A second recursive call.) Then take the *minimum* of that cluster. (A *third* recursive call!)

Algorithm 95: PROTO-VEB-SUCCESSOR(V, x)

Input: A proto-vEB V of size u, key x.
Output: Smallest stored key $> x$, or NIL.

```
1  if V.u = 2 then
2      if x = 0 and V.A[1] = 1 then return 1;
3      else return NIL;
4  o ← PROTO-VEB-SUCCESSOR(V.cluster[high(x)], low(x));
5  if o ≠ NIL then
6      return index(high(x), o) ;                    // found in same cluster
7  c ← PROTO-VEB-SUCCESSOR(V.summary, high(x));
8  if c = NIL then return NIL;
9  o' ← PROTO-VEB-MINIMUM(V.cluster[c]);
10 return index(c, o');
```

In the worst case this makes recursive calls into the cluster *and* the summary *and* a minimum. With MINIMUM itself costing $\Theta(\lg u)$ as we just found, the whole thing is comfortably $\Theta(\lg u)$. Worse than we want.

Cost summary

proto-vEB. MEMBER: $O(\lg \lg u)$ – already perfect. MINIMUM/MAXIMUM: $\Theta(\lg u)$ – too slow (two calls/level). SUCCESSOR/PREDECESSOR: $\Theta(\lg u)$ – too slow. INSERT/DELETE: $\Theta(\lg u)$ for the same reason (they recurse into a cluster *and* update the summary). The structure is correct but the speed is no better than a BST. Diagnosis: multiple recursive calls per level.

21.6 The two ideas that fix everything

Look again at where the extra recursive calls came from. MINIMUM made a call just to find its answer. SUCCESSOR made a call to MINIMUM. INSERT made a call into a cluster *and* a call to update the summary. If we could make MINIMUM cost $O(1)$, and stop INSERT from always touching both the cluster and the summary, the budget of "one recursive call per level" would be within reach. Two modifications do exactly this.

Fix 1: store the minimum and maximum explicitly. Give every vEB node two extra fields, $V.min$ and $V.max$, caching the smallest and largest keys in that subtree. Now MINIMUM and MAXIMUM are $O(1)$ – just read the field. No recursion at all.

Fix 2: the minimum does not live in any cluster. This is the subtle, beautiful part. We adopt the convention that the element stored in $V.min$ is *not* also stored down in the clusters. It floats at the top, held only in the *min* field. (The maximum *is* kept down in its cluster as well; only the min is special.)

Why on earth do that? Because it lets INSERT into an *empty* vEB stop instantly, and – more importantly – it ensures that whenever INSERT has to recurse into a cluster, that cluster was already nonempty, so the summary does *not* also need a recursive update. We will see in a moment how this lazy trick collapses two recursive calls into one. The same applies to SUCCESSOR: pulling the min out lets it answer most queries by reading *min* and *max* fields without a second descent.

Intuition

The *min* field is a doorman standing at the entrance of each vEB node. Inserting into an empty node? The doorman just remembers you, no need to disturb anyone inside (the clusters stay untouched, the summary stays untouched). Inserting a second element? The doorman is already busy, so *now* you go inside – but because the node is no longer empty, the summary already knows this cluster is occupied, so you only ever need to recurse *one* level deeper, never two. The doorman trick is precisely what guarantees one recursive call per level.

Formal

The real vEB tree. A vEB(u) structure stores a set $S \subseteq \{0, \ldots, u-1\}$. It has fields *min*, *max* (each a key or NIL). If $u > 2$ it also has $cluster[0..\sqrt{u}-1]$, each a vEB($\sqrt{u}$), and a *summary*, also a vEB($\sqrt{u}$). Invariants:

- *min* holds the smallest key of S and is *not* stored in any cluster.
- *max* holds the largest key of S (and, unless it equals *min*, *is* also stored in its cluster).
- $cluster[i]$ stores exactly $\{\text{low}(x) : x \in S, \text{high}(x) = i, x \neq min\}$.
- *summary* stores exactly $\{i : cluster[i] \text{ is nonempty}\}$.
- An empty S has $min = max =$ NIL. A singleton $S = \{x\}$ has $min = max = x$ and *all clusters empty.*

When $u = 2$ there are no clusters or summary; the set is fully described by *min* and *max* over $\{0, 1\}$.

21.7 The fast operations

Now we rewrite the operations to exploit the two fixes. The recurring pattern to watch for: *do as much as possible with min and max in $O(1)$, and make at most one genuine recursive call.*

21.7.1 Minimum, Maximum, Member

MINIMUM and MAXIMUM simply return $V.min$ and $V.max$: $O(1)$, done. MEMBER is almost as before, but must first check whether x is the floating minimum or maximum (since those are not in the clusters):

Algorithm 96: vEB-MEMBER(V, x)

```
1 if x = V.min or x = V.max then
2     return TRUE
3 else if V.u = 2 then return FALSE;
4 else return vEB-MEMBER(V.cluster[high(x)], low(x));
```

One recursive call per level $\Rightarrow O(\lg \lg u)$, as before.

21.7.2 Successor: the centerpiece

Algorithm 97: vEB-Successor(V, x)

Input: vEB V of size u, key x (need not be in S).
Output: Smallest key in S that is $> x$, or NIL.

```
1  if V.u = 2 then
2      if x = 0 and V.max = 1 then return 1;
3      else return NIL;
4  if V.min ≠ NIL and x < V.min then
5      return V.min ;                                  // the floating min is the answer
6  maxlow ← vEB-Maximum(V.cluster[high(x)]);
7  if maxlow ≠ NIL and low(x) < maxlow then
8      o ← vEB-Successor(V.cluster[high(x)], low(x));
9      return index(high(x), o) ;                      // successor is in same cluster
10 else
11     c ← vEB-Successor(V.summary, high(x));
12     if c = NIL then return NIL;
13     return index(c, vEB-Minimum(V.cluster[c]));
```

Read it slowly. There are three exits, and only one of them recurses:

1. *Cheap shortcut.* If x is smaller than the floating minimum, the minimum itself is the successor. $O(1)$, no recursion.

2. *Same cluster.* We peek at the *maximum* of x's own cluster in $O(1)$ (it is just a cached field). If $\text{low}(x)$ is below that max, the successor lives in this cluster, so we make one recursive Successor call into it – and *stop*.

3. *Later cluster.* Otherwise we recurse once into the *summary* to find the next nonempty cluster c, then read that cluster's Minimum – but Minimum is now $O(1)$! So this branch also makes exactly *one* recursive call (into the summary).

That is the whole magic. The $O(1)$ Minimum (Fix 1) is what lets branch (3) avoid a second recursion. So no matter which exit we take, we recurse at most once into a $\sqrt{u}$-sized substructure. The recurrence is finally

$$T(u) = T(\sqrt{u}) + O(1),$$

and we already solved this for Member: $T(u) = O(\lg \lg u)$. Predecessor is the mirror image (swap min/max, swap successor/maximum) and is the same cost.

21.7.3 A complete numeric trace of Successor

Let $u = 16$ (so $\sqrt{u} = 4$) and $S = \{2, 3, 4, 5, 7, 14, 15\}$. We ask for Successor$(S, 5)$; the answer should be 7. Recall the grid view: $\text{high}(x) = \lfloor x/4 \rfloor$ is the row, $\text{low}(x) = x \bmod 4$ is the column. Figure 21.5 lays out the structure for this set.

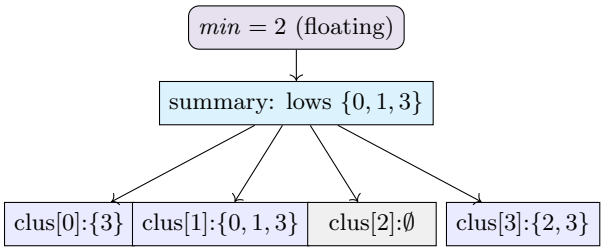


Figure 21.5: The vEB(16) for $S = \{2, 3, 4, 5, 7, 14, 15\}$. The smallest key, 2, floats in *min* and is *not* stored in any cluster. The remaining keys land in their clusters by high half (stored as low halves). The summary marks clusters $0, 1, 3$ as nonempty. Cluster 2 is empty.

Algorithm lab

Trace. The top vEB has $min = 2$ (floating, not in any cluster). The remaining keys $\{3, 4, 5, 7, 14, 15\}$ distribute into clusters by their high half:

cluster i	keys with high $= i$	stored lows
0	3	$\{3\}$ (since low(3) = 3)
1	4, 5, 7	$\{0, 1, 3\}$
3	14, 15	$\{2, 3\}$

Cluster 2 is empty. The summary stores $\{0, 1, 3\}$ (the nonempty clusters), with its own floating $min = 0$.

Now run vEB-Successor$(V, 5)$:

1. $u = 16 \neq 2$. Is $5 < V.min = 2$? No.
2. high(5) = 1, low(5) = 1. Peek at Maximum$(cluster[1])$. Cluster 1 holds lows $\{0, 1, 3\}$ so its max is 3. Is low(5) $= 1 < 3$? Yes — the successor is in the same cluster.
3. Recurse: vEB-Successor$(cluster[1],\ 1)$. Inside, the next low after 1 among $\{0, 1, 3\}$ is 3. Return 3.
4. Splice back: index(high $= 1, o = 3) = 1 \cdot 4 + 3 = 7$.

Answer: 7. ✓ Exactly one recursive descent was made.

Second trace, crossing clusters: vEB-Successor$(V, 7)$, answer should be 14.

1. $7 < 2$? No. high(7) = 1, low(7) = 3.
2. Maximum$(cluster[1]) = 3$. Is low(7) $= 3 < 3$? No. So look in a *later* cluster.
3. Recurse into summary: vEB-Successor$(summary, 1)$. Summary holds $\{0, 1, 3\}$; the next after 1 is 3. So $c = 3$.
4. Minimum$(cluster[3])$: cluster 3 holds lows $\{2, 3\}$, min is 2 ($O(1)$ field read). Splice: index$(3, 2) = 3 \cdot 4 + 2 = 14$.

Answer: 14. ✓

21.7.4 Insert: one recursion via the doorman

Algorithm 98: vEB-INSERT(V, x)

```
1  if V.min = NIL then
2  |  V.min ← V.max ← x ;                  // empty: just seat the doorman, O(1), stop
3  |  return
4  if x < V.min then
5  |  swap x ↔ V.min ;                    // new smallest: displace the old min downward
6  if V.u > 2 then
7  |  if vEB-MINIMUM(V.cluster[high(x)]) = NIL then
8  |  |  vEB-INSERT(V.summary, high(x)) ;     // cluster was empty: update summary
9  |  |  set cluster[high(x)].min = cluster[high(x)].max = low(x);
10 |  else
11 |  |  vEB-INSERT(V.cluster[high(x)], low(x)) ;   // cluster nonempty: recurse into
   |  |   it
12 if x > V.max then V.max ← x;
```

Here is the punchline that justifies the doorman convention. The two recursive calls – one into the summary, one into the cluster – live in *opposite* branches of an `if/else`. They never both fire on the same level:

- If the target cluster is *empty*, we recurse into the summary to record that it just became nonempty, and we seat the cluster's doorman in $O(1)$ *without* recursing into the cluster. Inserting into an empty vEB is $O(1)$ (the first `if`), so the summary call's own deeper recursion also terminates immediately at its next level.
- If the target cluster is *nonempty*, the summary already knows about it, so we skip the summary entirely and recurse only into the cluster.

So along the actual chain of nested calls, only one "real" (non-$O(1)$) recursive call happens per level. The recurrence is again $T(u) = T(\sqrt{u}) + O(1) = O(\lg \lg u)$.

Common trap

A tempting misreading: "INSERT makes two recursive calls, so it must be $\Theta(\lg u)$ like proto-vEB." Not so. The two calls are in mutually exclusive branches, and the branch that recurses into the summary does so only when the cluster is empty – which makes the *paired* cluster operation $O(1)$. The "$\leq$ one expensive recursive call per level" invariant holds. Always check *which* calls can fire *together on a path*, not how many appear in the source.

21.7.5 Delete: the bookkeeping is heavier but the bound holds

DELETE is the fiddliest operation because removing the floating minimum forces us to promote a new one from the clusters. The structure of the argument is identical, though: only one nontrivial recursive call fires per level.

Algorithm 99: vEB-DELETE(V, x)

```
1  if V.min = V.max then
2      V.min ← V.max ← NIL ;                          // only one element; now empty
3      return
4  if V.u = 2 then
5      if x = 0 then V.min ← 1;
6      else V.min ← 0;
7      V.max ← V.min;
8      return
9  if x = V.min then
10     c ← vEB-MINIMUM(V.summary) ;                   // first nonempty cluster
11     x ← index(c, vEB-MINIMUM(V.cluster[c]));
12     V.min ← x ;     // promote:  this key will be removed from its cluster below
13 vEB-DELETE(V.cluster[high(x)], low(x));
14 if vEB-MINIMUM(V.cluster[high(x)]) = NIL then
15     vEB-DELETE(V.summary, high(x)) ; // cluster emptied:  clear its summary bit
16     if x = V.max then
17         recompute V.max from summary/clusters (O(1) field reads);
18 else if x = V.max then  V.max ← index(high(x), vEB-MAXIMUM(V.cluster[high(x)])) ;
```

There appear to be two recursive DELETE calls (cluster, then possibly summary), so we must argue carefully that they do not both genuinely recurse on the same path. The second one fires only when the cluster became *empty* after the first deletion. But deleting the last element of a cluster (DELETE on a one-element vEB) hits the very first `if` and costs $O(1)$ – it does not recurse deeper. So the expensive deletion happens in *either* the cluster *or* the summary, never both at full depth. Once more $T(u) = T(\sqrt{u}) + O(1) = O(\lg \lg u)$.

Cost summary

vEB (final). Every operation – MEMBER, INSERT, DELETE, MINIMUM, MAXIMUM, SUCCESSOR, PREDECESSOR – runs in $O(\lg \lg u)$ worst-case time, governed by the single recurrence $T(u) = T(\sqrt{u}) + O(1)$. The price is space (next section) and a fixed integer universe.

21.8 Solving the recurrence, once and for all

We keep invoking "$T(u) = T(\sqrt{u}) + O(1) = O(\lg \lg u)$." Let us actually solve it, gently, because the same substitution unlocks several recurrences in this book.

The obstacle is the $\sqrt{u}$: it is an awkward thing to iterate. The cure is to change variables so the awkward operation becomes a friendly one. Let

$$m = \lg u, \qquad \text{equivalently } u = 2^m.$$

Then $\sqrt{u} = u^{1/2} = 2^{m/2}$, so its log is $m/2$. Define $S(m) = T(2^m)$. The recurrence $T(u) = T(\sqrt{u}) + O(1)$ becomes

$$S(m) = T(2^m) = T(2^{m/2}) + O(1) = S(m/2) + O(1).$$

That is a recurrence that *halves* m and adds a constant – precisely the shape of binary search. By the master theorem (Chapter 4, case 2 with $a = 1, b = 2, f = O(1)$), it solves to

$$S(m) = O(\lg m).$$

Unwinding the substitution, $m = \lg u$, so

$$T(u) = S(\lg u) = O(\lg \lg u).$$

Walking question

On your walk, prove the $O(\lg m)$ from scratch by unrolling, no master theorem. Write $S(m) = S(m/2) + c = S(m/4) + 2c = S(m/8) + 3c = \cdots$. After t steps the argument is $m/2^t$ and the accumulated cost is tc. The recursion stops when $m/2^t$ reaches the base (1), i.e. when $t = \lg m$. So $S(m) = \Theta(\lg m) \cdot c = O(\lg m)$. Now you have rederived the depth $\lg \lg u$ with your own hands.

21.9 The cost of all this: space

There is no free lunch. A vEB(u) recursively contains $\sqrt{u}$ cluster substructures plus one summary substructure, each a vEB($\sqrt{u}$), and all of them are *allocated up front* – even the clusters that hold nothing. Let $P(u)$ be the space. Then

$$P(u) = (\sqrt{u} + 1)\, P(\sqrt{u}) + O(1).$$

This solves to $P(u) = \Theta(u)$. The structure occupies space proportional to the *entire universe*, whether you store one key or a million.

Common trap

$\Theta(u)$ space is the catch that limits where vEB is usable. For $u = 2^{32}$ that is billions of cells – gigabytes – even to store ten keys. The remedy in practice is to replace the array of $\sqrt{u}$ cluster pointers with a *hash table* (Chapter 11) keyed by cluster index, allocating a cluster only when it first becomes nonempty. That cuts space to $O(n)$ (proportional to the keys actually present) while keeping the $O(\lg \lg u)$ time *expected*. CLRS develops this as the related "y-fast trie" direction in its problems and chapter notes.

Why this matters

The deeper lesson generalizes far past this one structure: *when your keys are not abstract, exploit their structure.* The comparison lower bound only binds when all you can do is ask "is $a < b$?". The instant you are allowed to *index by a key* – to use the key as an address – whole new speedups open up. This is the same insight behind counting sort and radix sort (Chapter 8) and behind direct-address tables (Chapter 11). vEB is the most sophisticated member of that family: it indexes *recursively*, by half the key at a time.

History and connection

The structure is due to Peter van Emde Boas, who introduced it around 1975 (with collaborators Kaas and Zijlstra). It was one of the first demonstrations that priority-queue operations could beat the $\Theta(\log n)$ comparison barrier by exploiting a bounded integer universe, and it kicked off the rich subfield of *integer data structures* (van Emde Boas trees, x-fast and y-fast tries, fusion trees, exponential search trees). In CLRS this is **Chapter 20, "van Emde Boas Trees"** (Chapter 20 in the 3rd edition). CLRS builds it in the same staged way we did: bit vector → binary summary tree → proto-vEB → the final vEB with stored min/max. Read it next; you now have the intuition to make every line of it feel inevitable. The master theorem we leaned on is CLRS Chapter 4, and the comparison lower bound that vEB sidesteps is CLRS Chapter 8.

21.10 Recap: the chain of ideas

It is worth seeing the whole arc in one glance, because each link was forced by the flaw in the link before it.

Focus

1. **Bit vector** ($O(u)$ successor): $O(1)$ membership but successor scans a flat array.
2. **Binary summary tree** ($O(\lg u)$): add OR-summaries to get shortcuts, but the tree is $\lg u$ tall.
3. **Square-root split / proto-vEB** (depth $\lg \lg u$): branch by $\sqrt{u}$ so the recursion is only $\lg \lg u$ deep – but operations make ≥ 2 recursive calls per level, so they still cost $\Theta(\lg u)$.
4. **Stored *min*/*max* + floating min** ($O(\lg \lg u)$): cache min/max for $O(1)$ access, and keep the min out of the clusters, so every operation makes *exactly one* recursive call per level. Recurrence $T(u) = T(\sqrt{u}) + O(1) = O(\lg \lg u)$.

The one rule beneath all of it: *one recursive call into a $\sqrt{u}$-substructure per level.* Everything else is bookkeeping in service of that rule.

21.11 Exercises

Exercise 21.1 (Counting the levels)**.** For each universe size $u \in \{4,\ 16,\ 256,\ 2^{16},\ 2^{64}\}$, write out the sequence of universe sizes down the vEB recursion ($u \to \sqrt{u} \to \cdots \to 2$) and confirm the number of levels equals $\lg \lg u$. Which of these would have operations costing more than 6 "levels" of work? (Warmup.)

Exercise 21.2 (Splitting keys)**.** Let $u = 256$, so $\sqrt{u} = 16$. Compute $\text{high}(x)$, $\text{low}(x)$, and verify $\text{index}(\text{high}(x), \text{low}(x)) = x$ for $x \in \{0, 17, 200, 255\}$. Describe high and low purely as bit operations (shift / mask) on the 8-bit value x. (Warmup.)

Exercise 21.3 (Why two calls per level is fatal)**.** Solve each recurrence by the $m = \lg u$ substitution and state the closed form: (a) $T(u) = T(\sqrt{u}) + O(1)$; (b) $T(u) = 2\,T(\sqrt{u}) + O(1)$; (c) $T(u) =$

$\sqrt{u}\,T(\sqrt{u})+O(1)$. Match each to one of the structures in the chapter (final vEB, proto-vEB minimum, total space). (Medium.)

Exercise 21.4 (Trace Successor)**.** Let $u = 16$ and $S = \{1, 2, 6, 9, 13\}$. Lay out the clusters and the summary (remember the floating minimum is not stored in a cluster). Then trace vEB-Successor(V, x) for $x = 2$, $x = 6$, and $x = 9$, naming which of the three exits fires each time and how many recursive descents occur. (Medium.)

Exercise 21.5 (Trace Insert)**.** Starting from an empty vEB(16), insert the keys $5, 2, 8, 5, 0$ in that order (the second 5 is a no-op; explain why). After each insertion, write down *min*, *max*, the contents of each cluster, and the summary. Point out every insertion that took $O(1)$ time because it hit the empty-node fast path. (Medium.)

Exercise 21.6 (The floating minimum, examined)**.** Explain in your own words why vEB-Insert into an *empty* node is $O(1)$, and why this single fact is what keeps Insert's recurrence at $T(u) = T(\sqrt{u}) + O(1)$ rather than $T(u) = 2\,T(\sqrt{u}) + O(1)$. What would break if we instead stored the minimum down in its cluster like every other element? (Medium.)

Exercise 21.7 (Predecessor by mirror)**.** vEB-Predecessor is the mirror of Successor, but there is one asymmetry: it has a special case that Successor does not, involving *min*. Write vEB-Predecessor in full pseudocode and explain the extra case. Hint: the floating *min* is below everything in the clusters, so when the cluster search fails, you must still check whether x is greater than *min*. (Medium-hard.)

Exercise 21.8 (Trace Delete, including a promotion)**.** Take $u = 16$ and $S = \{0, 3, 4, 11\}$ with the structure correctly built. Trace vEB-Delete$(V, 0)$. Since 0 is the floating minimum, follow the promotion: which key becomes the new *min*, and from which cluster is it then removed? Show the clusters and summary before and after. (Hard.)

Exercise 21.9 (Space recurrence)**.** Set up and solve the space recurrence $P(u) = (\sqrt{u}+1)P(\sqrt{u}) + O(1)$ to show $P(u) = \Theta(u)$. Then estimate the space, in cells, for $u = 2^{20}$ holding a set of just 3 keys, and contrast with a balanced BST holding the same 3 keys. What does this tell you about when to reach for a vEB tree? (Hard.)

Exercise 21.10 (From $\Theta(u)$ space to $O(n)$ space)**.** Sketch how replacing the array $cluster[0..\sqrt{u}-1]$ with a hash table (Chapter 11), allocating a cluster only on its first nonempty insert, reduces space to $O(n)$. Which time bounds become *expected* rather than worst-case, and why? (Challenge.)

Exercise 21.11 (Successor without stored max)**.** Suppose you kept the floating *min* trick but did *not* cache *max* – you would have to compute a cluster's maximum by a recursive call. Show that Successor then makes two genuine recursive calls in its "same cluster" branch (the max query plus the successor query), and that its running time degrades to $\Theta(\lg u)$. This isolates exactly why caching *max* – not just *min* – is load-bearing. (Challenge.)

Part VI

Graph Algorithms

Chapter 22

Elementary Graph Algorithms

Almost everything interesting in the world is a bunch of *things* with *connections* between them. Cities joined by roads. Web pages joined by links. People joined by friendships. Tasks joined by "must happen before" arrows. Courses joined by prerequisites. The moment you notice this pattern, you have discovered the single most useful abstraction in all of computer science: the *graph*. A graph is just a set of dots and a set of lines between dots, and yet an astonishing fraction of real algorithmic problems turn out to be questions about graphs wearing a disguise.

This chapter is the foundation for everything graph-related that follows – minimum spanning trees, shortest paths, network flow. We are going to move slowly and build genuine intuition. First we will decide how to *store* a graph in a computer, because that choice quietly shapes everything else. Then we will learn the two fundamental ways to *explore* a graph: breadth-first search, which fans outward in rings, and depth-first search, which plunges forward and backtracks. Out of depth-first search we will mine two surprisingly deep tools: *topological sort*, which linearizes a tangle of dependencies, and the discovery of *strongly connected components*, which finds the tightly-knit clusters inside a directed graph. By the end you will be able to look at almost any "things and connections" problem and reach for the right hammer.

22.1 What a Graph Is

Let us pin down the vocabulary, gently. A *graph* $G = (V, E)$ has a set of *vertices* V (the dots, also called *nodes*) and a set of *edges* E (the lines). Each edge joins two vertices. That is the whole definition. Everything else is detail.

The first detail that matters: are the edges *directed* or *undirected*? In an *undirected* graph, an edge $\{u, v\}$ is a two-way street – if u is connected to v, then v is connected to u, with no preferred direction. Think of friendships, or roads you can drive both ways. In a *directed* graph (often called a *digraph*), an edge (u, v) is a one-way arrow from u *to* v, and it says nothing about whether you can get back. Think of one-way streets, web links, or "task u must finish before task v starts."

Intuition

A useful mental test: if you can imagine standing on a vertex and an edge "points" somewhere, it is directed. If the edge is just a wire connecting two pegs with no arrowhead, it is undirected. Undirected graphs are really a special case of directed ones where every arrow comes with a matching arrow pointing the other way. We keep them separate because so many real situations are genuinely symmetric, and pretending otherwise wastes space.

A few more words you will need constantly. Two vertices joined by an edge are *adjacent* (or *neighbors*). The number of edges touching a vertex is its *degree*; in a directed graph we split this into *out-degree* (arrows leaving) and *in-degree* (arrows arriving). A *path* is a sequence of vertices where each consecutive pair is joined by an edge. A *cycle* is a path that returns to where it started. A graph with no cycles is *acyclic*; a directed acyclic graph appears so often it has its own three-letter name, *DAG*, which we will meet again in topological sort.

Focus

Throughout the chapter we write V for the number of vertices and E for the number of edges. (Strictly $|V|$ and $|E|$, but everyone abuses notation and writes V and E inside $O(\cdot)$, and so will we.) Almost every running time in graph algorithms is some combination of V and E, and learning to read those formulas – to feel whether $O(V + E)$ is fast and $O(V^2)$ is wasteful for your particular graph – is half the skill.

How big can E be relative to V? In an undirected graph with no self-loops or repeated edges, every pair of vertices contributes at most one edge, so $E \le \binom{V}{2} = \Theta(V^2)$. A graph that has nearly this many edges is called *dense*; one with only a handful per vertex, so $E = O(V)$, is *sparse*. Most real graphs – road networks, social networks, the web – are wildly sparse, and this single fact drives the most important storage decision we are about to make.

22.2 Storing a Graph: Lists versus Matrices

You cannot run an algorithm on a picture. We need to encode "these dots, those lines" as data the machine can chew on. There are two classic encodings, and they trade off against each other in a way worth understanding to your bones.

22.2.1 The adjacency matrix

The most literal encoding is a grid. Number the vertices $1, 2, \ldots, V$. Build a $V \times V$ table A where $A[i][j] = 1$ if there is an edge from i to j, and 0 otherwise. That's the *adjacency matrix*.

Example 22.1. Take an undirected graph on four vertices $\{1, 2, 3, 4\}$ with edges $\{1, 2\}$, $\{1, 3\}$, $\{2, 3\}$, and $\{3, 4\}$. Its adjacency matrix is

$$A = \begin{array}{c|cccc} & 1 & 2 & 3 & 4 \\ \hline 1 & 0 & 1 & 1 & 0 \\ 2 & 1 & 0 & 1 & 0 \\ 3 & 1 & 1 & 0 & 1 \\ 4 & 0 & 0 & 1 & 0 \end{array}$$

Notice the matrix is *symmetric* across the diagonal: $A[i][j] = A[j][i]$. That symmetry is exactly what "undirected" means in matrix form. For a directed graph the matrix would generally not be symmetric.

The matrix has two lovely properties. First, you can answer "is there an edge from i to j?" in $O(1)$ time – one array lookup, no searching. Second, it is dead simple and supports slick algebraic tricks (you will see in a later chapter that squaring the matrix counts paths of length two). But it has one fatal flaw for big sparse graphs: it always uses $\Theta(V^2)$ space, even if the graph has only a dozen edges. A social network with a billion users would need a matrix with 10^{18} entries, almost all of them zero. That is hopeless.


22.2.2 The adjacency list

The adjacency list throws away all those zeros. For each vertex u, keep a little list $Adj[u]$ naming exactly the vertices u connects to. Nothing more.


Example 22.2. The same graph from Example 22.1 as adjacency lists:

$$\begin{aligned} Adj[1] &= [\,2,\ 3\,] \\ Adj[2] &= [\,1,\ 3\,] \\ Adj[3] &= [\,1,\ 2,\ 4\,] \\ Adj[4] &= [\,3\,] \end{aligned}$$

In an undirected graph each edge shows up *twice* – edge $\{1, 2\}$ puts a 2 in $Adj[1]$ and a 1 in $Adj[2]$. So the total length of all the lists is exactly $2E$. In a directed graph each edge appears once, in the list of its source vertex, and the total length is E. Either way, the space used is $\Theta(V + E)$: one slot per vertex for the list header, plus one entry per edge-endpoint.

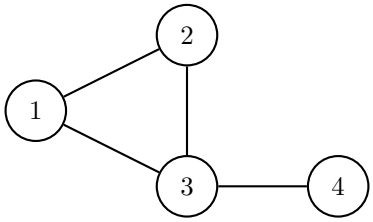

The same four lists, drawn as the linked structure a machine actually holds – a header array on the left, each pointing to a little chain of its neighbors:



Now the trade-off is clear. The list uses $\Theta(V + E)$ space, which for a sparse graph is enormously smaller than $\Theta(V^2)$. The price is that checking "is there an edge from i to j?" now means scanning i's list, which can take up to $O(\deg(i))$ time instead of $O(1)$. For most algorithms – including every one in this chapter – you do not ask that question; instead you ask "what are all of u's neighbors?", and the list answers that perfectly by just handing them to you. That is why adjacency lists are the default.

Cost summary

For a graph with V vertices and E edges:

	Adjacency list	Adjacency matrix
Space	$\Theta(V + E)$	$\Theta(V^2)$
Edge query (i, j)?	$O(\deg i)$	$O(1)$
List u's neighbors	$\Theta(\deg u)$	$\Theta(V)$
Best for	sparse graphs	dense graphs

The rule of thumb: *lists for sparse, matrix for dense.* Since real graphs are usually sparse, lists win in practice almost every time.

Common trap

A classic beginner mistake is to reach for the adjacency matrix because it "feels simpler," then watch the program run out of memory on a graph with a million vertices. A million-by-million matrix of bytes is a terabyte. The same graph as lists, if it averages ten edges per vertex, is about ten million entries – a few tens of megabytes. Always ask: is my graph sparse? If yes, use lists.

History and connection

This material maps to CLRS Chapter 20 ("Elementary Graph Algorithms"). The representations live in CLRS Section 20.1; breadth-first search in 20.2; depth-first search and edge classification in 20.3; topological sort in 20.4; and strongly connected components in 20.5. CLRS presents these crisply and assumes you already believe graphs are useful. Our job here is to make you believe it, slowly, and to derive every running time rather than assert it.

22.3 Breadth-First Search: Exploring in Rings

Imagine you drop a pebble into a still pond at vertex s (the *source*). Ripples spread outward in perfect rings: first the vertices one edge away, then the vertices two edges away, then three, and so on. *Breadth-first search* (BFS) is exactly this ripple, made into an algorithm. It visits vertices in order of their distance *in number of edges* from s, and as a free gift it computes the length of the shortest such path to every reachable vertex.

Intuition

Picture a fire spreading through dry grass from one spot. At minute 1 every cell touching the start is alight. At minute 2 every cell touching *those*. The fire never skips ahead – it cannot reach a cell three steps away before it has burned through the cells two steps away. BFS is that fire. The "distance" it computes is the minute at which each cell catches.

How do we make a computer fan out in rings? The secret is a *queue* – a first-in-first-out line. We process vertices in the exact order we discover them. Because a vertex at distance d is always discovered before any vertex at distance $d+1$, and the queue hands them back in arrival order, we are guaranteed to finish all of ring d before touching ring $d+1$. The queue *is* the ripple.

To keep the bookkeeping honest, we color every vertex one of three colors as the search runs:

- **white** – not yet discovered (still untouched grass),
- **gray** – discovered but we have not yet looked at all its neighbors (the burning frontier),
- **black** – discovered and fully explored (burnt out).

A vertex goes white → gray when it first enters the queue, and gray → black when it leaves the queue after we have scanned its neighbors. We also record, for each vertex u, a distance $d[u]$ (rings from s) and a *predecessor* $\pi[u]$ (the vertex from which we discovered u). Those predecessors, chained together, form the shortest-path tree.

Algorithm 100: BFS(G, s)


Input: Graph $G = (V, E)$ as adjacency lists; source vertex s.
Output: For each v: distance $d[v]$ in edges from s, and predecessor $\pi[v]$.

```
1  for each vertex u ∈ V do
2      color[u] ← white;   d[u] ← ∞;   π[u] ← NIL;
3  color[s] ← gray;   d[s] ← 0;   π[s] ← NIL;
4  Q ← empty queue;   ENQUEUE(Q, s);
5  while Q is not empty do
6      u ← DEQUEUE(Q);
7      for each v ∈ Adj[u] do
8          if color[v] = white then
9              color[v] ← gray;
10             d[v] ← d[u] + 1;
11             π[v] ← u;
12             ENQUEUE(Q, v);
13     color[u] ← black;
```

Read it once for the shape. We seed the queue with the source. Then, over and over, we pull the front vertex u, look at each neighbor v, and – only if v is still white (never seen) – we color it gray, set its distance to one more than u's, point its predecessor at u, and put it in line. The white check is crucial: it is what stops us from processing a vertex twice and what guarantees each vertex enters the queue at most once.

22.3.1 A full numeric trace

Let us run BFS by hand. Here is a directed-feeling but undirected graph on six vertices; we will start from $s = 1$.

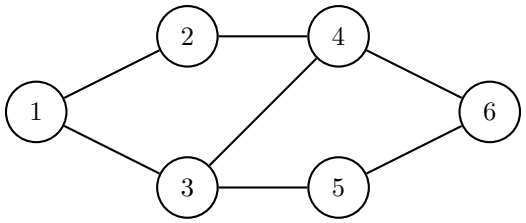

The adjacency lists (with neighbors listed in increasing order) are $Adj[1] = [2, 3]$, $Adj[2] = [1, 4]$, $Adj[3] = [1, 4, 5]$, $Adj[4] = [2, 3, 6]$, $Adj[5] = [3, 6]$, $Adj[6] = [4, 5]$.

We track the queue contents and the distances after each dequeue.


Step	Dequeue	Newly discovered (distance)	Queue after
0	–	1 (0)	[1]
1	1	2 (1), 3 (1)	[2, 3]
2	2	4 (2)	[3, 4]
3	3	5 (2)	[4, 5]
4	4	6 (3)	[5, 6]
5	5	(nothing new)	[6]
6	6	(nothing new)	[ ]

Walk through the interesting moments. At step 2 we dequeue 2 and look at its neighbors 1 and 4. Vertex 1 is already black, so we skip it; vertex 4 is white, so it becomes gray at distance $d[2] + 1 = 2$, with $\pi[4] = 2$. At step 3 we dequeue 3; among its neighbors 1 (black) and 4 (already gray – we discovered it a moment ago via 2) are skipped, but 5 is white and gets distance 2 with $\pi[5] = 3$. Notice that 4 was *not* re-discovered through 3: the white check protected it. At step 4 vertex 4 finally gives us 6 at distance 3. By the time we reach 5 and 6, everything is discovered, so they add nothing.

Final distances from $s = 1$:

$$d[1] = 0, \quad d[2] = 1, \quad d[3] = 1, \quad d[4] = 2, \quad d[5] = 2, \quad d[6] = 3.$$

It helps to see the same result drawn as rings. Each dashed band collects the vertices at one distance from the source, and the bold edges are the predecessor (tree) edges that BFS kept. Notice every bold edge steps from one ring to the very next – BFS never reaches across two rings at once.

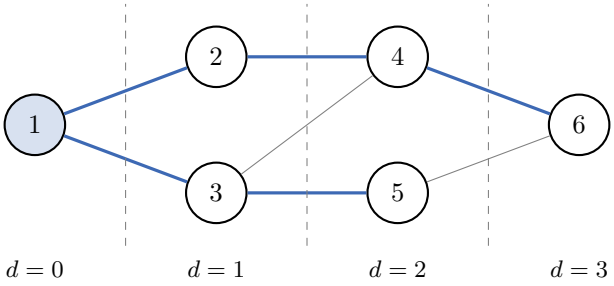

And the predecessor tree, $\pi[2] = \pi[3] = 1$, $\pi[4] = 2$, $\pi[5] = 3$, $\pi[6] = 4$, encodes one shortest path to each vertex. To recover the path to 6, follow predecessors backward: $6 \leftarrow 4 \leftarrow 2 \leftarrow 1$, i.e. $1 \rightarrow 2 \rightarrow 4 \rightarrow 6$, three edges – exactly $d[6]$.

Algorithm lab

Re-run the trace, but this time start from $s = 6$ and write out the queue at every step yourself. Predict the distances before you check them: you should get $d[6] = 0$, the neighbors of 6 at distance 1, and so on. Then notice something: because this graph is undirected, $d_{s=1}[6] = d_{s=6}[1] = 3$. Distance is symmetric in undirected graphs. Is it symmetric in directed graphs? (No – and that is worth feeling viscerally.)

22.3.2 Why BFS finds shortest paths

We claimed BFS computes the shortest distance in edges. Let us make that precise and then argue it gently. Define $\delta(s, v)$ to be the *true* minimum number of edges on any path from s to v (and ∞ if no path exists).

Formal

Theorem (BFS correctness). After BFS(G, s) terminates, $d[v] = \delta(s, v)$ for every vertex v. Moreover the predecessor edges form a tree in which the path from s to v is a shortest path.

The heart of the argument is a loop invariant about the queue. Here is the intuition before the statement: the queue is always a snapshot of the frontier, and the frontier is never more than one ring deep.

Formal

Queue invariant. At every point during BFS, if the queue holds the vertices $\langle v_1, v_2, \ldots, v_r \rangle$ from front to back, then $d[v_r] \leq d[v_1] + 1$, and the distances are non-decreasing: $d[v_1] \leq d[v_2] \leq \cdots \leq d[v_r]$.

Why does this hold? Initially the queue is just $\langle s \rangle$ with $d[s] = 0$, so both parts hold trivially. Now suppose they hold and we dequeue the front v_1. Whatever new vertices we enqueue get distance $d[v_1] + 1$, and they go to the *back*. The new front becomes v_2, whose distance is at least $d[v_1]$; the new back has distance $d[v_1] + 1 \leq d[v_2] + 1$. A short check shows both parts survive. So the queue is forever sorted by distance and spans at most two adjacent rings – the fire never jumps a ring.

From this invariant the theorem follows by induction on distance. Every vertex v first becomes gray

when some neighbor u with $d[u] = \delta(s, v) - 1$ dequeues; at that instant $d[v]$ is set to $d[u] + 1 = \delta(s, v)$, and it is never changed again. The one subtlety is ruling out that v gets a *smaller* (impossible – you cannot beat the true shortest path) or *larger* value; the invariant, by keeping the queue ordered, guarantees v is discovered by a vertex on the correct ring. CLRS Section 20.2 gives the full five-line proof; the picture to keep is the ordered queue.

Walking question

Go for a walk and convince yourself, without any algebra, why a queue and not a stack is what makes BFS find shortest paths. What goes wrong if you swap the queue for a stack – if you always explore the *most recently* discovered vertex instead of the oldest? (Hint: you get a different, equally famous algorithm, and it does *not* respect rings. That is the next section.)

22.3.3 The running time of BFS

Let us derive the cost rather than quote it. Two things happen during BFS: queue operations, and scanning adjacency lists.

Queue operations. Each vertex is colored gray exactly once – the moment it is enqueued – and the white check forbids enqueuing it again. So each vertex is enqueued once and dequeued once: $O(V)$ total queue operations, each $O(1)$.

Scanning lists. When a vertex u is dequeued, we scan its entire adjacency list $Adj[u]$ once, doing $O(1)$ work per neighbor. Since each vertex is dequeued once, each adjacency list is scanned once. The total length of all adjacency lists is $\Theta(E)$ (counting each edge once if directed, twice if undirected). So all the scanning costs $\Theta(E)$.

Adding the one-time initialization of $\Theta(V)$, we get:

Cost summary

BFS runs in $O(V + E)$ time and uses $O(V)$ extra space for the queue, colors, distances, and predecessors. This is *linear in the size of the graph* – you cannot do better, because you must at least look at every vertex and edge. Note the $+$: you pay for vertices *and* edges separately, never their product. This is the payoff of adjacency lists; the same algorithm on an adjacency matrix would cost $O(V^2)$, because scanning a vertex's neighbors means walking a whole matrix row of length V.

22.4 Depth-First Search: Plunge and Backtrack

Breadth-first search is cautious: it never steps into ring $d+1$ until ring d is fully mapped. *Depth-first search* (DFS) is the opposite temperament. It is bold to a fault: from wherever it stands, it charges down the first unexplored edge it sees, then down the first edge from *there*, plunging ever deeper until it hits a dead end – a vertex whose neighbors are all already visited. Only then does it *backtrack* one step and try the next edge.

Intuition

DFS is how you explore a maze with a ball of string and a piece of chalk. You walk forward, chalking each junction so you know you have been there, always taking some unmarked corridor. When every corridor from your current spot is already chalked, you reel in the string one junction and try another corridor there. You only stop when the string is fully reeled in and you are back at the start with no fresh corridors anywhere. The string is the recursion stack; the chalk is the color.

Because DFS backtracks, it is naturally *recursive*: "explore u" means "for each neighbor, if it is white, explore it." The recursion stack remembers the trail of string for us. We keep the same white/gray/black coloring as BFS, but now we also stamp each vertex with two *timestamps* from a global clock that ticks once per event:

- $d[u]$, the *discovery time*, when u turns gray (we first arrive),
- $f[u]$, the *finish time*, when u turns black (we leave for good, having explored everything reachable below it).

These timestamps are not decoration. They encode the entire nested structure of the search and, as we will see, unlock topological sort and strongly connected components. Every vertex gets a discovery and a finish time, so the clock runs from 1 to $2V$.

Unlike BFS, DFS does not need a source: it sweeps over *all* vertices, launching a fresh exploration from each white one, so that even a disconnected graph is fully covered. The result is a *forest* of trees, one per launch.

Algorithm 101: DFS(G)

Input: Graph $G = (V, E)$ as adjacency lists.
Output: Discovery/finish times $d[u], f[u]$ and predecessors $\pi[u]$.

```
for each vertex u ∈ V do
    color[u] ← white;  π[u] ← NIL;
time ← 0;
for each vertex u ∈ V do
    if color[u] = white then
        DFS-Visit(G, u);
```


Algorithm 102: DFS-Visit(G, u)

```
time ← time + 1;  d[u] ← time;
color[u] ← gray;
for each v ∈ Adj[u] do
    if color[v] = white then
        π[v] ← u;
        DFS-Visit(G, v);
color[u] ← black;
time ← time + 1;  f[u] ← time;
```

22.4.1 A full numeric trace

Let us run DFS on a *directed* graph – the timestamps are most interesting there. Consider six vertices with arrows:

$$1 \to 2, \quad 1 \to 4, \quad 2 \to 3, \quad 3 \to 1, \quad 4 \to 3, \quad 5 \to 4, \quad 5 \to 6, \quad 6 \to 6.$$



We process vertices in numeric order and, within each list, neighbors in increasing order. The clock starts at 0.


We launch from 1 (time becomes 1, $d[1] = 1$). Its first white neighbor is 2 ($d[2] = 2$). From 2 we go to 3 ($d[3] = 3$). From 3 the only neighbor is 1, which is *gray* (still on the stack) – skip it. So 3 has no white neighbor; it finishes: $f[3] = 4$. Back at 2: no more neighbors, finish $f[2] = 5$. Back at 1: next neighbor 4 is white ($d[4] = 6$). From 4 the neighbor 3 is now *black* – skip. So 4 finishes $f[4] = 7$. Back at 1: no more neighbors, finish $f[1] = 8$.

The outer loop now looks for the next white vertex. Vertices $2, 3, 4$ are black; 5 is white. Launch from 5 ($d[5] = 9$). Neighbor 4 is black – skip. Neighbor 6 is white ($d[6] = 10$). From 6, the only neighbor is 6 itself, which is gray – skip. Finish $f[6] = 11$. Back at 5: done, $f[5] = 12$.

Collecting the stamps as (d, f) pairs:


Vertex	1	2	3	4	5	6
d	1	2	3	6	9	10
f	8	5	4	7	12	11

The DFS forest has two trees: one rooted at 1 (containing $1, 2, 3, 4$) and one rooted at 5 (containing $5, 6$). It is worth redrawing the graph as that forest, with each non-tree edge labeled by its kind (we classify the edges in the next subsection); the solid edges are the tree, and the dashed ones are the back and cross edges that DFS *walked but did not build the tree from*.

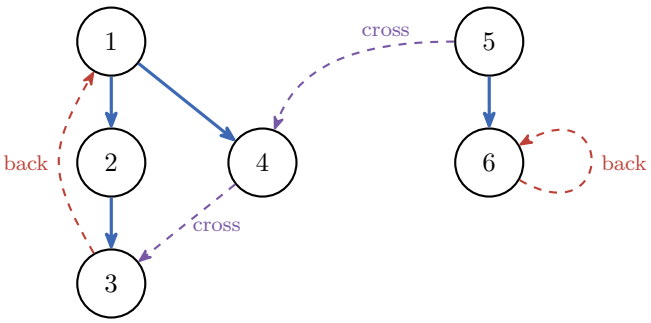

22.4.2 The parenthesis structure

Stare at those intervals $[d[u], f[u]]$ as if each vertex opens a parenthesis at $d[u]$ and closes it at $f[u]$. Writing them out in time order gives a perfectly nested string:



They never *cross*. Vertex 3's interval $[3, 4]$ sits entirely inside 2's $[2, 5]$, which sits inside 1's $[1, 8]$. This is not a coincidence; it is a theorem, and it is the single most useful fact about DFS.

Formal

Parenthesis theorem. In any DFS, for any two vertices u and v, exactly one of these holds:

- the intervals $[d[u], f[u]]$ and $[d[v], f[v]]$ are completely **disjoint**, and neither is a descendant of the other in the forest;
- one interval is entirely **contained** in the other, and the inner vertex is a descendant of the outer in the DFS forest.

The forbidden case – intervals that overlap but neither contains the other – **never happens.**

Why must this be true? Because the recursion stack enforces nesting. If u is discovered while v is still gray (on the stack), then u is being explored *inside* v's call, so u must finish before control returns to v – forcing $[d[u], f[u]]$ inside $[d[v], f[v]]$. If instead u is discovered after v has already finished, the two calls never overlap in time at all. There is no third option: a vertex is either still on the stack or already off it. Nesting, not crossing.

Focus

The slogan: *descendant intervals nest inside ancestor intervals; unrelated intervals are disjoint.* Equivalently, v is a descendant of u in the DFS forest *if and only if* $d[u] < d[v] < f[v] < f[u]$. Almost every clever DFS application – topological sort, strongly connected components, finding articulation points – is really an exploitation of this one nesting fact.

22.4.3 Classifying the edges

Here is where DFS earns its keep. As DFS walks an edge (u, v) – meaning we are at gray vertex u and looking at neighbor v – the *color of* v tells us exactly what kind of edge it is. There are four kinds:

- **Tree edge**: v is white. We are discovering v for the first time through this edge. Tree edges are the solid edges of the DFS forest.
- **Back edge**: v is gray. Then v is still on the stack – it is an *ancestor* of u. The edge points backward, up toward the root. Back edges are the smoking gun for cycles.
- **Forward edge**: v is black and $d[u] < d[v]$. Then v is a *descendant* of u that we already finished exploring by another route. The edge skips forward to an already-explored descendant.

- **Cross edge**: v is black and $d[u] > d[v]$. Then v is in a different subtree (or an earlier-finished sibling). The edge crosses between branches.

Intuition

The color of the vertex you are looking at *is* the edge type, almost: white means tree, gray means back, black means forward-or-cross, and you split the last case by comparing discovery times. You never have to do anything extra to classify edges; the coloring already running for the search hands you the answer for free.

In our trace above, walk the edges: $1 \to 2$, $2 \to 3$, $1 \to 4$ are tree edges (each found a white vertex). $3 \to 1$ is a *back edge* – when we looked at 1 from 3, vertex 1 was gray (an ancestor). $4 \to 3$ is a *cross edge* – when we looked at 3 from 4, vertex 3 was already black and $d[4] = 6 > d[3] = 3$. The self-loop $6 \to 6$ is a back edge (a vertex is its own ancestor in the degenerate sense). The edge $5 \to 4$ is also a cross edge: 4 was black with $d[4] = 6 < d[5] = 9$.

Formal

Cycle test. A directed graph has a cycle *if and only if* some DFS of it produces a back edge.

This is the key to detecting cycles, and it has a one-line proof both ways. If there is a back edge (u, v), then v is an ancestor of u, so the tree path from v down to u plus the edge (u, v) is a cycle. Conversely, if there is a cycle, consider the first vertex v on it that DFS discovers; following the cycle, every later vertex is reachable from v through white vertices, so they all become descendants of v, and the cycle's edge that returns to v is a back edge. We will lean on exactly this fact in topological sort.

Common trap

Edge classification depends on the *order* in which DFS happens to visit vertices and neighbors. The same graph, explored in a different order, can label the same edge differently (a forward edge in one run might not appear as such in another). But two things never change: tree and back edges in an *undirected* graph are the only two kinds that can appear, and a back edge appears if and only if the graph has a cycle. Do not over-read a specific classification as a property of the graph; read it as a property of *this* traversal.

22.4.4 The running time of DFS

The accounting is the same shape as BFS. The initialization loop is $\Theta(V)$. DFS-Visit is called exactly once per vertex (the white check guards it), contributing $\Theta(V)$ across all calls. Inside those calls, we scan each adjacency list exactly once, and the lists total $\Theta(E)$ in length.

Cost summary

DFS runs in $\Theta(V + E)$ time, linear in the graph, using $O(V)$ space for colors, timestamps, predecessors, and the recursion stack (whose depth is at most V). Like BFS, it touches every vertex and edge a constant number of times and never their product. If your DFS ever seems to cost more, you are probably re-scanning lists or testing edges through a matrix – check that.

22.5 Topological Sort: Untangling Dependencies

Now a genuine application. Suppose you must do a list of tasks, and some tasks depend on others: you cannot put your socks on after your shoes, cannot compile a file before its headers, cannot take Algorithms before Discrete Math. Model each task as a vertex and draw an arrow $u \to v$ meaning "u must come before v." The dependencies form a *directed graph*, and if your requirements are sane – no task transitively requires itself – that graph is a *DAG*, a directed acyclic graph.

The question: *can you line all the tasks up in a single row so that every arrow points forward*? Such a linear order is a *topological sort*. It tells you a valid sequence in which to actually do everything.

Intuition

Think of the famous "getting dressed" graph: underwear before pants, pants before belt, socks before shoes, shirt before tie, tie before jacket. There is no single "correct" order – you might do socks-then-underwear or underwear-then-socks, it doesn't matter – but *any* order you pick must respect every arrow. A topological sort produces one such legal dressing sequence. There can be many; you just need one.

Here is the beautiful part: DFS already computes this, almost for free. Recall the finish times $f[u]$. The trick is:

Formal

Topological sort via DFS. Run DFS on the DAG. As each vertex finishes (turns black), prepend it to the front of a list. When DFS ends, the list is a valid topological order. Equivalently: output the vertices in *decreasing order of finish time* $f[u]$.

Algorithm 103: Topological-Sort(G)

Input: A directed acyclic graph $G = (V, E)$.
Output: A list of vertices in topological order.

```
1 Call DFS(G), computing finish times f[u] for all u;
2 (as each vertex finishes, push it onto the front of a linked list L);
3 return L;
```

Why on earth does ordering by finish time work? The whole proof rests on one clean claim:

Formal

Claim. If G is a DAG and DFS is run on it, then for every edge (u, v) we have $f[u] > f[v]$.

Here is the argument, and it is short. Consider any edge (u, v). When DFS explores u and looks at v, v has some color.

- v cannot be *gray*. If it were, (u, v) would be a back edge, and a back edge means a cycle – but G is acyclic. Contradiction. (This is the only place we use the no-cycles assumption, and it is essential.)
- If v is *white*, then v becomes a descendant of u, so by the parenthesis theorem v finishes before u: $f[v] < f[u]$. Good.

- If v is *black*, then v already finished while u is still gray, so $f[v] < d[u] < f[u]$. Good.

In every possible case, $f[v] < f[u]$. So listing vertices by decreasing finish time puts u before v for *every* edge (u, v) – which is exactly the definition of a topological order. Done.

22.5.1 A worked topological sort

Take this small DAG of morning tasks:


$$\text{wake} \to \text{shower}, \quad \text{shower} \to \text{dress}, \quad \text{wake} \to \text{coffee}, \quad \text{dress} \to \text{leave}, \quad \text{coffee} \to \text{leave}.$$

Label them w, s, d, c, ℓ. Run DFS starting at w, neighbors in the order listed. We discover w ($d[w] = 1$), then s ($d = 2$), then d ($d = 3$), then ℓ ($d = 4$). From ℓ there are no out-edges, so ℓ finishes $f[\ell] = 5$. Back up: d finishes $f[d] = 6$, s finishes $f[s] = 7$. Back at w, next neighbor c is white: discover c ($d = 8$); its neighbor ℓ is black, skip; c finishes $f[c] = 9$; finally w finishes $f[w] = 10$.

Finish times: $f[w] = 10$, $f[c] = 9$, $f[s] = 7$, $f[d] = 6$, $f[\ell] = 5$. Sorting by *decreasing* finish time:

$$w\ (10), \quad c\ (9), \quad s\ (7), \quad d\ (6), \quad \ell\ (5).$$

So a valid order is: **wake, coffee, shower, dress, leave**. Drawn on a line, with every vertex placed left-to-right by decreasing finish time, the point of the claim becomes visible: *every* edge points rightward.

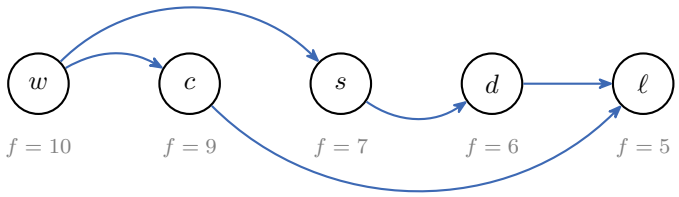

Check every edge: w before s and c (yes), s before d (yes), d before ℓ (yes), c before ℓ (yes). Every arrow points forward in the list. Note this is not the *only* valid order – "wake, shower, dress, coffee, leave" also works – but DFS handed us one legal answer with no extra effort.

Why this matters

Topological sort is everywhere once you see it. `make` and every modern build system topologically sorts your source files so headers compile before the code that includes them. Spreadsheet engines topologically sort cell formulas so a cell is computed after the cells it references. Package managers (`apt`, `npm`, `pip`) topologically sort dependencies to decide install order. Course-planning tools sort prerequisites. Every time a program must do things "in a valid order given constraints," a topological sort is hiding underneath. And because it is just one DFS, it costs only $O(V + E)$.

Walking question

On your walk, ponder: what happens if you try to topologically sort a graph that secretly has a cycle? Trace what the DFS does – it produces a back edge. Could you modify Topological-Sort to *detect* the cycle and report "these tasks have a circular dependency" instead of silently producing garbage? (You can: it is exactly the back-edge test from the previous section.)

22.6 Strongly Connected Components

Our final and deepest application. In a *directed* graph, two vertices u and v are *strongly connected* if you can get from u to v *and* from v back to u, each by following arrows. This "mutual reachability" is an equivalence relation, so it carves the vertices into clusters: a *strongly connected component* (SCC) is a maximal set of vertices that are all pairwise mutually reachable.

Intuition

Picture a city of one-way streets. Two intersections are in the same SCC if you can legally drive from either to the other and back. An SCC is a "neighborhood" you can fully circulate within. Between neighborhoods, traffic might flow one way only – you can leave downtown for the suburbs but never drive back. If you shrink each neighborhood to a single point, the city of one-way streets becomes a DAG: a clean hierarchy with no loops. That shrunken DAG, the *component graph*, is often what you really wanted to understand.

Focus

The component graph (contract each SCC to a single super-vertex) is *always* a DAG. Reason: if it had a cycle among components, all those components would be mutually reachable and would therefore be one single larger component – a contradiction with "maximal." Finding SCCs is exactly the act of revealing the DAG of clusters hiding inside any directed graph.

How do we find these components? The clever and famous answer is *Kosaraju's algorithm*, which uses DFS *twice* and a trick involving the *transpose* graph. The transpose G^T is G with every edge reversed: if G has $u \to v$, then G^T has $v \to u$. Crucially, G and G^T have *exactly the same strongly connected components* – reversing all arrows does not change whether two vertices can reach each other both ways.

Algorithm 104: Strongly-Connected-Components(G)

Input: A directed graph $G = (V, E)$.
Output: The strongly connected components of G.

1 Call DFS(G) to compute finish times $f[u]$ for every vertex u;
2 Compute the transpose G^T (reverse every edge);
3 Call DFS(G^T), but in the main loop consider the vertices in order of *decreasing* $f[u]$ (from step 1);
4 Output the vertices of each tree of the second DFS forest as one SCC;

That's it – two depth-first searches and an edge reversal. The whole thing runs in $\Theta(V + E)$. The mystery is why such a simple recipe works, and the answer is genuinely beautiful, so let us build the intuition carefully.

22.6.1 Why the trick works

Think about the component graph – the DAG you get by shrinking each SCC to a point. Because it is a DAG, it has "source" components (nothing flows in) and "sink" components (nothing flows out).

The key fact is about finish times *of whole components*. Define the finish time of a component C to be the largest finish time among its vertices. Then:

Formal

Lemma. If C and C' are distinct SCCs and there is an edge from *some* vertex of C to *some* vertex of C' in G, then the largest finish time in C is greater than the largest finish time in C'.

In words: in the first DFS, edges between components always run from *later*-finishing to *earlier*-finishing components. This is the component-level echo of the DAG fact we proved for topological sort ($f[u] > f[v]$ across an edge). So if we sort components by their largest finish time, we get a topological order of the component DAG – the source components come first.

Now the magic of the transpose. In the second DFS we start from the vertex of overall largest finish time – which lives in a *source* component C of G. In G^T all edges are reversed, so C becomes a *sink*: in G^T there are no edges *leaving* C to other components. Therefore the DFS-Visit launched from that first vertex can reach exactly the vertices of C and no further – it is trapped inside the component, which is precisely what we want. It scoops up all of C as one tree, then halts. We move to the next-highest finish time still white, which heads the next component, and so on. Each tree of the second DFS forest is exactly one SCC.

Intuition

Here is the whole idea in one breath: the first DFS *ranks the components* by finish time so that sources rank highest. Reversing the edges turns every source into a sink, so when the second DFS starts at the highest-ranked vertex, the reversed edges fence it inside its own component. Peel off the top component, repeat. Each peel is one DFS tree, each tree is one SCC.

22.6.2 A worked example

Reuse the directed graph from the DFS trace in Section 22.4.1: edges $1 \to 2$, $1 \to 4$, $2 \to 3$, $3 \to 1$, $4 \to 3$, $5 \to 4$, $5 \to 6$, $6 \to 6$. We already computed the first-DFS finish times:

$$f[1] = 8,\ f[2] = 5,\ f[3] = 4,\ f[4] = 7,\ f[5] = 12,\ f[6] = 11.$$

Sorting vertices by decreasing finish time gives the order $5\,(12),\ 6\,(11),\ 1\,(8),\ 4\,(7),\ 2\,(5),\ 3\,(4)$.

Now form the transpose G^T by flipping every arrow:


$$2 \to 1,\ 4 \to 1,\ 3 \to 2,\ 1 \to 3,\ 3 \to 4,\ 4 \to 5,\ 6 \to 5,\ 6 \to 6.$$

Adjacency lists of G^T: $Adj^T[1] = [3]$, $Adj^T[2] = [1]$, $Adj^T[3] = [2, 4]$, $Adj^T[4] = [1, 5]$, $Adj^T[5] = [\,]$, $Adj^T[6] = [5, 6]$.

Run the second DFS, taking roots in the order $5, 6, 1, 4, 2, 3$:

- Start at 5. In G^T, vertex 5 has *no* out-edges, so the tree is just $\{5\}$. **SCC:** $\{5\}$**.**
- Next white root is 6. From 6: neighbor 5 is black (skip), neighbor 6 is itself. So the tree is just $\{6\}$. **SCC:** $\{6\}$**.**
- Next white root is 1. From $1 \to 3 \to 2 \to 1$(gray, skip) and $3 \to 4 \to 1$(black, skip), $4 \to 5$(black, skip). So this DFS reaches $1, 3, 2, 4$ and stops. **SCC:** $\{1, 2, 3, 4\}$**.**
- Vertices $4, 2, 3$ are now black, so the loop ends.

The strongly connected components are $\{1, 2, 3, 4\}$, $\{5\}$, and $\{6\}$. Sanity check the big one: in the original G, can we get from 1 to 4 and back? $1 \to 4$ directly; and $4 \to 3 \to 1$ returns. From 1 to 2? $1 \to 2$, and $2 \to 3 \to 1$ returns. Yes – $1, 2, 3, 4$ are all mutually reachable, forming one tight cluster. Vertex 5 can reach others but nothing returns to it, so it stands alone; same for 6.



That last picture is the *component graph*: shrink each SCC to a point and the arrows between them form a DAG (here, $\{5\}$ points to both $\{1, 2, 3, 4\}$ and $\{6\}$, and nothing points back). The tangled directed graph has revealed its clean hierarchical skeleton.

Cost summary

Kosaraju's algorithm runs in $\Theta(V + E)$: the first DFS is $\Theta(V + E)$, building the transpose is $\Theta(V + E)$ (one pass over all edges), and the second DFS is $\Theta(V + E)$. Linear, again – which is remarkable for a problem that sounds like it should require checking reachability between all pairs of vertices.

History and connection

SCCs sit in CLRS Section 20.5. The two-pass transpose method we showed is *Kosaraju's algorithm* (sometimes Kosaraju–Sharir), the version CLRS presents because its correctness flows so cleanly from the parenthesis theorem. There is also *Tarjan's algorithm*, which finds SCCs in a single DFS using a stack and "low-link" values – one pass instead of two, no transpose – but its correctness argument is subtler. Both are linear time; learn Kosaraju first for the clarity, Tarjan later for the elegance.

Why this matters

Why care about SCCs? They expose hidden structure. In a web graph, an SCC is a cluster of pages that all link to each other – a tightly knit community. In a package-dependency graph, an SCC bigger than one vertex is a *circular dependency*, a bug you must break. In program analysis, the SCCs of a call graph reveal mutual recursion. In social networks they find groups where influence circulates. And contracting SCCs turns any messy directed graph into a DAG, on which the topological-sort and dynamic-programming machinery suddenly applies. SCC decomposition is often the first move in taming a directed graph.

22.7 Stepping Back

You now own the two great graph-traversal strategies and three of their most important consequences. Let us gather them.

- **Representation.** Store sparse graphs as *adjacency lists* ($\Theta(V + E)$ space); reserve the *adjacency matrix* ($\Theta(V^2)$) for dense graphs or $O(1)$ edge queries.
- **BFS** explores in rings using a *queue*, computes shortest-path distances *in edges* from a source, and runs in $O(V + E)$.
- **DFS** explores by *plunging and backtracking* using recursion, stamps each vertex with discovery/finish times, classifies edges, and runs in $\Theta(V + E)$. Its *parenthesis structure* is the workhorse fact.
- **Topological sort** of a DAG falls out of DFS for free: list vertices by *decreasing finish time*. $O(V + E)$.
- **Strongly connected components** come from two DFS passes plus an edge reversal (Kosaraju), also $O(V + E)$.

Focus

If you remember one structural idea from this chapter, make it the parenthesis theorem: DFS intervals nest, never cross. Topological sort, cycle detection, and SCCs are all just that nesting fact, looked at from three angles. And if you remember one practical idea, make it $O(V + E)$: every algorithm here is linear in the graph, and that is the standard you should expect and demand from a good graph algorithm.

Everything ahead – weighted shortest paths (Dijkstra, Bellman–Ford), minimum spanning trees (Prim, Kruskal), maximum flow – builds directly on this foundation. They are BFS and DFS with weights, priorities, and cleverer bookkeeping bolted on. Get these elementary traversals into your fingertips and the rest of graph algorithms will feel like natural variations rather than new inventions.

22.8 Exercises

Exercise 22.1. A graph has $V = 1000$ vertices and $E = 4000$ edges. Estimate the storage (in number of entries) for (a) an adjacency matrix and (b) adjacency lists, assuming the graph is undirected. Which uses less, and by roughly what factor?

Exercise 22.2. Run BFS by hand on the undirected graph of Section 22.3.1 starting from $s = 4$. Give $d[v]$ and $\pi[v]$ for every vertex, and write out the shortest path from 4 to 1 that your predecessor tree encodes.

Exercise 22.3. On the same undirected graph, run DFS from vertex 1 (neighbors in increasing order) and record discovery and finish times. Then explain in one or two sentences why the DFS tree and the BFS tree differ even though the graph is the same.

Exercise 22.4. Prove carefully: an *undirected* graph contains a cycle if and only if a DFS of it produces a back edge. (Be careful with the edge that leads straight back to your DFS parent – why does that one not count as a cycle?)

Exercise 22.5. Consider the DAG with edges $a \to b$, $a \to c$, $b \to d$, $c \to d$, $d \to e$, $c \to e$. Run DFS (vertices and neighbors in alphabetical order), report all finish times, and produce a topological order. Then exhibit a *second*, different valid topological order, proving the answer is not unique.

Exercise 22.6. A DAG can have many topological orders. Give a small DAG on 4 vertices that has exactly 2 valid topological orders, and a different DAG on 4 vertices that has $4! = 24$ valid orders. (Hint: the second has no edges at all – what does that allow?)

Exercise 22.7. For the directed graph with edges $a \to b$, $b \to c$, $c \to a$, $c \to d$, $d \to e$, $e \to d$, list all strongly connected components by inspection (no full algorithm needed). Then draw the component graph and confirm it is a DAG.

Exercise 22.8. Run Kosaraju's algorithm in full on the graph of the previous exercise: give the first-DFS finish times, the transpose's adjacency lists, the order of roots in the second DFS, and the resulting components. Check they match your by-inspection answer.

Exercise 22.9. Prove that G and its transpose G^T have exactly the same strongly connected components. (Hint: u and v are mutually reachable in G if and only if they are mutually reachable in G^T – show this directly from the definition of a path.)

Exercise 22.10. (Challenge.) A graph is *bipartite* if you can 2-color its vertices so that every edge joins two different colors. Describe how to modify BFS so that it either produces a valid 2-coloring or reports that the graph is not bipartite, and argue your method runs in $O(V + E)$. (Hint: color each vertex the opposite of its BFS parent, and watch what happens at an edge between two same-distance vertices.)

Exercise 22.11. (Challenge.) Given a DAG and a source s, describe an $O(V + E)$ algorithm to count the number of distinct paths from s to every other vertex. (Hint: process vertices in topological order; the number of paths to v is the sum over its in-neighbors u of the number of paths to u. Why does topological order make this work in one pass?)

Chapter 23

Minimum Spanning Trees

Imagine you have been handed a map of a small mountain region. There are a dozen villages scattered across the slopes, and the regional council wants to lay fibre-optic cable so that every village can reach every other village over the network. Cable is expensive, and the cost of connecting two particular villages depends on the terrain between them: some pairs are a short flat hop, others require boring a tunnel through a ridge. You are given, for each pair of villages that *could* be connected directly, the cost of that link. Your job is to choose a set of links so that the whole region is connected — you can get from any village to any other by hopping along chosen links — while spending as little money as possible.

That is the *minimum spanning tree* problem, and it is one of the most satisfying problems in all of algorithms. It is satisfying because the obvious greedy instinct — "keep grabbing the cheapest link you safely can" — turns out to be exactly, provably right, and the reason *why* it is right is a single elegant fact called the *cut property*. Once you understand the cut property in your bones, two famous algorithms (Kruskal's and Prim's) fall out as two different ways of repeatedly applying it.

Focus

By the end of this chapter you should be able to: (1) say precisely what a spanning tree is and why a minimum one always exists; (2) state and *feel* the cut property, the engine behind every MST algorithm; (3) run Kruskal's algorithm by hand, backed by a union-find structure, and Prim's algorithm by hand, backed by a priority queue; (4) prove both correct using the cut property; and (5) derive their running times from scratch rather than memorizing them.

23.1 What exactly are we looking for?

Let us pin down the vocabulary before we chase any algorithm. We model the region as a *graph*. The villages are *vertices*, gathered into a set V. The possible direct links are *edges*, gathered into a set E; each edge joins two vertices. Every edge e carries a number $w(e)$, its *weight* — here, the cost of building that link. We write the graph as $G = (V, E)$ with weight function w. The graph is *undirected* (a cable from u to v is also a cable from v to u) and *connected* (there is at least one way to get between any two villages using available links — otherwise no choice of edges could ever connect everyone, and the problem has no solution).

Definition 23.1 (Spanning tree)**.** A *spanning tree* of a connected undirected graph $G = (V, E)$ is a subset $T \subseteq E$ of the edges such that the graph (V, T) is (i) *connected* — every vertex can reach every other using only edges of T — and (ii) *acyclic* — T contains no cycle. A set of edges that is connected and acyclic is called a *tree*; "spanning" means it touches all of V.

Intuition

A spanning tree is the leanest possible connected skeleton of the graph. It is *connected*, so the network does its job: everyone can reach everyone. It is *acyclic*, so there is not one drop of wasted cable: a cycle would mean two different routes between some pair of villages, and you could snip one edge of that cycle and still keep everyone connected — so a cycle is, by definition, an avoidable expense.

Trees have a magic counting property that we will lean on constantly: a tree on n vertices has *exactly* $n - 1$ edges. Fewer than $n - 1$ edges cannot connect n vertices; more than $n - 1$ edges on n vertices must contain a cycle. So every spanning tree of a graph with $n = |V|$ vertices uses precisely $n - 1$ edges — no algorithm can do better or worse on the *count*. The only thing left to optimize is *which* $n - 1$ edges.

Definition 23.2 (Minimum spanning tree)**.** The *weight* of a spanning tree T is $w(T) = \sum_{e \in T} w(e)$. A *minimum spanning tree* (MST) is a spanning tree of smallest possible total weight. (There may be several MSTs tied for the minimum; we want any one of them.)

Focus

Hold these three facts: (1) A spanning tree is connected and acyclic and touches every vertex. (2) Every spanning tree of an n-vertex graph has exactly $n - 1$ edges. (3) We want one whose total weight is as small as possible. The whole chapter is about how to *find* that tree without checking the astronomically many spanning trees one by one.


Why not just check them all? Because there are far too many. A complete graph on n vertices has n^{n-2} different spanning trees (a classical result of Cayley). For a mere 30 villages that is already 30^{28}, a number with 42 digits. Brute force is hopeless. We need structure, and the structure we need is the cut property.

Why this matters

MST is not a toy. It is the backbone of network design: laying water pipes, electrical grids, road and rail networks, and — yes — fibre. It appears inside clustering algorithms (delete the most expensive edges of an MST and the tree falls into natural clusters), inside image segmentation, inside the approximation algorithm for the travelling salesman problem you will meet much later, and even in the wiring of computer chips. When "connect everything as cheaply as possible" is the question, an MST is usually the answer.

23.2 A picture to anchor everything

Let us draw a small graph and keep it on the table for the rest of the chapter. Five villages, a through e, with the following links and costs.

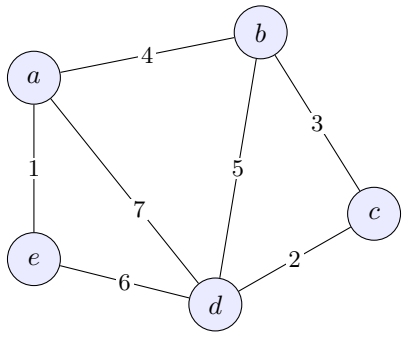

Read off the edges and weights: ae=1, cd=2, bc=3, ab=4, bd=5, de=6, ad=7. There are 5 vertices, so every spanning tree will use exactly 4 edges. Spend a moment eyeballing it: the cheap edges are ae=1, cd=2, bc=3, ab=4. Do those four edges form a spanning tree? They connect a–e, c–d, b–c, a–b. Following the chain: e–a–b–c–d. That is all five villages, no cycle, four edges. Total cost $1 + 2 + 3 + 4 = 10$. We will prove later that 10 is optimal, but you can already sense the strategy: grab cheap edges, refuse any that would close a loop.

23.3 The cut property: the heart of the matter


Here is the single idea that makes everything work. Suppose you split the vertices into two non-empty groups — call this split a *cut*. Some edges have both endpoints inside the same group; those edges stay clear of the divide. But some edges have one endpoint in each group; those edges *cross* the cut.

Definition 23.3 (Cut and crossing edge)**.** A *cut* of $G = (V, E)$ is a partition of V into two non-empty sets S and $V \setminus S$. An edge *crosses* the cut if it has one endpoint in S and the other in $V \setminus S$. A *light edge* crossing the cut is a crossing edge of minimum weight among all edges that cross that cut.

Intuition

Picture a river slicing your map into a north bank (S) and a south bank ($V \setminus S$). Some links are entirely on one bank; the river does not touch them. The links that span the river are the *crossing* edges. Now ask: if the final network must connect north to south, it must include *at least one* bridge across the river. Which bridge should it be? Intuitively, the cheapest one. The cut property says that instinct is not just reasonable — it is guaranteed safe.

Here is a concrete cut on our five-village graph. Take $S = \{a, e\}$ (shaded) and $V \setminus S = \{b, c, d\}$. The edges *inside* a side (ae, bc, cd, bd) stay grey; the edges that *cross* the cut are drawn in colour with their weights: ab=4, ad=7, de=6. The lightest crossing edge is ab=4, so the cut property promises ab is in some MST.

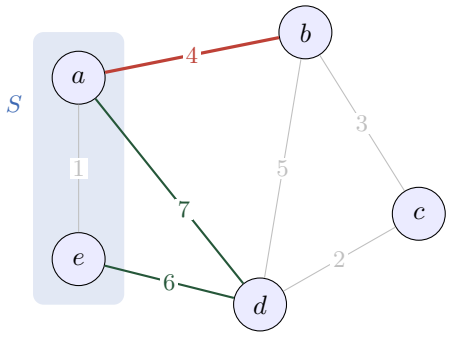

Theorem 23.1 (Cut property)**.** *Let $G = (V, E)$ be a connected, undirected, weighted graph. Take any cut $(S, V \setminus S)$, and let e be a light edge crossing that cut (a crossing edge of minimum weight). Then e belongs to* some *minimum spanning tree of G.*

If, in addition, all edge weights are distinct, then e belongs to every *minimum spanning tree — the MST is unique and e is forced.*


Before we prove it, let us savour what it says. It does not require you to know anything about the rest of the graph. Pick *any* cut you like; the cheapest edge across it is safe to commit to. That is astonishing: a purely *local* decision (look at one cut, grab its cheapest crossing edge) is guaranteed to be part of a *globally* optimal solution. This is the dream of greedy algorithms, and here the dream comes true.

23.3.1 Proof of the cut property, slowly

We will use an *exchange argument*, the workhorse technique for proving greedy choices safe. The plan: assume someone hands you an MST that does *not* contain our light edge e, and show you can swap e into it without making it worse. If you can never make it worse by adding e, then some MST contains e.

Proof. Let $e = (u, v)$ be a light edge crossing the cut $(S, V \setminus S)$, with $u \in S$ and $v \in V \setminus S$. Let T be *any* minimum spanning tree. If $e \in T$ we are already done, so assume $e \notin T$.

Now T is a spanning tree, so it connects u to v by *some* path P inside T. (A spanning tree connects every pair of vertices, and does so by a unique path, since trees have no cycles.) This path starts at u, which is in S, and ends at v, which is in $V \setminus S$. Walking along P from u to v, you begin on the S side and finish on the other side, so *somewhere* along the way the path must step across the cut. Let $e' = (x, y)$ be an edge of P that crosses the cut, with $x \in S$ and $y \in V \setminus S$.



Both e and e' cross the same cut. Since e is a *light* crossing edge, $w(e) \le w(e')$.

Here is the exchange. Form a new edge set $T' = T - \{e'\} + \{e\}$: throw out e', throw in e. I claim T' is again a spanning tree. Why? Adding e to the tree T creates exactly one cycle, and that cycle consists of the new edge e together with the path P that already joined u and v. The edge e' lies on P, hence on that cycle. Deleting any one edge of a cycle leaves the graph connected, so removing e' breaks the cycle without disconnecting anything. After the swap we still have $|V| - 1$ edges, still connected, hence still a spanning tree.

What is its weight? We removed e' and added e, so

$$w(T') = w(T) - w(e') + w(e) \le w(T),$$

because $w(e) \le w(e')$. But T was a *minimum* spanning tree, so its weight cannot be beaten: $w(T') \ge w(T)$. The only way to have both $w(T') \le w(T)$ and $w(T') \ge w(T)$ is $w(T') = w(T)$. Therefore T' is also a minimum spanning tree — and it contains e. So *some* MST contains e, which is the first claim.

For the second claim, suppose all weights are distinct. Then unless $e' = e$ we have strict inequality $w(e) < w(e')$, which would give $w(T') < w(T)$, contradicting that T is minimum. So in fact $e' = e$, meaning e was in T all along. Since T was an arbitrary MST, *every* MST contains e. □

Focus

The exchange argument is worth more than the theorem. The pattern — "assume an optimal solution lacks my greedy choice; find a cycle/path that lets me swap my choice in for free; conclude an optimal solution *can* contain my choice" — recurs throughout greedy algorithm design. Learn the move, not just the result.

Common trap

The cut property does **not** say "the globally cheapest edge of the whole graph is in every MST." It says "the cheapest edge *across a given cut* is safe." These coincide for the very cheapest edge (it is light across the cut separating one of its endpoints from everything else), but for a general edge you must name the cut. Beginners often try to argue "this edge is the second cheapest, so it must be in the MST" — false in general. Always exhibit a cut.

23.4 The generic MST algorithm

The cut property hands us a strategy so general that it is barely an algorithm yet — more like a recipe with a blank to fill in. We grow a set of edges A that we have committed to. We maintain one invariant: *A is always a subset of some MST.* At each step we find an edge that is "safe" to add — meaning $A \cup \{e\}$ is still a subset of some MST — and add it. When A has $|V| - 1$ edges, it is a spanning tree, and since it is a subset of some MST and has the right size, it *is* that MST.

Algorithm 105: GENERIC-MST(G, w)

Input: A connected weighted undirected graph $G = (V, E)$ with weights w.
Output: A minimum spanning tree, returned as an edge set A.

```
A ← ∅;
while A does not yet span all of V (fewer than |V| − 1 edges) do
    find an edge (u, v) that is safe for A;
    A ← A ∪ {(u, v)};                                   // commit to it
return A;
```

How do we find a safe edge? The cut property gives a sufficient condition.

Formal

Call an edge e *safe* for A if $A \cup \{e\}$ is a subset of some MST. **Sufficient condition (from the cut property).** Suppose A is a subset of some MST. Choose any cut $(S, V \setminus S)$ that *no edge of A crosses*. Then a light edge across that cut is safe for A.

The condition "no edge of A crosses the cut" is what guarantees the new edge can be added to the partial solution without conflict: A lives entirely within the two sides, and we are adding the first, cheapest bridge between them. The proof is the cut property applied to the MST that contains A — the light edge joins A rather than disturbing it.

Focus

Every MST algorithm in this chapter is just GENERIC-MST with a specific rule for choosing the cut (and therefore the safe edge):

- **Prim** fixes one growing blob S and always cuts "blob vs. the rest," adding the cheapest edge leaving the blob.
- **Kruskal** keeps a forest of blobs and adds the globally cheapest edge that joins two *different* blobs — which is a light edge for the cut separating one of those blobs from everything else.

Same engine, two steering wheels.

23.5 Kruskal's algorithm

Kruskal's algorithm is the embodiment of the village engineer's instinct: sort all the candidate links from cheapest to most expensive, then walk down the list and build each one *unless* it would create a redundant loop.

23.5.1 The idea

Intuition

Start with n villages and no cable at all — n separate islands. Sort the links by cost. Consider them cheapest first. For each link, ask: do its two endpoints already sit on the same island (already connected by cable laid so far)? If yes, skip it — building it would only close a wasteful loop. If no, build it; this fuses two islands into one. Stop when a single island remains.

Why is each accepted edge safe? Suppose we are about to accept edge (u, v) because u and v are on different islands. Let S be the island containing u. No edge of A crosses the cut $(S, V \setminus S)$ — because S is a *whole* connected island, every edge already built either stays inside S or stays outside it. And (u, v) is the cheapest edge crossing that cut that we have seen, because we are processing edges in increasing weight order and this is the first one we have encountered that joins S to the outside. So (u, v) is a light edge for a cut that A does not cross: safe, by the cut property.

23.5.2 The mechanism: union-find

The one operation we keep performing is "are u and v on the same island, and if not, fuse their islands." This is precisely what a *disjoint-set* (union-find) data structure is built for. You met it in the chapter on disjoint sets; here is the contract we need.

- MAKE-SET(x): create a one-element island $\{x\}$.
- FIND-SET(x): return a canonical name (the "representative") of the island containing x. Two elements are on the same island iff their FIND-SET answers are equal.
- UNION(x, y): fuse the islands of x and y into one.

With *union by rank* and *path compression*, a sequence of m of these operations on n elements costs $O(m\,\alpha(n))$, where α is the inverse-Ackermann function — so slow-growing it is at most 4 for any input size that fits in this universe. For our purposes you may treat each operation as "essentially constant time."

23.5.3 The algorithm

Algorithm 106: MST-Kruskal(G, w)

Input: Connected weighted undirected graph $G = (V, E)$.
Output: An MST as an edge set A.

```
A ← ∅;
for each vertex v ∈ V do
    Make-Set(v);                                   // each village its own island
sort the edges of E into nondecreasing order by weight w;
for each edge (u, v) ∈ E, taken in that sorted order do
    if Find-Set(u) ≠ Find-Set(v) then
        A ← A ∪ {(u, v)};                  // endpoints on different islands:  safe
        Union(u, v);                                                 // fuse the islands
return A;
```

23.5.4 A full trace on our graph


Sort the edges of the five-village graph by weight:

$$ae{=}1, \quad cd{=}2, \quad bc{=}3, \quad ab{=}4, \quad bd{=}5, \quad de{=}6, \quad ad{=}7.$$

Start with five islands: $\{a\}, \{b\}, \{c\}, \{d\}, \{e\}$.

edge	weight	same island?	action / islands after
ae	1	no	**accept**; islands $\{a, e\}, \{b\}, \{c\}, \{d\}$
cd	2	no	**accept**; islands $\{a, e\}, \{b\}, \{c, d\}$
bc	3	no	**accept**; islands $\{a, e\}, \{b, c, d\}$
ab	4	no	**accept**; islands $\{a, b, c, d, e\}$
bd	5	yes	skip (would close cycle b–c–d–b)
de	6	yes	skip
ad	7	yes	skip

We accepted $\{ae, cd, bc, ab\}$, four edges, total weight $1+2+3+4 = 10$. Once the fourth edge merged everything into one island, every later edge had both endpoints in that single island and was skipped. The result matches the tree we eyeballed earlier.

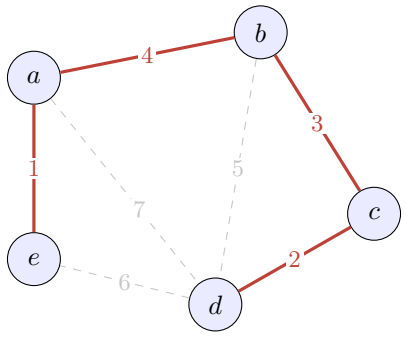

Algorithm lab

Trace Kruskal yourself on this graph. Vertices $\{1, 2, 3, 4\}$; edges with weights 12=1, 13=4, 14=3, 23=2, 34=5. Sort the edges, walk the list, and record the islands after each decision. You should accept three edges of total weight $1 + 2 + 3 = 6$. Which edges? Confirm that each edge you skip would have closed a cycle.

23.5.5 Why Kruskal is correct

Theorem 23.2. MST-KRUSKAL *returns a minimum spanning tree.*

Proof. We show the loop invariant: *at every point, A is a subset of some MST.* Initially $A = \emptyset$, which is a subset of any MST, so the invariant holds.

Suppose it holds and we are about to accept an edge (u, v) because FIND-SET$(u) \neq$ FIND-SET(v). Let S be the set of vertices currently in the island (the union-find tree) of u. Two things are true. First, no edge of A crosses the cut $(S, V \setminus S)$: every edge already in A joined two vertices that ended up in the *same* island, so it lies wholly inside one side. Second, (u, v) is a light edge across this cut. To see this, notice that no crossing edge of $(S, V \setminus S)$ can have been examined before (u, v). Indeed, take any edge (x, y) that crosses the cut now, with $x \in S$ and $y \notin S$. The island S only grew over time, so at any earlier moment x sat in some sub-island of S while y sat outside it; the two endpoints were therefore in *different* islands, and had we examined (x, y) back then we would have *accepted* it, fusing y's side into S — contradicting that y is still outside S. So every crossing edge is examined no earlier than (u, v). Because we scan edges in nondecreasing weight order, (u, v) is no heavier than any crossing edge, i.e. it is a minimum-weight crossing edge. By the cut property, (u, v) is safe: $A \cup \{(u, v)\}$ is still a subset of some MST. The invariant is preserved.

Edges we *skip* (same island) do not change A, so they cannot break the invariant. When the loop ends, A is acyclic (we never added an edge inside an island) and connected (the graph is connected, so processing all its edges must have fused every vertex into one island; an unfused vertex would witness an edge that crosses between islands and was wrongly skipped). Hence A is a spanning tree, and being a subset of some MST with the full $|V| - 1$ edges, it *is* that MST. □

23.5.6 Running time of Kruskal

Let $n = |V|$ and $m = |E|$. Walk through the costs:

- n calls to MAKE-SET: $O(n)$.
- Sorting the m edges: $O(m \log m)$. Since $m \le n^2$, $\log m \le 2 \log n$, so this is $O(m \log n)$.
- The main loop runs m times, each doing two FIND-SETs and at most one UNION. That is $O(m)$ union-find operations, costing $O(m\,\alpha(n))$ in total.

Cost summary

Kruskal's algorithm. Sorting dominates.

$$T(n, m) = O(m \log m) + O(m\,\alpha(n)) = O(m \log n).$$

Because $\alpha(n)$ grows slower than every log, the union-find work is lost in the noise; the bottleneck is putting the edges in sorted order. If the edges arrive *already* sorted, or can be sorted in linear time (small integer weights), Kruskal runs in $O(m\,\alpha(n))$, essentially linear.

History and connection

Joseph Kruskal published this algorithm in 1956, in a short paper that was partly about justifying a different, then-popular method. The union-find machinery that makes it fast came later. In CLRS this material is Chapter 21 ("Minimum Spanning Trees"), with the disjoint-set structures in Chapter 19. If you want the cut property stated as CLRS states it, look for their Theorem 21.1.

23.6 Prim's algorithm

Kruskal grows many little trees at once and merges them. Prim takes the opposite tack: grow *one* tree, outward from a single seed, always reaching for the cheapest edge that extends it.

23.6.1 The idea

Intuition

Plant a flag on any one village; call it the start of your network. You now have a blob $S = \{\text{start}\}$ and everyone else outside. Repeat: among all links with exactly one endpoint inside the blob, pick the cheapest, and build it. That link pulls one new village into the blob. Keep going until the blob swallows every village. The links you built form the tree.

This is GENERIC-MST with the cut fixed as "the blob S versus the rest" at every step. The cheapest edge leaving the blob is a light edge across that cut, and no edge of our growing tree crosses the cut (the tree lives entirely inside S). So every edge Prim adds is safe.

23.6.2 The mechanism: a priority queue

The repeated question is now "which outside village is cheapest to attach to the blob, and by which edge?" For each vertex v still outside, keep a number $key[v]$ = the weight of the cheapest edge

connecting v to a vertex already inside, and $\pi[v]$ = the inside vertex at the other end of that edge. We want to repeatedly extract the outside vertex of smallest *key*, then, when a vertex joins the blob, update its outside neighbours in case it offers them a cheaper hookup. "Repeatedly extract the smallest, and decrease keys" is exactly the job of a *min-priority queue*.

Algorithm 107: MST-Prim(G, w, r)

Input: Connected weighted undirected graph $G = (V, E)$; a start vertex r.
Output: For each v, its parent $\pi[v]$; the tree edges are $\{(v, \pi[v])\}$.

```
1  for each vertex u ∈ V do
2      key[u] ← ∞;   π[u] ← Nil
3  key[r] ← 0;
4  Q ← V;                                   // min-priority queue keyed by key[·]
5  while Q ≠ ∅ do
6      u ← Extract-Min(Q);                  // cheapest vertex to attach now
7      for each neighbour v of u do
8          if v ∈ Q and w(u, v) < key[v] then
9              π[v] ← u;
10             key[v] ← w(u, v);                                  // Decrease-Key
```

A subtlety worth a sentence: "$v \in Q$" means v is still outside the blob. Once a vertex is extracted it is inside the blob forever, and its key is frozen — that frozen key is the weight of the edge that pulled it in.

23.6.3 A full trace on our graph


Start at $r = a$. Keys begin at $key[a] = 0$, all others ∞. We will write the key vector as (a, b, c, d, e) and underline the vertex we extract.

step	extract u	edge added	keys after relaxing u
1	$\underline{a}$ (0)	— (root)	b=4 (πa), d=7 (πa), e=1 (πa)
2	$\underline{e}$ (1)	$a-e$	d: de=6 $<$ 7 $\Rightarrow$ d=6 (πe)
3	$\underline{b}$ (4)	$a-b$	c=3 (πb); d: bd=5 $<$ 6 $\Rightarrow$ d=5 (πb)
4	$\underline{c}$ (3)	$b-c$	d: cd=2 $<$ 5 $\Rightarrow$ d=2 (πc)
5	$\underline{d}$ (2)	$c-d$	queue empty

Let us narrate the interesting steps. After extracting a, its neighbours get keys: b=4, d=7, e=1, each pointing back at a. The smallest key now belongs to e, so we extract e and add the edge $a-e$ (weight 1). From e the only outside neighbour is d via de=6, which beats d's current 7, so $key[d]$ drops to 6 with $\pi[d] = e$. Next smallest outside is b at 4; extract it, add $a-b$. Relaxing b: neighbour c gets key=3 ($\pi c = b$), and d improves from 6 to 5 via bd. Next we extract c at 3, add $b-c$; relaxing c drops d from 5 to 2 via cd. Finally extract d at 2, adding $c-d$.

Edges added: $a-e$ (1), $a-b$ (4), $b-c$ (3), $c-d$ (2). Total $1 + 4 + 3 + 2 = 10$. Same tree, same cost as Kruskal — as it must be, since the MST here is unique.

The figure below shows the same run as a *growing blob*. The shaded region is S, the set of villages already pulled in; the small number on each tree edge is its weight, and the number in a circle marks the step at which that vertex was extracted. Watch S swallow one vertex per step, always along the cheapest exit.

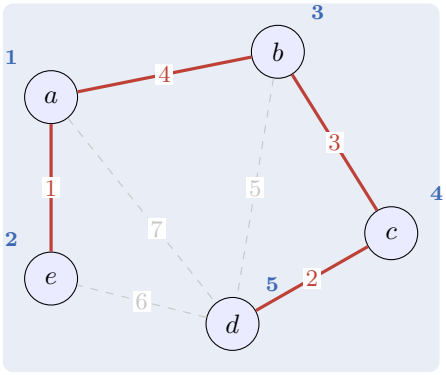

Common trap

Notice that $key[d]$ was lowered *four* times — from ∞ to 7, then 6, then 5, then 2 — before d was finally extracted. That is the whole point of DECREASE-KEY: a vertex's cheapest connection keeps improving as the blob grows and gets closer to it. The value frozen at extraction time (2, via cd) is the one that lands in the tree. A common bug is to "lock in" a vertex's parent the first time you see it; you must keep relaxing until it is extracted.

23.6.4 Why Prim is correct

Theorem 23.3. MST-PRIM *computes a minimum spanning tree.*

Proof. Let $A = \{(v, \pi[v]) : v \neq r,\ v \notin Q\}$ be the set of tree edges collected so far — the edges of vertices already extracted. We claim A is always a subset of some MST. Initially $A = \emptyset$: fine.

Consider the moment we extract a vertex u (other than r) and thereby add edge $(u, \pi[u])$ to A. Let S be the set of vertices already inside the blob just before this extraction (the previously extracted vertices). No edge of A crosses the cut $(S, V \setminus S)$, since every edge of A joins two already-extracted vertices, both in S. We must check that $(u, \pi[u])$ is a light edge across this cut. Each outside vertex v has $key[v]$ equal to the weight of the cheapest edge from v into S (that is the invariant the relaxation loop maintains), and EXTRACT-MIN chose u as the outside vertex with smallest such key. So $w(u, \pi[u]) = key[u]$ is the minimum over all outside vertices of their cheapest edge into S — precisely the minimum-weight edge crossing the cut. By the cut property, $(u, \pi[u])$ is safe, and the invariant survives. When Q empties, every vertex is in the blob, A has $|V| - 1$ edges, and being a subset of an MST of the right size, it *is* an MST. □

23.6.5 Running time of Prim

The cost depends entirely on the priority queue. The algorithm performs:

- $|V|$ EXTRACT-MIN operations (one per vertex), and
- at most $|E|$ DECREASE-KEY operations (each edge (u, v) can trigger at most one key decrease for v when u is extracted; summed over the graph, the relaxation loop runs $\sum_v \deg(v) = 2|E|$ times).

So the running time is

$$|V| \cdot t_{\text{extract}} + |E| \cdot t_{\text{decrease}},$$

and we just plug in the queue's costs.

priority queue	EXTRACT-MIN	DECREASE-KEY	total time
unsorted array	$O(n)$	$O(1)$	$O(n^2 + m) = O(n^2)$
binary heap	$O(\log n)$	$O(\log n)$	$O((n + m) \log n) = O(m \log n)$
Fibonacci heap	$O(\log n)$ *	$O(1)$ *	$O(m + n \log n)$

(The Fibonacci-heap bounds are *amortized*, marked $*$.) With a binary heap Prim matches Kruskal at $O(m \log n)$. With a Fibonacci heap Prim reaches $O(m + n \log n)$, which is asymptotically better on *dense* graphs where m is close to n^2. And for a truly dense graph the humble unsorted array, at $O(n^2)$, can beat the heap, since $O(n^2) = O(m)$ when $m = \Theta(n^2)$ and there is no log factor to pay.

Cost summary

Prim's algorithm.

- Binary heap: $O(m \log n)$ — the standard, all-purpose choice.
- Fibonacci heap: $O(m + n \log n)$ — best for dense graphs, in theory.
- Array: $O(n^2)$ — simplest, and best when $m \approx n^2$.

Kruskal's algorithm. $O(m \log n)$, dominated by sorting the edges. On sparse graphs the two are tied; on dense graphs the right Prim variant wins.

History and connection

The algorithm is named for Robert Prim (1957), though Vojtěch Jarník described it back in 1930 and Edsger Dijkstra rediscovered it in 1959 — so you will sometimes see it called the Jarník–Prim or Prim–Dijkstra algorithm. Notice how closely MST-PRIM resembles Dijkstra's shortest-path algorithm, which you will meet in the next chapter: both grow a blob by repeatedly extracting the minimum-key frontier vertex. The difference is one line — Prim's key is "weight of the single connecting edge," Dijkstra's key is "total distance from the source." CLRS Chapter 21 covers both Kruskal and Prim.

23.7 Kruskal vs. Prim: which, and why

Intuition

Kruskal thinks globally about edges: sort everything, take the cheapest that does not loop. It grows a *forest* of many trees that gradually merge. It is the natural choice when the edges are few (sparse graph) or already sorted.
Prim thinks locally about one tree: keep extending a single blob along its cheapest exit. It grows *one* tree from a seed. It shines on dense graphs, especially with a good priority queue, because it never has to sort all the edges at once — it only ever looks at edges on the current frontier.

Both rest on the identical foundation — the cut property — and both return a correct MST. They differ only in *which cut* they apply the property to at each step. That is a beautiful illustration of a deep idea: a single theorem can spawn a family of algorithms, each making the abstract "find a safe edge" step concrete in its own way.

Walking question

Here is something to chew on during a walk. The cut property guarantees the cheapest edge across any cut is in *some* MST. Is there a matching "cycle property"? Try to convince yourself that the *most expensive* edge on any cycle can be safely *excluded* from some MST. (Hint: mirror the exchange argument — if an MST contained that heaviest cycle edge, swap it out for the edge that closes the cycle.) If both properties hold, you have two ways to think about every MST: include light cut edges, exclude heavy cycle edges. They are two faces of the same coin.

23.8 A few honest subtleties

Remark 23.1 (Ties and uniqueness). If all edge weights are distinct, the MST is unique (the cut property, second half, forces every light edge). When weights tie, several MSTs may exist; both algorithms still return a valid one, but *which* one can depend on tie-break order. Nothing about correctness changes — all of them have the same minimum total weight.

Remark 23.2 (Disconnected graphs). We assumed G is connected. If it is not, no spanning tree exists. Both algorithms then produce a *minimum spanning forest*: Kruskal naturally yields one tree per connected component; Prim from a single seed only reaches the seed's component, so you would restart it on an unreached vertex.

Remark 23.3 (Negative weights are fine). Unlike some shortest-path algorithms, MST algorithms do not care if weights are negative. The cut property never assumed positivity — "cheapest crossing edge" makes perfect sense whether costs are $+5$ or -5. You could add a huge constant to every weight; the same tree stays minimal, since every spanning tree has the same number of edges, so all their weights shift by the same amount.

Looking back

We started with a single, concrete worry — connect the villages as cheaply as possible — and uncovered a structure so clean it almost feels unfair. One theorem, the cut property, says local greed is globally safe. One generic procedure repeatedly grabs a safe edge. Two famous algorithms, Kruskal and Prim, are just two ways of choosing the cut to look at. And the analysis bottoms out in two data structures you already know: union-find for Kruskal, a priority queue for Prim. When you reach CLRS Chapter 21, you will find these same ideas stated more tersely — but you will recognize every move, because you built them here from the ground up.

23.9 Exercises

Exercise 23.1. Run both Kruskal and Prim (start Prim at vertex 1) on this graph and confirm they produce the same tree and total weight. Vertices $\{1, 2, 3, 4, 5\}$; edges 12=2, 13=3, 24=5, 34=4, 35=6, 45=1, 25=7. Show your island merges (Kruskal) and your key vector at each extraction (Prim).

Exercise 23.2. A connected graph has 100 vertices. Exactly how many edges does *any* of its spanning trees contain? Explain in one sentence why the count cannot depend on which spanning tree you pick.

Exercise 23.3. Prove that the single cheapest edge of a connected graph (assume a unique minimum-weight edge) belongs to every MST. (Hint: find a cut for which it is the light edge.)

Exercise 23.4. Cycle property. Let C be any cycle in G, and let e be a strictly-heaviest edge on C (assume it is the unique heaviest edge of C). Prove that e belongs to *no* MST. Use an exchange argument that mirrors the proof of the cut property.

Exercise 23.5. Suppose you wanted a *maximum*-weight spanning tree instead (the most expensive connected acyclic skeleton). Describe the smallest change to Kruskal's algorithm that solves it, and argue briefly why your change is correct.

Exercise 23.6. Prove that if every edge weight in G is distinct, then G has exactly one minimum spanning tree. (You may use the second half of the cut property.)

Exercise 23.7. For a complete graph on n vertices ($m = \binom{n}{2}$), compare the running time of Prim with a binary heap, $O(m \log n)$, against Prim with an unsorted array, $O(n^2)$. Which is asymptotically faster here, and by what factor? When would you still prefer the heap?

Exercise 23.8. Challenge (bottleneck spanning tree). The *bottleneck* of a spanning tree is the weight of its single heaviest edge. Prove that every minimum spanning tree is also a *minimum-bottleneck* spanning tree — that is, no spanning tree has a smaller heaviest edge. (Is the converse true? Find a small counterexample showing a minimum-bottleneck tree need not be an MST.)

Exercise 23.9. You have already computed an MST T of a graph G. Now a single new edge (u, v) with weight w is added to G. Describe an $O(n)$-time method to update the MST, and justify it using the cycle property from Exercise 23.4. (Hint: adding (u, v) to T creates one cycle.)

Exercise 23.10. In Kruskal's algorithm, why is the union-find structure the right tool rather than, say, re-running a graph search after each edge to test connectivity? State the running time Kruskal would have with the naive "search every time" test, and compare it to the union-find version.

Chapter 24

Single-Source Shortest Paths

You are standing at a street corner in a city you have never visited, holding a phone that promises to route you to a friend's apartment across town. In the half-second before the blue line appears, something remarkable happens: a piece of software considers an astronomical number of possible walking routes – left here, right there, double back, cut through the park – and returns the single shortest one. Not a pretty-good route. The shortest. And it does this not by trying every route (there are far too many) but by exploiting a handful of quiet, almost obvious facts about how short paths are built out of shorter ones.

This chapter is about those facts and the algorithms that ride on them. We are given a graph whose edges carry *weights* – think distances, times, costs, tolls – and a single *source* vertex. We want the cheapest path from the source to every other vertex. That is the *single-source shortest-paths* problem, and it is one of the most useful problems in all of computing: routing, networking, scheduling, currency arbitrage, and a hundred other things reduce to it.

We will move slowly. First we will nail down what a shortest path even *is*, and discover the structural facts that make the whole enterprise possible. Then we will meet the one operation – *relaxation* – that every algorithm in this chapter is secretly built from. Armed with that, we will study three algorithms in increasing order of cleverness: Bellman–Ford (slow but fearless, handles negative edges and detects the pathological cases), the DAG algorithm (blisteringly fast when the graph has no cycles), and Dijkstra's algorithm (the elegant workhorse behind your phone's blue line). Along the way we will prove, gently but honestly, that these algorithms actually return shortest paths.

24.1 What is a shortest path, exactly?

Let us set up the world carefully, because sloppiness here causes endless confusion later.

We have a directed graph $G = (V, E)$ with $|V| = n$ vertices and $|E| = m$ edges. (We write n and m throughout; CLRS often writes $|V|$ and $|E|$.) Each edge $(u, v) \in E$ has a real-valued *weight* $w(u, v)$. A *path* from u to v is a sequence of vertices $\langle v_0, v_1, \ldots, v_k \rangle$ with $v_0 = u$, $v_k = v$, and every consecutive pair (v_{i-1}, v_i) an edge of G. The *weight* of that path is just the sum of its edge weights:

$$w(p) \;=\; \sum_{i=1}^{k} w(v_{i-1}, v_i).$$

Definition 24.1 (Shortest-path weight)**.** The *shortest-path weight* from u to v, written $\delta(u, v)$, is

$$\delta(u,v) = \begin{cases} \min\{\, w(p) : p \text{ is a path from } u \text{ to } v \,\} & \text{if such a path exists,} \\ \infty & \text{otherwise.} \end{cases}$$

A *shortest path* from u to v is any path p with $w(p) = \delta(u, v)$.

Notice the word *any*. There can be many shortest paths tied for the minimum, and that is fine; we want one of them (and its weight). Notice too that δ is a *minimum*, and a minimum over an infinite set of paths only makes sense if that set is bounded below. Hold that thought – it is exactly where negative-weight cycles will bite us.

Intuition

Picture the graph as a road network. The vertices are intersections, the directed edges are one-way street segments, and the weight on an edge is how many minutes that segment takes. A path is a legal driving route; its weight is the total driving time. $\delta(u, v)$ is the fastest possible time to get from u to v. Our whole job, given a starting intersection s, is to fill in a little table: "fastest time from s to here" for every intersection.

24.1.1 Why negative edges, and why negative cycles are poison

Weights are not always distances, and they are not always positive. If an edge weight is a financial gain or loss, or an elevation change, it can be negative. Negative *edges* are perfectly fine and meaningful. The trouble is negative *cycles*.

Suppose there is a cycle – a path that returns to where it started – whose total weight is negative. Then for any vertex on that cycle, you can lower your path weight by looping around once more, and again, and again, forever. The minimum in Definition 24.1 is then $-\infty$: there is no shortest path. We say $\delta(u, v) = -\infty$ for any v reachable from such a cycle (reachable from u).

Common trap

A negative *edge* is not a problem. A negative-weight *cycle that is reachable from the source* is. The two get confused constantly. Dijkstra's algorithm forbids negative edges entirely (we will see precisely why). Bellman–Ford tolerates negative edges and, as a bonus, *detects* negative cycles and tells you they exist instead of silently returning garbage.

There is also the gentler cousin: a *positive* or *zero*-weight cycle. Those never help – looping around a cycle of nonnegative weight can only keep your weight the same or make it worse. So we can always assume a shortest path has *no repeated vertices*: it is a *simple* path, with at most n vertices and hence at most $n - 1$ edges. Remember that number, $n - 1$. It will reappear as the magic iteration count in Bellman–Ford.

24.2 The two structural facts everything rests on

Before any algorithm, we extract the facts that make shortest paths tractable. There are really only two, and both are intuitive once you see them.

24.2.1 Optimal substructure: shortest paths contain shortest paths

Intuition

Here is a fact so obvious it is easy to miss. Suppose the fastest route from your home to the airport happens to pass through a particular gas station. Then the piece of that route from home to the gas station must itself be the fastest route from home to the gas station. Why? Because if there were a faster way to reach the gas station, you could splice it in and beat your supposedly-fastest airport route – contradiction. *Subpaths of shortest paths are shortest paths.*

Lemma 24.1 (Optimal substructure)**.** *Let $p = \langle v_0, v_1, \ldots, v_k \rangle$ be a shortest path from v_0 to v_k. For any $0 \le i \le j \le k$, the subpath $p_{ij} = \langle v_i, \ldots, v_j \rangle$ is a shortest path from v_i to v_j.*

Formal

Proof (cut-and-paste). Decompose p into three pieces: $v_0 \xrightarrow{p_{0i}} v_i \xrightarrow{p_{ij}} v_j \xrightarrow{p_{jk}} v_k$, so $w(p) = w(p_{0i}) + w(p_{ij}) + w(p_{jk})$. Suppose, for contradiction, that p_{ij} is *not* a shortest path from v_i to v_j; then there is a path p'_{ij} from v_i to v_j with $w(p'_{ij}) < w(p_{ij})$. Replace p_{ij} by p'_{ij} inside p to get a new v_0-to-v_k path of weight $w(p_{0i}) + w(p'_{ij}) + w(p_{jk}) < w(p)$. That contradicts p being shortest. Hence p_{ij} is shortest. □

This optimal substructure is exactly what licenses dynamic programming and greedy strategies on shortest paths. It is the same shape of argument you saw in Chapter 15.

24.2.2 The triangle inequality

The second fact is the shortest-path version of "a detour is never shorter than going straight."

Lemma 24.2 (Triangle inequality)**.** *For any edge $(u, v) \in E$ and any source s,*

$$\delta(s, v) \;\le\; \delta(s, u) + w(u, v).$$

Formal

Proof. One particular way to get from s to v is: take a shortest path from s to u (weight $\delta(s, u)$), then traverse the single edge (u, v) (weight $w(u, v)$). This is *a* path to v, of weight $\delta(s, u) + w(u, v)$. The shortest-path weight $\delta(s, v)$ is the minimum over *all* paths to v, so it cannot exceed this particular one. (If $\delta(s, u) = \infty$ the inequality holds trivially; if a negative cycle makes $\delta(s, u) = -\infty$, then $\delta(s, v) = -\infty$ too and again it holds.) □

Focus

Two facts. (1) **Optimal substructure**: chop a shortest path anywhere and each piece is itself shortest. (2) **Triangle inequality**: $\delta(s, v) \le \delta(s, u) + w(u, v)$ for every edge. The first tells us shortest paths can be *built up* from smaller shortest paths. The second is the yardstick our algorithms will constantly check estimates against. Everything else in this chapter is bookkeeping on top of these two.

24.3 Relaxation: the one move to rule them all

Here is the secret. *Every* algorithm in this chapter – Bellman–Ford, the DAG algorithm, Dijkstra – is the same single operation applied to edges, over and over, in different orders. That operation is called *relaxation*, and once you understand it deeply you understand all three algorithms at once.

We keep two arrays. For each vertex v:

- $d[v]$ – our current *estimate* of $\delta(s, v)$. It starts at ∞ ("no idea, assume unreachable") and only ever goes *down*. It is always an *upper bound*: $d[v] \geq \delta(s, v)$ at all times.
- $\pi[v]$ – the *predecessor* of v on the best path we have found so far. Following π pointers backward from v reconstructs the path. Starts at NIL.

Initialization sets everyone to "unknown" except the source, which is zero distance from itself.

Algorithm 108: INITIALIZE-SINGLE-SOURCE(G, s)

Input: Graph $G = (V, E)$, source vertex s.
Output: Arrays d and π initialized.

```
for each vertex v ∈ V do
    d[v] ← ∞;
    π[v] ← NIL;
d[s] ← 0;
```

Now the star of the show. To *relax* an edge (u, v) is to ask one question: "Can I reach v more cheaply by going through u?" If yes, we improve the estimate.

Algorithm 109: RELAX(u, v, w)

Input: Edge (u, v) with weight $w(u, v)$; current d, π.
Output: $d[v]$ and $\pi[v]$ possibly improved.

```
if d[v] > d[u] + w(u, v) then
    d[v] ← d[u] + w(u, v) ;          // found a cheaper route to v via u
    π[v] ← u;
```

Intuition

Relaxation is a rumor spreading through the graph. Vertex u currently believes it can be reached from s in $d[u]$ time. It turns to its neighbor v and says, "I can get to you in $d[u] + w(u, v)$. Is that better than your current best?" If so, v updates its belief and remembers that the good news came from u. The word "relax" comes from physics/optimization: we are loosening an over-tight upper bound, letting it slip down toward the truth.

Why does this single move suffice? Because of the triangle inequality. The true distances satisfy $\delta(s, v) \leq \delta(s, u) + w(u, v)$ for every edge. An algorithm has finished only when its estimates likewise satisfy $d[v] \leq d[u] + w(u, v)$ for *every* edge – when no edge can be relaxed any further. At that point, as we will prove, the estimates have hit the truth. So the entire game is: relax edges, in some clever order, until none can be improved.

Two small lemmas make this precise. They are the workhorses behind every correctness proof to come, so let us state them plainly.

Lemma 24.3 (Relaxation keeps estimates honest)**.** *If we run* INITIALIZE-SINGLE-SOURCE *and then perform any sequence of relaxation steps, then $d[v] \geq \delta(s, v)$ holds for every vertex v at all times. Moreover, once $d[v]$ reaches $\delta(s, v)$, it never changes again.*

Formal

Proof sketch (induction on the number of relaxations). Initially $d[s] = 0 = \delta(s, s)$ and $d[v] = \infty \geq \delta(s, v)$ for $v \neq s$. Now suppose the invariant holds and we relax (u, v), possibly setting $d[v] = d[u] + w(u, v)$. By the inductive hypothesis $d[u] \geq \delta(s, u)$, so $d[u] + w(u, v) \geq \delta(s, u) + w(u, v) \geq \delta(s, v)$, the last step by the triangle inequality (Lemma 24.2). Thus the new $d[v]$ is still $\geq \delta(s, v)$. Since $d[v]$ can never drop below $\delta(s, v)$ and relax only ever decreases it, once it equals $\delta(s, v)$ it is stuck there. □

Lemma 24.4 (Convergence)**.** *Let $s \rightsquigarrow u \to v$ be a shortest path to v, so that $\delta(s, v) = \delta(s, u) + w(u, v)$. Suppose at some moment $d[u] = \delta(s, u)$, and at some later moment we relax the edge (u, v). Then from that point on $d[v] = \delta(s, v)$.*

Formal

Proof. By Lemma 24.3, once $d[u] = \delta(s, u)$ it stays there, so at the moment we relax (u, v) we have $d[u] = \delta(s, u)$. Relaxation guarantees afterward $d[v] \leq d[u] + w(u, v) = \delta(s, u) + w(u, v) = \delta(s, v)$. But also $d[v] \geq \delta(s, v)$ always. Hence $d[v] = \delta(s, v)$, and it cannot change afterward. □

The convergence lemma is the lever every algorithm pulls. It says: *if you relax the edges of a shortest path in order, the estimate at the end of that path becomes correct.* Each algorithm is just a strategy for making sure the edges of every shortest path get relaxed in the right order.

Walking question

Before reading on, take a walk with this question. The convergence lemma needs the edges of a shortest path relaxed *in path order* – $d[u]$ correct first, *then* relax (u, v). If you relax edges in a bad order, you might relax (u, v) while $d[u]$ is still too big, miss the improvement, and never revisit it. How could you guarantee good order? Two ideas: relax *everything* many times so order stops mattering (Bellman–Ford), or process vertices in an order where d-values are correct by the time you use them (topological order for DAGs, increasing-distance order for Dijkstra). The whole chapter is those two ideas.

24.4 Bellman–Ford: relax everything, repeatedly

The most fearless idea is the simplest. If we are not clever enough to figure out a good relaxation order, we can be *thorough* instead: relax *every* edge, then do it again, and again, enough times that no order could have mattered. How many times is enough? Exactly $n - 1$, and we can see why from the convergence lemma.

A shortest (simple) path has at most $n-1$ edges. Walk along such a path $s = v_0 \to v_1 \to \cdots \to v_k = v$ with $k \leq n - 1$. After the first full pass over all edges, the edge (v_0, v_1) certainly got relaxed at some point, and since $d[v_0] = \delta(s, v_0) = 0$ from the start, the convergence lemma makes $d[v_1] = \delta(s, v_1)$.

After the second pass, (v_1, v_2) got relaxed with $d[v_1]$ already correct, so $d[v_2]$ becomes correct. In general, after pass i, the first i vertices on the path have correct d-values. So after $k \le n-1$ passes, $d[v] = \delta(s, v)$. Since this holds for every vertex's shortest path simultaneously, $n-1$ passes settle everyone.

Algorithm 110: BELLMAN-FORD(G, w, s)

Input: Weighted digraph $G = (V, E)$ with weights w (may be negative), source s.
Output: TRUE with correct d, π if no negative cycle is reachable; else FALSE.

```
1 INITIALIZE-SINGLE-SOURCE(G, s);
2 for i ← 1 to n − 1 do
3 |   for each edge (u, v) ∈ E do
4 |   |   RELAX(u, v, w);
5 for each edge (u, v) ∈ E do
6 |   if d[v] > d[u] + w(u, v) then
7 |   |   return FALSE ;                  // an edge still improves:  negative cycle!
8 return TRUE;
```

24.4.1 The negative-cycle detector, explained

Look at that final loop. After $n-1$ honest passes, if the graph had no reachable negative cycle, *every* edge would satisfy $d[v] \le d[u] + w(u, v)$ – nothing left to relax. So if even one edge still says "I can improve you," $d[v] > d[u] + w(u, v)$, the only explanation is a negative cycle: the relaxations never converged because there is no finite minimum. The check is a single extra pass, and it turns a fragile algorithm into a robust one that *tells you when the question has no answer.*

Formal

Why the detector is correct. Suppose a negative-weight cycle $c = \langle v_0, v_1, \ldots, v_k = v_0 \rangle$ reachable from s existed and the algorithm wrongly returned TRUE. Returning TRUE means every edge on c passed the test: $d[v_i] \le d[v_{i-1}] + w(v_{i-1}, v_i)$ for $i = 1, \ldots, k$. Sum all k of these inequalities:

$$\sum_{i=1}^{k} d[v_i] \;\le\; \sum_{i=1}^{k} d[v_{i-1}] \;+\; \sum_{i=1}^{k} w(v_{i-1}, v_i).$$

Because c is a cycle, the vertices on the left and the vertices in the first sum on the right are the same multiset, so those two sums are equal and cancel. We are left with $0 \le \sum_{i=1}^{k} w(v_{i-1}, v_i) = w(c)$. But c is a negative cycle, $w(c) < 0$, a contradiction. So a reachable negative cycle always trips the detector. □

24.4.2 A complete numeric trace

Let us run Bellman–Ford on a small graph with a negative edge but *no* negative cycle, so we see relaxation do honest work. The vertices are s, t, x, y, z and the edges (with weights) are:

$$(s,t) = 6,\ (s,y) = 7,\ (t,x) = 5,\ (t,y) = 8,\ (t,z) = -4,$$
$$(x,t) = -2,\ (y,x) = -3,\ (y,z) = 9,\ (z,s) = 2,\ (z,x) = 7.$$

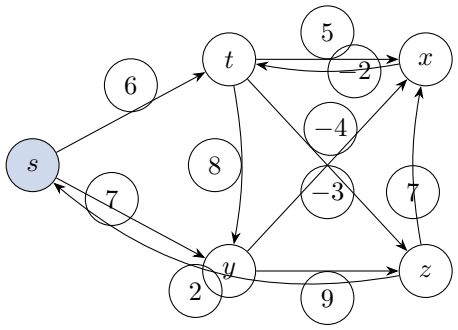


Figure 24.1: The Bellman–Ford example graph. Source s is shaded. Note the negative weights on (t, z), (x, t), (y, x), but no negative cycle.

We fix the edge-relaxation order once and reuse it every pass:

$$(t, x),\ (t, y),\ (t, z),\ (x, t),\ (y, x),\ (y, z),\ (z, x),\ (z, s),\ (s, t),\ (s, y).$$

Start with $d[s] = 0$ and everyone else ∞.

Algorithm lab

Trace each pass with me. In a pass, walk the edge list above and apply RELAX. An edge does nothing if its tail u still has $d[u] = \infty$.

Pass 1. Most edges have an infinite tail and do nothing. The two edges out of s fire: (s, t) sets $d[t] = 0 + 6 = 6$; (s, y) sets $d[y] = 0 + 7 = 7$. Everyone else is still ∞.

$$d = (s{:}0,\ t{:}6,\ x{:}\infty,\ y{:}7,\ z{:}\infty).$$

Pass 2. Now t and y are finite. (t, x): $d[x] = 6 + 5 = 11$. (t, z): $d[z] = 6 + (-4) = 2$. (y, x): $7 + (-3) = 4 < 11$, so $d[x] = 4$. (y, z): $7 + 9 = 16$, not better than 2. After the pass:

$$d = (s{:}0,\ t{:}6,\ x{:}4,\ y{:}7,\ z{:}2).$$

Pass 3. (x, t): $4 + (-2) = 2 < 6$, so $d[t] = 2$. Other edges find no improvement this pass.

$$d = (s{:}0,\ t{:}2,\ x{:}4,\ y{:}7,\ z{:}2).$$

Pass 4. With $d[t] = 2$ now, (t, z): $2 + (-4) = -2 < 2$, so $d[z] = -2$. Nothing else improves.

$$d = (s{:}0,\ t{:}2,\ x{:}4,\ y{:}7,\ z{:}-2).$$

That is $n - 1 = 4$ passes for $n = 5$ vertices. The final pass over all edges finds *no* improvable edge, so the detector returns TRUE. These are the true shortest-path weights: $\delta(s, t) = 2$, $\delta(s, x) = 4$, $\delta(s, y) = 7$, $\delta(s, z) = -2$.

Following π pointers, the shortest path to z is $s \to y \to x \to t \to z$ with weight $7 - 3 - 2 - 4 = -2$. Pause on that: the *shortest* route to z goes the "long way" through four edges, exploiting the negative weights. A greedy nearest-first strategy would have grabbed $s \to t \to z$ for weight 2 and missed it. This is exactly why Dijkstra cannot handle negative edges – foreshadowing.

In this particular example the final predecessor pointers happen to line up into a single chain: $\pi[y] = s$, $\pi[x] = y$, $\pi[t] = x$, $\pi[z] = t$. That chain *is* the shortest-paths tree (Figure 24.2); reading it backward from any vertex recovers that vertex's shortest path from s.




Figure 24.2: The shortest-paths tree the π pointers encode after Bellman–Ford finishes on Figure 24.1. Here it degenerates to a single path; following the arrows from s gives each vertex its δ-value (shown below).

Cost summary

Bellman–Ford. The main loop runs $n - 1$ passes, each relaxing all m edges in $\Theta(m)$ time, plus one detector pass. Total:

$$\Theta\big((n-1)\cdot m + m\big) = \Theta(nm).$$

With m up to $\Theta(n^2)$ in a dense graph, that is $\Theta(n^3)$ in the worst case. Space is $\Theta(n)$ for the d and π arrays. It is slow, but it is the price of handling negative edges and detecting negative cycles.

Common trap

A common implementation bug: people "optimize" by stopping early when a pass makes no changes (a fine and correct optimization) but then *forget the detector pass*, or they run only $n - 2$ passes off a fencepost error. If the longest shortest path has exactly $n - 1$ edges, $n - 2$ passes leave one vertex wrong. Always $n - 1$ relaxation passes, then one detector pass. Count carefully.

24.5 Shortest paths in a DAG: order is free

Now a special case where we can be genuinely clever about order. Suppose the graph is a *directed acyclic graph* (DAG) – no cycles at all. Then there are no negative cycles to worry about (no cycles, period), and something wonderful is available to us: a *topological order*.

Recall from Chapter 22 that a topological sort lists the vertices so that every edge (u, v) goes from an earlier vertex to a later one. In a DAG such an ordering always exists and is computable in $\Theta(n+m)$ time. Here is why it is exactly what the convergence lemma craves.

Intuition

Imagine the vertices lined up left to right in topological order, every edge pointing rightward. Process them left to right. When you arrive at a vertex u, *every* vertex that could possibly feed into u – everything that could lower $d[u]$ – sits to its left and has already been processed. So $d[u]$ is already final the moment you reach u. You relax u's outgoing edges once, push its

now-correct estimate rightward, and never look back. One pass. No repetition. No priority queue. Just a single left-to-right sweep (Figure 24.3).

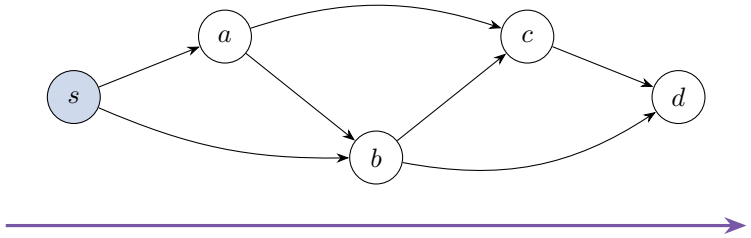


Figure 24.3: A DAG drawn in topological order. Every edge points rightward, so when the sweep reaches a vertex, all edges that could lower its estimate have already fired from its left. One pass suffices.

Algorithm 111: DAG-Shortest-Paths(G, w, s)

Input: Weighted DAG $G = (V, E)$, weights w (any sign), source s.
Output: Correct d and π.

```
1 topologically sort the vertices of G;
2 Initialize-Single-Source(G, s);
3 for each vertex u in topological order do
4     for each vertex v in Adj[u] do
5         Relax(u, v, w);
```

Formal

Why it is correct. We claim $d[u] = \delta(s, u)$ for every u, by induction along the topological order. Consider a shortest path $s = v_0 \to v_1 \to \cdots \to v_k = u$. Because every edge goes forward in topological order, the vertices $v_0, v_1, \ldots, v_k$ appear in increasing topological position. The algorithm processes them in that very order, and when it processes v_{i-1} it relaxes (v_{i-1}, v_i). By induction $d[v_{i-1}]$ is already $\delta(s, v_{i-1})$ at that moment, so by the convergence lemma (Lemma 24.4) $d[v_i]$ becomes $\delta(s, v_i)$. Marching i from 1 to k gives $d[u] = \delta(s, u)$. □

Cost summary

DAG shortest paths. Topological sort is $\Theta(n+m)$. The main loop touches each vertex once and each edge exactly once (every edge is relaxed a single time), which is again $\Theta(n+m)$. Total: $\Theta(n+m)$ – *linear*. This is the fastest single-source algorithm in the chapter, and it works with negative edges, because a DAG can never contain a negative cycle.

Why this matters

DAG shortest paths is the engine behind *critical-path analysis* in project scheduling (PERT charts). Tasks are vertices, dependencies are edges, durations are weights, and the *longest* path – found by negating weights and running this same algorithm – is the minimum time to finish the whole project. The same linear sweep also underlies many dynamic programs: a DP over a DAG of subproblems is literally this algorithm in disguise, which is why Chapter 15's tables and this chapter's relaxations feel so similar.

24.6 Dijkstra's algorithm: greedy on nonnegative weights

Now the famous one. Edsger Dijkstra's algorithm assumes *all edge weights are nonnegative* and, in return, is fast and elegant. It does not need a DAG, and it does not relax every edge $n-1$ times. Instead it discovers the correct order on the fly using a greedy rule.

Intuition

Think of it as fire spreading from the source, but a careful, accountant's fire. Each vertex has a current best-known time $d[v]$. Maintain a set S of vertices whose true distance is already *finalized*. Repeatedly do this: among all vertices *not* yet finalized, pick the one with the smallest current estimate $d[u]$ – call it the "closest frontier vertex" – declare its estimate final, add it to S, and relax all its outgoing edges to update its neighbors. Repeat until every vertex is finalized. The closest unfinished vertex is always safe to finalize, because (with nonnegative weights) no cheaper route to it could possibly exist through a vertex that is even farther away.

That last sentence is the whole algorithm, and also exactly where nonnegativity is load-bearing. Hold it; we will prove it.

Algorithm 112: DIJKSTRA(G, w, s)

Input: Weighted digraph $G=(V,E)$ with $w(u,v) \geq 0$ for all edges, source s.
Output: Correct d and π.

```
1 INITIALIZE-SINGLE-SOURCE(G, s);
2 S ← ∅;
3 Q ← V ;                                   // min-priority queue keyed on d
4 while Q ≠ ∅ do
5 |   u ← EXTRACT-MIN(Q) ;                  // closest unfinalized vertex
6 |   S ← S ∪ {u};
7 |   for each vertex v ∈ Adj[u] do
8 |   |   RELAX(u, v, w) ;                  // may call DECREASE-KEY on v
```

Each vertex is extracted from Q exactly once, and at the moment of extraction we claim its estimate is already the true distance. The greedy choice – always pull the smallest – is what makes the order come out right.

24.6.1 A complete numeric trace

Let us run Dijkstra on a small *nonnegative* graph. Vertices s, t, x, y, z, edges:

$$(s,t) = 10,\ (s,y) = 5,\ (t,x) = 1,\ (t,y) = 2,$$
$$(y,t) = 3,\ (y,x) = 9,\ (y,z) = 2,\ (x,z) = 4,\ (z,x) = 6,\ (z,s) = 7.$$

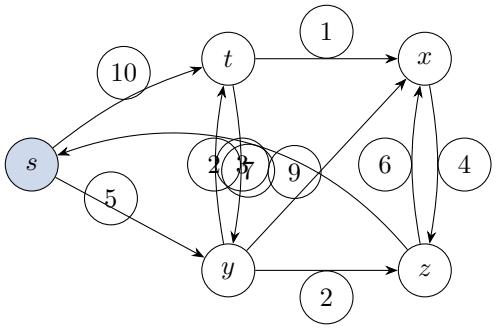


Figure 24.4: The Dijkstra example graph. All weights nonnegative; source s shaded.

Algorithm lab

Initialize: $d[s] = 0$, rest ∞; $S = \emptyset$. At each step I pick the non-finalized vertex of smallest d, finalize it, and relax its out-edges.

Step 1. Smallest d is s ($d = 0$). Finalize s. Relax: (s,t) gives $d[t] = 10$; (s,y) gives $d[y] = 5$.

$$S = \{s\}, \quad d = (t{:}10,\ y{:}5,\ x{:}\infty,\ z{:}\infty).$$

Step 2. Smallest non-final is y ($d = 5$). Finalize y. Relax: (y,t): $5 + 3 = 8 < 10$, so $d[t] = 8$. (y,x): $5 + 9 = 14$, so $d[x] = 14$. (y,z): $5 + 2 = 7$, so $d[z] = 7$.

$$S = \{s, y\}, \quad d = (t{:}8,\ x{:}14,\ z{:}7).$$

Step 3. Smallest non-final is z ($d = 7$). Finalize z. Relax: (z,x): $7 + 6 = 13 < 14$, so $d[x] = 13$. (z,s): $7 + 7 = 14$, but s is finalized at 0 – no change.

$$S = \{s, y, z\}, \quad d = (t{:}8,\ x{:}13).$$

Step 4. Smallest non-final is t ($d = 8$). Finalize t. Relax: (t,x): $8 + 1 = 9 < 13$, so $d[x] = 9$. (t,y): y already finalized – no change.

$$S = \{s, y, z, t\}, \quad d = (x{:}9).$$

Step 5. Only x remains ($d = 9$). Finalize it. Done.

$$\delta(s,s) = 0,\ \delta(s,y) = 5,\ \delta(s,z) = 7,\ \delta(s,t) = 8,\ \delta(s,x) = 9.$$

Notice the finalization order: s, y, z, t, x – exactly increasing d-value, $0, 5, 7, 8, 9$. That is no accident. Dijkstra finalizes vertices in nondecreasing order of true distance. That monotonic order is the soul of the correctness proof.

24.6.2 Why Dijkstra is correct

Theorem 24.1 (Dijkstra's correctness)**.** *Run on a graph with all nonnegative edge weights,* DIJKSTRA *terminates with $d[u] = \delta(s, u)$ for every vertex u.*

The key is the invariant that the vertex we extract is already correct. Let us prove it carefully but gently. The picture to hold in mind is the cut between the finalized set S and the rest (Figure 24.5): a shortest path to the soon-to-be-extracted u must cross that cut somewhere, and we zero in on the very first crossing edge.

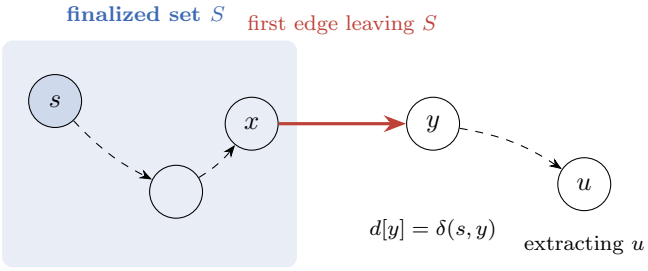


Figure 24.5: The cut argument in Dijkstra's proof. A shortest path from s (inside S) to u (outside S) crosses the boundary; (x, y) is its first crossing edge. We show $d[y]$ is already correct and $d[y] \le d[u]$, forcing $d[u] = \delta(s, u)$.

Formal

Proof. We show: *at the moment a vertex u is extracted (added to S), $d[u] = \delta(s, u)$.* Since d never changes after extraction (Lemma 24.3, $d[u]$ already at its floor), this gives the theorem. Suppose not. Let u be the *first* vertex extracted with $d[u] \neq \delta(s, u)$; by Lemma 24.3 this means $d[u] > \delta(s, u)$, so in particular $u \neq s$ (since s is extracted first with $d[s] = 0 = \delta(s, s)$) and u is reachable (else $\delta = \infty = d$).

Consider a shortest path p from s to u. It starts inside S (at s) and ends outside S (at u, the vertex we are about to add). Walk along p and let (x, y) be the *first* edge that leaves S: $x \in S$, $y \notin S$, with y the first off-S vertex on p (possibly $y = u$).

Because x was extracted before u and u is the *first* bad extraction, x was correct when extracted: $d[x] = \delta(s, x)$. When x was extracted we relaxed the edge (x, y), so by the convergence lemma (Lemma 24.4) $d[y] = \delta(s, y)$ now.

Now the punchline, and the place nonnegativity is essential. Since y lies on a shortest path to u and all weights from y onward to u are *nonnegative*, the subpath from y to u has weight ≥ 0, so $\delta(s, y) \le \delta(s, u)$. Therefore

$$d[y] = \delta(s, y) \le \delta(s, u) \le d[u],$$

the last step because $d[u] \geq \delta(s,u)$ always. But u was chosen by EXTRACT-MIN as having the *smallest* d among non-S vertices, and y is also outside S, so $d[u] \leq d[y]$. Squeezing, $d[y] = d[u] = \delta(s,u)$ – which says $d[u] = \delta(s,u)$, contradicting our assumption that u was bad. No bad extraction exists. □

Common trap

Stare at the step "$\delta(s,y) \leq \delta(s,u)$ because the subpath from y to u has nonnegative weight." If a *negative* edge lay on that subpath, the inequality could flip: a vertex y farther out by current estimate might secretly reach u via a negative shortcut for less. Then finalizing the smallest d is wrong, and Dijkstra returns incorrect answers *silently*. This is the precise, single reason Dijkstra requires nonnegative weights. Our earlier Bellman–Ford trace, where the best path to z snaked through negatives, is a concrete graph on which Dijkstra would have failed.

24.6.3 The role of the priority queue

Dijkstra's skeleton – "repeatedly grab the closest unfinalized vertex, finalize it, relax its edges" – demands a data structure that supports three operations: build the queue, EXTRACT-MIN (remove the smallest-d vertex), and DECREASE-KEY (lower a vertex's d when a relaxation improves it). The *entire* running time of Dijkstra is determined by how fast that priority queue is. The algorithm performs exactly n EXTRACT-MIN operations (one per vertex) and at most m DECREASE-KEY operations (at most one per edge). So the cost is

$$n \cdot T_{\text{extract}} \; + \; m \cdot T_{\text{decrease}} \; + \; T_{\text{build}}.$$

Different queues give different bounds:

- **Unsorted array / linear scan.** EXTRACT-MIN scans all remaining vertices: $\Theta(n)$ each. DECREASE-KEY is $\Theta(1)$ (just write the value). Total $\Theta(n^2 + m) = \Theta(n^2)$. Best for *dense* graphs where $m \approx n^2$.
- **Binary min-heap** (Chapter 6). EXTRACT-MIN and DECREASE-KEY are each $\Theta(\log n)$. Total $\Theta((n+m)\log n) = \Theta(m \log n)$ for a connected graph. Best for *sparse* graphs where $m = O(n^2/\log n)$. This is the version most libraries ship.
- **Fibonacci heap** (Chapter 20). EXTRACT-MIN is $O(\log n)$ amortized, but DECREASE-KEY is $O(1)$ amortized. Total $\Theta(n \log n + m)$, the theoretical best. The constants are large, so it wins only on very large, edge-heavy graphs.

Cost summary

Dijkstra, by priority queue.

array	$\Theta(n^2)$	dense graphs
binary heap	$\Theta(m \log n)$	sparse graphs, the practical default
Fibonacci heap	$\Theta(n \log n + m)$	asymptotically optimal

Across all three the count of operations is identical – n extractions and $\leq m$ decrease-keys – only the per-operation cost differs. This is a textbook example of an algorithm whose performance is dictated by its data structure, not its control flow.

History and connection

Edsger W. Dijkstra devised this algorithm in 1956 (published 1959), reportedly in about twenty minutes at a cafe, while thinking about how to demonstrate the power of a new computer to a general audience. Richard Bellman and Lester Ford developed the relaxation-everything approach in the late 1950s. The unifying view – that all of these are relaxation in different orders – is the modern textbook framing. *In CLRS this material is Chapter 22 (Single-Source Shortest Paths in the 4th edition; Chapter 24 in the 3rd): §22.1 properties and relaxation, §22.1 Bellman–Ford, §22.2 DAG shortest paths, §22.3 Dijkstra.* The all-pairs problem and Johnson's algorithm (which uses Bellman–Ford to reweight a graph so Dijkstra can run safely with no negative edges) come in the next chapter.

24.6.4 The predecessor graph: reconstructing the actual path

We have been computing *weights* $d[v]$, but the user usually wants the *route*. That is what π is for. After any of these algorithms finishes, the π pointers form a *shortest-paths tree* rooted at s: follow π backward from any vertex v and you walk a shortest path from v to s in reverse. Reversing that list gives the path from s to v.

Algorithm 113: PRINT-PATH(G, s, v)

Input: Source s, target v, predecessor array π.
Output: The vertices of a shortest $s \to v$ path, in order.

```
1 if v = s then
2     print s;
3 else if π[v] = NIL then
4     print "no path from s to v";
5 else
6     PRINT-PATH(G, s, π[v]);
7     print v;
```

Focus

The shape of a shortest-paths tree: s is the root; each vertex v has exactly one parent $\pi[v]$; and the tree path from s to v is *a* shortest path. There may be other shortest paths of equal weight, but the tree commits to one. The relaxation steps build this tree edge by edge: every time RELAX updates $\pi[v] \leftarrow u$, it is re-parenting v under a better-positioned u.

24.7 Putting the three together

Three algorithms, one operation. Here is the map to keep in your head.

Algorithm	Graph	Negative edges?	Order of relaxation	Time
Bellman–Ford	any	yes (detects neg. cycles)	all edges, $n-1$ times	$\Theta(nm)$
DAG	acyclic only	yes	topological order, once	$\Theta(n+m)$
Dijkstra	any	*no*	greedy, closest-first	$\Theta(m \log n)$

Intuition

A decision tree for choosing. *Is the graph a DAG?* If yes, use the linear DAG algorithm – nothing beats $\Theta(n+m)$. *Are there negative edges (and the graph is not a DAG)?* You must use Bellman–Ford, and you get negative-cycle detection for free. *Otherwise* – general graph, nonnegative weights, the overwhelmingly common case – use Dijkstra with a binary heap. Faster, cleaner, and the basis of real routing engines (which then add tricks like A* and contraction hierarchies on top).

Why this matters

These three power a startling range of real systems. Internet routing protocols (OSPF) run Dijkstra to compute forwarding tables. GPS navigation runs Dijkstra variants over road graphs. Currency-arbitrage detection runs Bellman–Ford: take logs of exchange rates, negate, and a reachable negative cycle is a sequence of trades that prints money. Build systems and spreadsheet recalculation run the DAG algorithm over dependency graphs. The same five-line RELAX sits at the heart of all of them.

Pause

If this chapter felt like a lot, here is the one-paragraph version to carry away. A shortest-path estimate $d[v]$ starts at ∞ and only ever decreases. *Relaxing* an edge (u, v) checks whether routing through u beats v's current estimate, and if so improves it. Relax the edges of a shortest path in order and its endpoint's estimate becomes exactly correct. The three algorithms are three disciplines for guaranteeing good relaxation order: brute repetition (Bellman–Ford), topological order (DAG), and greedy closest-first (Dijkstra). Get those, and you have the chapter.

24.8 Exercises

Exercise 24.1. Consider the graph with vertices s, a, b, c and edges $(s,a) = 4$, $(s,b) = 1$, $(b,a) = 2$, $(a,c) = 1$, $(b,c) = 5$. Initialize and then relax the edges in the order (s,a), (a,c), (b,c), (s,b), (b,a), (a,c). Show d after each relaxation. Did $d[c]$ reach $\delta(s,c)$? Explain how the order helped or hurt.

Exercise 24.2. Run Bellman–Ford by hand on the graph s, a, b, c with edges $(s,a) = 3$, $(s,b) = 5$, $(a,b) = -2$, $(b,c) = 2$, $(a,c) = 6$, $(c,a) = 1$. Use any fixed edge order, show the d-array after each of the $n-1$ passes, and state whether the detector pass returns TRUE or FALSE. (Check first: the cycle $a \to b \to c \to a$ has weight $-2+2+1 = 1 > 0$, so there is no negative cycle and the detector should return TRUE.)

Exercise 24.3. Modify edge (c,a) in the previous exercise to weight -6. Now the cycle $a \to b \to c \to a$ becomes a negative-weight cycle reachable from s. Identify it, compute its total weight, and

confirm that the Bellman–Ford detector would return FALSE (no $n-1$ passes will settle the d-values, and the detector pass finds an edge it can still relax).

Exercise 24.4. Give a topological order for the DAG with edges $(s,a),(s,c),(a,b),(c,a),(c,d),(b,d)$ and weights $2,4,1,3,1,2$ respectively. Run DAG-Shortest-Paths from s and report d and π for every vertex. How many times is each edge relaxed?

Exercise 24.5. Run Dijkstra from s on the graph with edges $(s,a)=2$, $(s,b)=6$, $(a,b)=3$, $(a,c)=5$, $(b,c)=1$, $(c,d)=4$, $(b,d)=8$ (all nonnegative). List the order in which vertices are finalized and the final d-values. Verify that the finalization order is nondecreasing in d.

Exercise 24.6. Construct a graph with *one* negative edge and no negative cycle on which Dijkstra returns a wrong distance for some vertex. Trace Dijkstra to show the wrong answer, then run Bellman–Ford to show the right one. (Three vertices suffice.)

Exercise 24.7. Argue carefully that Dijkstra performs exactly n Extract-Min operations and at most m Decrease-Key operations, regardless of which priority queue is used. Now specialize to a d-ary heap (a heap where each node has d children), where Extract-Min costs $\Theta\big(d\,\frac{\log n}{\log d}\big)$ and Decrease-Key costs $\Theta\big(\frac{\log n}{\log d}\big)$. Write the total running time as a function of n, m, and d, and show that choosing $d \approx \max(2,\, m/n)$ minimizes it. What total time does that choice give for a dense graph with $m=\Theta(n^2)$? (Binary heap, $d=2$, and the dense-graph optimum should both fall out of your formula.)

Exercise 24.8. You are given a DAG of tasks with positive durations on the edges and want the *longest* path (the critical path / minimum project completion time). Explain precisely how to adapt DAG-Shortest-Paths to compute longest paths, and why the same trick would *not* work for longest paths in a general graph with cycles.

Exercise 24.9. Prove the upper-bound invariant (Lemma 24.3) in full, filling in every inductive step, including the base case and the case where a relaxation does *not* change $d[v]$. Where exactly does the triangle inequality get used?

Exercise 24.10. Explain, in your own words and with a worst-case example graph, why Bellman–Ford needs $n-1$ passes and not fewer. Construct a graph on $n=5$ vertices where some vertex's d-value only becomes correct on the very last (fourth) pass. (Hint: a single long path $s \to v_1 \to v_2 \to v_3 \to v_4$, and pick an edge order that relaxes the path edges in reverse each pass.)

Chapter 25

All-Pairs Shortest Paths

In the previous chapter you learned how to stand at one fixed vertex – call it the *source* – and compute the shortest distance from that single source to every other vertex in a graph. Dijkstra's algorithm did this when all the edge weights were nonnegative; the Bellman–Ford algorithm did it even when some weights were negative, and it had the good manners to tell you when a negative-weight cycle made the whole question meaningless.

But sometimes one source is not enough. A road atlas in the back of an old travel guide does not give you distances from a single city; it gives you a big triangular table where you can look up the distance between *any* two cities at once. A router wants to know the best next hop toward every possible destination, not just one. A program that scores how "central" each person is in a social network needs the distance between every pair of people. In all of these you want the shortest path between *every* ordered pair of vertices. That is the all-pairs shortest-paths problem, and it is the subject of this chapter.

Intuition

You already own a hammer that solves this: run a single-source algorithm once from each vertex. With n vertices, run Dijkstra n times, or Bellman–Ford n times. That genuinely works, and for some graphs it is the best thing to do. But running n separate searches feels wasteful – each run rediscovers structure the others also needed. The fresh idea of this chapter is to forget about "search from a source" entirely and instead think about the answer as one big table that we refine, all n^2 entries at once, in a handful of sweeps. That table-refinement view turns out to be pure dynamic programming, and it produces two of the most quietly elegant algorithms in the book: the matrix-multiplication method and Floyd–Warshall.

Focus

Hold on to three numbers as you read. The input is a graph with n vertices and m edges. The output is an $n \times n$ matrix D where $D[i][j]$ is the weight of a shortest path from i to j. The repeated-Dijkstra baseline costs $O(nm \log n)$ (or $O(nm + n^2 \log n)$ with a Fibonacci heap); Floyd–Warshall costs a clean $\Theta(n^3)$ no matter what; and Johnson's algorithm gets you down to roughly $O(nm \log n)$ *even with negative edges*, which is the best of both worlds for sparse graphs.

25.1 Setting Up: Inputs, Outputs, and Conventions

Let us fix notation once and reuse it for the whole chapter. We are given a directed, weighted graph $G = (V, E)$ with $V = \{1, 2, \ldots, n\}$. Each edge $(i, j) \in E$ carries a real weight $w(i, j)$, which may be negative. We will represent the graph as an $n \times n$ *weight matrix* W, defined by

$$W[i][j] = \begin{cases} 0 & \text{if } i = j, \\ w(i,j) & \text{if } i \neq j \text{ and } (i,j) \in E, \\ \infty & \text{if } i \neq j \text{ and } (i,j) \notin E. \end{cases}$$

The diagonal is 0 because the empty path from a vertex to itself has weight zero (assuming no negative-weight cycles, which we discuss below). A missing edge is ∞ because you cannot get there in one hop. This matrix is the raw material; everything else is built from it.

The output is the *distance matrix* D, where $D[i][j] = \delta(i, j)$, the weight of a shortest path from i to j, with the usual convention that $\delta(i, j) = \infty$ if j is unreachable from i.

Common trap

A negative-weight *cycle* reachable on a path from i to j makes $\delta(i, j) = -\infty$: you can loop the cycle forever, shaving off weight each time, so there is no shortest path at all. Negative edges by themselves are fine; negative *cycles* are the poison. Every algorithm in this chapter assumes there is no negative-weight cycle, and we will note how each one can be made to *detect* one if it is present.

We will also want a second output: not just the distances, but the actual paths. For that we keep a *predecessor matrix* Π, where $\Pi[i][j]$ is the vertex that comes just before j on a shortest path from i to j (or NIL if no path exists or if $i = j$). Reading off the path then means walking backwards: from j to $\Pi[i][j]$ to $\Pi[i][\Pi[i][j]]$ and so on until you reach i. The i-th row of Π is exactly a shortest-paths tree rooted at i, the same object Dijkstra and Bellman–Ford produced.

Intuition

Think of the whole chapter as bookkeeping with two matrices that grow up together. D holds the best distances we currently believe; Π holds the "how did I get here?" breadcrumbs. Every time we improve a D entry we also update its Π entry to remember the move that made the improvement. If you ever lose the thread, ask: *what does $D[i][j]$ mean right now, and what does $\Pi[i][j]$ point at?*

25.2 First Idea: Shortest Paths as Matrix "Multiplication"

We will warm up with an algorithm that is a little slower than what we ultimately want, but that reveals the dynamic-programming skeleton with unusual clarity. The trick is to organize shortest paths by *how many edges they use*.

25.2.1 The subproblem: shortest paths with a bounded number of edges

Let $\ell_{ij}^{(r)}$ denote the minimum weight of any path from i to j that uses *at most* r edges. This is our subproblem. The base case is the zero-edge case:

$$\ell_{ij}^{(0)} = \begin{cases} 0 & \text{if } i = j, \\ \infty & \text{if } i \neq j. \end{cases}$$

With zero edges you can only stay put. Now the recursive step. Suppose we already know $\ell_{ij}^{(r-1)}$ for all pairs – the best you can do with at most $r-1$ edges. How do we get the best path with at most r edges from i to j? Either we are happy with a path of at most $r-1$ edges (which is already covered), or we take a path of at most $r-1$ edges from i to some intermediate vertex k and then add the single final edge (k, j). We try every possible last-but-one vertex k and keep the best:

$$\ell_{ij}^{(r)} = \min\left(\ell_{ij}^{(r-1)},\ \min_{1 \le k \le n}\ \left(\ell_{ik}^{(r-1)} + W[k][j]\right)\right).$$

Here is the lovely observation that gives this section its name. Because $W[j][j] = 0$, the term $k = j$ inside the inner min reproduces $\ell_{ij}^{(r-1)}$ exactly. So the outer min with $\ell_{ij}^{(r-1)}$ is redundant, and we can write the whole thing as one tidy minimization:

$$\ell_{ij}^{(r)} = \min_{1 \le k \le n}\ \left(\ell_{ik}^{(r-1)} + W[k][j]\right).$$

Stare at that formula and compare it with ordinary matrix multiplication, $C[i][j] = \sum_k A[i][k] \cdot B[k][j]$. They are the same shape! We have just replaced "+" with "min" and "×" with "+". In this *min-plus* algebra (also called the tropical semiring), computing the next layer of distances *is* a matrix product. If we name the operation $\odot$, then $L^{(r)} = L^{(r-1)} \odot W$.

Formal

Define the min-plus product of two $n \times n$ matrices A and B by

$$(A \odot B)[i][j] = \min_{1 \le k \le n}\ \left(A[i][k] + B[k][j]\right).$$

Let $L^{(1)} = W$ (at most one edge) and $L^{(r)} = L^{(r-1)} \odot W$. Then $L^{(r)}[i][j] = \ell_{ij}^{(r)}$, the minimum weight of an i-to-j path using at most r edges.

Figure 25.1 shows the shape of one entry of the product: to fill $L'[i][j]$ we slide across row i of L and down column j of W, add the paired entries, and keep the smallest sum – the same dance as an ordinary dot product, but with min for the outer combine and + for the inner one.

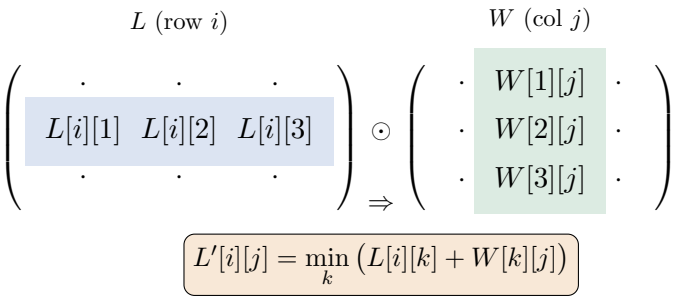


Figure 25.1: One entry of the min-plus product $L' = L \odot W$. Slide row i of L against column j of W, add paired cells, and keep the minimum.

25.2.2 When do we stop?

In a graph with no negative-weight cycles, any shortest path is *simple*: it never repeats a vertex, because cutting out a loop can only keep the weight the same or lower it. A simple path among n vertices has at most $n-1$ edges. So once r reaches $n-1$, the table stops changing: $L^{(n-1)} = L^{(n)} = \cdots$, and $L^{(n-1)}[i][j] = \delta(i, j)$. We have the answer.

Algorithm lab

Let us trace it on a tiny graph. Vertices $\{1, 2, 3\}$ with edges $1 \to 2$ (weight 3), $2 \to 3$ (weight 4), and $1 \to 3$ (weight 9). The weight matrix (rows = from, columns = to; "$\cdot$" is ∞) is

$$W = L^{(1)} = \begin{pmatrix} 0 & 3 & 9 \\ \cdot & 0 & 4 \\ \cdot & \cdot & 0 \end{pmatrix}.$$

Now compute $L^{(2)} = L^{(1)} \odot W$. The interesting entry is $L^{(2)}[1][3] = \min_k (L^{(1)}[1][k] + W[k][3])$. Try each k: $k = 1$ gives $0 + 9 = 9$; $k = 2$ gives $3 + 4 = 7$; $k = 3$ gives $9 + 0 = 9$. The minimum is 7, found via $k = 2$. So routing through vertex 2 beats the direct edge:

$$L^{(2)} = \begin{pmatrix} 0 & 3 & 7 \\ \cdot & 0 & 4 \\ \cdot & \cdot & 0 \end{pmatrix}.$$

With $n = 3$ we stop at $r = n - 1 = 2$, and indeed $D = L^{(2)}$. The shortest path from 1 to 3 has weight 7, going $1 \to 2 \to 3$.

25.2.3 Pseudocode and a first cost

Algorithm 114: EXTEND-SHORTEST-PATHS(L, W) – one min-plus product

Input: An $n \times n$ matrix L (best distances so far) and weight matrix W.
Output: The matrix $L' = L \odot W$.

```
let L' be a new n × n matrix;
for i ← 1 to n do
    for j ← 1 to n do
        L'[i][j] ← ∞;
        for k ← 1 to n do
            L'[i][j] ← min(L'[i][j], L[i][k] + W[k][j]);
return L';
```

One product costs $\Theta(n^3)$, exactly like grade-school matrix multiplication. We need products $L^{(2)}$, $L^{(3)}$, all the way up to $L^{(n-1)}$, which is $n-2$ of them, so the naive method costs $\Theta(n^4)$. That is worse than running Bellman–Ford n times ($\Theta(n^2 m)$, which is $\Theta(n^4)$ on a dense graph but better on a sparse one), so why bother? Because of one clever speed-up.

25.2.4 Repeated squaring: $\Theta(n^3 \log n)$

We do not actually need every intermediate $L^{(r)}$; we only need $L^{(n-1)}$. And once the table stabilizes at $L^{(n-1)}$, multiplying by W again changes nothing. So $L^{(r)} = L^{(n-1)}$ for every $r \geq n-1$. That means we can leap ahead by *squaring*: $L^{(2r)} = L^{(r)} \odot L^{(r)}$.

Intuition

This is the same trick as fast exponentiation. To compute x^{16} you do not multiply x by itself sixteen times; you square four times: $x \to x^2 \to x^4 \to x^8 \to x^{16}$. Here we square the distance matrix instead. Each squaring doubles the number of edges our paths may use, so after $\lceil \log_2(n-1) \rceil$ squarings we have surpassed $n-1$ edges and the answer has converged.

Algorithm 115: FASTER-APSP(W) – min-plus repeated squaring

Input: Weight matrix W of an n-vertex graph with no negative cycle.
Output: Distance matrix D.

```
L ← W;
r ← 1;
while r < n − 1 do
    L ← EXTEND-SHORTEST-PATHS(L, L);
    r ← 2r;
return L;
```

Each squaring is one $\Theta(n^3)$ product, and we do $\lceil \log_2(n-1) \rceil$ of them, for a total of $\Theta(n^3 \log n)$. Notice we feed L as *both* arguments now (squaring), not L and W.

Cost summary

Matrix-multiplication APSP.

- Naive layer-by-layer: $\Theta(n^4)$ time, $\Theta(n^2)$ space.
- Repeated squaring: $\Theta(n^3 \log n)$ time, $\Theta(n^2)$ space.
- Handles negative edges; assumes no negative-weight cycle.
- Sub-cubic "fast" matrix multiplication does *not* directly help, because min-plus has no subtraction, so Strassen-style cancellation tricks do not apply. Beating n^3 in min-plus is a deep open-ish problem.

Walking question

We argued $L^{(r)}$ stops changing at $r = n - 1$ because shortest paths are simple. Suppose the graph *did* contain a negative-weight cycle. Trace what would happen to a $D[i][j]$ for some i, j that can reach and leave that cycle as you keep squaring. Does the table ever stabilize? What does that suggest about how to *detect* a negative cycle with this method?

25.3 Floyd–Warshall: A Smarter Dynamic Program

The matrix method organized paths by their *number of edges*. Robert Floyd and Stephen Warshall organized them by a completely different feature, and it buys us a factor of $\log n$, landing at a clean $\Theta(n^3)$ with code so short you can write it from memory.

25.3.1 The new subproblem: allowed intermediate vertices

Fix an ordering of the vertices $1, 2, \ldots, n$. Consider a path from i to j. Its *intermediate vertices* are all the vertices on it except the two endpoints i and j. The new idea: build up the set of intermediate vertices we are *allowed to use*, one vertex at a time.

Define $d_{ij}^{(k)}$ to be the weight of a shortest path from i to j whose intermediate vertices all lie in the set $\{1, 2, \ldots, k\}$. (The endpoints i and j are always allowed; the restriction is only on what we may pass *through*.) The base case uses no intermediate vertices at all:

$$d_{ij}^{(0)} = W[i][j].$$

With $k = 0$ the only allowed paths are direct edges, which is exactly W.

25.3.2 The recurrence: "do I route through vertex k or not?"

Now suppose we know $d_{ij}^{(k-1)}$ for all i, j – shortest paths allowed to pass through $\{1, \ldots, k-1\}$. We want $d_{ij}^{(k)}$, which additionally permits passing through vertex k. A shortest such path either uses k as an intermediate vertex or it does not. These two cases tile every possibility:

- **Does not use k.** Then it only passes through $\{1, \ldots, k-1\}$, so its weight is $d_{ij}^{(k-1)}$.
- **Uses k exactly once.** (At most once, since the path is simple when there are no negative cycles.) Then it splits at k into a piece from i to k and a piece from k to j, and *neither* piece uses k as an intermediate vertex – they only pass through $\{1, \ldots, k-1\}$. So the weight is $d_{ik}^{(k-1)} + d_{kj}^{(k-1)}$.

Take the better of the two (Figure 25.2):

$$\boxed{d_{ij}^{(k)} = \min\left(d_{ij}^{(k-1)},\ \ d_{ik}^{(k-1)} + d_{kj}^{(k-1)}\right).}$$

After we have allowed all n vertices as intermediates, no restriction remains, so $d_{ij}^{(n)} = \delta(i, j)$. That is the whole algorithm.

Intuition

Picture the sentence: "I now permit myself to drive through city k. For each pair of cities (i, j), is it worth detouring through k?" Routing through k is worth it exactly when the trip $i \to k$ plus the trip $k \to j$ (each using only cities I had already cleared) is shorter than my current best $i \to j$. Sweep k from 1 to n, opening up one city at a time, and after the last sweep every city is open and every distance is final.

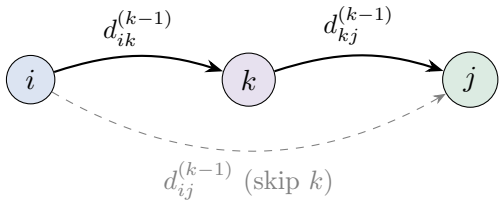


Figure 25.2: The Floyd–Warshall choice for the pair (i, j) at step k: either keep the best path that avoids k (dashed) or detour through k (solid), gluing together the best i-to-k and k-to-j pieces that already avoid k.

25.3.3 We only need two layers... actually one

The recurrence reads layer $k-1$ to produce layer k. Naively that suggests storing all $n+1$ layers, costing $\Theta(n^3)$ space. But there is a beautiful simplification: *you can overwrite the matrix in place.* Use a single matrix D and the assignment $D[i][j] \leftarrow \min(D[i][j],\ D[i][k] + D[k][j])$.

Why is reading possibly-already-updated values safe? Look at the two cells we read: $D[i][k]$ and $D[k][j]$. In the row k and column k entries, $d_{ik}^{(k)} = d_{ik}^{(k-1)}$ and $d_{kj}^{(k)} = d_{kj}^{(k-1)}$, because a shortest path to or from k that is allowed to use k as an intermediate gains nothing – using k in the middle would just repeat the endpoint. So the k-th row and k-th column do not change during pass k, and reading them "early" returns the right old value. Single matrix, $\Theta(n^2)$ space.

Figure 25.3 captures the picture: during pass k, the gray cross (row k and column k) is frozen, and the update to any cell (i, j) reads exactly the two cross cells $D[i][k]$ and $D[k][j]$. Because those two never move during this pass, it does not matter whether they have already been visited.




Figure 25.3: Pass k of Floyd–Warshall on a 5×5 table. The frozen cross is row k and column k (gray). Updating cell (i, j) (orange) reads only $D[i][k]$ (blue) and $D[k][j]$ (green), both on the frozen cross – which is why the in-place overwrite is safe.

Algorithm 116: FLOYD-WARSHALL(W) with predecessor reconstruction

Input: Weight matrix W of an n-vertex graph with no negative cycle.
Output: Distance matrix D and predecessor matrix Π.

```
D ← W;
for i ← 1 to n do
    for j ← 1 to n do
        if i ≠ j and W[i][j] < ∞ then Π[i][j] ← i;
        else Π[i][j] ← NIL;
for k ← 1 to n do
    for i ← 1 to n do
        for j ← 1 to n do
            if D[i][k] + D[k][j] < D[i][j] then
                D[i][j] ← D[i][k] + D[k][j];
                Π[i][j] ← Π[k][j];
return (D, Π);
```

The predecessor update deserves a word. When routing through k improves the path from i to j, the new path ends with the k-to-j portion, so the vertex just before j is whatever was just before j on the best k-to-j path: that is $\Pi[k][j]$. Copying it gives correct breadcrumbs.

Focus

The order of the loops is sacred: k *outermost*, then i, then j. The k loop is the dynamic-programming dimension (which intermediates are allowed); i and j just sweep all pairs within one k-layer. Swap k to the inside and you compute nonsense, because you would be allowing each pair a different, inconsistent set of intermediates.

25.3.4 A full worked trace

Algorithm lab

Take a four-vertex directed graph with these edges (and weights), which we will carry through: $1\to2=3$, $1\to4=7$, $2\to1=8$, $2\to3=2$, $3\to1=5$, $3\to4=1$, $4\to1=2$, $4\to3=6$. The starting matrix $D=D^{(0)}=W$ ("$\cdot$" is ∞):

$$D^{(0)}=\begin{pmatrix}0&3&\cdot&7\\8&0&2&\cdot\\5&\cdot&0&1\\2&\cdot&6&0\end{pmatrix}.$$

Pass $k=1$ (route through vertex 1). We improve $D[i][j]$ whenever $D[i][1]+D[1][j]<D[i][j]$. For instance $D[2][4]$: currently ∞; $D[2][1]+D[1][4]=8+7=15$, so it drops to 15. Also $D[3][2]$: $D[3][1]+D[1][2]=5+3=8$, new. And $D[4][2]$: $D[4][1]+D[1][2]=2+3=5$, new.

$$D^{(1)}=\begin{pmatrix}0&3&\cdot&7\\8&0&2&15\\5&8&0&1\\2&5&6&0\end{pmatrix}.$$

Pass $k=2$ (now also allow vertex 2). Check $D[1][3]$: $D[1][2]+D[2][3]=3+2=5<\infty$, so it becomes 5. Check $D[1][4]$: $D[1][2]+D[2][4]=3+15=18$, not better than 7. $D[3][3]$ stays 0.

$$D^{(2)}=\begin{pmatrix}0&3&5&7\\8&0&2&15\\5&8&0&1\\2&5&6&0\end{pmatrix}.$$

Pass $k=3$ (allow vertex 3). $D[1][4]$: $D[1][3]+D[3][4]=5+1=6<7$, improves to 6! $D[2][4]$: $D[2][3]+D[3][4]=2+1=3<15$, big improvement to 3. $D[2][1]$: $D[2][3]+D[3][1]=2+5=7<8$, drops to 7. $D[4][1]$ stays 2.

$$D^{(3)}=\begin{pmatrix}0&3&5&6\\7&0&2&3\\5&8&0&1\\2&5&6&0\end{pmatrix}.$$

Pass $k=4$ (allow vertex 4). $D[3][2]$: $D[3][4]+D[4][2]=1+5=6<8$, improves to 6. $D[3][1]$: $D[3][4]+D[4][1]=1+2=3<5$, drops to 3. $D[1][3]$: $D[1][4]+D[4][3]=6+6=12$, no. $D[2][1]$: $D[2][4]+D[4][1]=3+2=5<7$, drops to 5.

$$D^{(4)}=D=\begin{pmatrix}0&3&5&6\\5&0&2&3\\3&6&0&1\\2&5&6&0\end{pmatrix}.$$

That final matrix is the answer: every entry is a true shortest distance. For example, the shortest way from 3 to 1 has weight 3, achieved by $3\to4\to1$ $(1+2)$, which the direct edge (5) could not match.

25.3.5 Why it is correct

Formal

Loop invariant (Floyd–Warshall). Just before the iteration of the outer loop with index k, every entry satisfies

$$D[i][j] = d_{ij}^{(k-1)} = (\text{weight of a shortest } i\text{-to-}j \text{ path through intermediates in } \{1, \dots, k-1\}).$$

Initialization. Before $k = 1$ we have $D = W = D^{(0)}$: paths through the empty set of intermediates are exactly direct edges. The invariant holds.

Maintenance. Assume it holds entering pass k. The update sets $D[i][j] \leftarrow \min(D[i][j], D[i][k] + D[k][j])$. By the in-place argument above, the values read are the old layer-$(k-1)$ values. By the case analysis (route through k or not), this min is exactly $d_{ij}^{(k)}$. So after the pass the invariant holds for $k + 1$.

Termination. After $k = n$ finishes, $D[i][j] = d_{ij}^{(n)}$, paths allowed to use *any* intermediate, which is the unrestricted shortest distance $\delta(i, j)$. Done.

Common trap

If a negative-weight cycle exists, Floyd–Warshall does not loop forever – it runs the same $\Theta(n^3)$ steps – but the answers become meaningless, and some diagonal entry $D[i][i]$ ends up *negative*. That is your detector: after running, scan the diagonal; if any $D[i][i] < 0$, vertex i lies on a negative-weight cycle and the affected distances are really $-\infty$.

Cost summary

Floyd–Warshall. Three nested loops of length n: $\Theta(n^3)$ time, flat, best case equals worst case. Space $\Theta(n^2)$ (single in-place matrix, plus Π if you want paths). Handles negative edges; detects negative cycles via the diagonal. No graph is too dense for it – in fact it is the method of choice precisely *when* the graph is dense.

25.4 Transitive Closure: Reachability for the Price of Booleans

Sometimes you do not care about distances at all – you only want to know *whether* a path exists from i to j. The transitive closure of G is the graph G^* with an edge (i, j) exactly when j is reachable from i in G. We adopt the convention that every vertex reaches itself (the empty path), so the diagonal is always `true`; off the diagonal, (i, j) means there is a directed path of one or more edges. Think of "can task i eventually trigger task j?" in a dependency graph, or "can person i reach person j through any chain of follows?"

You could just run Floyd–Warshall with weights 0 and ∞ and then mark "reachable" wherever $D[i][j] < \infty$. That works. But if all you need is a yes/no answer, you can run the *same skeleton* on booleans and avoid arithmetic entirely, which is faster in practice and uses single bits.

Define $t_{ij}^{(k)}$ to be `true` iff there is a path from i to j with all intermediate vertices in $\{1, \dots, k\}$. The

base case is $t_{ij}^{(0)} = \texttt{true}$ iff $i = j$ or $(i, j) \in E$. The recurrence mirrors Floyd–Warshall, with min becoming logical OR and + becoming logical AND:

$$t_{ij}^{(k)} = t_{ij}^{(k-1)} \ \textbf{or} \ \left(t_{ik}^{(k-1)} \ \textbf{and} \ t_{kj}^{(k-1)}\right).$$

Intuition

The translation is exact and worth savoring. "Shortest distance" lived in the $(\min, +)$ world; "can you get there" lives in the (OR, AND) world. Both are semirings, and the Floyd–Warshall update is really a generic semiring algorithm. Change the two operations and the same triple loop computes a different fact about the graph. Distances, reachability, maximum-bottleneck capacity, most-reliable paths – all the same code, four different pairs of operators.

Algorithm 117: TRANSITIVE-CLOSURE(G)

Input: Adjacency structure of an n-vertex graph G.
Output: Boolean matrix T with $T[i][j] = \texttt{true}$ iff j is reachable from i.

```
1 for i ← 1 to n do
2     for j ← 1 to n do
3         if i = j or (i, j) ∈ E then T[i][j] ← true;
4         else T[i][j] ← false;
5 for k ← 1 to n do
6     for i ← 1 to n do
7         for j ← 1 to n do
8             T[i][j] ← T[i][j] or (T[i][k] and T[k][j]);
9 return T;
```

Same $\Theta(n^3)$ shape, but each operation is a single bit op. If you pack rows into machine words, the inner loop becomes a bitwise-OR of word-sized chunks, and you get a real constant-factor speed-up of roughly the word size w (commonly 64), giving $\Theta(n^3/w)$ in practice – which is why transitive closure on bitsets is genuinely fast.

Why this matters

Reachability is the backbone of static analysis. Compilers ask "can the value defined here reach this use?"; type checkers and build systems ask "does target A transitively depend on target B?"; security tools ask "can tainted input flow to this dangerous sink?" All of these are transitive closures of a graph, and the bitset version of this very loop is what runs under the hood at scale.

25.5 Johnson's Algorithm: Fast on Sparse Graphs, Even with Negative Edges

Floyd–Warshall is a joy on dense graphs, but its $\Theta(n^3)$ is wasteful when the graph is *sparse* – few edges, $m \ll n^2$. On a sparse graph you would love to run Dijkstra from each vertex, since one

Dijkstra costs $O(m \log n)$ and n of them cost $O(nm \log n)$, far below n^3 when m is small. There is just one problem: Dijkstra requires *nonnegative* edge weights, and we want to handle negative ones.

Donald Johnson's beautiful idea is to *reweight* the graph so that all weights become nonnegative, *without changing which paths are shortest*, and then run Dijkstra n times on the reweighted graph. The reweighting itself is done with one run of Bellman–Ford. Let us build it.

25.5.1 The reweighting trick

We want to assign each vertex v a number $h(v)$ – think of it as an "elevation" or potential – and replace every edge weight by

$$\hat{w}(u, v) = w(u, v) + h(u) - h(v).$$

Watch what happens to the weight of an entire path $p = v_0 \to v_1 \to \cdots \to v_k$. The new weight telescopes:

$$\hat{w}(p) = \sum_{i=1}^{k} \big(w(v_{i-1}, v_i) + h(v_{i-1}) - h(v_i)\big) = w(p) + h(v_0) - h(v_k).$$

Every interior h cancels with its neighbor; only the endpoints survive. So the new weight of *any* path from s to t is the old weight plus the same constant $h(s) - h(t)$, regardless of which path you took. This is the crucial point. Figure 25.4 shows the cancellation on a three-edge path: each $+h(v_i)$ from one edge meets the $-h(v_i)$ of the next.




Figure 25.4: Reweighting telescopes. Each interior potential $h(v_i)$ appears once with a $+$ and once with a $-$ and cancels; only the endpoint terms $+h(v_0)$ and $-h(v_3)$ survive, so every v_0-to-v_3 path shifts by the same amount.

Focus

Because the additive correction $h(s) - h(t)$ depends only on the endpoints, *the ranking of paths from s to t is unchanged*. A path that was shortest in w is still shortest in $\hat{w}$. We have changed all the numbers but preserved every shortest path. To recover the true distance afterward we just undo the shift: $\delta(s, t) = \hat{\delta}(s, t) - h(s) + h(t)$.

Intuition

Think of $h(v)$ as the height of vertex v and an edge's reweight as "how much you climb minus how much you descend" added to its length. Walking a whole route, all the intermediate ups and downs cancel; only your net elevation change between start and finish matters. Reweight-

ing is just adding a conservative "gravity" field. Gravity does not change which route between two fixed points is shortest – it only re-labels the costs.

25.5.2 Choosing h so every $\hat{w} \geq 0$

We need an h that makes $\hat{w}(u, v) = w(u, v) + h(u) - h(v) \geq 0$ for every edge, i.e. $h(v) - h(u) \leq w(u, v)$. That inequality should look familiar: it is exactly the *triangle / relaxation* condition that shortest-path distances satisfy. So if we let $h(v)$ be a shortest-path distance from some fixed source to v, the condition holds automatically.

Here is the construction. Add a brand-new vertex s to the graph, with a zero-weight edge $s \to v$ to every original vertex v (and no edges into s). This new vertex can reach everything and reaches it with finite distance (at worst 0). Run Bellman–Ford from s. Set $h(v) = \delta(s, v)$, the shortest distance from s to v in the augmented graph.

Why does this satisfy $h(v) - h(u) \leq w(u, v)$? Because shortest distances obey the triangle inequality: the best way to reach v is no worse than the best way to reach u followed by the edge (u, v), so $\delta(s, v) \leq \delta(s, u) + w(u, v)$, which rearranges to exactly what we need. And Bellman–Ford from s is also where we *detect a negative cycle*: if it reports one, we stop and announce that all-pairs shortest paths are undefined.




Figure 25.5: The augmented graph G' for Johnson's algorithm. A synthetic source s (orange) sends a dashed 0-weight edge to every real vertex; one Bellman–Ford run from s then yields a potential $h(v) = \delta(s, v)$ for each vertex in a single sweep.

The dashed 0-weight edges from the synthetic source s let Bellman–Ford compute one h value per vertex in a single pass over the whole graph (Figure 25.5).

25.5.3 The full algorithm

Algorithm 118: JOHNSON(G, w)

Input: Directed weighted graph $G = (V, E)$ with weights w, possibly negative.
Output: Distance matrix D, or a report that a negative-weight cycle exists.

form G' by adding a new vertex s and edges (s, v) of weight 0 for all $v \in V$;
if BELLMAN-FORD*(G', w, s) finds a negative-weight cycle* **then**
  return "negative-weight cycle";
foreach $v \in V$ **do**
  $h(v) \leftarrow \delta(s, v)$; `// from Bellman--Ford`
foreach *edge* $(u, v) \in E$ **do**
  $\hat{w}(u, v) \leftarrow w(u, v) + h(u) - h(v)$
foreach $u \in V$ **do**
  run DIJKSTRA(G, $\hat{w}$, u) to get $\hat{\delta}(u, v)$ for all v;
  foreach $v \in V$ **do**
    $D[u][v] \leftarrow \hat{\delta}(u, v) - h(u) + h(v)$;
return D;

25.5.4 A worked example of the reweighting

Algorithm lab

Use the three-vertex graph from the diagram: edges $2 \to 1$ (weight 2), $1 \to 3$ (weight -4), $3 \to 2$ (weight 5). Add source s with 0-weight edges to $1, 2, 3$ and run Bellman–Ford. The cheapest way to reach each vertex from s:

$$h(1) = \delta(s, 1) = 0, \quad h(2) = \delta(s, 2) = 0, \quad h(3) = \delta(s, 3) = -4.$$

(Vertex 3 is reached via $s \to 1 \to 3 = 0 + (-4) = -4$; everything else is reached directly at cost 0, since the synthetic edges already cost 0.) Now reweight each real edge with $\hat{w}(u, v) = w(u, v) + h(u) - h(v)$:

$$\hat{w}(2, 1) = 2 + 0 - 0 = 2, \quad \hat{w}(1, 3) = -4 + 0 - (-4) = 0, \quad \hat{w}(3, 2) = 5 + (-4) - 0 = 1.$$

Every reweighted edge is nonnegative – exactly as promised – so Dijkstra is now legal. And the -4 edge, which would have broken Dijkstra, became a harmless 0. To read a true distance back out, say from 1 to 2: Dijkstra on $\hat{w}$ gives $\hat{\delta}(1, 2) = \hat{w}(1, 3) + \hat{w}(3, 2) = 0 + 1 = 1$; then $\delta(1, 2) = \hat{\delta}(1, 2) - h(1) + h(2) = 1 - 0 + 0 = 1$, while the true path $1 \to 3 \to 2$ costs $-4 + 5 = 1$. They match.

25.5.5 Why it is correct, and what it costs

Formal

Claim. With $h(v) = \delta(s, v)$, every reweighted edge satisfies $\hat{w}(u, v) \geq 0$, and for every pair (u, v), $\delta(u, v) = \hat{\delta}(u, v) - h(u) + h(v)$.
Nonnegativity. The triangle inequality gives $\delta(s, v) \leq \delta(s, u) + w(u, v)$, i.e. $h(v) - h(u) \leq w(u, v)$, i.e. $\hat{w}(u, v) = w(u, v) + h(u) - h(v) \geq 0$.
Distance recovery. For any path p from u to v, telescoping gives $\hat{w}(p) = w(p) + h(u) - h(v)$. The additive term is the same for all p, so the $\hat{w}$-shortest path is a w-shortest path; taking the minimum over p on both sides yields $\hat{\delta}(u, v) = \delta(u, v) + h(u) - h(v)$, which rearranges to the stated recovery formula.

Cost summary

Johnson's algorithm.

- One Bellman–Ford from s: $O(nm)$.
- Reweighting all edges: $O(m)$.
- n runs of Dijkstra with a binary heap: $O\big(n\,(m \log n)\big) = O(nm \log n)$; with a Fibonacci heap, $O\big(n\,(m + n \log n)\big) = O(nm + n^2 \log n)$.
- Total: $O(nm \log n)$ (binary heap), dominated by the Dijkstra runs.
- Space $O(n^2)$ for the output, $O(n + m)$ working.
- Handles negative edges; detects negative cycles in the Bellman–Ford phase.

Intuition

The division of labor is the whole point. Bellman–Ford is slow but robust: it tolerates negative edges, so we use it *once* to neutralize them by reweighting. Dijkstra is fast but fragile: it cannot tolerate negative edges, so we run it n times only *after* the graph has been made nonnegative. Johnson's algorithm is a marriage that takes the best trait from each partner.

25.6 Choosing an Algorithm

You now have several tools. Which one should you reach for?

Method	Time	Best when
Repeated Dijkstra	$O(nm \log n)$	sparse, weights ≥ 0
Johnson	$O(nm \log n)$	sparse, some negative edges
Floyd–Warshall	$\Theta(n^3)$	dense, any weights, want simplicity
Matrix (squaring)	$\Theta(n^3 \log n)$	mainly of theoretical interest
Transitive closure	$\Theta(n^3/w)$	only reachability needed

The rough rule: **dense graph** $\Rightarrow$ **Floyd–Warshall**; **sparse graph** $\Rightarrow$ **Johnson** (or repeated

Dijkstra if all weights are already nonnegative). The crossover is around $m \approx n^2/\log n$. Below that density, $nm \log n < n^3$ and Johnson wins; above it, Floyd–Warshall's tiny constant factor and cache-friendly triple loop make it the practical champion.

History and connection

This material is CLRS Chapter 25, "All-Pairs Shortest Paths," which builds directly on CLRS Chapter 24 (single-source) and the graph foundations of Chapter 22. The matrix-multiplication formulation and Floyd–Warshall are CLRS §25.1–25.2; the transitive-closure variant is in §25.2; Johnson's algorithm is §25.3. Bernard Roy (1959), Stephen Warshall (1962), and Robert Floyd (1962) arrived at the triple-loop algorithm independently – Warshall for reachability, Floyd for distances – which is why you will sometimes see it called the Roy–Floyd–Warshall algorithm. Donald Johnson published his reweighting algorithm in 1977. The deeper observation, that all of these are the *same* algorithm over different semirings, is part of the algebraic path problem and connects onward to Kleene's theorem in automata theory.

Why this matters

All-pairs shortest paths quietly powers things you use daily. Route planners precompute distance tables over regions so a query is a lookup, not a fresh search. The classic distance-vector routing protocols (RIP and friends) are distributed cousins of Bellman–Ford run continuously across the internet. Network-analysis tools compute *betweenness centrality* – how often a node sits on shortest paths between others – which needs all-pairs distances and is used to find influential people, fragile links, and bottleneck routers. And in program analysis, the transitive-closure form decides reachability questions that keep compilers and security scanners honest.

25.7 Summary

Pause

Take a breath and collect the through-line.

- The problem: a full $n \times n$ table of shortest distances between all ordered pairs, plus optional predecessors for path reconstruction.
- Organize paths by *number of edges* and you get a min-plus matrix product; squaring gives $\Theta(n^3 \log n)$.
- Organize paths by *which intermediate vertices are allowed* and you get Floyd–Warshall, a clean in-place $\Theta(n^3)$ triple loop.
- Swap $(\min, +)$ for (OR, AND) and the same loop computes transitive closure (reachability) on bits.
- For sparse graphs with negative edges, Johnson reweights once with Bellman–Ford to kill negativity, then runs Dijkstra n times for $O(nm \log n)$.
- Negative cycles make distances $-\infty$; watch the Floyd–Warshall diagonal, or trust

Bellman–Ford in Johnson, to detect them.

Exercises

Exercise 25.1. Run Faster-APSP (repeated squaring) by hand on the four-vertex graph from the Floyd–Warshall lab. Write $L^{(1)} = W$, then $L^{(2)}$, then $L^{(4)}$. Confirm that $L^{(4)}$ equals the final matrix $D^{(4)}$ we obtained with Floyd–Warshall. Why is computing $L^{(4)}$ (rather than stopping at $L^{(3)}$) the right call for $n = 4$?

Exercise 25.2. Carry the predecessor matrix Π through the full Floyd–Warshall trace in the lab. Then use it to print the actual shortest path from vertex 2 to vertex 4. (You should recover $2 \to 3 \to 4$ with total weight 3.)

Exercise 25.3. Explain precisely why the loop order in Floyd–Warshall must have k outermost. Construct a tiny graph (three vertices is enough) on which putting the k loop innermost produces a wrong answer, and show the wrong number it computes.

Exercise 25.4. The in-place version of Floyd–Warshall reuses one matrix. We justified this by arguing the k-th row and k-th column do not change during pass k. Prove that claim carefully from the recurrence $d_{ij}^{(k)} = \min(d_{ij}^{(k-1)}, d_{ik}^{(k-1)} + d_{kj}^{(k-1)})$ by specializing to $j = k$ and to $i = k$.

Exercise 25.5. Modify Floyd–Warshall so that instead of *shortest* paths it computes, for every pair (i, j), the maximum-bottleneck path: the path that maximizes the minimum edge weight along it (useful for finding the widest channel between two network nodes). What two operations replace min and +? What is the base case? This is another semiring – name the operations.

Exercise 25.6. A negative-weight cycle leaves a fingerprint on the Floyd–Warshall diagonal. Run Floyd–Warshall on the two-vertex graph with edges $1 \to 2$ (weight 1) and $2 \to 1$ (weight -3). Show that after the algorithm finishes, $D[1][1]$ and $D[2][2]$ are negative, and explain how you would scan for this.

Exercise 25.7. In Johnson's algorithm we added a synthetic source s with 0-weight edges to every vertex. Suppose instead you used edges of weight $+5$. Would the algorithm still be correct? What about weight -5? Argue from the role $h(v) = \delta(s, v)$ plays, and state exactly which property of h you must preserve.

Exercise 25.8. Work out the density crossover between Johnson and Floyd–Warshall more carefully. Setting $nm \log n = n^3$, solve for m in terms of n. For $n = 1000$, roughly how many edges does a graph need before Floyd–Warshall becomes the faster choice? (Use $\log_2 1000 \approx 10$.)

Exercise 25.9. (*Challenge.*) Show how to use the predecessor information from a single run of Floyd–Warshall to detect, for a graph *with* a negative cycle, an actual vertex sequence forming a negative cycle – not just the fact that one exists. Hint: a negative diagonal entry $D[i][i] < 0$ means i is on such a cycle; follow predecessors from i back to i.

Exercise 25.10. (*Challenge.*) The min-plus product has no known truly sub-cubic *combinatorial* algorithm, but there is a clever $O(n^3/\log n)$-style speed-up and connections to the famous APSP-vs-min-plus equivalence. Without looking it up, explain why Strassen's $O(n^{2.81})$ matrix multiplication cannot simply be dropped in to speed up min-plus APSP. (Hint: what algebraic operation does Strassen rely on that min does not have?)

Chapter 26

Maximum Flow

Picture a network of pipes. Water enters at one special place, sloshes through a tangle of junctions and pipes of various widths, and leaves at another special place. Each pipe has a limit – a maximum rate it can carry before it bursts. The question of this chapter is embarrassingly simple to ask and genuinely deep to answer: *how much water per second can you push from the entrance to the exit?*

That is the maximum-flow problem. It does not look like sorting, or shortest paths, or anything you have met so far, and the first honest reaction to it is "surely I just send as much as I can down every pipe." But the pipes share junctions, and water that piles up at a junction has nowhere to go – whatever flows in must flow out. The constraints interlock. Greedily flooding one path can block a better global arrangement, and the whole charm of the subject is learning how to *undo* a greedy mistake without starting over.

By the end of this chapter you will be able to compute the maximum flow of any network by hand and in code; you will understand the single most beautiful theorem in the area – that the most you can *push* equals the cheapest way to *cut* the network in two – and you will see how a problem about water pipes secretly solves a problem about matchmaking, with no water in sight.

Intuition

Here is the mental picture to carry the whole way through. Flow is not just about where water *can* go; it is about leaving yourself the freedom to *reroute* water you already committed. The central trick – the residual network – is a bookkeeping device that says, "if I previously sent five units down this pipe, I am allowed to cancel up to five of them later by pretending to send flow backward." That permission to take back a decision is what turns a hopeless greedy idea into an exact algorithm.

26.1 Flow Networks

Let us pin down the objects. A *flow network* is a directed graph $G = (V, E)$ in which every edge $(u, v) \in E$ carries a nonnegative *capacity* $c(u, v) \geq 0$. Two vertices are singled out: a *source* s, where material is produced, and a *sink* t, where it is consumed. We assume every vertex lies on some path from s to t, so the graph is connected in the relevant sense and $|E| \geq |V| - 1$.

For convenience we adopt a small convention: if (u, v) is not an edge, we set $c(u, v) = 0$, and we forbid

antiparallel edges, meaning we never have both (u, v) and (v, u) in E at once. (If a real problem has both, split one of them by inserting a dummy vertex in the middle; nothing important changes. We will explain why this convention is convenient when residual networks appear.)

Definition 26.1 (Flow)**.** A *flow* in G is a function $f : V \times V \to \mathbb{R}$ satisfying two properties:

- **Capacity constraint:** for all $u, v \in V$, $0 \le f(u, v) \le c(u, v)$.
- **Flow conservation:** for every vertex $u \in V \setminus \{s, t\}$,

$$\sum_{v \in V} f(v, u) \;=\; \sum_{v \in V} f(u, v).$$

The *value* of the flow, written $|f|$, is the net amount leaving the source,

$$|f| \;=\; \sum_{v \in V} f(s, v) \;-\; \sum_{v \in V} f(v, s).$$


Read the two constraints slowly, because the entire chapter is a meditation on them. The capacity constraint says no pipe carries more than its width allows, and (in this nonnegative formulation) no pipe carries a negative amount. Flow conservation is the law of the junction: at every vertex other than the source and sink, total inflow equals total outflow. Water is neither created nor destroyed inside the network; it only gathers at s and drains at t.

Focus

A flow is a *global* object that must be *locally consistent* everywhere. You cannot just maximize one pipe at a time, because changing one pipe's flow ripples through conservation at both of its endpoints. The skill you are building is reasoning about a quantity ($|f|$) that lives at the source and sink, while honoring constraints that live on every edge and at every interior vertex.

26.1.1 A network to keep on the table

We will trace one small network through the whole chapter. It has six vertices s, a, b, c, d, t and the capacities drawn below. Memorize nothing; just keep this picture handy.

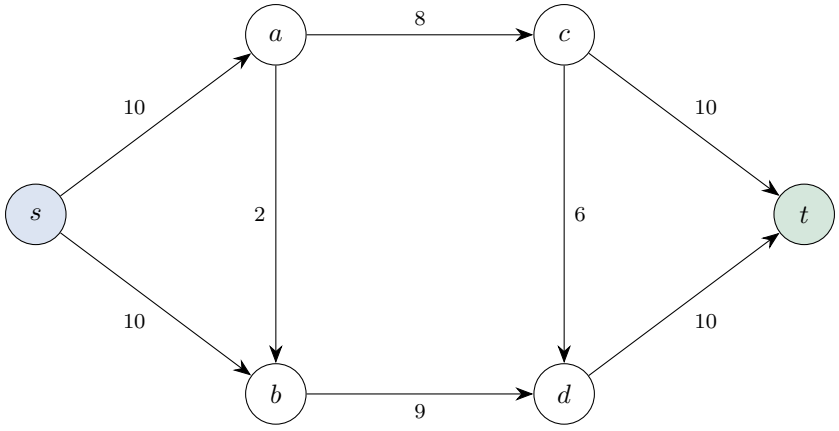

Take a guess right now, before any theory: what do you think the maximum flow from s to t is? Many people eyeball s's two outgoing pipes, see capacity $10 + 10 = 20$, and guess 20. Hold that guess. We will see it is too optimistic, and the reason why is the heart of the subject.

Why this matters

Flow networks are not a toy. The same model computes how much data a computer network can route between two machines, how many trucks a road system can carry between two cities, how to schedule airline crews, how to segment an image into foreground and background, how to assign students to schools, and how baseball teams get mathematically eliminated from a pennant race. Whenever a resource must travel through a shared, capacity-limited structure, maximum flow is lurking. It is one of the highest-leverage algorithms an engineer can know, precisely because so many problems quietly reduce to it.


26.2 The Ford–Fulkerson Method

We attack maximum flow with an idea so natural it is almost dumb: *start with zero flow, then keep finding a path from s to t along which you can push a little more, and push it.* A path with spare room all the way from source to sink is called an *augmenting path*. As long as one exists, you are not done; when none exists, the claim (to be proved) is that you have the maximum.

This is called a *method* rather than an algorithm because it leaves one choice unspecified: *which* augmenting path do you pick when several exist? Different answers give different algorithms with wildly different running times. We will nail down a good choice in Section 26.4. For now, focus on the engine.

26.2.1 Why naive greedy is not enough

Let us try the dumb version on a tiny three-edge graph and watch it fail, so that the cure feels earned. Consider this network, with all capacities equal to 1 except where noted.

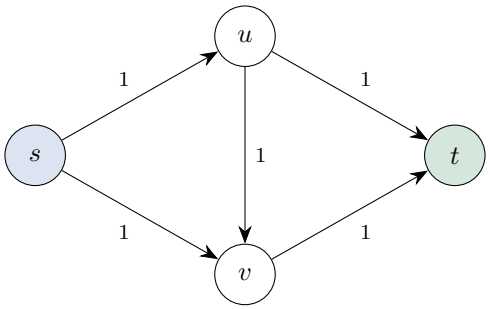

Suppose your first greedy path is $s \to u \to v \to t$, and you push 1 unit along it. Now $s \to u$, $u \to v$, and $v \to t$ are all saturated. Look for another augmenting path with spare capacity: $s \to v$ has room, but $v \to t$ is full; $u \to t$ has room, but $s \to u$ is full. There is no path of strictly positive spare capacity from s to t. Naive greedy stops, declaring the answer 1.

But the true answer is 2: push 1 unit along $s \to u \to t$ and 1 unit along $s \to v \to t$, using no middle edge at all. The greedy mistake was committing flow to the middle edge $u \to v$. We need

a mechanism to *retract* that unit – to send flow "backward" along $u \to v$ to cancel it, freeing u to serve t and v to be served by s. That mechanism is the residual network, and the figure below shows exactly the move it unlocks: a path that uses the *dashed backward copy* of the saturated middle edge.

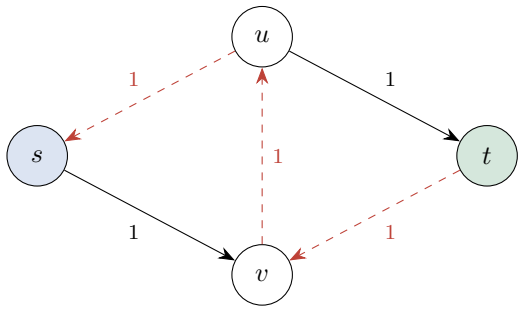


Figure 26.1: The residual network G_f after the greedy push of 1 unit along $s \to u \to v \to t$. Solid arrows are forward residual edges (spare capacity in a real pipe); dashed red arrows are backward residual edges that grant permission to cancel existing flow. The new augmenting path is $s \to v \to u \to t$: take $s \to v$ (spare), then the backward edge $v \to u$ (which cancels the committed middle unit), then $u \to t$ (spare). Pushing 1 along it leaves the middle edge empty and yields the optimal flow of value 2.

26.2.2 Residual networks

Given a flow f, the *residual network* G_f tells you, for every ordered pair of vertices, how much *additional* flow you may push there. It has two kinds of edges, and the second kind is the clever one.

For each edge $(u, v) \in E$:

- a *forward residual edge* (u, v) with residual capacity $c_f(u, v) = c(u, v) - f(u, v)$, the unused room in the pipe;
- a *backward residual edge* (v, u) with residual capacity $c_f(v, u) = f(u, v)$, equal to the flow currently in the pipe.

Edges of residual capacity 0 are simply omitted. The backward edge encodes exactly the "permission to cancel" from our intuition box: if $f(u, v)$ units are flowing forward, you may push up to $f(u, v)$ units backward, which has the net effect of reducing the forward flow.

Formal

Formally, the residual capacity is

$$c_f(u, v) = \begin{cases} c(u, v) - f(u, v) & \text{if } (u, v) \in E, \\ f(v, u) & \text{if } (v, u) \in E, \\ 0 & \text{otherwise.} \end{cases}$$

The residual network is $G_f = (V, E_f)$ where $E_f = \{(u, v) \in V \times V : c_f(u, v) > 0\}$. Note $|E_f| \leq 2|E|$, so G_f is no more than twice the size of G. This is exactly why we banned antiparallel edges: it guarantees that a forward residual edge and a backward residual edge never collide on the same ordered pair, so c_f is well-defined by a single formula.

Common trap

The backward edge is not a real pipe and carries no real water. It is a *bookkeeping* edge that exists only inside G_f. When an augmenting path uses a backward residual edge (v, u), you are not sending new water from v to u; you are *reducing* the existing real flow $f(u, v)$. Mixing up "residual flow" with "actual flow" is the single most common confusion in this chapter. Actual flow f lives in G; residual capacities live in G_f; the algorithm reads G_f to decide how to update f.

26.2.3 Augmenting along a path

An *augmenting path* p is any simple path from s to t in the residual network G_f. Because every edge on it has $c_f > 0$, we can push flow along the whole path. How much? Exactly the smallest residual capacity on the path – the bottleneck:

$$c_f(p) \;=\; \min\{\, c_f(u, v) : (u, v) \text{ is on } p \,\}.$$

To augment, we walk the path and, for each residual edge (u, v), push $c_f(p)$ units. If (u, v) is a forward edge of G, we *increase* $f(u, v)$; if it is a backward edge (meaning $(v, u) \in E$), we *decrease* $f(v, u)$. In symbols, the updated flow f' satisfies, for each (u, v) on p,

$$f'(u, v) = f(u, v) + c_f(p) \quad \text{(forward)}, \qquad f'(v, u) = f(v, u) - c_f(p) \quad \text{(backward)}.$$

Lemma 26.1 (Augmentation produces a valid flow)**.** *If f is a flow in G and p is an augmenting path in G_f, then f' defined above is a flow in G, and $|f'| = |f| + c_f(p) > |f|$.*

Why this is true, gently. Capacities first. On a forward edge we add at most $c_f(u, v) = c(u, v) - f(u, v)$, so $f'(u, v) \le c(u, v)$, and since $c_f(p) > 0$ we keep $f'(u, v) \ge 0$. On a backward edge we subtract at most $c_f(v, u) = f(u, v)$, so $f'(u, v) \ge 0$, and it only decreased so it stays $\le c(u, v)$. Every edge remains legal.

Conservation next. Take any interior vertex w on the path. The path enters w once and leaves w once, so exactly two residual edges at w change. Walk through the four cases (the entering edge forward or backward, likewise the leaving edge) and in each case the net inflow at w changes by $+c_f(p)$ from one edge and $-c_f(p)$ from the other – conservation is preserved. (Pushing $c_f(p)$ "backward" on a real edge reduces both that edge's contribution to its head and to its tail by the same amount, which is exactly what keeps the books balanced.) Vertices not on p are untouched.

Finally the value. The path leaves s along exactly one residual edge. If it is a forward edge out of s, then $f(s, \cdot)$ increases by $c_f(p)$; if it is a backward edge into s, then some $f(\cdot, s)$ decreases by $c_f(p)$. Either way the net out-of-s quantity $|f|$ rises by exactly $c_f(p)$. □

This lemma is the workhorse. It says: *find any s-t path in G_f, push its bottleneck, repeat.* Each augmentation strictly increases the value. We state the method as pseudocode.

Algorithm 119: FORD-FULKERSON(G, s, t)

Input: flow network G with capacities c, source s, sink t
Output: a maximum flow f

```
for each edge (u, v) ∈ E do
    f(u, v) ← 0
while there exists an augmenting path p from s to t in G_f do
    c_f(p) ← min{c_f(u, v) : (u, v) ∈ p};
    for each edge (u, v) on p do
        if (u, v) ∈ E then
            f(u, v) ← f(u, v) + c_f(p)
        else
            f(v, u) ← f(v, u) − c_f(p)
return f;
```

26.2.4 A full numeric trace

Let us run the method on the running network of Section 26.1.1. We start with $f = 0$ everywhere, so initially G_f is just G with every edge at its full capacity.

Augmentation 1. Find a path; say we find $s \to a \to c \to t$. The residual capacities are $10, 8, 10$, so the bottleneck is $c_f(p) = 8$. Push 8. Now $f(s, a) = 8$, $f(a, c) = 8$, $f(c, t) = 8$, and $|f| = 8$. The edge $a \to c$ is saturated.

Augmentation 2. Find $s \to b \to d \to t$. Residual capacities $10, 9, 10$; bottleneck 9. Push 9. Now $f(s, b) = 9$, $f(b, d) = 9$, $f(d, t) = 9$, and $|f| = 8 + 9 = 17$. The edge $b \to d$ is saturated.

Augmentation 3. Is there any path left? Let us search the residual network from s and see how far we get. From s we can still reach a (residual $10 - 8 = 2$) and b (residual $10 - 9 = 1$). From a the forward edge $a \to c$ is saturated, but $a \to b$ has residual 2 – so a only takes us to b, which we already have. From b the lone out-edge $b \to d$ is saturated. So the search from s reaches exactly $\{s, a, b\}$ and stops dead.

You might hope a *backward* residual edge rescues us, the way it did in the diamond. The only real edge with spare capacity past the waist is $c \to d$ (residual 6), which would let us try

$$s \;\to\; a \;\to\; c \;\to\; d \;\to\; t.$$

But this path is blocked at its second step: $c_f(a, c) = 0$, because $a \to c$ is saturated. We can never *reach* c from s in G_f, so its outgoing room is useless. The honest conclusion: after pushing 8 and 9, *there is no augmenting path*, and the maximum flow of this network is

$$|f| = 17,$$

not the 20 you might have guessed from the source's two outgoing pipes of capacity 10 each. The bottleneck is downstream: edges $a \to c$ (cap 8) and $b \to d$ (cap 9) together can pass at most $8 + 9 = 17$, and everything from s must funnel through them.

Walking question

Go look at the running network again and find the "narrowest waist" of the whole graph – a set of edges you could cut to completely separate s from t whose total capacity is as small as possible. Did you find $\{a \to c,\, b \to d\}$ with total $8 + 9 = 17$? Notice that this number is exactly the maximum flow we computed, and that this waist is the very cut drawn in Figure 26.2 below. Sit with that coincidence on your walk. It is not a coincidence; it is the deepest theorem in the chapter, coming up next.

26.3 Cuts and the Max-Flow Min-Cut Theorem

The trace ended on a tantalizing note: the maximum flow equaled the capacity of the cheapest "waist" separating s from t. Let us make "waist" precise and then prove the equality. This is the intellectual summit of the chapter.

Definition 26.2 (Cut)**.** An *s-t cut* of G is a partition of V into two sets S and $T = V \setminus S$ with $s \in S$ and $t \in T$. The *net flow across the cut* is

$$f(S,T) = \sum_{u \in S} \sum_{v \in T} f(u,v) - \sum_{u \in S} \sum_{v \in T} f(v,u),$$

and the *capacity of the cut* is

$$c(S,T) = \sum_{u \in S} \sum_{v \in T} c(u,v).$$

Notice the asymmetry: the *net flow* subtracts the flow coming back from T to S, but the *capacity* only counts edges going from S to T (forward), with no subtraction. That asymmetry is exactly where the slack between flow and capacity will live.

Lemma 26.2 (Flow across any cut equals the flow value)**.** *For any flow f and any s-t cut (S,T), we have $f(S,T) = |f|$.*

The bookkeeping. Start from $|f| = \sum_v f(s,v) - \sum_v f(v,s)$, the net flow out of s alone. Now *add zero* cleverly: for every other vertex $u \in S$, conservation says its net outflow $\sum_v f(u,v) - \sum_v f(v,u)$ is 0, so we may add all of these in without changing the total. Summing over all $u \in S$,

$$|f| = \sum_{u \in S} \Big(\sum_{v \in V} f(u,v) - \sum_{v \in V} f(v,u) \Big).$$

Split the inner sum over v into $v \in S$ and $v \in T$. The $v \in S$ terms cancel in pairs (each $f(u,v)$ with $u, v \in S$ appears once with a $+$ and once, as $f(v,u)$, with a $-$). What survives is precisely the S-to-T part, which is $f(S,T)$. Done. □

This little identity has an enormous consequence. The flow value is the same no matter which cut you measure it across – pick any line separating s from t, and the net flow crossing it equals $|f|$. Combined with capacities, it gives an instant upper bound.

Corollary 26.1 (Weak duality)**.** *For any flow f and any cut (S,T), $|f| \le c(S,T)$.*

Proof. $|f| = f(S,T) = \sum f(u,v) - \sum f(v,u) \le \sum f(u,v) \le \sum c(u,v) = c(S,T)$, where the first inequality drops the nonnegative back-flow term and the second uses the capacity constraint edge by edge. □

So *every* flow value is at most *every* cut capacity. In our running example, the cut $S = \{s, a, b\}$, $T = \{c, d, t\}$ has forward edges $a \to c$ (cap 8) and $b \to d$ (cap 9), capacity 17. Weak duality already guarantees the maximum flow cannot exceed 17. The remarkable fact is that this bound is always *tight*: some flow actually achieves the smallest cut.

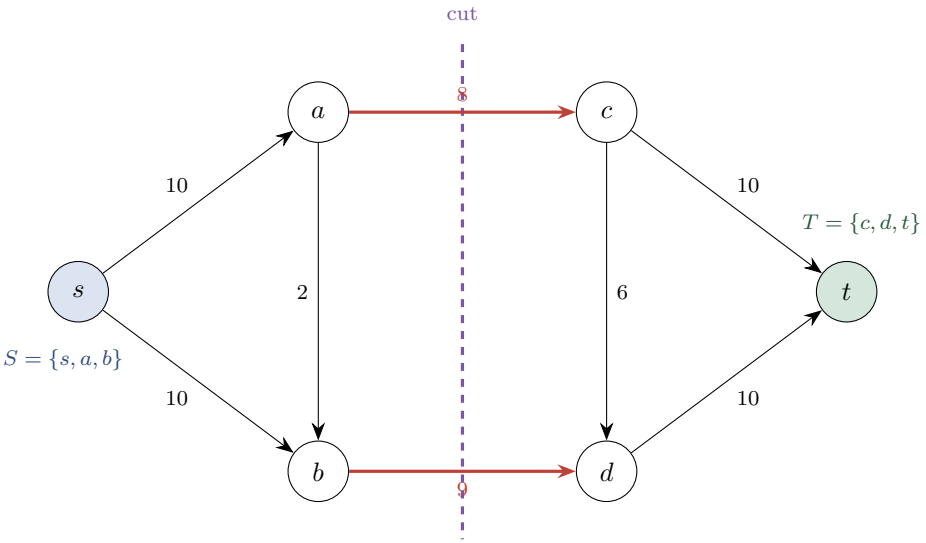


Figure 26.2: The minimum cut of the running network. The dashed purple line separates $S = \{s, a, b\}$ from $T = \{c, d, t\}$. Only the two thick red edges $a \to c$ and $b \to d$ cross forward from S to T, so the cut capacity is $8 + 9 = 17$. By max-flow min-cut this equals the maximum flow value – the network's true bottleneck lies at this downstream waist, not at the source's two pipes of capacity 10.

Theorem 26.1 (Max-Flow Min-Cut)**.** *For a flow f in a network G with source s and sink t, the following three statements are equivalent:*

1. *f is a maximum flow in G.*
2. *The residual network G_f contains no augmenting path from s to t.*
3. *$|f| = c(S,T)$ for some s-t cut (S,T).*

Consequently the value of a maximum flow equals the capacity of a minimum cut.

The three-way cycle. We show (1) ⇒ (2) ⇒ (3) ⇒ (1).

(1) ⇒ (2). Contrapositive. If G_f *has* an augmenting path p, then by Lemma 26.1 we can push $c_f(p) > 0$ more flow, so f was not maximum.

(2) ⇒ (3). This is the magic step. Suppose G_f has no s-t path. Define

$$S = \{\, v \in V : \text{there is a path from } s \text{ to } v \text{ in } G_f \,\}, \qquad T = V \setminus S.$$

Then $s \in S$ (trivially) and $t \in T$ (because no path reaches it), so (S,T) is a genuine s-t cut. Now look at any real edge (u,v) with $u \in S$, $v \in T$. If it had spare capacity, $c_f(u,v) = c(u,v) - f(u,v) > 0$,

then v would be reachable from s in G_f, contradicting $v \in T$. So every such edge is *saturated*: $f(u,v) = c(u,v)$. Symmetrically, any real edge (v,u) with $v \in T$, $u \in S$ must carry *zero* flow, for otherwise the backward residual edge (u,v) would have $c_f(u,v) = f(v,u) > 0$ and again reach into T. Plug these into the cut identity:

$$|f| = f(S,T) = \underbrace{\sum_{u\in S, v\in T} f(u,v)}_{=\sum c(u,v) = c(S,T)} - \underbrace{\sum_{u\in S, v\in T} f(v,u)}_{=0} = c(S,T).$$

(3) $\Rightarrow$ (1). If $|f| = c(S,T)$ for some cut, then by weak duality every flow f' satisfies $|f'| \le c(S,T) = |f|$, so f is maximum. The final sentence follows because the maximum flow value equals this particular cut capacity, and no cut can be cheaper (weak duality again), so it is the minimum cut. □

Focus

The proof gives you a free gift: once Ford–Fulkerson halts, the set S of vertices reachable from s in the final residual network *is* a minimum cut. So the same run that computes the maximum flow also hands you the bottleneck – the exact edges you would need to upgrade (or sabotage) to change the answer. "Run a max-flow, then read off the reachable set" is a standard move you will use again and again.

History and connection

The Ford–Fulkerson method and the max-flow min-cut theorem were published in 1956 by Lester Ford and Delbert Fulkerson at the RAND Corporation, where the motivating application was, of all things, estimating the capacity of the Soviet railway network – and, equivalently by min-cut, the cheapest way to interdict it. The theorem is one of a famous family of min-max dualities in combinatorics (alongside Konig's theorem and the duality of linear programming, the subject of a later chapter). In CLRS this material is Chapter 24, "Maximum Flow": Section 24.1 covers flow networks, 24.2 the Ford–Fulkerson method and the max-flow min-cut theorem, 24.3 maximum bipartite matching. (Older editions number it Chapter 26; if your copy does, look there.)

26.3.1 Why "method" and not "algorithm": termination

We have been careful to call Ford–Fulkerson a *method*, and now we can say why precisely. If all capacities are integers, then every residual capacity stays an integer, every bottleneck $c_f(p)$ is a positive integer, and so each augmentation increases $|f|$ by at least 1. The value can rise at most up to $|f^*| = c(S,T)$ for the min cut, so the method halts after at most $|f^*|$ augmentations. Good – it terminates, and as a bonus we get:

Corollary 26.2 (Integrality theorem)**.** *If every capacity is an integer, then some maximum flow is integer-valued (every $f(u,v)$ is an integer). Ford–Fulkerson, started from $f = 0$, produces such a flow.*

This integrality is not a footnote; it is the bridge to combinatorics. It is why a problem about "half a matching" never arises – if capacities are 1, the flow on every edge is forced to be 0 or 1, which is precisely a yes/no decision. We exploit this directly in Section 26.5.

Common trap

With *irrational* capacities, the bad choice of augmenting paths can make Ford–Fulkerson run forever – and worse, converge to a flow value strictly *below* the true maximum. There is a classic five-vertex example using the golden ratio $\phi = (\sqrt{5}-1)/2$ where naive path selection produces an infinite sequence of ever-smaller augmentations summing to a value well short of optimal. The lesson is not "avoid irrationals"; it is "the path choice matters." Choosing *shortest* augmenting paths – the Edmonds–Karp rule – cures this completely, regardless of the capacities.

26.4 Edmonds–Karp: Choosing Good Paths

The fix is almost insultingly simple. When several augmenting paths exist, always take a *shortest* one – fewest edges – which you find with a breadth-first search from s in G_f. That single rule turns the method into a polynomial-time algorithm whose running time does not depend on the capacity values at all.

Algorithm 120: EDMONDS-KARP(G, s, t)

Input: flow network G, source s, sink t
Output: a maximum flow f

```
f ← 0 on every edge;
while BFS from s in G_f reaches t do
    let p be the BFS tree path s ⇝ t (fewest edges);
    c_f(p) ← min{c_f(u, v) : (u, v) ∈ p};
    augment f along p by c_f(p) ;                    // as in Ford--Fulkerson
return f;
```

Why does "shortest path" help? The key is a monotonicity fact about BFS distances in the residual network. Write $\delta_f(s, v)$ for the *breadth-first distance* (number of edges) from s to v in G_f.

Lemma 26.3 (Distances never decrease)**.** *Running Edmonds–Karp, for every vertex $v \neq s, t$ the distance $\delta_f(s, v)$ in the residual network is monotonically nondecreasing across augmentations.*

The proof (we sketch it rather than belabor it) is a tidy argument by contradiction: suppose some augmentation strictly decreased $\delta(s, v)$, and take the v closest to s for which this happens. Augmenting along a *shortest* path can only *add* residual edges that go "backward" one BFS level, never a shortcut that jumps forward, so no distance can drop – contradiction. The discipline of always using a shortest path is exactly what forbids the creation of shortcuts.

Lemma 26.4 (At most $O(VE)$ augmentations)**.** *Edmonds–Karp performs $O(|V||E|)$ augmentations before halting.*

The critical-edge counting argument. Call an edge (u, v) *critical* on an augmentation if it is the bottleneck, i.e. $c_f(u, v) = c_f(p)$; this edge disappears from G_f (its residual capacity drops to 0). On a shortest augmenting path through (u, v) we have $\delta_f(s, v) = \delta_f(s, u) + 1$. For (u, v) to become critical *again* later, the flow on it must first increase from 0, which happens only when (u, v) lies on an augmenting path in the other direction, i.e. when (v, u) is used; at that moment $\delta_{f'}(s, u) =$

$\delta_{f'}(s,v)+1$. Because distances never decrease (Lemma 26.3), between the two times (u,v) is critical, $\delta(s,u)$ must have grown by at least 2. Since δ ranges in $\{0,1,\dots,|V|\}$ (or is ∞), each edge can be critical at most $|V|/2 = O(|V|)$ times. There are $O(|E|)$ residual edges, so the total number of critical events – and hence augmentations, since each augmentation has at least one critical edge – is $O(|V||E|)$. □

Each augmentation costs one BFS, which is $O(|V|+|E|) = O(|E|)$ on a connected network. Multiply.

Theorem 26.2 (Edmonds–Karp running time)**.** *Edmonds–Karp computes a maximum flow in $O(|V||E|^2)$ time, regardless of the edge capacities.*

Cost summary

Ford–Fulkerson (any augmenting path, integer capacities): up to $|f^*|$ augmentations, each $O(E)$, giving $O(E \cdot |f^*|)$. This is *pseudo-polynomial* – it depends on the numeric value of the answer, so a single capacity of 1,000,000 can make it crawl.
Edmonds–Karp (shortest augmenting path via BFS): $O(VE^2)$, independent of capacities.
For reference, more advanced algorithms beat this: Dinic's algorithm runs in $O(V^2E)$; push–relabel methods reach $O(V^2\sqrt{E})$ or $O(V^3)$; and modern results (Orlin; and the 2022 almost-linear-time breakthrough) push the frontier far lower. Edmonds–Karp is the right first algorithm to *know cold*, because it is Ford–Fulkerson plus one line: "use BFS."

Algorithm lab

Re-run the running network of Section 26.1.1 *by hand* under the Edmonds–Karp rule, and keep a table.

step	shortest path p	bottleneck $c_f(p)$	$\lvert f\rvert$ after
0	—	—	0
1	$s \to a \to c \to t$	$\min(10,8,10) = 8$	8
2	$s \to b \to d \to t$	$\min(10,9,10) = 9$	17
3	no s-t path in G_f	—	17 (max)

Now do the verification the theorem promises: after step 2, run a BFS from s in G_f and list which vertices you can reach. You should reach $\{s,a,b\}$ and no further ($a \to c$ and $b \to d$ are saturated, blocking the way). That set is S; the cut (S,T) has capacity $c(a,c)+c(b,d) = 8+9 = 17 = |f|$. You have just *certified* optimality with a min cut, by hand. Try inventing a third path that increases the flow; convince yourself it is impossible.

26.5 Application: Maximum Bipartite Matching

Now the payoff that makes the whole machine feel magical. We will solve a problem that has nothing to do with water – matchmaking – by quietly building a flow network and pushing ones and zeros through it.

A *bipartite graph* $G = (L \cup R, E)$ has its vertices split into two sides L and R, with every edge joining a vertex of L to a vertex of R. Think of L as job applicants and R as positions, with an edge (ℓ, r)

meaning "applicant ℓ is qualified for position r." A *matching* is a set of edges $M \subseteq E$ no two of which share a vertex: each applicant gets at most one job, each job at most one applicant. The *maximum matching* problem asks for a matching of greatest size. How many people can be hired at once?

Intuition


A matching is just an honest pairing-off with no double-booking. The trouble is local greed: hire applicant 1 for the only job she shares with applicant 2, and you may strand applicant 2 with nothing – when a smarter pairing could employ both. This is the very same "my early commitment blocks a better global plan" disease we cured with residual networks. So we will let flow's backward-edge magic do the un-committing for us.

26.5.1 The reduction

Build a flow network $G' = (V', E')$ from the bipartite graph as follows.

- Add a new source s and sink t.
- Add an edge $s \to \ell$ of capacity 1 for every $\ell \in L$.
- Add an edge $r \to t$ of capacity 1 for every $r \in R$.
- For every original edge $(\ell, r) \in E$, add a directed edge $\ell \to r$ of capacity 1 (any capacity ≥ 1 works; we use 1).

Every capacity is 1. Here is the picture, with three applicants and three jobs.

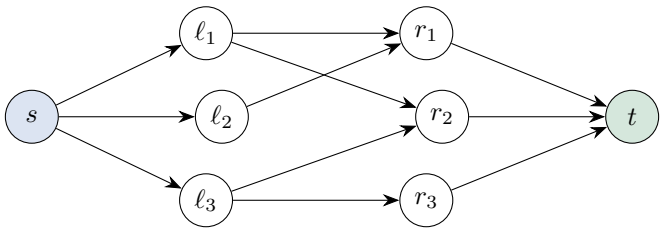

Theorem 26.3 (Matching equals integer flow)**.** *The maximum number of edges in a matching of G equals the value of a maximum flow in G'. Moreover, given an integer maximum flow f, the set of middle edges $\ell \to r$ carrying flow 1 is a maximum matching.*

Why the correspondence works, both directions. Matching → flow. Given a matching M, route one unit along $s \to \ell \to r \to t$ for each edge $(\ell, r) \in M$. Because M has no two edges sharing an ℓ, each $s \to \ell$ carries at most 1; because no two share an r, each $r \to t$ carries at most 1; capacities are respected and conservation holds. This is a valid flow of value $|M|$.

Flow → matching. By the integrality theorem (Corollary 26.2), a maximum flow may be taken integer-valued, so every middle edge carries 0 or 1. Let M be the middle edges carrying 1. Each ℓ has only one incoming unit (from s, capacity 1), so by conservation it sends out at most one unit – ℓ touches at most one matched edge. Each r sends only one unit to t, so receives at most one – r touches at most one matched edge. Thus M is a matching, and $|M| = |f|$ because every unit out of s passes through exactly one middle edge.

Since the two constructions preserve value and are inverse in size, the maxima coincide. □

So to find a maximum matching, build G' and run Edmonds–Karp. Because every capacity is 1, the analysis even sharpens: the flow value is at most $\min(|L|, |R|) \le |V|$, so Ford–Fulkerson alone makes at most $|V|$ augmentations, each an $O(E)$ search, giving a clean $O(VE)$ bound for bipartite matching.

26.5.2 Tracing the matching

Run it on the three-by-three example. First augmenting path $s \to \ell_1 \to r_1 \to t$, push 1: ℓ_1 matched to r_1. Second path $s \to \ell_3 \to r_2 \to t$, push 1: ℓ_3 matched to r_2. Now try ℓ_2: from $s \to \ell_2$ we reach r_1, but $r_1 \to t$ is saturated. Dead end? No – the residual network offers the backward edge $r_1 \to \ell_1$ (because $f(\ell_1, r_1) = 1$). The BFS finds

$$s \to \ell_2 \to r_1 \xrightarrow{\text{backward}} \ell_1 \to r_2 \xrightarrow{\text{backward}} \ell_3 \to r_3 \to t.$$

Pushing 1 unit along it *re-routes* the earlier matches: ℓ_1 drops r_1 and takes r_2; ℓ_3 drops r_2 and takes r_3; and ℓ_2 grabs the freed r_1. Final flow value 3 – a *perfect* matching $\{\ell_1 r_2, \ell_2 r_1, \ell_3 r_3\}$ that naive greed would have missed. Figure 26.3 traces that zig-zag.




Figure 26.3: The augmenting (alternating) path that grows the matching from 2 to 3. Thick green edges are the current matches $\ell_1 r_1$ and $\ell_3 r_2$. The path enters along blue "add" edges ($\ell_2 r_1$, $\ell_1 r_2$, $\ell_3 r_3$, numbered in traversal order) and crosses two dashed red backward edges that *undo* the old matches. Flipping every edge on the path turns the two matches into three: $\{\ell_1 r_2,\ \ell_2 r_1,\ \ell_3 r_3\}$.

Focus

That backward-edge zig-zag has a classical name in matching theory: an *augmenting path* for matchings – a path that alternates between unmatched and matched edges, starting and ending at unmatched vertices. Flipping it increases the matching by one. The flow algorithm rediscovers this idea for free: matching's augmenting paths are exactly s-t paths in the residual network. Two subjects, one mechanism.

Why this matters

This reduction is the reason maximum flow earns its place in every algorithms course. With it you also get, almost for free: assigning taxis to riders, scheduling exams to rooms, detecting whether a sports team is mathematically eliminated, segmenting medical images (fore-

ground/background as a min cut), and the entire theory of bipartite assignment that underlies kidney-exchange matching programs and ad auctions. The pattern – "model the decisions as edges of capacity 1, route flow, read the integer answer" – is one of the most reusable tools in applied computing.

26.6 What to Carry Forward

Pause

Five sentences to keep:

1. A flow obeys *capacity* on every edge and *conservation* at every interior vertex; its *value* is the net amount leaving s.
2. The *residual network* adds backward edges that grant permission to cancel earlier flow; this is what lets a greedy method become exact.
3. Ford–Fulkerson repeatedly pushes the bottleneck of an augmenting path; with integer capacities it terminates and yields an integer flow.
4. *Max-flow equals min-cut*: when no augmenting path remains, the set reachable from s in G_f is a minimum cut certifying optimality.
5. *Edmonds–Karp* = "always use the shortest augmenting path (BFS)," giving $O(VE^2)$ time, independent of capacities; bipartite matching reduces to a unit-capacity flow.

Exercises

Exercise 26.1 (Warmup: read a flow)**.** In the running network of Section 26.1.1, suppose someone hands you the assignment $f(s,a) = 8$, $f(a,c) = 8$, $f(c,t) = 8$, $f(s,b) = 9$, $f(b,d) = 9$, $f(d,t) = 9$, and 0 on the remaining edges. Verify that it satisfies the capacity constraint and flow conservation at a, b, c, d, and compute $|f|$.

Exercise 26.2 (Build a residual network)**.** For the flow in Exercise 26.1, draw the residual network G_f: list every residual edge and its residual capacity (remember both forward and backward edges). Then argue from your drawing that no s-t path exists.

Exercise 26.3 (Find the min cut)**.** Continuing the previous exercise, compute the set S of vertices reachable from s in G_f, write down the cut (S, T), and verify that its capacity equals $|f|$. Which two edges form the bottleneck?

Exercise 26.4 (Greedy can fail)**.** Recall the five-vertex network of Section 26.2 (the s, u, v, t diamond with the middle edge $u \to v$, all capacities 1). Trace Ford–Fulkerson starting with the bad first path $s \to u \to v \to t$. Show explicitly the augmenting path through the backward residual edge that recovers the optimal flow of value 2, and give the resulting flow on each real edge.

Exercise 26.5 (Why no antiparallel edges)**.** Suppose a network genuinely has both (u, v) and (v, u) as edges with positive capacities. Explain in one or two sentences why the single-formula definition

of c_f in Section 26.2.2 would become ambiguous. Then describe the fix (split one edge with a dummy vertex w: replace (u, v) by $u \to w \to v$, each of capacity $c(u, v)$) and argue it does not change the maximum flow value.

Exercise 26.6 (Integrality is essential for matching)**.** Show by a small example that if you allowed *fractional* flow on the middle edges of the bipartite construction, a maximum flow could split a unit of an applicant across two jobs. Explain why Corollary 26.2 guarantees we can always avoid this, so the flow really does encode an honest matching.

Exercise 26.7 (Counting augmentations)**.** Construct a network on which *naive* Ford–Fulkerson, making the worst possible path choices, performs about 2,000,000 augmentations, while Edmonds–Karp performs only a handful. *(Hint: the classic "diamond" with two outer edges of capacity* 1,000,000 *and a middle edge of capacity* 1*; alternately augment through the middle.)* What does this say about the difference between pseudo-polynomial and polynomial time?

Exercise 26.8 (Vertex capacities)**.** Some problems limit how much flow can pass *through a vertex* v, not just along edges – say at most $\mathrm{cap}(v)$ units. Show how to model this with ordinary edge capacities by splitting v into v_{in} and v_{out} joined by an edge of capacity $\mathrm{cap}(v)$, routing all in-edges to v_{in} and all out-edges from v_{out}. Argue correctness.

Exercise 26.9 (Multiple sources and sinks)**.** A factory network has three sources s_1, s_2, s_3 (each able to produce any amount) and two sinks t_1, t_2. Explain how to compute the maximum total flow from all sources to all sinks by adding a single *super-source* and a single *super-sink* with appropriate infinite-capacity edges, reducing to the single-source single-sink problem of this chapter.

Exercise 26.10 (Edge-disjoint paths – a challenge)**.** Menger's theorem states that the maximum number of *edge-disjoint* paths from s to t in a directed graph equals the minimum number of edges whose removal disconnects t from s. Show how to prove this using max-flow min-cut: assign every edge capacity 1, and interpret an integer flow of value k as k edge-disjoint paths. Where exactly does the integrality theorem enter the argument?

Exercise 26.11 (Uniqueness – a challenge)**.** The *value* of the maximum flow is unique, but the flow itself and the minimum cut need not be. Construct a small network that has (a) two different maximum flows of the same value, and (b) two different minimum cuts of the same capacity. Then prove the general fact that if (S_1, T_1) and (S_2, T_2) are both minimum cuts, so are $(S_1 \cap S_2, \cdot)$ and $(S_1 \cup S_2, \cdot)$ – the minimum cuts form a lattice.

Part VII

Selected Topics

Chapter 27

Matrix Operations

Somewhere in your past a teacher drew a grid of numbers, called it a "matrix," and made you multiply two of them by a procedure that felt like a secret handshake: go across one, down the other, add up the products. You did it, you passed the test, and you may never have asked the obvious question: *why on earth is multiplication defined that strange way, and what is it good for?*

This chapter answers both. We will rebuild matrices as a tool for computation, not a chore for arithmetic. A matrix, it turns out, is the natural language for talking about *many things changing at once*: a thousand linear equations, a rotation in space, a step of a neural network, the flow of populations between cities. The operations we study — multiply, decompose, solve, invert — are the verbs of that language, and they sit at the computational heart of scientific computing, graphics, statistics, optimization, and machine learning.

Focus

By the end of this chapter you should be able to: (1) define matrix addition and multiplication and explain *why* multiplication is defined as it is; (2) understand how Strassen's algorithm beats the $\Theta(n^3)$ schoolbook product, and why that surprised the world; (3) solve a system of linear equations $Ax = b$ by *LUP decomposition* — factor first, then solve cheaply; (4) compute a matrix inverse, and appreciate the beautiful fact that *inverting is no harder than multiplying*; and (5) see how least squares fits a line (or a hyperplane) through noisy data using the same machinery.

27.1 Matrices from the ground up

A *matrix* is a rectangular array of numbers. We write A for the whole array and a_{ij} for the entry in row i, column j. A matrix with m rows and n columns is an "$m \times n$ matrix" (always rows first, columns second — say it out loud a few times so the order sticks). A matrix with one column is a *column vector*; one row, a *row vector*. When $m = n$ we call the matrix *square*.

$$A = \begin{pmatrix} 2 & 0 & 1 \\ 3 & 5 & 4 \end{pmatrix} \quad \text{is } 2 \times 3, \qquad a_{13} = 1, \quad a_{21} = 3.$$

Two matrices of the same shape *add* entrywise: $(A+B)_{ij} = a_{ij} + b_{ij}$. You scale a matrix by a number

c entrywise too: $(cA)_{ij} = c\,a_{ij}$. Both cost $\Theta(mn)$ time — one operation per entry, no surprises. The interesting verb is multiplication.

27.1.1 Why multiplication is defined the way it is

Here is the one idea that makes the "secret handshake" inevitable. Think of an $m \times n$ matrix not as a static grid but as a *machine* that eats a vector of length n and spits out a vector of length m. Feed it the vector $x = (x_1, \dots, x_n)$; out comes $y = Ax$, where

$$y_i = \sum_{k=1}^{n} a_{ik}\, x_k.$$

Row i of A is a recipe: "to make output i, take a_{i1} of the first input plus a_{i2} of the second, and so on." This is exactly how a system of linear equations looks, and it is exactly how a layer of a neural network mixes its inputs. A matrix *is* a linear transformation written down in coordinates.

Now suppose you have two machines. Machine B ($n \times p$) turns a length-p vector into a length-n vector; machine A ($m \times n$) turns that into a length-m vector. Chain them: first B, then A. The combined machine takes length p to length m. *What single matrix represents the chained machine?* Call it $C = AB$. Push a vector x through: $z = Bx$ has entries $z_k = \sum_j b_{kj} x_j$, and then $y = Az$ has entries

$$y_i = \sum_k a_{ik} z_k = \sum_k a_{ik} \sum_j b_{kj} x_j = \sum_j \Big(\underbrace{\sum_k a_{ik} b_{kj}}_{c_{ij}} \Big) x_j.$$

The thing in the parentheses must be c_{ij}, because $y = Cx$ means $y_i = \sum_j c_{ij} x_j$. So the definition is forced on us:

$$\boxed{c_{ij} = \sum_{k=1}^{n} a_{ik}\, b_{kj}}$$

Intuition

Matrix multiplication is *composition of machines*. The reason you go "across a row of A and down a column of B" is that c_{ij} collects every path from input j, through some middle coordinate k, to output i: the coefficient b_{kj} on the way in, the coefficient a_{ik} on the way out, multiplied, then summed over all middles k. It is not an arbitrary rule; it is the only rule that makes "do B, then do A" equal "do AB."

Two shapes must match for the product to exist: the *inner* dimensions. An $m \times n$ times an $n \times p$ gives an $m \times p$. The n's must agree because the middle coordinate k runs over them. Figure 27.1 shows which slice of each factor produces a single output entry.

Example 27.1 (A product, traced by hand)**.** Let

$$A = \begin{pmatrix} 1 & 2 \\ 3 & 4 \end{pmatrix}, \qquad B = \begin{pmatrix} 5 & 6 \\ 7 & 8 \end{pmatrix}.$$

Both are 2×2, so $C = AB$ is 2×2. Compute each entry by "row of A dotted with column of B":

$$c_{11} = 1 \cdot 5 + 2 \cdot 7 = 5 + 14 = 19, \qquad c_{12} = 1 \cdot 6 + 2 \cdot 8 = 6 + 16 = 22,$$
$$c_{21} = 3 \cdot 5 + 4 \cdot 7 = 15 + 28 = 43, \qquad c_{22} = 3 \cdot 6 + 4 \cdot 8 = 18 + 32 = 50.$$

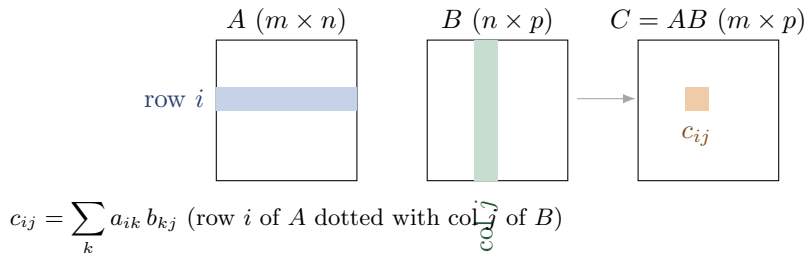


Figure 27.1: The entry c_{ij} of the product gathers row i of A against column j of B. The shared length n is the "inner" dimension both factors must agree on.

So $C = \begin{pmatrix} 19 & 22 \\ 43 & 50 \end{pmatrix}$. Notice BA is *different*: $BA = \begin{pmatrix} 23 & 34 \\ 31 & 46 \end{pmatrix}$. Matrix multiplication does *not* commute — of course not: putting on socks then shoes is not the same as shoes then socks.

Common trap

Three traps that bite everyone at least once. **(1) Order matters.** $AB \neq BA$ in general; you may not silently swap. **(2) Shapes must line up.** You can multiply A $(m \times n)$ by B $(n \times p)$ only when A's column count equals B's row count. "2×3 times 2×3" is undefined. **(3) Indices.** c_{ij} uses row i of A and column j of B. Going "down a column of A" by accident is the single most common bug in handwritten matrix code.

A few special matrices earn names. The *identity* I_n has 1's on the diagonal and 0's elsewhere; it is the "do nothing" machine, so $AI = IA = A$. The *transpose* A^{T} flips rows and columns: $(A^{\mathsf{T}})_{ij} = a_{ji}$. A matrix is *symmetric* if $A = A^{\mathsf{T}}$. A *diagonal* matrix is zero off the diagonal; *lower triangular* means zero above the diagonal, *upper triangular* means zero below. Keep triangular matrices in mind — they are the heroes of the second half of this chapter, because systems involving them are trivially easy to solve.

27.1.2 The cost of the schoolbook product

How long does it take to multiply two $n \times n$ matrices by the definition? The output has n^2 entries. Each entry is a sum of n products. So we do $n^2 \cdot n = n^3$ scalar multiplications and about as many additions.

Algorithm 121: SQUARE-MATRIX-MULTIPLY(A, B)

Input: Two $n \times n$ matrices A and B.
Output: Their product $C = AB$.

```
let C be a new n × n matrix;
for i ← 1 to n do
    for j ← 1 to n do
        c_ij ← 0;
        for k ← 1 to n do
            c_ij ← c_ij + a_ik · b_kj;
return C;
```

Three nested loops, each running n times, with constant work inside: the running time is $\Theta(n^3)$. For decades people assumed that was the end of the story — surely you cannot multiply two matrices without touching every pair of entries the cubic number of times. In 1969 Volker Strassen proved that assumption wrong, and we turn to his trick next.

Cost summary

Schoolbook $n \times n$ matrix multiply. Scalar multiplications: n^3. Additions: $n^3 - n^2$. Time: $\Theta(n^3)$. Extra space: $\Theta(n^2)$ for the output (the inputs are read-only). Simple, cache- friendly, and for small or medium n it is genuinely the fastest thing you can do.

27.2 Strassen's algorithm, revisited

You met divide-and-conquer earlier in the book. Let us point it at matrix multiplication and watch something remarkable happen.

27.2.1 A first, honest attempt: blocking

Split each $n \times n$ matrix into four $n/2 \times n/2$ *blocks* (assume n is a power of two so the halving stays clean):

$$A = \begin{pmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{pmatrix}, \quad B = \begin{pmatrix} B_{11} & B_{12} \\ B_{21} & B_{22} \end{pmatrix}, \quad C = \begin{pmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{pmatrix}.$$




Figure 27.2: Each $n \times n$ matrix is split into four $n/2 \times n/2$ blocks. The blocks then multiply by the same "rows times columns" rule as scalar entries, e.g. $C_{11} = A_{11}B_{11} + A_{12}B_{21}$.

A wonderful fact: blocks multiply by the very same rule as scalars, as long as you keep the order straight (see Figure 27.2). So

$$C_{11} = A_{11}B_{11} + A_{12}B_{21}, \quad C_{12} = A_{11}B_{12} + A_{12}B_{22},$$
$$C_{21} = A_{21}B_{11} + A_{22}B_{21}, \quad C_{22} = A_{21}B_{12} + A_{22}B_{22}.$$

Each of the four output blocks is a sum of two products of half-size matrices: 8 multiplications of $n/2 \times n/2$ matrices, plus a handful of $n/2 \times n/2$ additions (each costing $\Theta(n^2)$). That gives the recurrence

$$T(n) = 8\,T(n/2) + \Theta(n^2).$$

By the master theorem (here $a = 8$, $b = 2$, so $n^{\log_b a} = n^{\log_2 8} = n^3$, and the $\Theta(n^2)$ combine is polynomially smaller), $T(n) = \Theta(n^3)$. We split the work cleverly and *got nothing*: still cubic. The eight multiplications are the problem. Strassen's insight is to do the same job with *seven*.

27.2.2 Seven products instead of eight

Strassen discovered that you can compute the four output blocks using only *seven* multiplications of half-size matrices, at the cost of a few extra additions and subtractions. The additions are cheap ($\Theta(n^2)$); the multiplications are the expensive recursive calls, so trading one multiplication for several additions is a fabulous bargain. First form ten sums:

$$\begin{aligned} S_1 &= B_{12} - B_{22}, & S_2 &= A_{11} + A_{12}, & S_3 &= A_{21} + A_{22}, \\ S_4 &= B_{21} - B_{11}, & S_5 &= A_{11} + A_{22}, & S_6 &= B_{11} + B_{22}, \\ S_7 &= A_{12} - A_{22}, & S_8 &= B_{21} + B_{22}, & S_9 &= A_{11} - A_{21}, \\ S_{10} &= B_{11} + B_{12}. \end{aligned}$$

Then the seven products (these are the recursive multiplications):

$$\begin{aligned} P_1 &= A_{11}\, S_1, & P_2 &= S_2\, B_{22}, & P_3 &= S_3\, B_{11}, & P_4 &= A_{22}\, S_4, \\ P_5 &= S_5\, S_6, & P_6 &= S_7\, S_8, & P_7 &= S_9\, S_{10}. \end{aligned}$$

Finally assemble the answer with additions and subtractions only:

$$\begin{aligned} C_{11} &= P_5 + P_4 - P_2 + P_6, & C_{12} &= P_1 + P_2, \\ C_{21} &= P_3 + P_4, & C_{22} &= P_5 + P_1 - P_3 - P_7. \end{aligned}$$

Intuition

Do not try to *memorize* those formulas, and do not be fooled into thinking they are obvious — they are not, and Strassen reportedly found them by clever search, not by a clean derivation. The point to carry away is structural: by allowing yourself to add and subtract input blocks *before* multiplying, you can arrange for the products to overlap so much that seven of them carry all the information eight used to. It is the same spirit as the fast Fourier transform: spend cheap operations (adds) to save expensive ones (multiplies).

Let us at least *check* one entry so you believe the magic.

Example 27.2 (Verifying $C_{12} = P_1 + P_2$)**.** $P_1 = A_{11}S_1 = A_{11}(B_{12} - B_{22}) = A_{11}B_{12} - A_{11}B_{22}$, and $P_2 = S_2B_{22} = (A_{11} + A_{12})B_{22} = A_{11}B_{22} + A_{12}B_{22}$. Adding,

$$P_1 + P_2 = A_{11}B_{12} - A_{11}B_{22} + A_{11}B_{22} + A_{12}B_{22} = A_{11}B_{12} + A_{12}B_{22} = C_{12}.$$

The two $A_{11}B_{22}$ terms cancel exactly. That cancellation is the whole trick: a term you do not want is created in one product and destroyed in another.

27.2.3 Why seven beats eight: the recurrence

The recurrence is now

$$T(n) = 7\,T(n/2) + \Theta(n^2).$$

Here $a = 7$, $b = 2$, so $n^{\log_b a} = n^{\log_2 7}$. Since $\log_2 7 \approx 2.807 > 2$, the recursive term dominates the $\Theta(n^2)$ combine, and the master theorem gives

$$T(n) = \Theta\big(n^{\log_2 7}\big) = \Theta\big(n^{2.807\ldots}\big).$$

That single dropped multiplication moved the exponent from 3.000 down to about 2.807. It sounds tiny. It is not: for $n = 1024$, $n^3 \approx 1.07 \times 10^9$ while $n^{2.807} \approx 2.0 \times 10^8$, roughly a fivefold reduction, and the gap widens without bound as n grows.

Algorithm lab

Trace the recursion tree. At depth d from the top there are 7^d subproblems, each of size $n/2^d$, and each does $\Theta((n/2^d)^2)$ addition work. So level d costs $7^d \cdot c\,(n/2^d)^2 = c\,n^2(7/4)^d$. The levels form a geometric series with ratio $7/4 > 1$, so the *bottom* levels dominate. There are $\log_2 n$ levels, and the last level's cost is $c\,n^2(7/4)^{\log_2 n} = c\,n^{\log_2 7}$. Sum the geometric series and the total is $\Theta(n^{\log_2 7})$. Draw this tree on paper for $n = 8$: a root, 7 children, 49 grandchildren, and watch the per-level cost climb by $7/4$ each step.




Figure 27.3: One level of Strassen's recursion: *seven* subproblems of half the size. Eight would give $\Theta(n^3)$; seven gives $\Theta(n^{2.807})$.

History and connection

Strassen's 1969 paper "Gaussian elimination is not optimal" detonated a quiet assumption and launched the hunt for the true exponent ω of matrix multiplication. Coppersmith–Winograd (1990) reached ≈ 2.376; modern refinements (Alman, Vassilevska Williams, and others) sit near 2.371 as of the mid-2020s. Nobody knows whether $\omega = 2$ is achievable. This material is CLRS (4th edition) **Chapter 4** (Strassen) and **Chapter 28** (matrix operations). CLRS develops Strassen carefully and proves the master theorem you are leaning on here.

Common trap

Strassen is *not* a free lunch in practice. The extra additions, the recursive bookkeeping, and worse numerical stability mean that on real hardware Strassen only pays off for fairly large n (often several hundred and up), and serious libraries switch to the cache-tuned cubic algorithm once the blocks get small. "Asymptotically faster" and "faster on your laptop today" are different claims; respect the constant factors.

27.3 Solving linear systems: $Ax = b$

Now we arrive at the operation that matrices were arguably invented for: solving *simultaneous linear equations*. You want x such that $Ax = b$, where A is a known $n \times n$ matrix, b a known vector, and x the unknown vector. Spelled out, that is n equations in n unknowns:

$$\begin{aligned} a_{11}x_1 + a_{12}x_2 + \cdots + a_{1n}x_n &= b_1, \\ &\vdots \\ a_{n1}x_1 + a_{n2}x_2 + \cdots + a_{nn}x_n &= b_n. \end{aligned}$$

You learned to do this with Gaussian elimination: scale and subtract rows until the system is triangular, then read off the answers. We are going to repackage exactly that process into a reusable *factorization*, which is both cleaner to reason about and far more useful when you must solve many systems with the same A.

27.3.1 Triangular systems are easy

Start with the easy case, because the whole strategy is "reduce the hard case to the easy one." Suppose A is *lower triangular* (zeros above the diagonal). Then the first equation involves only x_1, so you solve it immediately. The second involves x_1 (now known) and x_2, so you solve for x_2. Marching down, each new equation introduces exactly one new unknown. This is *forward substitution*:

$$x_i = \frac{1}{\ell_{ii}}\Big(b_i - \sum_{j=1}^{i-1} \ell_{ij}\, x_j\Big).$$

For an *upper* triangular system you start from the *last* equation and march up — *back substitution*. Either way the cost is $\Theta(n^2)$: roughly one multiply-add per nonzero entry below (or above) the diagonal.

Example 27.3 (Forward substitution by hand)**.** Solve $Lx = b$ with

$$L = \begin{pmatrix} 2 & 0 & 0 \\ 1 & 3 & 0 \\ 4 & 5 & 6 \end{pmatrix}, \qquad b = \begin{pmatrix} 4 \\ 11 \\ 40 \end{pmatrix}.$$

Row 1: $2x_1 = 4 \Rightarrow x_1 = 2$. Row 2: $1 \cdot 2 + 3x_2 = 11 \Rightarrow 3x_2 = 9 \Rightarrow x_2 = 3$. Row 3: $4 \cdot 2 + 5 \cdot 3 + 6x_3 = 40 \Rightarrow 8 + 15 + 6x_3 = 40 \Rightarrow 6x_3 = 17$, so $x_3 = 17/6$. Each step uses only already-known values — no system-solving, just arithmetic.

27.3.2 LU and LUP decomposition

Here is the plan. Most matrices are not triangular, but *every* (nonsingular) matrix can be *factored* into a product of triangular matrices. If we can write

$$A = LU, \qquad L \text{ unit lower triangular, } U \text{ upper triangular,}$$

then $Ax = b$ becomes $L(Ux) = b$. Let $y = Ux$. First solve $Ly = b$ by forward substitution (easy, triangular), then solve $Ux = y$ by back substitution (easy, triangular). Two easy solves replace one hard one. "Unit" lower triangular means L has 1's on its diagonal — a normalization that makes the factorization unique.

Where does L come from? It is the *record of Gaussian elimination*. When you eliminate x_1 from row i by subtracting a multiple ℓ_{i1} of row 1, you *store* that multiplier ℓ_{i1}. Collect all the multipliers into L and the eliminated (upper-triangular) result into U, and you can check that $LU = A$. Elimination does not destroy information; it reorganizes it.

Intuition

LU decomposition is Gaussian elimination that *keeps its receipts*. The upper-triangular U is where elimination leaves the matrix. The lower-triangular L records, in entry ℓ_{ij}, exactly how much of row j you subtracted from row i along the way. Multiply the receipts (L) back into the result (U) and you recover the original A. The factorization *is* the algorithm, frozen and reusable.

One catch makes the plain $A = LU$ recipe fragile: at some step the entry we want to divide by (the *pivot*) might be zero, or merely tiny. Dividing by a tiny pivot amplifies rounding error catastrophically. The fix is *pivoting*: before each elimination step, swap rows to bring the largest-magnitude available entry into the pivot position. Swapping rows is itself a matrix operation — multiplication by a *permutation matrix* P — and recording all the swaps gives the more robust LUP *decomposition*:

$$PA = LU.$$

Now solving $Ax = b$ becomes: permute b to get Pb, forward-solve $Ly = Pb$, back-solve $Ux = y$. Same two easy solves, just with the rows reordered first.

Focus

The LUP strategy in one breath. Factor once: $PA = LU$, costing $\Theta(n^3)$. Then *each* right-hand side b is solved for $\Theta(n^2)$ by a forward solve and a back solve. If you must solve $Ax = b$ for many different b's with the same A, you pay the cubic cost a single time and the cheap quadratic cost over and over. *Factor first, solve cheaply forever after.*

Example 27.4 (A full LU factorization)**.** Factor (no pivoting needed here)

$$A = \begin{pmatrix} 2 & 4 & -2 \\ 4 & 9 & -3 \\ -2 & -3 & 7 \end{pmatrix}.$$

Step 1: eliminate column 1. Pivot is $a_{11} = 2$. Multiplier for row 2: $\ell_{21} = 4/2 = 2$; subtract $2\times$row 1 from row 2: $(4, 9, -3) - 2(2, 4, -2) = (0, 1, 1)$. Multiplier for row 3: $\ell_{31} = -2/2 = -1$; subtract $-1\times$row 1 from row 3: $(-2, -3, 7) - (-1)(2, 4, -2) = (0, 1, 5)$. The matrix is now $\begin{pmatrix} 2 & 4 & -2 \\ 0 & 1 & 1 \\ 0 & 1 & 5 \end{pmatrix}$.

Step 2: eliminate column 2. Pivot is 1. Multiplier $\ell_{32} = 1/1 = 1$; subtract $1\times$row 2 from row 3: $(0, 1, 5) - (0, 1, 1) = (0, 0, 4)$. Now the matrix is upper triangular:

$$U = \begin{pmatrix} 2 & 4 & -2 \\ 0 & 1 & 1 \\ 0 & 0 & 4 \end{pmatrix}, \qquad L = \begin{pmatrix} 1 & 0 & 0 \\ 2 & 1 & 0 \\ -1 & 1 & 1 \end{pmatrix}.$$

Check: LU should rebuild A. Row 3 of LU is $(-1)(2, 4, -2) + (1)(0, 1, 1) + (1)(0, 0, 4) = (-2, -3, 7)$, the original row 3. It works.

Algorithm 122: LUP-Decomposition(A)

Input: A nonsingular $n \times n$ matrix A.
Output: A permutation π and matrices L, U (stored in A) with $PA = LU$.

```
1  let π[1...n] be a new array; for i ← 1 to n do
2      π[i] ← i
3  for k ← 1 to n do
4      p ← 0;
5      for i ← k to n do
6          if |a_ik| > p then
7              p ← |a_ik|;  k' ← i;                          // find largest pivot
8      if p = 0 then error "singular matrix";
9      exchange π[k] ↔ π[k'] and row k ↔ row k' of A;
10     for i ← k + 1 to n do
11         a_ik ← a_ik / a_kk;                    // store multiplier in L's slot
12         for j ← k + 1 to n do
13             a_ij ← a_ij − a_ik · a_kj;                                // eliminate
14 return π;
```




Figure 27.4: In-place packing: the strictly lower triangle holds L's multipliers, the diagonal and upper triangle hold U. Because they never overlap, the factorization overwrites the original array A with no extra $\Theta(n^2)$ space.

The clever space trick (Figure 27.4): L and U never overlap (off-diagonal L below, U on and above the diagonal, and L's diagonal 1's are implicit), so both fit inside the original array A. No extra $\Theta(n^2)$ storage needed.

Cost summary

LUP decomposition. The outer loop runs n times; step k does about $(n-k)^2$ multiply-adds in its double inner loop. Summing, $\sum_{k=1}^{n}(n-k)^2 \approx n^3/3$, so the time is $\Theta(n^3)$ — asymptotically the same as one matrix multiply, with a smaller constant. **Each solve** afterward (forward + back substitution) is $\Theta(n^2)$. Pivot search adds only $\Theta(n^2)$ total, lost in the noise.

Walking question

You need to solve $Ax = b_1$, $Ax = b_2$, …, $Ax = b_{1000}$ — a thousand right-hand sides, same A ($n = 500$). Estimate the work two ways: (a) solve each from scratch with full elimination; (b) factor $A = LU$ once, then do a thousand cheap solves. Which is faster, and by roughly what factor? (Hint: compare $1000 \cdot n^3/3$ against $n^3/3 + 1000 \cdot n^2$.) Now you understand why every

serious linear-algebra library hands you a *factorization object*, not just a solve.

27.3.3 Why we never compute A^{-1} to solve $Ax = b$

Beginners reach for the inverse: "$Ax = b$, so $x = A^{-1}b$ — just invert and multiply!" Mathematically true, computationally foolish. Computing A^{-1} costs more than an LUP factorization, then you still must multiply $A^{-1}b$. And the inverse is numerically worse: it tends to be denser and to amplify rounding error. The factor-and-substitute route is faster *and* more accurate. Compute inverses only when you genuinely need the inverse *matrix* itself, not merely the solution to a system.

27.4 Matrix inversion and its equivalence to multiplication

The *inverse* of a square matrix A is the matrix A^{-1} with $AA^{-1} = A^{-1}A = I$. It exists exactly when A is *nonsingular* (its columns are linearly independent; equivalently $\det A \neq 0$). The inverse is the "undo" machine: if A turns x into b, then A^{-1} turns b back into x.

27.4.1 Computing the inverse with LUP

You can read A^{-1} off of solves. The j-th column of A^{-1} is the solution x to $Ax = e_j$, where e_j is the j-th standard basis vector (a 1 in position j, zeros elsewhere) — because $AA^{-1} = I$ says "A times column j of A^{-1} equals column j of I." So: factor $A = LU$ once ($\Theta(n^3)$), then solve n systems $Ax = e_1, \ldots, Ax = e_n$ (n solves at $\Theta(n^2)$ each, totaling $\Theta(n^3)$). Stack the n answer vectors as columns and you have A^{-1}. Total time: $\Theta(n^3)$.

Focus

Inversion costs the same order as multiplication: $\Theta(n^3)$ by the schoolbook route. That is no coincidence. It turns out inversion and multiplication are *equivalent* problems — if you can do either in $\Theta(n^c)$ time (for any reasonable $c \geq 2$), you can do the other in $\Theta(n^c)$ too. Speed one up and the other automatically speeds up to match.

27.4.2 The equivalence, both directions

Multiplication is no harder than inversion. Suppose you have a fast inverter. Given $n \times n$ matrices A and B, build the $3n \times 3n$ block matrix

$$D = \begin{pmatrix} I_n & A & 0 \\ 0 & I_n & B \\ 0 & 0 & I_n \end{pmatrix}.$$

This D is upper triangular with 1's on the diagonal, so it is invertible, and a short computation shows

$$D^{-1} = \begin{pmatrix} I_n & -A & AB \\ 0 & I_n & -B \\ 0 & 0 & I_n \end{pmatrix}.$$

The product AB sits right there in the top-right block of D^{-1}! So one inversion of a matrix three times the size — still $\Theta(n^c)$ since the size only tripled — hands you the product. Inverting is *at least as hard* as multiplying.

Example 27.5 (Reading AB out of D^{-1})**.** Verify the middle of the claim: multiply D by the proposed D^{-1} and check you get I_{3n}. The $(1,3)$ block of DD^{-1} is

$$I_n \cdot (AB) + A \cdot (-B) + 0 \cdot I_n = AB - AB = 0,$$

which is exactly what the identity's top-right block should be (zero). The product AB appears and then cancels precisely because we placed A and B in adjacent super-diagonal blocks. Every block of DD^{-1} checks out the same tidy way.

Inversion is no harder than multiplication. The other direction is more involved (CLRS proves it carefully for symmetric positive-definite matrices and then reduces the general case to that one), but the headline is what matters: a divide-and-conquer scheme inverts a matrix using a *constant number* of multiplications, inversions of half-size matrices, additions, and subtractions. Unrolling the recursion gives $I(n) = \Theta(M(n))$, where $M(n)$ is the cost of multiplying $n \times n$ matrices. Plug in Strassen's $M(n) = \Theta(n^{2.807})$ and you get an inverter that beats $\Theta(n^3)$ for free.

Formal

Theorem (equivalence of inversion and multiplication). Let $M(n)$ be the time to multiply two $n \times n$ matrices and $I(n)$ the time to invert a nonsingular $n \times n$ matrix, where both M and I are well-behaved (satisfy a mild regularity condition and are $\Omega(n^2)$). Then

$$M(n) = \Theta\big(I(n)\big).$$

Concretely: any algorithm multiplying in $\Theta(n^c)$ yields one that inverts in $\Theta(n^c)$, and vice versa. The two problems have the same complexity exponent.

Why this matters

Why care about an *equivalence*? Because it focuses the entire research program. You do not need to separately chase a fast inverter, a fast determinant, a fast linear-system solver, a fast LU factorizer — they are all tied, by reductions like the one above, to the single quantity $M(n)$, the cost of multiplying. Improve matrix multiplication and an entire ecosystem of numerical algorithms speeds up in lockstep. That is why the exponent ω is one of the most studied constants in all of computer science.

27.5 Least squares: solving systems that have no solution

So far A has been square and the system $Ax = b$ has had exactly one answer. Real data is messier. Often you have *more equations than unknowns*: A is $m \times n$ with $m > n$, and there is simply *no* x satisfying all m equations at once. The system is *overdetermined*. Throwing up your hands is not an option — this is the everyday situation of fitting a model to noisy measurements. Instead of demanding $Ax = b$ exactly, we ask for the x that comes *closest*.

27.5.1 The picture: a best-fit line

Imagine you measured a quantity y at several inputs t and suspect a linear law $y \approx c_0 + c_1 t$. Each data point (t_i, y_i) gives one equation $c_0 + c_1 t_i = y_i$. With, say, 50 data points and only 2 unknowns (c_0, c_1), you have 50 equations in 2 unknowns. Because the data is noisy, no straight line hits all 50 points. So we minimize the total squared miss:

$$\min_x \ \|Ax - b\|^2 = \min_x \sum_{i=1}^{m} \big((Ax)_i - b_i\big)^2,$$

where row i of A is $(1,\ t_i)$, the unknown is $x = (c_0, c_1)$, and $b_i = y_i$. We square the errors so that positive and negative misses cannot cancel, and because squaring makes the calculus clean. The vector $r = Ax - b$ is the *residual* — what is left over — and we are shrinking its length.

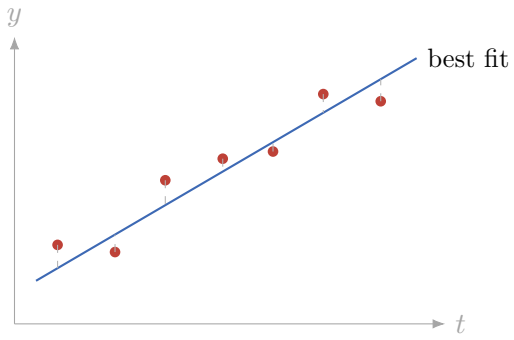


Figure 27.5: Least squares fits the line minimizing the sum of squared vertical residuals (dashed). No line passes through every point; we pick the one that misses by the least, measured in squared distance.

27.5.2 The normal equations

Calculus (or a clean geometric argument) gives a startlingly simple answer. The minimizing x satisfies the *normal equations*:

$$\boxed{(A^{\mathsf{T}}A)\,x = A^{\mathsf{T}}b}$$

Here is the geometry behind that boxed line, which is worth more than the calculus. The achievable outputs $\{Ax : x \in \mathbb{R}^n\}$ form an n-dimensional *subspace* (the column space of A) sitting inside $\mathbb{R}^m$. The target b usually lies outside it. The closest point in the subspace to b is the *perpendicular projection* of b onto the subspace. "Closest" and "perpendicular" mean the residual $r = Ax - b$ must be orthogonal to *every* column of A, i.e. $A^{\mathsf{T}}r = 0$, i.e. $A^{\mathsf{T}}(Ax - b) = 0$, which rearranges to exactly the normal equations.

Intuition

Picture standing in a room (your 3-D world) trying to reach a point b floating near the ceiling, but you may only stand on the *floor* (the column space). Where on the floor are you closest to b? Directly beneath it — the foot of the perpendicular dropped from b. "Drop a perpendicular" is the entire content of least squares; the normal equations are that perpendicularity condition written in matrix form.

The matrix $A^{\mathsf{T}}A$ is $n \times n$ and (when A's columns are independent) symmetric positive-definite, so the normal equations are an ordinary square system you already know how to solve: factor $A^{\mathsf{T}}A$ and forward/back-substitute. The whole least-squares recipe is therefore: form $A^{\mathsf{T}}A$ and $A^{\mathsf{T}}b$, then run an LUP (or, exploiting symmetry, a Cholesky) solve.

Example 27.6 (Fitting a line to three points)**.** Fit $y = c_0 + c_1 t$ to $(t, y) \in \{(1,1), (2,2), (3,2)\}$. Then

$$A = \begin{pmatrix} 1 & 1 \\ 1 & 2 \\ 1 & 3 \end{pmatrix}, \quad b = \begin{pmatrix} 1 \\ 2 \\ 2 \end{pmatrix}, \quad A^{\mathsf{T}}A = \begin{pmatrix} 3 & 6 \\ 6 & 14 \end{pmatrix}, \quad A^{\mathsf{T}}b = \begin{pmatrix} 5 \\ 11 \end{pmatrix}.$$

(Check: $(A^{\mathsf{T}}A)_{11} = 1+1+1 = 3$, $(A^{\mathsf{T}}A)_{12} = 1+2+3 = 6$, $(A^{\mathsf{T}}A)_{22} = 1+4+9 = 14$; $(A^{\mathsf{T}}b)_1 = 1+2+2 = 5$, $(A^{\mathsf{T}}b)_2 = 1\cdot 1 + 2\cdot 2 + 3\cdot 2 = 11$.) Solve $\begin{pmatrix} 3 & 6 \\ 6 & 14 \end{pmatrix}\begin{pmatrix} c_0 \\ c_1 \end{pmatrix} = \begin{pmatrix} 5 \\ 11 \end{pmatrix}$. The determinant is $3 \cdot 14 - 6 \cdot 6 = 6$, so

$$c_0 = \frac{14 \cdot 5 - 6 \cdot 11}{6} = \frac{70 - 66}{6} = \frac{2}{3}, \qquad c_1 = \frac{3 \cdot 11 - 6 \cdot 5}{6} = \frac{33 - 30}{6} = \frac{1}{2}.$$

The best-fit line is $y = \frac{2}{3} + \frac{1}{2}t$. Sanity check at $t = 2$: $y = \frac{2}{3} + 1 = \frac{5}{3} \approx 1.67$, sitting sensibly between the data values 1, 2, 2.

Common trap

Forming and solving the normal equations is the textbook method and it is great for understanding, but on a computer $A^{\mathsf{T}}A$ can be numerically nasty: it *squares* the condition number, so it amplifies rounding error. Production least-squares solvers usually avoid $A^{\mathsf{T}}A$ and instead factor A directly with a *QR decomposition* (or an SVD). Same answer in exact arithmetic; far steadier in floating point. Learn the normal equations for the geometry; reach for QR when accuracy matters.

Why this matters

Least squares is everywhere. It is the engine inside linear regression in statistics, the calibration of GPS positions from satellite ranges, the "line of best fit" in every spreadsheet, polynomial curve fitting, and the closed-form solution of a linear neural-network layer. The single idea — when you cannot solve a system, project onto what you *can* reach — generalizes all the way up to modern machine learning.

27.6 Pulling it together

Focus

The arc of this chapter.

- A matrix is a linear machine; multiplication is *composing* machines, which forces the "row dot column" rule. Schoolbook multiply: $\Theta(n^3)$.
- **Strassen** trades one multiplication for several additions per recursion level, dropping the exponent to $\log_2 7 \approx 2.807$. It started a fifty-year hunt for the true exponent ω.

- **LUP decomposition** is Gaussian elimination that keeps receipts: $PA = LU$. Factor once in $\Theta(n^3)$, then solve any $Ax = b$ in $\Theta(n^2)$ via forward and back substitution. Pivoting buys numerical stability.
- **Inversion** costs $\Theta(M(n))$: it is *equivalent* to multiplication, so a faster multiplier is automatically a faster inverter. Never invert just to solve a system.
- **Least squares** handles overdetermined systems by projecting b onto the column space; the normal equations $A^\mathsf{T}Ax = A^\mathsf{T}b$ are the perpendicularity condition, solvable with the same factor-and-substitute tools.

The thread running through all of it: *a hard matrix problem is solved by reducing it to an easy one.* Hard multiplication reduces to seven half-size multiplications. A general linear system reduces to two triangular ones. Inversion reduces to multiplication. An unsolvable overdetermined system reduces to a small, solvable square system. Reduction is the master move of algorithm design, and matrices are where you watch it work most gracefully.

Exercises

Exercise 27.1 (Warmup: by hand)**.** Let $A = \begin{pmatrix} 1 & -1 \\ 2 & 0 \end{pmatrix}$ and $B = \begin{pmatrix} 3 & 1 \\ 4 & 2 \end{pmatrix}$. Compute AB and BA entry by entry and confirm they differ. Then compute A^T and verify $(AB)^\mathsf{T} = B^\mathsf{T}A^\mathsf{T}$ (note the reversed order).

Exercise 27.2 (Identity and powers)**.** Show that for any $n \times n$ matrix A, $AI_n = I_nA = A$ directly from the definition $c_{ij} = \sum_k a_{ik}b_{kj}$. Then compute M^2 and M^3 for $M = \begin{pmatrix} 0 & 1 \\ 1 & 1 \end{pmatrix}$ and explain what the entries of M^k have to do with Fibonacci numbers.

Exercise 27.3 (Strassen's count)**.** The blocked 8-multiplication scheme has recurrence $T(n) = 8T(n/2) + \Theta(n^2)$ and Strassen's has $T(n) = 7T(n/2) + \Theta(n^2)$. For each, identify a, b, and $n^{\log_b a}$, then state the master-theorem case and the resulting Θ. Why does the $\Theta(n^2)$ combine term not change either answer?

Exercise 27.4 (Verify a Strassen formula)**.** Using the P_i definitions in the text, verify algebraically that $C_{21} = P_3 + P_4$ equals $A_{21}B_{11} + A_{22}B_{21}$. (Expand $P_3 = S_3B_{11}$ and $P_4 = A_{22}S_4$ and watch the unwanted terms cancel.)

Exercise 27.5 (Forward and back substitution)**.** Solve $Lx = b$ where $L = \begin{pmatrix} 1 & 0 & 0 \\ 2 & 1 & 0 \\ 3 & -1 & 1 \end{pmatrix}$ and $b = \begin{pmatrix} 1 \\ 4 \\ 6 \end{pmatrix}$ by forward substitution. Then, *using the same numbers*, solve $Uy = x$ where $U = \begin{pmatrix} 2 & 1 & -1 \\ 0 & 3 & 2 \\ 0 & 0 & 5 \end{pmatrix}$ by back substitution.

Exercise 27.6 (An LU factorization by hand)**.** Factor $A = \begin{pmatrix} 4 & 3 \\ 6 & 3 \end{pmatrix}$ as $A = LU$ with L unit lower triangular (no pivoting). Then use it to solve $Ax = \begin{pmatrix} 1 \\ 0 \end{pmatrix}$ by a forward solve followed by a back solve.

Exercise 27.7 (Why pivot?)**.** Consider $A = \begin{pmatrix} \varepsilon & 1 \\ 1 & 1 \end{pmatrix}$ for a tiny $\varepsilon > 0$. Attempt $A = LU$ without pivoting and observe that the multiplier $\ell_{21} = 1/\varepsilon$ and the resulting U entry $1 - 1/\varepsilon$ are enormous. Now swap the two rows first and redo it. Explain in one or two sentences why pivoting prevents the blow-up. (This is the trap behind "tiny pivots.")

Exercise 27.8 (Cost of many solves)**.** You must solve $Ax = b$ for r different right-hand sides b, all with the same $n \times n$ matrix A. Write the total cost of (a) running full Gaussian elimination r separate times, and (b) factoring $PA = LU$ once and doing r forward/back solves. For $n = 1000$ and $r = 200$, estimate the speedup of (b) over (a) using $n^3/3$ and n^2 as your unit costs.

Exercise 27.9 (Inversion via solves)**.** Explain why solving $Ax = e_j$ for $j = 1, \ldots, n$ and stacking the answers as columns produces A^{-1}. Using this, invert $A = \begin{pmatrix} 2 & 1 \\ 1 & 1 \end{pmatrix}$ by solving $Ax = e_1$ and $Ax = e_2$, and check your answer by computing AA^{-1}.

Exercise 27.10 (Multiplication from inversion)**.** Take $A = \begin{pmatrix} 1 & 2 \\ 0 & 1 \end{pmatrix}$ and $B = \begin{pmatrix} 1 & 0 \\ 3 & 1 \end{pmatrix}$ (so $n = 2$). Build the 6×6 block matrix D from the text, write down the claimed D^{-1}, and confirm that its top-right 2×2 block equals AB.

Exercise 27.11 (Least squares from scratch)**.** Fit a line $y = c_0 + c_1 t$ to the four points $(0, 1)$, $(1, 3)$, $(2, 4)$, $(3, 4)$. Write down A and b, form $A^{\mathsf{T}}A$ and $A^{\mathsf{T}}b$, solve the 2×2 normal equations, and report the best-fit line. What is the residual at $t = 1$?

Exercise 27.12 (Challenge: projection is idempotent)**.** When $A^{\mathsf{T}}A$ is invertible, the best-fit *prediction* is $\hat{b} = A(A^{\mathsf{T}}A)^{-1}A^{\mathsf{T}}b = Hb$, where H is the "hat matrix." Prove that $H^2 = H$ (projecting twice is the same as projecting once) and that $H^{\mathsf{T}} = H$. Explain geometrically why both facts *must* hold for an orthogonal projection onto the column space.

Chapter 28

Linear Programming

Most of this book has handed you a specific problem – sort this array, find the shortest path, push the most flow – and then a clever algorithm tailored to it. Linear programming flips that around. It is not so much an algorithm as a *language*: a single, astonishingly expressive way to write down an enormous family of optimization problems, plus a small toolbox of general solvers that will answer any problem written in that language. You learn the language once, and suddenly shortest paths, maximum flow, and a thousand scheduling, blending, and resource-allocation problems from the real world all become the same kind of object.

The phrase "linear programming" is, like "dynamic programming," a historical accident. "Programming" here means *planning* – arranging a schedule or an allocation – not writing code. And "linear" means exactly what it says: every quantity we care about is built only out of additions and constant multiples. No squares, no products of two unknowns, no `if` branches. That self-imposed poverty – only straight lines and flat planes – is precisely what makes the whole theory work so beautifully.

Intuition

Picture a factory that makes two products. Each product earns some profit per unit, and each consumes some of your limited labor hours and raw material. You want to choose how much of each to make to maximize profit, without using more labor or material than you have. Every constraint ("labor used $\leq$ labor available") is a straight-line boundary cutting through the plane of possible production plans. Together those boundaries fence off a region of *legal* plans, and "maximize profit" means sliding a ruler across that region until it just kisses the farthest corner. That picture – a flat-sided region and a direction you want to push – *is* linear programming. Everything else is making the picture precise and finding the corner fast.

We will build the whole machine slowly. First we learn to *model*: turning a word problem into algebra. Then we pin down two tidy normal forms (standard and slack form) so that "any LP" means something definite. Then we look at the *geometry*, because the geometry is where all the intuition lives. Then we trace the *simplex method* – the classic solver – on a real numeric example, step by step. Then we meet *duality*, one of the deepest and most useful ideas in all of optimization. Finally we use LP as a *design tool* through the lens of LP relaxation. This material maps to CLRS Chapter 29, but we are going to go a good deal slower and draw more pictures.

28.1 Modeling: From Words to Algebra

Let us make the factory concrete. You run a small workshop that builds two kinds of furniture, chairs and tables. The numbers:

	chair	table	available
profit per unit ($)	3	5	—
wood (board-feet)	1	2	8
labor (hours)	2	2	12

Each chair earns $3 and each table earns $5. A chair needs 1 board-foot of wood and 2 hours of labor; a table needs 2 board-feet and 2 hours. You have 8 board-feet of wood and 12 hours of labor this week. How many chairs and tables should you build to maximize profit?

The first move in every modeling problem is to name the things you get to *decide*. Call them *decision variables*. Let x_1 be the number of chairs and x_2 the number of tables. Now everything else is forced.

- **Objective.** Total profit is $3x_1 + 5x_2$, and you want it as large as possible. A linear function of the variables that you push up or down is called the *objective function*.
- **Constraints.** You cannot use more wood than you have: $x_1 + 2x_2 \le 8$. You cannot use more labor than you have: $2x_1 + 2x_2 \le 12$. And you cannot build a negative number of anything: $x_1 \ge 0$ and $x_2 \ge 0$. Those last two are the *nonnegativity constraints*, and they show up so often we usually write them in one breath.

Put it all together and you have a *linear program*:

$$\begin{aligned} \text{maximize} \quad & 3x_1 + 5x_2 \\ \text{subject to} \quad & x_1 + 2x_2 \le 8 \\ & 2x_1 + 2x_2 \le 12 \\ & x_1, x_2 \ge 0. \end{aligned}$$

Focus

An LP has exactly three ingredients, and the word "linear" applies to all of them:

1. **Decision variables** $x_1, \dots, x_n$ – the quantities you choose.
2. A **linear objective** $c_1x_1 + \cdots + c_nx_n$ to maximize (or minimize).
3. **Linear constraints**, each an inequality ($\le$ or $\ge$) or equality ($=$) between a linear combination of the variables and a constant.

"Linear" means every appearance of a variable is just that variable times a constant, added to others. No x_1^2, no x_1x_2, no $\sqrt{x_1}$.

Common trap

The single most common modeling mistake is sneaking in a *nonlinearity* without noticing. "The profit per chair drops once I sell more than 10" is a nonlinear objective. "I can build

chairs *or* tables but not both" is a logical `or`, which is also not linear (it needs integer 0/1 variables – see Section 28.6). Watch for products of variables ("revenue = price × quantity" when *both* are decisions) – that is the classic trap. If your model has any of these, it is not a plain LP, and the gentle theory of this chapter does not directly apply.

Why this matters

Why care? Because this template fits a staggering range of real decisions. Oil refineries blend crude streams into gasoline grades to hit octane targets at least cost – an LP. Airlines assign crews and aircraft to routes – LPs (with integers) at industrial scale. Hospitals schedule nurses, farms choose crop mixes, data centers route traffic, portfolios balance risk. The reason a seventy-year-old method still runs constantly in the background of the world economy is that "maximize a linear thing subject to linear limits" is the honest skeleton of an unreasonable number of planning problems.

28.1.1 A second model: shortest paths as an LP

To convince you LP is a *language*, let us encode something you already know – single-source shortest paths – as a linear program. Suppose you want the shortest-path distances d_v from a source s in a graph with edge weights $w(u, v)$. Here is a slick trick: ask for the distances that are as *large* as possible while still respecting the triangle inequality on every edge.

$$\begin{aligned} \text{maximize} \quad & \sum_v d_v \\ \text{subject to} \quad & d_v - d_u \le w(u,v) \quad \text{for every edge } (u,v), \\ & d_s = 0. \end{aligned}$$

The constraint $d_v \le d_u + w(u, v)$ is exactly the relaxation condition from the shortest-paths chapter. Maximizing the total pushes each d_v up until some constraint stops it – and the value where it gets stuck is precisely the true shortest-path distance. We will not prove that here, but file it away: a problem you solved with Dijkstra is *also* an LP. That universality is the whole point.

28.2 Standard and Slack Forms

If we want general algorithms, "any LP" has to mean something precise. Different LPs come dressed differently – some maximize, some minimize, some have $\le$, some $\ge$, some $=$, some variables allowed to go negative. We tame this zoo with two canonical shapes.

28.2.1 Standard form

Formal

A linear program is in **standard form** if it is a *maximization* over nonnegative variables subject to $\leq$ constraints:

$$\begin{aligned} \text{maximize} \quad & \sum_{j=1}^{n} c_j x_j \\ \text{subject to} \quad & \sum_{j=1}^{n} a_{ij} x_j \leq b_i \quad (i = 1, \ldots, m), \\ & x_j \geq 0 \quad (j = 1, \ldots, n). \end{aligned}$$

In matrix shorthand, with $c, x \in \mathbb{R}^n$, $b \in \mathbb{R}^m$, and A an $m \times n$ matrix: *maximize* $c^\top x$ *subject to* $Ax \leq b$ *and* $x \geq 0$.

Our furniture problem is already in standard form, with

$$c = \begin{pmatrix} 3 \\ 5 \end{pmatrix}, \quad A = \begin{pmatrix} 1 & 2 \\ 2 & 2 \end{pmatrix}, \quad b = \begin{pmatrix} 8 \\ 12 \end{pmatrix}.$$

Every LP can be massaged into standard form with a few mechanical moves. Keep this little phrasebook:

- **Minimize $\to$ maximize.** To minimize $c^\top x$, instead maximize $-c^\top x$ and negate the answer at the end.
- **$\geq$ constraint $\to$ $\leq$.** Multiply both sides by -1: the constraint $\sum_j a_{ij} x_j \geq b_i$ becomes $\sum_j (-a_{ij}) x_j \leq -b_i$.
- **Equality $\to$ two inequalities.** Replace $\sum_j a_{ij} x_j = b_i$ by the pair $\leq b_i$ and $\geq b_i$.
- **Free (unbounded) variable.** If some x_j is allowed to be negative, split it: write $x_j = x_j' - x_j''$ with $x_j', x_j'' \geq 0$. Any real value is some nonnegative minus some nonnegative.

Example 28.1. Convert "minimize $2x_1 - 3x_2$ subject to $x_1 + x_2 = 4$, $x_1 \geq 1$, with x_2 free" to standard form. Maximize $-2x_1 + 3x_2$. Split $x_2 = x_2' - x_2''$. The equality becomes $x_1 + x_2' - x_2'' \leq 4$ and $-x_1 - x_2' + x_2'' \leq -4$. The bound $x_1 \geq 1$ becomes $-x_1 \leq -1$. Now every variable (x_1, x_2', x_2'') is ≥ 0 and every constraint is $\leq$. Done.

28.2.2 Slack form

Standard form is the right shape for stating theory and duality. But the simplex algorithm prefers a cousin in which every inequality has been turned into an *equality* by introducing a brand-new nonnegative variable that soaks up the difference. That extra variable is called a *slack variable*, because it measures how much slack – unused resource – remains in the constraint.

Take the wood constraint $x_1 + 2x_2 \leq 8$. Define a slack $x_3 = 8 - x_1 - 2x_2 \geq 0$. The constraint $x_3 \geq 0$

is now *exactly* equivalent to the original $\leq$. Doing this for both constraints of the furniture LP:

$$\begin{aligned} z &= 3x_1 + 5x_2 \\ x_3 &= 8 - x_1 - 2x_2 \qquad\qquad x_1, x_2, x_3, x_4 \geq 0. \\ x_4 &= 12 - 2x_1 - 2x_2, \end{aligned}$$

Focus

Slack form writes the objective z and each slack variable on the left, as a function of the others on the right, plus a constant. The variables that sit alone on the left are called *basic*; the ones on the right are *nonbasic*. A slack variable being zero means its constraint is *tight* (the resource is fully used); positive slack means room to spare. This split into basic and nonbasic is the bookkeeping the simplex method lives on.

A neat consequence: if you set all the nonbasic variables to 0, you can read off the basic ones instantly. Here, setting $x_1 = x_2 = 0$ gives $x_3 = 8$, $x_4 = 12$, $z = 0$. That is the "build nothing" plan – a perfectly legal, if unambitious, starting point. We will improve it shortly.


28.3 The Geometry of an LP

Algebra is exact but blind; geometry is approximate but *sighted*. Let us draw the furniture problem and *see* the answer before we compute it.

Each variable is an axis. With two variables we live in the plane, with x_1 (chairs) horizontal and x_2 (tables) vertical. Each constraint is a half of the plane:

- $x_1 \geq 0$: everything to the right of the vertical axis.
- $x_2 \geq 0$: everything above the horizontal axis.
- $x_1 + 2x_2 \leq 8$: everything on or below the line through $(8, 0)$ and $(0, 4)$.
- $2x_1 + 2x_2 \leq 12$, i.e. $x_1 + x_2 \leq 6$: on or below the line through $(6, 0)$ and $(0, 6)$.

The points satisfying *all* the constraints form the shaded region below, called the *feasible region*. Because it is an intersection of half-planes, it is a convex polygon (in higher dimensions, a convex *polytope*).

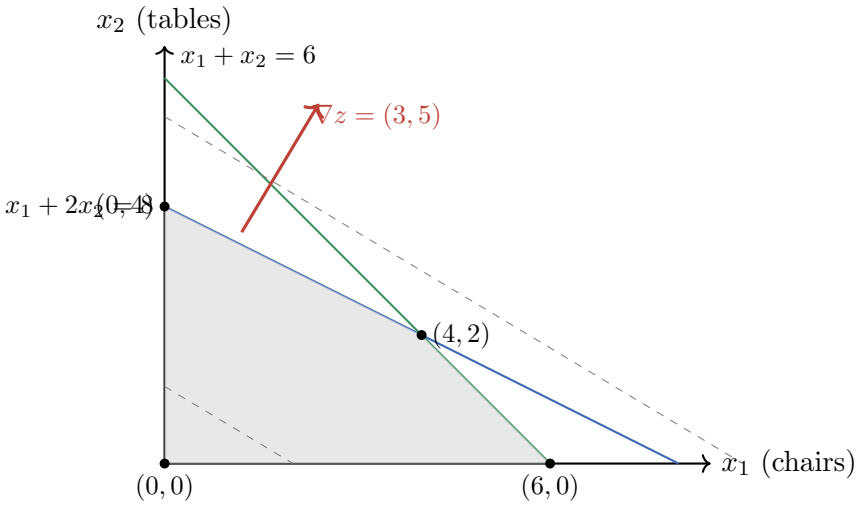

The four corners are $O = (0, 0)$, $A = (6, 0)$, $B = (4, 2)$, and $C = (0, 4)$. (Corner B is where the two constraint lines cross; solve $x_1 + 2x_2 = 8$ and $x_1 + x_2 = 6$ simultaneously: subtracting gives $x_2 = 2$, then $x_1 = 4$.)

Now the objective. The function $z = 3x_1 + 5x_2$ has the same value along any line of slope $-3/5$; these are the dashed *iso-profit* lines. Increasing z slides that line in the direction of the gradient $(3, 5)$ – up and to the right. To maximize z you push the iso-profit line as far in the $(3, 5)$ direction as you can while still touching the feasible region. The last point it touches is the optimum.

Let us just evaluate z at all four corners:

$$z(O) = 0, \quad z(A) = 18, \quad z(B) = 3 \cdot 4 + 5 \cdot 2 = 22, \quad z(C) = 5 \cdot 4 = 20.$$

The winner is $B = (4, 2)$ with profit $\boxed{22}$: build 4 chairs and 2 tables.

Intuition

Notice the optimum landed on a *corner*, not in the middle of an edge or the interior. That is not luck. An iso-profit line, sliding outward, leaves the region last at a vertex (or, in a tie, along a whole edge – but then a vertex of that edge is still optimal). So you never need to search the infinite interior. **You only ever need to check the corners.** A continuous problem with infinitely many feasible points collapses to a finite search over vertices. That single observation is the seed of the simplex method.

Formal

The feasible region of an LP is a convex set: if x and y are both feasible then so is every point $\lambda x + (1 - \lambda)y$ on the segment between them, for $0 \le \lambda \le 1$. (Each constraint is preserved under averaging because it is linear.) A **vertex** (or *basic feasible solution*) is a feasible point that is *not* the midpoint of any segment lying in the region – a true corner. The fundamental theorem of linear programming says: if an LP has an optimal solution, then some *vertex* is optimal.

Common trap

"Just check the corners" sounds like a finished algorithm, but it hides a trap: the number of vertices can be *exponential* in the number of variables and constraints. An LP in n variables with m constraints can have on the order of $\binom{m+n}{n}$ vertices. Enumerating them all is hopeless for large problems. The simplex method's contribution is not "look at vertices" – it is "walk cleverly from vertex to neighboring vertex, always uphill, so you reach the best one after visiting only a tiny fraction of them."

A few more geometric vocabulary words you will meet:

- **Infeasible.** The constraints contradict each other and the feasible region is empty. (E.g. $x \leq 1$ and $x \geq 2$.) There is nothing to optimize.
- **Unbounded.** The region runs off to infinity in a direction where the objective keeps improving, so there is no finite maximum. (E.g. maximize x_1 with only $x_1 \geq 0$.)
- **Bounded and feasible.** The good case: a finite optimum exists, on a vertex.

28.4 The Simplex Method, by Example

Now we make "walk uphill from corner to corner" mechanical. The simplex method, due to George Dantzig in 1947, does exactly this, using slack form as its ledger. We will run it on the furniture LP and *watch* it travel from O to B.

28.4.1 The idea in one paragraph

Start at a known vertex (the origin, where all original variables are 0 and the slacks hold all the resource). Look at the objective written in terms of the current nonbasic variables. If some nonbasic variable has a *positive* coefficient, increasing it would raise z – so we want to bring it into the basis. We increase it as much as we can until some basic variable hits 0 (a constraint goes tight); that variable leaves the basis. Swap them, rewrite everything, and repeat. Each swap moves us to an adjacent vertex with no worse (usually strictly better) objective value. When no nonbasic variable has a positive coefficient, no local move helps – and by convexity, we are at the global optimum.

Focus

Two pieces of jargon for the swap:

- The variable we increase (positive objective coefficient) is the **entering variable** – it enters the basis.
- The basic variable that hits 0 first, limiting how far we can go, is the **leaving variable** – it leaves the basis.

One entering, one leaving, per iteration. The rewrite that re-expresses everything in terms of the new basis is called a **pivot**, by analogy with Gaussian elimination.

28.4.2 Iteration 0: the starting dictionary

We begin in slack form, which when written this way is often called a *dictionary*:

$$\begin{aligned} z &= \quad 3x_1 + 5x_2 \\ x_3 &= 8 - x_1 - 2x_2 \\ x_4 &= 12 - 2x_1 - 2x_2. \end{aligned}$$

Basic variables: x_3, x_4. Nonbasic: x_1, x_2 (set to 0). Current vertex: $(x_1, x_2) = (0, 0)$, with $z = 0$. This is corner O.

Choose entering variable. Both x_1 (coefficient 3) and x_2 (coefficient 5) would increase z. A common rule is to pick the largest coefficient, so let x_2 enter.

Choose leaving variable (ratio test). As we raise x_2 from 0 (keeping $x_1 = 0$), how far can we go before a basic variable goes negative? Look at each basic equation:

$$x_3 = 8 - 2x_2 \geq 0 \;\Rightarrow\; x_2 \leq \tfrac{8}{2} = 4, \qquad x_4 = 12 - 2x_2 \geq 0 \;\Rightarrow\; x_2 \leq \tfrac{12}{2} = 6.$$

The tightest bound wins: x_2 can rise to 4, at which point x_3 hits 0. So x_2 enters and x_3 leaves. This is the *ratio test*: divide each constant by the (positive) coefficient of the entering variable and take the minimum.

28.4.3 Iteration 1: the pivot

Solve the binding equation $x_3 = 8 - x_1 - 2x_2$ for the entering variable x_2:

$$x_2 = 4 - \tfrac{1}{2}x_1 - \tfrac{1}{2}x_3.$$

Now substitute this everywhere x_2 appeared. In the objective:

$$z = 3x_1 + 5\big(4 - \tfrac{1}{2}x_1 - \tfrac{1}{2}x_3\big) = 20 + \tfrac{1}{2}x_1 - \tfrac{5}{2}x_3.$$

In the other basic equation:

$$x_4 = 12 - 2x_1 - 2\big(4 - \tfrac{1}{2}x_1 - \tfrac{1}{2}x_3\big) = 4 - x_1 + x_3.$$

So the new dictionary is

$$\begin{aligned} z &= 20 + \tfrac{1}{2}x_1 - \tfrac{5}{2}x_3 \\ x_2 &= 4 - \tfrac{1}{2}x_1 - \tfrac{1}{2}x_3 \\ x_4 &= 4 - x_1 + x_3. \end{aligned}$$

Basic: x_2, x_4. Nonbasic: x_1, x_3 (both 0). Vertex: $(x_1, x_2) = (0, 4)$ – that is corner C – with $z = 20$. We climbed from 0 to 20 in one step.

Are we done? The objective row is $z = 20 + \frac{1}{2}x_1 - \frac{5}{2}x_3$. The coefficient on x_1 is $+\frac{1}{2} > 0$, so raising x_1 still helps. Not done. Let x_1 enter.

Ratio test for x_1:

$$x_2 = 4 - \tfrac{1}{2}x_1 \geq 0 \Rightarrow x_1 \leq \tfrac{4}{1/2} = 8, \qquad x_4 = 4 - x_1 \geq 0 \Rightarrow x_1 \leq \tfrac{4}{1} = 4.$$

Minimum is 4, achieved by the x_4 row, so x_4 leaves.

28.4.4 Iteration 2: the second pivot

Solve the binding equation $x_4 = 4 - x_1 + x_3$ for x_1:

$$x_1 = 4 - x_4 + x_3.$$

Substitute into the objective:

$$z = 20 + \tfrac{1}{2}(4 - x_4 + x_3) - \tfrac{5}{2}x_3 = 22 - 2x_3 - \tfrac{1}{2}x_4.$$

And into the x_2 row:

$$x_2 = 4 - \tfrac{1}{2}(4 - x_4 + x_3) - \tfrac{1}{2}x_3 = 2 - x_3 + \tfrac{1}{2}x_4.$$

New dictionary:

$$\begin{aligned} z &= 22 - 2x_3 - \tfrac{1}{2}x_4 \\ x_1 &= 4 + x_3 - x_4 \\ x_2 &= 2 - x_3 + \tfrac{1}{2}x_4. \end{aligned}$$

Basic: x_1, x_2. Nonbasic: x_3, x_4 (both 0). Vertex: $(x_1, x_2) = (4, 2)$ – corner B – with $z = 22$.

Stop? Every coefficient in the objective row is now *negative* (-2 and $-\frac{1}{2}$). Increasing either nonbasic variable would only lower z. There is no improving move. **We are optimal:** build 4 chairs and 2 tables for \$22, exactly matching what the corner-by-corner geometry told us.

Figure 28.1 draws the whole journey on the feasible polygon: two pivots, two edges, climbing $0 \to 20 \to 22$.

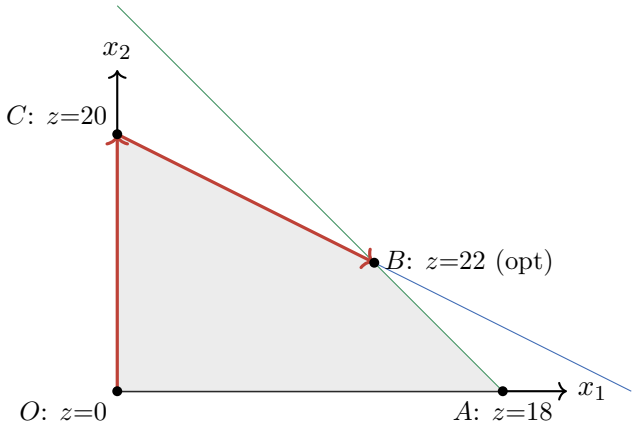


Figure 28.1: The simplex walk on the furniture LP. Starting at the origin O, the first pivot brings x_2 into the basis and slides up edge OC to $C = (0, 4)$; the second pivot brings x_1 in and crosses edge CB to the optimum $B = (4, 2)$. Vertex A is never visited.

Algorithm lab

Trace the journey on Figure 28.1: simplex walked $O \to C \to B$, climbing $0 \to 20 \to 22$. It never visited A. Now *you* re-run it but break the first tie differently: at iteration 0 let x_1 enter instead of x_2 ("largest coefficient" is just one rule; "first positive" is another). Do the ratio test, pivot, and keep going. You should travel $O \to A \to B$ and still land at $z = 22$. Two different paths, same summit – that is the convexity guarantee made tangible. Write out all

three dictionaries yourself.

28.4.5 Simplex as pseudocode

The example contains the whole algorithm. Here it is in skeleton form, operating on a slack-form dictionary with basic set B and nonbasic set N.

Algorithm 123: SIMPLEX (one phase, on a feasible dictionary)

Input: slack-form dictionary: objective row $z = v + \sum_{j \in N} \bar{c}_j x_j$ and rows $x_i = \bar{b}_i - \sum_{j \in N} \bar{a}_{ij} x_j$ for $i \in B$
Output: an optimal basic feasible solution, or report "unbounded"

while *some* $\bar{c}_e > 0$ *for* $e \in N$ **do**
  pick entering index $e \in N$ with $\bar{c}_e > 0$;
  `// ratio test: how far can` x_e `rise?`
  if $\bar{a}_{ie} \le 0$ *for all* $i \in B$ **then**
    return "unbounded" ; `//` x_e `rises forever,` $z \to \infty$
  pick leaving index $\ell \in B$ minimizing $\bar{b}_i / \bar{a}_{ie}$ over i with $\bar{a}_{ie} > 0$;
  `// pivot: swap` x_e `into the basis,` x_ℓ `out`
  rewrite row ℓ to express x_e, then substitute into all other rows and the objective;
  update $B \leftarrow (B \setminus \{\ell\}) \cup \{e\}$ and $N \leftarrow (N \setminus \{e\}) \cup \{\ell\}$;
return the basic solution: $x_j = 0$ for $j \in N$, $x_i = \bar{b}_i$ for $i \in B$;

Focus

Read the three decisions in that loop, because they are the whole method:

1. **Optimality test.** If no nonbasic coefficient $\bar{c}_e$ is positive, stop – you are optimal.
2. **Entering rule.** Among positive $\bar{c}_e$, pick one (largest coefficient, or Bland's rule, etc.).
3. **Ratio test / leaving rule.** The entering variable rises until the first basic variable hits 0; that one leaves. If *nothing* stops it, the LP is unbounded.

28.4.6 Two loose ends: starting and cycling

We glossed over two things, and honesty requires naming them.

Getting an initial feasible vertex. We were lucky: the origin was feasible (all $b_i \ge 0$), so the slacks gave a ready basic feasible solution. When some $b_i < 0$, the origin is infeasible and you cannot just start there. The fix is a preliminary "Phase I" LP: introduce an auxiliary variable that measures total infeasibility and minimize it with simplex itself. If the minimum is 0, you have found a genuine feasible vertex to start the real ("Phase II") optimization from; if it is positive, the original LP is infeasible. So simplex bootstraps itself.

Cycling. The ratio test can tie, producing a *degenerate* pivot that changes the basis but not the vertex or the objective (you move 0 distance). In rare crafted cases a sequence of degenerate pivots can loop forever, returning to a basis it already saw. The cure is a tie-breaking discipline

called *Bland's rule*: among allowed entering and leaving candidates, always choose the one with the smallest index. It can be proved that Bland's rule never cycles, so simplex always terminates.

History and connection

George Dantzig invented the simplex method in 1947 while working on Air Force planning problems; the word "programming" is military planning lingo from that era. There is a famous tale that as a graduate student he arrived late to class, copied two "homework" problems off the board, and solved them – only to learn they were open problems in statistics. The simplex method is in **CLRS Chapter 29**, specifically Section 29.3 (the algorithm), Section 29.4 (duality), and Section 29.5 (the initial basic feasible solution / Phase I). CLRS develops the same pivot-on-a-slack-form machinery we just traced; read it right after this chapter and it will feel familiar. The deep surprise, covered in CLRS's notes, is that simplex can take exponentially many steps on adversarial inputs (the Klee–Minty cubes) yet is fast in practice; the first *provably* polynomial methods were Khachiyan's ellipsoid algorithm (1979) and Karmarkar's interior-point method (1984).

Cost summary

Simplex cost. Each pivot is a Gaussian-elimination-style rewrite of an m-row dictionary in n variables, costing $O(mn)$ arithmetic per iteration (or $O(m^2)$ in the revised, matrix form). The number of pivots is the wild card: typically $O(m)$ to $O(m+n)$ in practice, giving excellent real-world speed, but worst-case *exponential* for every known deterministic pivot rule. By contrast, interior-point methods solve an LP to accuracy ε in a provably polynomial number of iterations – roughly $O(\sqrt{n}\,\log(1/\varepsilon))$ Newton steps, each a linear solve. In short: simplex is fast in practice and ugly in the worst case; interior-point is polynomial always and competitive in practice. Solvers ship both.

28.5 Duality: Every LP Has a Shadow

Here is the most beautiful idea in linear programming, and the one most worth slowing down for. To every LP (the *primal*) there corresponds a second LP (its *dual*), built from the same numbers rearranged. The two are locked together so tightly that solving one solves the other, and the dual hands you something the primal never explicitly asked for: the *value of each scarce resource*.

28.5.1 Where does the dual come from?

Go back to the furniture LP and ask a sneaky question: *without* solving it, can we prove an *upper bound* on the best possible profit? Watch. Take the labor constraint $2x_1 + 2x_2 \le 12$ and multiply it by $\frac{5}{2}$:

$$5x_1 + 5x_2 \le 30.$$

Since $x_1 \ge 0$, certainly $3x_1 \le 5x_1$, so the profit obeys

$$z = 3x_1 + 5x_2 \le 5x_1 + 5x_2 \le 30.$$

We just proved, with one line of algebra, that no plan earns more than \$30 – *without ever solving the LP*. Can we do better? Try combining the two constraints. Pick nonnegative multipliers y_1 (for

wood) and y_2 (for labor):

$$y_1(x_1 + 2x_2) + y_2(2x_1 + 2x_2) \le 8y_1 + 12y_2.$$

The left side is $(y_1 + 2y_2)x_1 + (2y_1 + 2y_2)x_2$. If we choose the y's so that this dominates the objective coefficient-by-coefficient – that is,

$$y_1 + 2y_2 \ge 3 \quad \text{(coeff. of } x_1\text{)}, \qquad 2y_1 + 2y_2 \ge 5 \quad \text{(coeff. of } x_2\text{)},$$

then, because all $x_j \ge 0$,

$$z = 3x_1 + 5x_2 \le (y_1 + 2y_2)x_1 + (2y_1 + 2y_2)x_2 \le 8y_1 + 12y_2.$$

So *any* nonnegative y_1, y_2 satisfying those two inequalities gives an upper bound $8y_1 + 12y_2$ on the profit. Naturally, we want the *tightest* such bound – the smallest $8y_1 + 12y_2$. And that is itself a linear program!

Focus

The **dual** of our furniture LP is:

$$\begin{aligned} \text{minimize} \quad & 8y_1 + 12y_2 \\ \text{subject to} \quad & y_1 + 2y_2 \ge 3 \\ & 2y_1 + 2y_2 \ge 5 \\ & y_1, y_2 \ge 0. \end{aligned}$$

One dual variable per primal *constraint*; one dual constraint per primal *variable*; the objective and right-hand side swap roles; max becomes min; $\le$ becomes $\ge$. The dual is the search for the best provable upper bound.

The mechanical recipe, for an LP in standard form (max $c^\top x$ s.t. $Ax \le b$, $x \ge 0$):

Primal (max)	**Dual (min)**
maximize $c^\top x$	minimize $b^\top y$
m constraints $Ax \le b$	m variables $y \ge 0$
n variables $x \ge 0$	n constraints $A^\top y \ge c$
right-hand side b	objective b
objective c	right-hand side c

In matrix form: the dual of "max $c^\top x$ s.t. $Ax \le b$, $x \ge 0$" is "min $b^\top y$ s.t. $A^\top y \ge c$, $y \ge 0$." Transpose the matrix, swap b and c, flip the inequalities, flip max/min. Beautifully symmetric – and indeed the dual of the dual is the primal again.

28.5.2 Weak and strong duality

Theorem 28.1 (Weak duality)**.** *If x is any feasible solution of the primal (a max LP) and y is any feasible solution of the dual (a min LP), then $c^\top x \le b^\top y$. Every primal value is below every dual value.*

We essentially proved this above: the chain $c^\top x \le (A^\top y)^\top x = y^\top (Ax) \le y^\top b$ uses only $x \ge 0$, $A^\top y \ge c$, $y \ge 0$, and $Ax \le b$. It is just bookkeeping with inequalities, but it is powerful: it sandwiches the unknown optimum from both sides.

Intuition

Picture the primal values (feasible profits) as numbers piling up from below and the dual values (provable upper bounds) coming down from above. Weak duality says the two piles *never cross*: every bound from above is at least every achievable profit from below. The question that remains is whether they actually *meet*. If a profit and a bound are ever equal, that profit must be optimal (nothing can beat its own upper bound) and that bound must be tight. The miracle of LP is that they always meet.

Figure 28.2 pictures the squeeze. The achievable primal profits cannot rise above the line of provable dual bounds, and at the shared optimum the two sides touch at the single value 22.

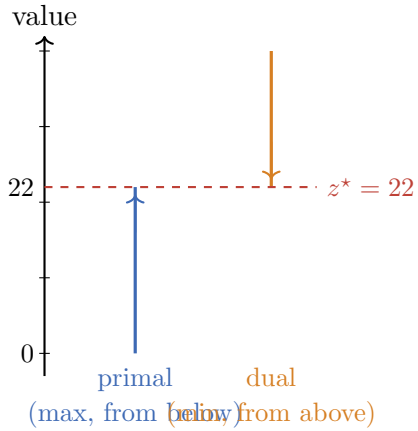


Figure 28.2: Weak and strong duality as a squeeze. Every feasible primal value (blue, pushing up) stays at or below every feasible dual value (orange, pressing down); weak duality forbids them from crossing. Strong duality says the gap closes exactly at the common optimum $z^\star = 22$.

Theorem 28.2 (Strong duality)**.** *If the primal LP has a finite optimum, then so does the dual, and their optimal values are* equal*:* $\max c^\top x = \min b^\top y$.

This is not obvious and does not hold for general (nonlinear) optimization. For LPs it is a theorem – in fact simplex proves it constructively: when simplex halts, the negated objective coefficients on the slack variables turn out to be exactly an optimal dual solution. Let us verify on the furniture problem. The primal optimum was 22. Solve the dual: minimize $8y_1 + 12y_2$ s.t. $y_1 + 2y_2 \ge 3$, $2y_1 + 2y_2 \ge 5$, $y \ge 0$. The optimum sits where both constraints are tight: $y_1 + 2y_2 = 3$ and $2y_1 + 2y_2 = 5$. Subtracting, $y_1 = 2$; then $2 + 2y_2 = 3$ gives $y_2 = \frac{1}{2}$. Dual value: $8(2) + 12(\frac{1}{2}) = 16 + 6 = 22$. They meet, exactly as promised.

Common trap

A frequent confusion: students expect the dual optimum to be *bigger* than the primal because "it's an upper bound." At the optimum they are *equal*; the dual is bigger only at *suboptimal* feasible points. Weak duality gives the inequality everywhere; strong duality collapses it to

equality precisely at the joint optimum. Also: strong duality can fail if the primal is infeasible or unbounded – then the meeting-in-the-middle story needs the careful case analysis CLRS Section 29.4 provides.

28.5.3 What the dual variables mean: shadow prices

The dual values $y_1 = 2$ and $y_2 = \frac{1}{2}$ are not just abstract multipliers – they have a vivid economic meaning. They are *shadow prices*: y_i is the rate at which the optimal profit would rise if you had one more unit of resource i.

Check it. We had 8 board-feet of wood; $y_1 = 2$ predicts that a 9th board-foot is worth \$2 of extra profit. Indeed, re-solving with the wood limit raised to 9 moves the optimum to $(3, 3)$ with $z = 24$ – up by \$2, exactly y_1. The labor shadow price $y_2 = \frac{1}{2}$ says an extra hour of labor is worth fifty cents at the margin.

Why this matters

Shadow prices are why managers love LP. Solve the plan once and the dual *automatically* tells you what each bottleneck resource is worth – where to invest, what overtime is worth paying for, which contract to renegotiate. A resource with a *zero* shadow price has slack to spare; buying more of it is wasted money. The LP doesn't just hand you a plan; it hands you the *prices of your constraints*. This is the same idea that underlies market prices in competitive-equilibrium economics, and it is why Dantzig's method and Koopmans's economics shared deep roots (Kantorovich and Koopmans won the 1975 Nobel in economics for related work).

Formal

Complementary slackness. At a primal-dual optimum, for each i and j:

$$y_i > 0 \;\Rightarrow\; \text{(primal constraint } i \text{ is tight)}, \qquad x_j > 0 \;\Rightarrow\; \text{(dual constraint } j \text{ is tight)}.$$

Equivalently: a resource with leftover slack ($Ax < b$ in row i) has shadow price $y_i = 0$; and you produce a positive amount of product j ($x_j > 0$) only if its dual constraint binds (it "pays for itself"). In the furniture optimum both resources were fully used, so both $y_i > 0$; and we built both products, so both dual constraints were tight – consistent with the solution we found.

28.6 LP Relaxation as a Design Tool

We close with the reason an algorithms book cares about LP beyond "it solves LPs." Linear programming is a *design tool* for attacking problems that are not themselves LPs – especially the brutally hard combinatorial ones.

The trouble usually is integrality. Real decisions are often whole numbers or yes/no: you ship a truck or you don't; you assign a worker to a shift or you don't; you pick a vertex into a cover or you leave it out. Add the constraint "$x_j \in \{0, 1\}$" (or "$x_j \in \mathbb{Z}$") to an LP and you get an *integer*

linear program (ILP). That little demand is catastrophic for complexity: ILP is NP-hard in general (Chapter 33), and the lovely corner-walking of simplex no longer finds integer corners.

The escape hatch is *LP relaxation*: drop the integrality requirement. Replace "$x_j \in \{0, 1\}$" with the interval "$0 \le x_j \le 1$," solve the resulting ordinary LP (fast!), and use its answer as a guide.

Intuition

The relaxed LP is more permissive – it allows fractional, "half a truck" solutions that the integer problem forbids. So the relaxed feasible region *contains* all the integer points and then some. For a minimization problem, allowing more options can only lower (or equal) the best value, so

$$\text{LP optimum} \;\le\; \text{ILP optimum}.$$

The relaxation gives you a *bound* for free, and a fractional solution to round. That bound is the lever for two of the most important algorithmic techniques in the next chapters.

Figure 28.3 makes the containment concrete. The shaded LP polytope holds every legal integer point (the dots) but also a continuum of fractional points between them; the LP optimum can sit at a fractional corner the ILP could never reach.

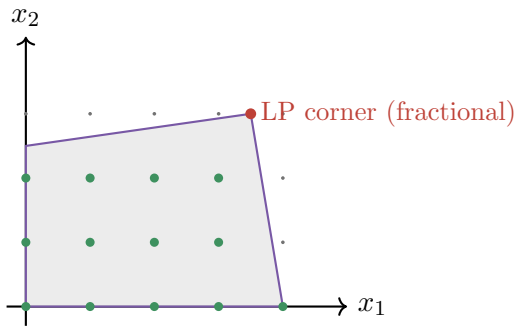


Figure 28.3: LP relaxation. The relaxed polytope (shaded, purple boundary) contains all the integer feasible points (green dots) and the fractional points between them. The relaxed optimum may land on a fractional corner (red), which is why its value bounds the integer optimum but its coordinates may need rounding.

Use 1: bounding for exact search. Branch-and-bound solves ILPs exactly by exploring a tree of subproblems. At each node it solves the LP relaxation; if the relaxed optimum is already worse than the best integer solution found so far, the entire subtree can be pruned – no integer point down there can beat what we have. The relaxation's bound does the pruning. This is how industrial ILP solvers (CPLEX, Gurobi) crack problems with millions of variables.

Use 2: rounding for approximation. When exact is too slow, solve the relaxation, then *round* the fractional solution to a nearby integer one, and prove the rounding doesn't cost too much. Consider Vertex Cover: choose a smallest set of vertices touching every edge. The ILP has $x_v \in \{0, 1\}$ and a constraint $x_u + x_v \ge 1$ for each edge (u, v). Relax to $0 \le x_v \le 1$, solve the LP, and round: put v in the cover iff $x_v \ge \frac{1}{2}$.

Focus

Why the rounding is safe and good: every edge constraint $x_u + x_v \geq 1$ forces at least one of x_u, x_v to be $\geq \frac{1}{2}$, so the rounded set still covers every edge (still feasible). And we at most *double* each variable (from $\geq \frac{1}{2}$ up to 1), so the rounded cost is at most $2 \times$ (LP optimum) $\leq$ $2 \times$ (ILP optimum). That is a **2-approximation**: a polynomial-time algorithm guaranteed within a factor of 2 of optimal, with the LP relaxation supplying both the rounding recipe and the proof. We meet this style again in Chapter 34.

Walking question

Take this on a walk. The shortest-path-as-an-LP from Section 28.1 and the maximum-flow problem (which can also be written as an LP) both have a magical property: their LP relaxations *automatically* produce integer optima – you never need to round. Why should some combinatorial LPs hand you whole numbers for free while Vertex Cover does not? Think about what is special about the constraint matrices of flow and shortest-path problems. (The keyword, for after your walk, is *total unimodularity*: matrices whose square submatrices all have determinant 0 or ± 1 guarantee integer vertices. Network-flow matrices are totally unimodular; the vertex-cover matrix is not.)

History and connection

LP relaxation is the bridge from this chapter to the hardest material in the book. It connects to integer programming, to NP-completeness (**CLRS Chapter 34**), and to approximation algorithms (**CLRS Chapter 35**), where LP-rounding and the primal-dual method are headline techniques. CLRS Chapter 29 itself sticks to pure LP – standard/slack forms (29.1), formulating problems (29.2), simplex (29.3), duality (29.4), and the initial solution (29.5). Treat relaxation as the trailhead: it is the single most reused idea connecting easy continuous optimization to hard discrete optimization.

28.7 Summary

You started with a furniture workshop and ended holding one of the master keys of optimization. The throughline:

- An **LP** maximizes a linear objective subject to linear constraints. Modeling means naming decision variables and writing the objective and constraints in their terms – staying strictly linear.
- **Standard form** (max, $\leq$, $x \geq 0$) is the canonical shape; **slack form** turns every inequality into an equality with a slack variable, splitting variables into basic and nonbasic.
- **Geometry**: the feasible region is a convex polytope, the optimum lives at a vertex, and you only ever need to check corners.
- The **simplex method** walks from vertex to adjacent vertex, always uphill, via entering/leaving pivots, stopping when no objective coefficient is positive. Fast in practice, exponential in the worst case.

- **Duality** pairs every LP with a shadow LP. Weak duality sandwiches the optimum; strong duality says primal and dual optima are equal; the dual variables are shadow prices that value each scarce resource.
- **LP relaxation** drops integrality to turn hard integer problems into solvable LPs, giving bounds for branch-and-bound and rounding recipes for approximation – the bridge to the book's final chapters.

Exercises

Exercise 28.1 (Model it)**.** A bakery makes muffins and cookies. A muffin earns \$2 and uses 3 oz flour and 1 egg; a cookie earns \$1 and uses 1 oz flour and 1 egg. There are 30 oz of flour and 12 eggs. Write the LP that maximizes revenue. Identify the decision variables, objective, and constraints.

Exercise 28.2 (Corners by hand)**.** For the bakery LP above, draw the feasible region in the muffin–cookie plane, list all its vertices, evaluate the revenue at each, and read off the optimal production plan. Confirm the optimum is at a corner.

Exercise 28.3 (Into standard form)**.** Convert to standard form: "minimize $4x_1 - x_2 + 2x_3$ subject to $x_1 - x_2 \geq 3$, $x_2 + x_3 = 5$, $x_1 \geq 0$, $x_2 \geq 0$, x_3 free." Show every transformation step.

Exercise 28.4 (Slack form and the origin)**.** Put the furniture LP's constraints into slack form, then write the basic feasible solution you get by setting both original variables to 0. Which constraints are tight there? Now do the same after raising the wood limit from 8 to 10 – does the origin remain feasible?

Exercise 28.5 (Run simplex)**.** Solve by simplex, showing every dictionary: "maximize $x_1 + 2x_2$ subject to $x_1 + x_2 \leq 4$, $x_1 + 3x_2 \leq 6$, $x_1, x_2 \geq 0$." Report the optimal vertex, the optimal value, and the path of vertices simplex visited.

Exercise 28.6 (Spot the unbounded LP)**.** Try to run simplex on "maximize $2x_1 + x_2$ subject to $x_1 - x_2 \leq 1$, $x_1, x_2 \geq 0$." At some iteration the ratio test will find no positive coefficient in the entering column. Explain why, and explain geometrically why this LP has no finite maximum.

Exercise 28.7 (Write the dual)**.** Write the dual of the bakery LP from Exercise 28.1. Identify what each dual variable would mean economically (the shadow price of which resource?).

Exercise 28.8 (Verify strong duality)**.** Solve the dual of the furniture LP (minimize $8y_1 + 12y_2$ subject to $y_1 + 2y_2 \geq 3$, $2y_1 + 2y_2 \geq 5$, $y \geq 0$) by checking its vertices. Confirm the optimal dual value equals the primal optimum of 22, and state which primal constraints the nonzero y_i correspond to.

Exercise 28.9 (Shadow price prediction)**.** Using the furniture shadow prices $y_1 = 2$ (wood) and $y_2 = \frac{1}{2}$ (labor), predict the new optimal profit if labor rises from 12 to 14 hours. Then re-solve the LP from scratch and check your prediction. For roughly how large an increase do you expect the shadow price to stay valid? (Hint: think about when the optimal corner changes.)

Exercise 28.10 (Relax and round)**.** Take the triangle graph with vertices $\{a, b, c\}$ and edges ab, bc, ca. Write the Vertex Cover ILP, then its LP relaxation. Show that $x_a = x_b = x_c = \frac{1}{2}$ is an optimal *fractional* solution with value $\frac{3}{2}$. Round by the "$x_v \geq \frac{1}{2}$" rule and report the resulting integer cover. Compare its size to the true optimum (which is 2) and to the $2 \times \frac{3}{2} = 3$ bound the analysis promises.

Exercise 28.11 (Challenge: shortest path is an LP)**.** Take a 4-vertex graph $s \to a \to t$ and $s \to t$ with weights $w(s,a) = 2$, $w(a,t) = 3$, $w(s,t) = 6$. Write the shortest-path LP from Section 28.1 (maximize $\sum_v d_v$ subject to $d_v - d_u \le w(u,v)$ and $d_s = 0$). Solve it and check that the d_v you get are the true shortest-path distances. Why does *maximizing* produce the *shortest* distances?

Exercise 28.12 (Challenge: dual of the dual)**.** Starting from the standard-form dual "minimize $b^\top y$ subject to $A^\top y \ge c$, $y \ge 0$," first convert it into a maximization in standard form, then take *its* dual using the recipe in Section 28.5. Show you recover the original primal "maximize $c^\top x$ subject to $Ax \le b$, $x \ge 0$." Conclude that dualizing twice is the identity.

Chapter 29

Polynomials and the FFT

Here is a small mystery to chew on before we begin. Multiplying two big numbers, or two polynomials, feels like it should cost a fixed amount of work — you learned the "multiply every digit by every digit" method in grade school, and it never occurred to you that it might be slow. But it *is* slow. To multiply two polynomials of degree n the schoolbook method does about n^2 little multiplications. For $n = 1{,}000{,}000$ that is a trillion operations. For a long time people simply assumed there was nothing to be done; multiplication was multiplication.

This chapter is the story of how that assumption was wrong, and of the beautiful divide-and-conquer algorithm — the *Fast Fourier Transform*, or FFT — that breaks n^2 down to $n \log n$. The same trick that makes the FFT fast is the trick that makes your phone decode an MP3, that lets a radio telescope clean up an image, and that underlies a large part of digital signal processing. We are going to build it from the ground up, starting with something completely innocent: two different ways to write down a polynomial.

Focus

By the end of this chapter you should be able to: (1) describe a polynomial in *coefficient* form and in *point-value* form, and say why each is good at a different job; (2) explain why multiplying in point-value form takes only linear time; (3) define the roots of unity and list the three algebraic facts about them that make the FFT work; (4) derive the FFT as a divide-and-conquer algorithm and prove its $\Theta(n \log n)$ running time from a recurrence; and (5) assemble the whole pipeline that multiplies two polynomials in $\Theta(n \log n)$ time.

29.1 Two ways to describe a polynomial

A polynomial of degree bound n (meaning degree at most $n-1$) is the object

$$A(x) = a_0 + a_1 x + a_2 x^2 + \cdots + a_{n-1} x^{n-1} = \sum_{j=0}^{n-1} a_j x^j.$$

The numbers $a_0, a_1, \ldots, a_{n-1}$ are its *coefficients*. This is the representation you have used your whole life, and it is so familiar that you may never have noticed it is a *choice*. We will call the list $(a_0, a_1, \ldots, a_{n-1})$ the *coefficient representation* of A.

Intuition

A polynomial is a function: feed it a number x, get a number $A(x)$ back. The coefficient list is one way to pin down which function it is — it is like describing a person by their DNA. But there is a totally different way to pin down the same function: instead of listing its genetic recipe, you list a bunch of *things it actually does*. "At $x = 0$ it outputs 3; at $x = 1$ it outputs 7; at $x = 2$ it outputs 17." If you give enough such observations, they nail down the function just as tightly as the coefficients do.

29.1.1 Point-value form

Here is the second representation. A *point-value representation* of a polynomial A of degree bound n is a set of n point-value pairs

$$\{(x_0, y_0), (x_1, y_1), \ldots, (x_{n-1}, y_{n-1})\}$$

where the x_k are all distinct and $y_k = A(x_k)$ for each k. So instead of the recipe, you record what the polynomial *evaluates to* at n chosen inputs.

Why exactly n points, no more and no fewer? Because of a fact you may remember from school dressed up in a fancier outfit: through any two points there is exactly one line (deg ≤ 1, so 2 coefficients); through any three points in general position there is exactly one parabola (deg ≤ 2, so 3 coefficients); and in general, n points determine a unique polynomial of degree bound n.

Theorem 29.1 (Uniqueness of interpolation)**.** *For any set of n point-value pairs $\{(x_0, y_0), \ldots, (x_{n-1}, y_{n-1})\}$ with all x_k distinct, there is a* unique *polynomial A of degree bound n such that $A(x_k) = y_k$ for all k.*

Formal

Why it is true. Asking for $A(x_k) = y_k$ for $k = 0, \ldots, n-1$ is asking the unknown coefficients $a_0, \ldots, a_{n-1}$ to satisfy the linear system

$$\begin{pmatrix} 1 & x_0 & x_0^2 & \cdots & x_0^{n-1} \\ 1 & x_1 & x_1^2 & \cdots & x_1^{n-1} \\ \vdots & & & & \vdots \\ 1 & x_{n-1} & x_{n-1}^2 & \cdots & x_{n-1}^{n-1} \end{pmatrix} \begin{pmatrix} a_0 \\ a_1 \\ \vdots \\ a_{n-1} \end{pmatrix} = \begin{pmatrix} y_0 \\ y_1 \\ \vdots \\ y_{n-1} \end{pmatrix}.$$

The matrix on the left is the *Vandermonde matrix* $V(x_0, \ldots, x_{n-1})$. Its determinant equals $\prod_{j<k}(x_k - x_j)$, which is nonzero exactly when all the x_k are distinct. A square linear system with a nonzero determinant has exactly one solution — so the coefficients exist and are unique. That is the whole proof.

The two representations are therefore *equivalent*: each one determines the same polynomial, and we may convert back and forth.

- **Evaluation** goes coefficient → point-value: pick the points x_k, compute $y_k = A(x_k)$.
- **Interpolation** goes point-value → coefficient: recover the a_j from the pairs (x_k, y_k). (This is solving the Vandermonde system, or running Lagrange's formula.)

Focus

Hold these two pictures side by side for the whole chapter:

coefficient form $(a_0, \ldots, a_{n-1})$ $\underset{\text{interpolate}}{\overset{\text{evaluate}}{\rightleftarrows}}$ **point-value form** $\{(x_k, y_k)\}$.


The FFT is nothing more than a *breathtakingly fast* way to travel along this double arrow when the x_k are chosen cleverly.

29.1.2 A small worked conversion

Take $A(x) = 1 + 2x + 3x^2$ (so $n = 3$, coefficients $(1, 2, 3)$). Let us evaluate at $x_0 = 0$, $x_1 = 1$, $x_2 = 2$.

$$A(0) = 1, \qquad A(1) = 1 + 2 + 3 = 6, \qquad A(2) = 1 + 4 + 12 = 17.$$

So a point-value representation is $\{(0, 1), (1, 6), (2, 17)\}$. Three coefficients in, three pairs out — both forms carry exactly the same information about the same parabola. If somebody hands you those three pairs and you did not know the coefficients, Theorem 29.1 promises you could recover $(1, 2, 3)$ and nothing else.

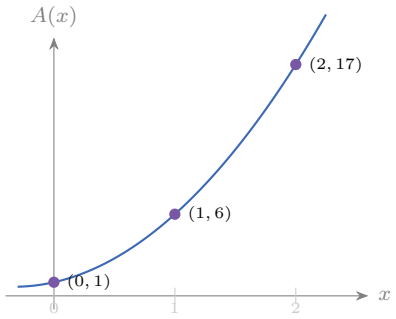

The three purple dots are the point-value pairs; the blue curve is the unique parabola threaded through them. Move any dot and you get a different parabola — but fix all three and the curve has no freedom left, which is exactly what Theorem 29.1 asserts.

29.2 The operation we actually care about: multiplication

Now let us see why anyone would bother with two representations. Suppose we want the *product* of two polynomials,

$$A(x) = \sum_{j=0}^{n-1} a_j x^j, \qquad B(x) = \sum_{j=0}^{n-1} b_j x^j,$$

giving a polynomial $C(x) = A(x)B(x)$ of degree bound $2n - 1$. In coefficient form, its coefficients are the *convolution* of the two coefficient lists:

$$c_k = \sum_{j=0}^{k} a_j \, b_{k-j}, \qquad k = 0, 1, \ldots, 2n - 2.$$

Intuition

Convolution is just "collect every way to make x^k." To get the coefficient of x^k in the product, you pair up a term $a_j x^j$ from A with the term $b_{k-j}x^{k-j}$ from B, because their exponents add to k. You sum over all such pairs. Computing one c_k costs about k multiplications; summing over all k costs $\Theta(n^2)$. That is the schoolbook cost, and it is exactly what we want to beat.

Now watch what happens in *point-value* form. Suppose we already know A and B at the *same* set of points $x_0, \ldots, x_{m-1}$:

$$A : \{(x_k, A(x_k))\}, \qquad B : \{(x_k, B(x_k))\}.$$

Then the value of the product at any one point is just the product of the two values, because $C(x_k) = A(x_k)\,B(x_k)$ — multiplication of *functions* is multiplication of their *outputs*, pointwise. So


$$C : \{(x_k,\ A(x_k)\,B(x_k))\}.$$

Focus

Point-value multiplication is embarrassingly cheap. If both polynomials are sampled at the same points, multiplying them is just multiplying the y-values one at a time: m scalar multiplications, total cost $\Theta(m)$. Linear! Compare that to the $\Theta(n^2)$ convolution in coefficient form.

There is one bookkeeping subtlety. The product C has degree bound $2n-1$, so by Theorem 29.1 it needs at least $2n-1$ points to be pinned down. So before sampling we treat A and B as degree-bound-$2n$ polynomials by padding their coefficient lists with zeros, and we evaluate both at $2n$ points. Then pointwise multiplication gives a valid point-value form of C.

This suggests a strategy with three steps, drawn here as a journey:

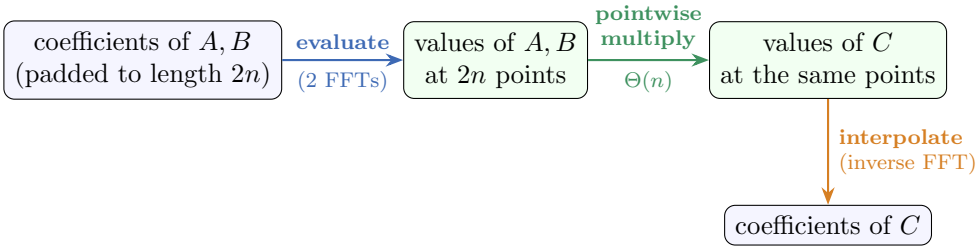

The middle step is already linear. The whole battle is in the side steps: *evaluate* (go right) and *interpolate* (come back). Done naively, each of those is $\Theta(n^2)$ — evaluating one polynomial at n points by Horner's rule is $\Theta(n)$ per point, $\Theta(n^2)$ for all points — and we have gained nothing. The FFT's entire job is to make those two side trips cost $\Theta(n \log n)$. And the secret is to stop letting the points x_k be arbitrary, and instead choose them with exquisite care.

29.3 Choosing the points: roots of unity

Why should the choice of evaluation points matter for *speed*? Here is the intuition, and it is the soul of the whole algorithm.

Intuition


Divide-and-conquer wants to split a problem of size n into two problems of size $n/2$ that we can solve and cheaply recombine. To evaluate A at n points, we would love to split A into two smaller polynomials and evaluate *those* at $n/2$ points each. For that to save work, the $n/2$ smaller points must somehow be "shared" between the two halves — evaluating the big polynomial at a point and its negative should reuse the same sub-computation. Ordinary points like $0, 1, 2, 3, \ldots$ have no such hidden relationships. But there is a magical set of points, evenly spaced around a circle, where squaring the set gives back a set half its size. Those are the *roots of unity*.

29.3.1 Complex roots of unity

A *complex nth root of unity* is a number ω with $\omega^n = 1$. There are exactly n of them, and they sit at equal angles around the unit circle in the complex plane. Using Euler's formula $e^{i\theta} = \cos\theta + i\sin\theta$, the *principal* nth root of unity is

$$\omega_n = e^{2\pi i/n},$$

and the full set of n roots is $\omega_n^0, \omega_n^1, \ldots, \omega_n^{n-1}$. They are the n points you reach by walking around the unit circle in n equal steps of angle $2\pi/n$.

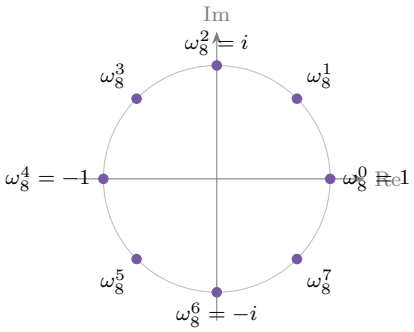

The figure shows the eight 8th roots of unity. Notice they come in *antipodal pairs*: ω_8^0 and $\omega_8^4 = -1$ are opposite; so are ω_8^1 and ω_8^5; and so on. That pairing is not a coincidence, and it is precisely the structure divide-and-conquer will exploit.

29.3.2 Three facts that make everything work

Everything the FFT needs rests on three small algebraic facts. Let us state and feel each one. Assume n is even (in fact a power of two).

Lemma 29.1 (Cancellation)**.** *For any integers $n > 0$, $d > 0$, and $k \geq 0$, $\omega_{dn}^{dk} = \omega_n^k$. In particular $\omega_n^{k+n/2} = -\omega_n^k$ (taking $d = 2$ together with $\omega_2^1 = -1$).*

Formal

Why. $\omega_{dn}^{dk} = \left(e^{2\pi i/(dn)}\right)^{dk} = e^{2\pi i\, dk/(dn)} = e^{2\pi i\, k/n} = \omega_n^k$. The exponents just cancel. For the second statement, $\omega_n^{k+n/2} = \omega_n^k\, \omega_n^{n/2}$, and $\omega_n^{n/2} = e^{2\pi i\,(n/2)/n} = e^{\pi i} = -1$. So evaluating at a root and at its antipode differ only by a sign — this is the "share the work between a point and its negative" phenomenon we hoped for.

Lemma 29.2 (Halving)**.** *If $n > 0$ is even, then the squares of the n complex nth roots of unity are the $n/2$ complex $(n/2)$th roots of unity,* each appearing exactly twice.

Formal

Why. Square the kth root: $\left(\omega_n^k\right)^2 = \omega_n^{2k} = \omega_{n/2}^k$ by cancellation (with $d = 2$, replacing n by $n/2$). As k runs $0, 1, \ldots, n-1$, the value $\omega_{n/2}^k$ cycles through all $n/2$ of the $(n/2)$th roots, and because ω_n^k and $\omega_n^{k+n/2}$ square to the same thing (their squares differ by $\omega_n^n = 1$), each value is hit exactly twice.

Intuition

The halving lemma is the entire reason the FFT exists. It says: if I want to evaluate a polynomial at all n roots of unity, the *squares* of those points form a problem half the size — the $n/2$ roots of unity — and the squares are what a divide step naturally produces. So a size-n evaluation reduces to a size-$n/2$ evaluation. Halve, halve, halve: that is where the $\log n$ comes from.

Lemma 29.3 (Summation)**.** *For any integer k not divisible by n, $\displaystyle\sum_{j=0}^{n-1} \left(\omega_n^k\right)^j = 0$. (When k is divisible by n, every term is 1 and the sum is n.)*

Formal

Why. This is a geometric series with ratio ω_n^k:

$$\sum_{j=0}^{n-1} (\omega_n^k)^j = \frac{(\omega_n^k)^n - 1}{\omega_n^k - 1} = \frac{(\omega_n^n)^k - 1}{\omega_n^k - 1} = \frac{1^k - 1}{\omega_n^k - 1} = 0,$$

valid because $\omega_n^k \neq 1$ when $n \nmid k$, so we are not dividing by zero. The summation lemma is what makes *interpolation* (the trip back) work; we will use it when we invert the FFT.

29.4 The Discrete Fourier Transform

We are now ready to name the object we are computing. We evaluate A at the n roots of unity. The resulting list of values is so important it gets its own name.

Definition 29.1 (DFT)**.** Let A have coefficient vector $(a_0, \dots, a_{n-1})$. Its *Discrete Fourier Transform* is the vector $(y_0, \dots, y_{n-1})$ where

$$y_k = A(\omega_n^k) = \sum_{j=0}^{n-1} a_j \, \omega_n^{kj}, \qquad k = 0, 1, \dots, n-1.$$

We write $\mathbf{y} = \mathrm{DFT}_n(\mathbf{a})$.

So the DFT is just "evaluate at the roots of unity," packaged. Computed directly from the definition — n values, each a sum of n terms — it costs $\Theta(n^2)$. The *Fast* Fourier Transform is an algorithm that produces the very same vector $\mathbf{y}$ in $\Theta(n \log n)$ time. Same output; cleverer route.

Why this matters

The DFT is one of the most used computations on Earth. Sampled sound, the pixels streaming off a camera sensor, the radio waves hitting a cellphone tower, the seismograph trace of an earthquake — all of these are sequences of numbers, and asking "which frequencies are present, and how strong?" is exactly asking for their DFT. Without a *fast* way to compute it, digital audio, image compression (JPEG), wireless communication (OFDM in Wi-Fi and 4G/5G), and medical imaging would all be impractical. Gilbert Strang has called the FFT "the most important numerical algorithm of our lifetime."

29.5 The FFT: divide and conquer on the coefficients

Here comes the idea. We want $A(\omega_n^k)$ for all k, where $A(x) = a_0 + a_1 x + \cdots + a_{n-1}x^{n-1}$ and n is a power of two. Split A into its *even-indexed* and *odd-indexed* coefficients:

$$A^{[0]}(x) = a_0 + a_2 x + a_4 x^2 + \cdots + a_{n-2}x^{n/2-1},$$

$$A^{[1]}(x) = a_1 + a_3 x + a_5 x^2 + \cdots + a_{n-1}x^{n/2-1}.$$

Each of these is a polynomial of degree bound $n/2$ — half the size. And they reassemble the original by

$$A(x) = A^{[0]}(x^2) + x\, A^{[1]}(x^2).$$

Intuition

Read that identity slowly. Group the even-power terms: $a_0 + a_2x^2 + a_4x^4 + \cdots$ is exactly $A^{[0]}$ evaluated at x^2. Group the odd-power terms: $a_1x + a_3x^3 + \cdots = x(a_1 + a_3x^2 + \cdots) = x\, A^{[1]}(x^2)$. Add them, you recover $A(x)$. So to evaluate A at a point x, it suffices to evaluate the two half-size polynomials at x^2 and combine with one multiply and one add.

Now plug in the roots of unity for x. To get all of $A(\omega_n^0), \dots, A(\omega_n^{n-1})$, we need $A^{[0]}$ and $A^{[1]}$ evaluated at the *squares* $\left(\omega_n^k\right)^2$. But by the halving lemma those squares are exactly the $n/2$ roots $\omega_{n/2}^k$ — and there are only $n/2$ distinct ones! So:

Focus

Evaluating A at the n roots of unity reduces to evaluating $A^{[0]}$ and $A^{[1]}$ — each half the degree — at the $n/2$ roots of unity. Two subproblems of half the size. That is a clean divide-and-conquer split, and the halving lemma is what guarantees the recursion lands back on the same kind of problem.

29.5.1 The combine step, made explicit

Suppose the two recursive calls have returned. Let $y_k^{[0]} = A^{[0]}(\omega_{n/2}^k)$ and $y_k^{[1]} = A^{[1]}(\omega_{n/2}^k)$ for $k = 0, \ldots, n/2 - 1$. We want $y_k = A(\omega_n^k)$ for $k = 0, \ldots, n-1$.

For k in the *lower* half, $0 \le k < n/2$, plug $x = \omega_n^k$ into the identity and use $\left(\omega_n^k\right)^2 = \omega_{n/2}^k$:


$$y_k = A^{[0]}(\omega_{n/2}^k) + \omega_n^k \, A^{[1]}(\omega_{n/2}^k) = y_k^{[0]} + \omega_n^k \, y_k^{[1]}.$$

For the *upper* half, look at index $k + n/2$. Here is where the cancellation lemma pays off. We have $\left(\omega_n^{k+n/2}\right)^2 = \omega_{n/2}^k$ (squaring removes the antipodal sign), so $A^{[0]}$ and $A^{[1]}$ are evaluated at the *same* point as before; and $\omega_n^{k+n/2} = -\omega_n^k$. Therefore

$$y_{k+n/2} = A^{[0]}(\omega_{n/2}^k) - \omega_n^k \, A^{[1]}(\omega_{n/2}^k) = y_k^{[0]} - \omega_n^k \, y_k^{[1]}.$$

Intuition

Two outputs for the price of one. The quantity $\omega_n^k \, y_k^{[1]}$ — called the *twiddle factor* times the odd value — is computed once, then *added* to give the lower-half answer and *subtracted* to give the upper-half answer. This add/subtract pair is the famous "butterfly," and it is the reason we get n output values from only $n/2$ subproblem values plus $n/2$ multiplications.



29.5.2 The algorithm

Algorithm 124: RECURSIVE-FFT(**a**)

Input: A coefficient vector $\mathbf{a} = (a_0, \dots, a_{n-1})$ with n a power of 2.
Output: $\mathbf{y} = \mathrm{DFT}_n(\mathbf{a})$, i.e. $y_k = A(\omega_n^k)$.

```
if n = 1 then
    return a;                                   // a constant:  A(ω_1^0) = a_0
ω_n ← e^{2πi/n};   ω ← 1;
a^[0] ← (a_0, a_2, ..., a_{n-2});
a^[1] ← (a_1, a_3, ..., a_{n-1});
y^[0] ← RECURSIVE-FFT(a^[0]);
y^[1] ← RECURSIVE-FFT(a^[1]);
for k ← 0 to n/2 − 1 do
    t ← ω · y_k^[1];                            // twiddle × odd value
    y_k ← y_k^[0] + t;
    y_{k+n/2} ← y_k^[0] − t;
    ω ← ω · ω_n;                                // advance to next root:  ω = ω_n^k
return y;
```

Notice the loop maintains $\omega = \omega_n^k$ as an invariant, updating it by a single multiplication each pass rather than recomputing a power from scratch. The base case $n = 1$ returns the single coefficient unchanged, because a degree-0 polynomial $A(x) = a_0$ evaluates to a_0 everywhere, in particular at $\omega_1^0 = 1$.

29.5.3 Correctness, gently

Formal

Claim. RECURSIVE-FFT(**a**) returns $y_k = A(\omega_n^k)$ for every k.
Induction on n (a power of 2). *Base case* $n = 1$: the only root is $\omega_1^0 = 1$, and $A(1) = a_0$, which is what we return. *Inductive step:* assume the two recursive calls are correct on inputs of size $n/2$, so $y_k^{[0]} = A^{[0]}(\omega_{n/2}^k)$ and $y_k^{[1]} = A^{[1]}(\omega_{n/2}^k)$. The combine step computes, for $0 \le k < n/2$,

$$y_k = y_k^{[0]} + \omega_n^k y_k^{[1]}, \qquad y_{k+n/2} = y_k^{[0]} - \omega_n^k y_k^{[1]}.$$


We showed above, using the identity $A(x) = A^{[0]}(x^2) + xA^{[1]}(x^2)$ and the halving/cancellation lemmas, that these equal $A(\omega_n^k)$ and $A(\omega_n^{k+n/2})$ respectively. As k ranges over $0, \dots, n/2 - 1$, the indices k and $k + n/2$ cover all of $0, \dots, n - 1$. So every output is correct. By induction the algorithm is correct for all powers of two. □

29.5.4 Running time

Each call does the two recursive calls on size $n/2$, plus a loop of $n/2$ iterations doing constant work each, plus building the even/odd lists in $\Theta(n)$. So

$$T(n) = 2\,T(n/2) + \Theta(n).$$

You have met this recurrence before — it is merge sort's recurrence. By the master theorem (case 2, since $n^{\log_2 2} = n$ matches the $\Theta(n)$ work), or by drawing the recursion tree:

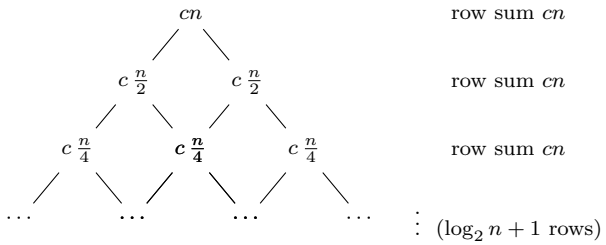

Every level of the tree does a total of cn work — the subproblems shrink but there are proportionally more of them — and there are $\log_2 n + 1$ levels, so

$$T(n) = \Theta(n \log n).$$

We have evaluated a polynomial at n points in $n \log n$ time. That is the breakthrough.

Cost summary

Task	Coefficient form	with the FFT
Evaluate at n roots of unity (DFT)	$\Theta(n^2)$	$\Theta(n \log n)$
Interpolate from n roots (inverse DFT)	$\Theta(n^2)$	$\Theta(n \log n)$
Multiply two degree-n polynomials	$\Theta(n^2)$	$\Theta(n \log n)$
Pointwise multiply n values	$\Theta(n)$	$\Theta(n)$

29.6 Coming back: the inverse FFT

We can travel coefficient → point-value fast. To finish the multiplication pipeline we need the return trip, point-value → coefficient, also fast. The miracle is that the inverse DFT is *almost the same algorithm.*

Write the DFT as a matrix-vector product $\mathbf{y} = V_n\,\mathbf{a}$, where V_n is the Vandermonde matrix at the roots of unity: its (k, j) entry is ω_n^{kj}. Inverting the DFT means solving $\mathbf{a} = V_n^{-1}\mathbf{y}$. And here the summation lemma hands us the inverse on a silver platter.

Theorem 29.2 (Inverse DFT)**.** *The inverse of V_n has (k, j) entry $\frac{1}{n}\,\omega_n^{-kj}$. Equivalently,*

$$a_j = \frac{1}{n}\sum_{k=0}^{n-1} y_k\,\omega_n^{-kj}, \qquad j = 0, \ldots, n-1.$$

Formal

Why. Multiply the candidate inverse W (with $W_{jk} = \frac{1}{n}\omega_n^{-kj}$) by V_n and look at the (j, j') entry of the product:

$$[WV_n]_{jj'} = \sum_{k=0}^{n-1} \frac{1}{n}\,\omega_n^{-kj}\,\omega_n^{kj'} = \frac{1}{n}\sum_{k=0}^{n-1} \omega_n^{k(j'-j)}.$$

By the summation lemma (Lemma 29.3) the inner sum is n when $j = j'$ and 0 otherwise. So $[WV_n]_{jj'}$ is 1 on the diagonal and 0 off it: $WV_n = I$. Hence $W = V_n^{-1}$. □

Stare at the inverse formula next to the forward one:

$$y_k = \sum_j a_j\,\omega_n^{kj} \qquad \text{vs.} \qquad a_j = \frac{1}{n}\sum_k y_k\,\omega_n^{-kj}.$$

They differ in exactly two cosmetic ways: replace ω_n by ω_n^{-1}, and divide the final answer by n. So we can compute the inverse DFT with the *same* RECURSIVE-FFT code: feed it $\mathbf{y}$, use ω_n^{-1} in place of ω_n, and divide every output by n. The cost is therefore the same $\Theta(n \log n)$.

Walking question

Take a walk and convince yourself that ω_n^{-1} is itself a primitive nth root of unity — it is just ω_n traversed clockwise instead of counterclockwise. Then ask: does the halving lemma still hold for ω_n^{-1}? (It must, or the same code could not work.) Why? Hint: the roots of unity as a *set* do not care which direction you number them.

29.7 The whole pipeline: fast polynomial multiplication

We can finally assemble the algorithm we promised at the very start.

Algorithm 125: POLY-MULTIPLY($\mathbf{a}, \mathbf{b}$)

Input: Coefficient vectors of A, B, each of degree bound n.
Output: Coefficient vector of $C = A \cdot B$, degree bound $2n - 1$.

```
Let m be the smallest power of 2 with m ≥ 2n;
Pad a and b with zeros up to length m;
y_A ← RECURSIVE-FFT(a);                    // evaluate A at m roots
y_B ← RECURSIVE-FFT(b);                    // evaluate B at m roots
for k ← 0 to m − 1 do
    y_C[k] ← y_A[k] · y_B[k];              // pointwise multiply
c ← INVERSE-FFT(y_C);                      // interpolate back
return c (real parts, rounded if inputs were integers);
```

Focus

Three FFTs ($\Theta(m \log m)$), one pointwise loop ($\Theta(m)$), and $m = \Theta(n)$. Total: $\Theta(n \log n)$. We multiply two polynomials — equivalently, convolve two sequences — in $n \log n$ time. The

schoolbook n^2 is broken.

29.7.1 A complete numerical trace

Let us multiply $A(x) = 1 + 2x$ and $B(x) = 3 + 4x$. By hand, $C(x) = 3 + 10x + 8x^2$, so we are hoping to recover coefficients $(3, 10, 8)$. The product has degree bound 3, so we pad to $m = 4$ and use the 4th roots of unity

$$\omega_4^0 = 1, \quad \omega_4^1 = i, \quad \omega_4^2 = -1, \quad \omega_4^3 = -i.$$

Padded coefficients: $\mathbf{a} = (1, 2, 0, 0)$, $\mathbf{b} = (3, 4, 0, 0)$.

Step 1: evaluate A. $A(x) = 1 + 2x$ (the padding zeros do nothing), so

$$y_A = \big(A(1), A(i), A(-1), A(-i)\big) = (3,\ 1 + 2i,\ -1,\ 1 - 2i).$$

Step 1b: evaluate B. $B(x) = 3 + 4x$, so

$$y_B = (7,\ 3 + 4i,\ -1,\ 3 - 4i).$$

Step 2: pointwise multiply.

$$y_C = \big(3 \cdot 7,\ (1 + 2i)(3 + 4i),\ (-1)(-1),\ (1 - 2i)(3 - 4i)\big).$$

Work out the middle two: $(1 + 2i)(3 + 4i) = 3 + 4i + 6i + 8i^2 = 3 + 10i - 8 = -5 + 10i$, and its conjugate $(1 - 2i)(3 - 4i) = -5 - 10i$. So

$$y_C = (21,\ -5 + 10i,\ 1,\ -5 - 10i).$$

Step 3: inverse DFT. Use $a_j = \frac{1}{4} \sum_k y_{C,k}\, \omega_4^{-kj}$ with $\omega_4^{-1} = -i$. For example, $c_0 = \frac{1}{4}(21 + (-5 + 10i) + 1 + (-5 - 10i)) = \frac{1}{4}(12) = 3$. And

$$c_1 = \tfrac{1}{4}\big(21 \cdot 1 + (-5 + 10i)(-i) + 1 \cdot (-1) + (-5 - 10i)(i)\big).$$

Compute the pieces: $(-5 + 10i)(-i) = 5i + 10 = 10 + 5i$; $(-5 - 10i)(i) = -5i + 10 = 10 - 5i$. Sum: $21 + (10 + 5i) - 1 + (10 - 5i) = 40$, so $c_1 = 40/4 = 10$. A similar computation gives $c_2 = 8$ and $c_3 = 0$.

Algorithm lab

Trace it yourself. You just watched $(1 + 2x)(3 + 4x)$ come out as $3 + 10x + 8x^2$ through the FFT machinery. Now do $A(x) = 1 + x + x^2$ times $B(x) = 1 - x$ by the same recipe.

1. The product has degree 3, so pad to $m = 4$. Write the padded vectors.
2. Evaluate both at $1, i, -1, -i$. (You already know $A(i) = 1 + i + i^2 = i$.)
3. Multiply the four value-pairs.
4. Run the inverse formula $c_j = \frac{1}{4} \sum_k y_{C,k} (-i)^{kj}$.
5. Check against the schoolbook answer $(1 + x + x^2)(1 - x) = 1 - x^3$, i.e. coefficients $(1, 0, 0, -1)$. Did the imaginary parts cancel to (almost) zero? They must, since real inputs give a real product.

Common trap

Five classic mistakes.

- **Forgetting to pad.** If you sample A and B at only n points, you get n values of C, but C has degree bound $2n-1$ and needs $2n$ values. Your interpolation will silently produce the wrong ("wrapped-around") answer. Always pad to length $\geq 2n$, rounded up to a power of two.
- **Using $+\omega_n$ instead of ω_n^{-1} on the way back**, or **forgetting the** $1/n$. Either one corrupts the inverse transform.
- **Assuming the imaginary parts are exactly zero.** With floating-point arithmetic the recovered coefficients carry tiny imaginary residue like $10^{-15}i$; take real parts and (for integer problems) round.
- **Thinking the FFT needs n prime, or n anything other than a power of two.** The radix-2 FFT in this chapter needs n to be a power of two; pad up to one. (More general FFTs exist, but start here.)
- **Confusing degree with degree bound.** A polynomial of *degree* d has *degree bound* $d+1$, i.e. $d+1$ coefficients. Off-by-one errors here cause the worst padding bugs.

29.8 Why the same code runs forward and backward

It is worth one more pass on the elegant symmetry, because it is easy to use the inverse FFT mechanically without seeing *why* the universe is so kind.

Intuition

The forward DFT mixes the coefficients into values by "winding" them around the circle counterclockwise (multiplying by $\omega_n = e^{+2\pi i/n}$). The inverse unwinds them by going clockwise ($\omega_n^{-1} = e^{-2\pi i/n}$) and then dividing out the factor n that the winding introduced. Because both directions use roots of unity — and the roots of unity are the *same set* whether you number them clockwise or counter — the halving and butterfly structure is identical. The FFT is a machine that runs equally well in reverse; you only change the gear ratio ($\omega \to \omega^{-1}$) and a final scale ($\div n$).

Why this matters

This forward/backward symmetry is exactly what makes the FFT the workhorse of signal processing. To filter a sound (remove hiss, boost bass, cancel an echo) you FFT into the frequency domain, tweak the frequency values, and inverse-FFT back to a waveform — and both legs cost $n \log n$. Convolution in the time domain becomes *pointwise multiplication* in the frequency domain, which is the same fact we used to multiply polynomials. Audio plug-ins, noise-cancelling headphones, MRI reconstruction, and the modulation scheme in every Wi-Fi router are all standing on this one $n \log n$ algorithm.

History and connection

The divide-and-conquer FFT is usually credited to James Cooley and John Tukey (1965), who were partly motivated by detecting Soviet nuclear tests from seismic data. But the core idea is far older: Carl Friedrich Gauss used essentially the same trick around 1805 to interpolate the orbits of asteroids, before Fourier's work was even published — his notes lay buried in his collected works in non-standard notation for over a century. This material is CLRS Chapter 30 ("Polynomials and the FFT"): Section 30.1 covers the two representations and the multiplication strategy, Section 30.2 develops the DFT and RECURSIVE-FFT, and Section 30.3 treats efficient implementations (the iterative, in-place FFT with bit-reversal). For the number theory behind doing FFTs in modular arithmetic — the "Number-Theoretic Transform," which avoids floating-point entirely — see the next chapter on number-theoretic algorithms.


29.9 A note on making it iterative and fast in practice

The recursive code is the clearest way to *understand* the FFT, but production implementations are usually *iterative* and operate in place. Two ideas drive this.

First, *bit-reversal*. If you trace which input coefficient ends up feeding each leaf of the recursion, you find that coefficient a_j lands in the slot whose index is the binary digits of j *reversed*. For $n = 8$, a_1 (001_2) lands at position $100_2 = 4$, a_3 (011_2) lands at $110_2 = 6$, and so on. Permute the input by bit-reversal once at the start, and the recursion's even/odd splitting is already laid out for you.

Second, *building up* instead of down. After bit-reversal, combine adjacent pairs with butterflies into transforms of size 2, then size 4, then size 8, … up to size n — $\log_2 n$ passes, each touching all n elements with $n/2$ butterflies. No recursion stack, no array allocation per call, excellent cache behavior. Same $\Theta(n \log n)$, much smaller constant.

The picture below shows the shape of the iterative FFT for $n = 8$. The inputs enter on the left in bit-reversed order; three columns of butterflies (combining blocks of size 2, then 4, then 8) carry them rightward into the finished transform $y_0, \ldots, y_7$. Each "⋈" is one butterfly: an add and a subtract sharing a twiddle multiply, exactly as in the recursive combine step.

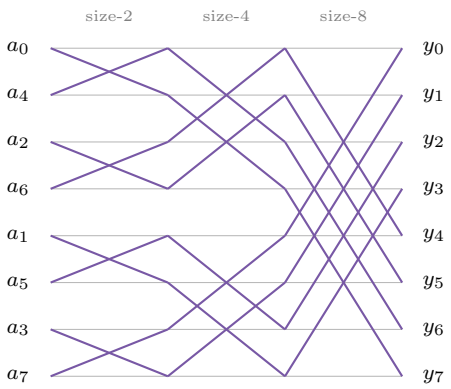

Cost summary

Recursive vs. iterative FFT. Both are $\Theta(n \log n)$. The iterative, in-place version (CLRS 30.3) wins by a constant factor: it avoids per-call allocation, computes twiddle factors with one multiply per use, and streams through memory in a cache-friendly pattern. For the asymptotics in this book either is fine; for real software, write the iterative one.

Pause

If this chapter went by fast, here is the one paragraph to keep. A polynomial can be written by its coefficients *or* by its values at chosen points; multiplication is slow (n^2) in coefficients but fast (n) in values. Converting between the two forms is normally n^2, but if you choose the points to be the nth roots of unity — evenly spaced on the unit circle — then a divide-and-conquer split on even/odd coefficients turns the conversion into $n \log n$. That conversion is the FFT; running it forward, multiplying pointwise, and running it backward multiplies polynomials in $\Theta(n \log n)$.

29.10 Exercises

Exercise 29.1. Convert $A(x) = 2 - x + x^2$ from coefficient form to a point-value representation using the points $x = -1, 0, 1$. Then, pretending you only had those three pairs, reconstruct the polynomial with Lagrange interpolation and confirm you get the original coefficients back.

Exercise 29.2. Write out the convolution sum for c_k when $A = (1, 2, 3)$ and $B = (4, 5, 6)$, computing all five coefficients $c_0, \ldots, c_4$ of the product by hand. How many scalar multiplications did the schoolbook method use? Now state the count for general degree bound n.

Exercise 29.3. List the six 6th roots of unity in the form $a + bi$ (use exact values where you can, decimals otherwise). Verify directly that their sum is 0, illustrating the summation lemma.

Exercise 29.4. Compute the squares of all eight 8th roots of unity and confirm by hand that the results are exactly the four 4th roots of unity, each appearing twice (the halving lemma).

Exercise 29.5. Run Recursive-FFT on the input $\mathbf{a} = (1, 2, 3, 4)$ ($n = 4$). Show the even/odd split, the two size-2 recursive results, and the butterfly combine. Your answer should be the four values $A(1), A(i), A(-1), A(-i)$. Check by evaluating $A(x) = 1 + 2x + 3x^2 + 4x^3$ directly.

Exercise 29.6. Take the output vector you computed in Exercise 29.5 and run the inverse DFT on it (use $\omega_4^{-1} = -i$ and divide by 4). You should recover $(1, 2, 3, 4)$. Show at least the computations for a_0 and a_2.

Exercise 29.7. Use the full Poly-Multiply pipeline to compute $(1 + x + x^2)(2 + 3x)$. Pad to the right power of two, do the two forward FFTs, multiply pointwise, and inverse-transform. Confirm the coefficients match the schoolbook product.

Exercise 29.8. For $n = 8$, write the bit-reversal permutation: for each index $0, \ldots, 7$ give its 3-bit binary, reverse the bits, and report the destination index. Which indices are fixed points (map to themselves)?

Exercise 29.9. The recurrence for RECURSIVE-FFT is $T(n) = 2T(n/2) + cn$. Solve it two ways: (a) by drawing the recursion tree and summing the per-level work; (b) by the master theorem, identifying which case applies and why. Confirm both give $\Theta(n \log n)$.

Exercise 29.10. *(Challenge.)* Explain how to multiply two n-digit integers in $\Theta(n \log n)$ time using the FFT. (Hint: an integer $\overline{d_{n-1} \cdots d_1 d_0}$ in base 10 is the polynomial $\sum d_j 10^j$ evaluated at $x = 10$. Multiply the polynomials, then handle carries.) What goes wrong if you forget to pad, and what is the role of carrying after the convolution?

Exercise 29.11. *(Reflection.)* The summation lemma says the roots of unity sum to zero for any k not a multiple of n. Explain geometrically why this must be true by thinking of the roots as vectors pointing from the origin, equally spaced around the circle. (What is the "center of mass" of evenly spaced points on a circle?)

Chapter 30

Number-Theoretic Algorithms

For most of this book the objects we have sorted, searched, and shuffled have been treated as opaque – a number was just a thing you could compare to another thing. In this chapter we finally open the numbers up and look at how they are built out of one another: which integers divide which, what is left over when they do not, and how all of this behaves when we agree to throw away everything but the remainder. This is the world of *number theory*, and it is at once the oldest branch of mathematics and the engine room of modern cryptography.

The plot of the chapter is a single, satisfying arc. We start with the most ancient algorithm still in daily use – Euclid's method for the greatest common divisor, older than Euclid himself – and we squeeze it for everything it is worth. From it we get a way to solve equations "modulo n," a way to stitch together answers from several different moduli (the Chinese Remainder Theorem), a way to raise numbers to enormous powers without ever computing the enormous intermediate values, and finally a way to test whether a 600-digit number is prime in a fraction of a second. Stack those four ideas on top of one another and you have built RSA, the public-key cryptosystem that, as you read this, is quietly protecting a great deal of the world's secrets.

Throughout, we will be obsessive about one thing CLRS is careful about and many courses are sloppy about: the *size* of the numbers. When the inputs are β-bit integers, an arithmetic operation is not free; it costs something that grows with β. We will mostly count arithmetic operations, but we will keep an honest eye on the bit cost too, because the entire reason these algorithms matter is that they stay cheap even when the numbers are astronomically large.

30.1 Divisibility, GCD, and the Idea of a Remainder

Let us begin where every number-theory course begins, with the relation of one integer *dividing* another.

Definition 30.1 (Divisibility)**.** For integers a and d with $d \neq 0$, we say d *divides* a, written $d \mid a$, if there is an integer k with $a = k\,d$. We call d a *divisor* of a and a a *multiple* of d. If d does not divide a we write $d \nmid a$.

So $3 \mid 12$ because $12 = 4 \cdot 3$, but $3 \nmid 13$. Every integer d divides 0 (take $k = 0$), and 1 divides everything.

The next idea is the workhorse of the entire chapter: when d does *not* evenly divide a, there is a unique leftover.

Theorem 30.1 (Division theorem)**.** *For any integer a and any positive integer n, there exist unique integers q (the* quotient*) and r (the* remainder*) such that*

$$a = q\,n + r \qquad \textit{and} \qquad 0 \le r < n.$$

We write $q = \lfloor a/n \rfloor$ and $r = a \bmod n$.

You have known this since grade school as "long division with a remainder." The remainder $a \bmod n$ is always dragged into the range $\{0, 1, \ldots, n-1\}$, even when a is negative: $(-7) \bmod 3 = 2$, because $-7 = (-3) \cdot 3 + 2$. Hold onto that; sign conventions for mod trip up almost everyone at least once.

30.1.1 The greatest common divisor

Definition 30.2 (GCD)**.** The *greatest common divisor* of two integers a and b, not both zero, written $\gcd(a, b)$, is the largest integer that divides both. We set $\gcd(0, 0) = 0$ by convention. If $\gcd(a, b) = 1$ we say a and b are *relatively prime* (or *coprime*).

How would you compute $\gcd(48, 36)$ if you had never heard of Euclid? You might factor: $48 = 2^4 \cdot 3$ and $36 = 2^2 \cdot 3^2$, take the smaller power of each shared prime, $2^2 \cdot 3 = 12$. That works, and it is correct, but it hides a catastrophe: *factoring large numbers is believed to be hard.* Nobody knows a fast way to factor a 600-digit number, and the security of RSA leans on exactly that difficulty. So if computing gcd required factoring, we would be stuck. The miracle of this chapter is that you can compute gcd without factoring at all, blindingly fast, using an idea that is about 2300 years old.

Intuition

Picture a floor that is 48 by 36 inches, and you want to tile it with the largest possible square tiles, all the same size, no cutting. The side length of that biggest tile is exactly $\gcd(48, 36)$. Here is Euclid's insight as a physical act. Lay down as many 36×36 squares along the long side as you can – you fit one, with a 12×36 strip left over. Now the leftover strip is itself a smaller tiling problem: tile a 36×12 region. The genius is that the biggest tile for the original floor is the same as the biggest tile for the leftover strip. The problem got smaller but the answer did not change. Keep peeling off the leftover and you race down to a strip that tiles perfectly – and that final side length is your answer.

Figure 30.1 draws the first peel of that process for a 48×36 floor: one 36×36 square fits along the long side, leaving a 12×36 strip that becomes the next, smaller tiling problem.




Figure 30.1: One step of Euclid as tiling: $\gcd(48, 36) = \gcd(36, 12)$. The blue 36×36 square is the largest that fits along the long side; the orange 12×36 leftover is the next subproblem, with the same answer.

The mathematical engine behind the picture is one short, perfect lemma.

Theorem 30.2 (Euclid's reduction)**.** *For any integer a and positive integer b,*

$$\gcd(a, b) = \gcd(b,\ a \bmod b).$$

Formal

Proof. Write $a = qb + r$ with $r = a \bmod b$. We show the two pairs (a, b) and (b, r) have *exactly the same set* of common divisors; then in particular their greatest common divisors coincide. Suppose $d \mid a$ and $d \mid b$. Then $d \mid (a - qb) = r$, so d divides both b and r. Conversely, suppose $d \mid b$ and $d \mid r$. Then $d \mid (qb + r) = a$, so d divides both a and b. The common-divisor sets are equal, hence so are their maxima. □

That one fact, applied over and over, *is* Euclid's algorithm. We replace the pair (a, b) by the smaller pair $(b, a \bmod b)$ and repeat. The second coordinate strictly shrinks each round and stays non-negative, so we must reach 0. When the second coordinate is 0, the first coordinate is the answer, because $\gcd(g, 0) = g$.

Algorithm 126: EUCLID(a, b) – greatest common divisor

Input: Non-negative integers a, b, not both zero.
Output: $\gcd(a, b)$.

```
while b ≠ 0 do
    r ← a mod b;
    a ← b;
    b ← r;
return a;
```

Example 30.1 (Tracing $\gcd(252, 198)$)**.** We march the pair downward, each line replacing (a, b) with $(b,\ a \bmod b)$.

a	b	$q = \lfloor a/b \rfloor$	$r = a \bmod b$
252	198	1	54
198	54	3	36
54	36	1	18
36	18	2	0
18	0	—	—

The loop stops when $b = 0$, returning $a = 18$. And indeed $252 = 14 \cdot 18$ and $198 = 11 \cdot 18$, with $\gcd(14, 11) = 1$, so 18 is right.

30.1.2 How fast is it? Enter Fibonacci

Each iteration is cheap, so the only question is: how many iterations can there be? The answer ties this ancient algorithm to a sequence you have met before.

Theorem 30.3 (Lamé's theorem, informal)**.** *If $a > b \geq 0$ and the call* Euclid(a, b) *performs $k \geq 1$ recursive reductions, then $a \geq F_{k+2}$, where F_i is the i-th Fibonacci number. Equivalently, the number of reductions is $O(\log b)$.*

Intuition

Why Fibonacci? Each reduction step replaces (a, b) with $(b, a \bmod b)$. To make the algorithm work as *hard* as possible – the most steps for the smallest inputs – you want the remainder $a \bmod b$ to be as large as it can be while still being a genuine reduction, and you want the quotient to be the smallest possible, namely 1. A quotient of 1 at every single step means $a = b + r$, i.e. each number is the *sum* of the next two. That recurrence, "each term is the sum of the previous two," is the definition of the Fibonacci numbers. So consecutive Fibonacci numbers are the worst case: $\gcd(F_{n+1}, F_n)$ takes the maximum number of steps. The slowest inputs of all are the golden ones.

Because F_k grows like ϕ^k with $\phi = (1 + \sqrt{5})/2 \approx 1.618$, the condition $a \geq F_{k+2}$ forces $k = O(\log a)$. Concretely, the number of divisions is at most about $\log_\phi a \approx 1.44 \log_2 a$ – under five divisions per decimal digit. That is why Euclid's algorithm is fast even on huge inputs: a 600-digit number triggers only a few thousand divisions.

Cost summary

Euclid's algorithm. On inputs $a > b \geq 0$:

- *Number of divisions:* $O(\log b)$, worst case at consecutive Fibonacci numbers.
- *Arithmetic operations:* $O(\log b)$ modulo operations.
- *Bit complexity:* each division of β-bit numbers costs $O(\beta^2)$ with schoolbook arithmetic, giving an easy $O(\beta^3)$ bound; a sharper accounting (the quotients shrink the numbers) brings the true cost down to $O(\beta^2)$, and fast multiplication improves it further.

Common trap

Do *not* "optimize" Euclid by factoring first. Factoring is exponentially slower than the GCD itself for large numbers. The whole point of Euclid's method is that it sidesteps factoring entirely. Also: the algorithm needs $a \bmod b$, not $a - b$ – repeated subtraction is correct but can take a/b steps in a single "level," which is catastrophic when, say, $a = 10^9$ and $b = 1$.

30.2 The Extended Euclidean Algorithm

Euclid's algorithm tells you *what* $\gcd(a, b)$ is. There is a deeper fact hiding inside it, and extracting it is the single most useful tool in this whole chapter.

Theorem 30.4 (Bézout's identity)**.** *For any integers a and b, not both zero, there exist integers x and y with*

$$ax + by = \gcd(a, b).$$

Moreover $\gcd(a, b)$ *is the* smallest *positive integer expressible as an integer combination $ax + by$.*

Read that slowly. It says the GCD is not just a divisor – it is a *combination*. You can always write 18 as "some multiple of 252 plus some multiple of 198," and indeed $252 \cdot 4 + 198 \cdot (-5) = 1008 - 990 = 18$. The coefficients x and y are the *Bézout coefficients*, and finding them is the job of the extended algorithm.

Intuition

Here is the trick to seeing why this must be true. Run Euclid forward, but this time write each remainder as a combination of the original a and b. At the start, $a = 1 \cdot a + 0 \cdot b$ and $b = 0 \cdot a + 1 \cdot b$. Every later remainder is built by subtracting a multiple of one previous line from another: $r = a - qb$. Since both inputs to that subtraction are already combinations of the original a and b, so is the result. The combinations ride along for free on top of the ordinary GCD computation. When you reach the GCD, you have its combination too.

The cleanest way to compute the coefficients is the recursive form. Suppose the recursive call on $(b, a \bmod b)$ has already handed back a triple (d, x', y') with $bx' + (a \bmod b)y' = d$. We want (d, x, y) with $ax + by = d$. Substitute $a \bmod b = a - \lfloor a/b \rfloor\, b$:

$$d = bx' + (a - \lfloor a/b \rfloor\, b)\, y' = a\, y' + b\big(x' - \lfloor a/b \rfloor\, y'\big).$$

Matching coefficients, $x = y'$ and $y = x' - \lfloor a/b \rfloor\, y'$.

Algorithm 127: EXTENDED-EUCLID(a, b)

Input: Non-negative integers a, b.
Output: Triple (d, x, y) with $d = \gcd(a, b)$ and $ax + by = d$.


```
if b = 0 then
    return (a, 1, 0);
(d, x', y') ← EXTENDED-EUCLID(b, a mod b);
(d, x, y) ← (d, y', x' − ⌊a/b⌋ · y');
return (d, x, y);
```

Example 30.2 (Coefficients for $\gcd(252, 198)$)**.** We recurse down to the base case, then unwind, building the coefficients on the way back up. The downward pass is exactly Example 30.1; here is the upward pass, each line using $x = y'$ and $y = x' - \lfloor a/b \rfloor y'$.

a	b	$\lfloor a/b \rfloor$	d	x	y
18	0	—	18	1	0
36	18	2	18	0	1
54	36	1	18	1	-1
198	54	3	18	-1	4
252	198	1	18	4	-5

The top line of the original call returns $(18, 4, -5)$, and we verify $252 \cdot 4 + 198 \cdot (-5) = 1008 - 990 = 18$. The Bézout coefficients fell out of the same number of steps as the plain GCD.

Let me draw the data flow so the up-and-down structure is unmistakable.

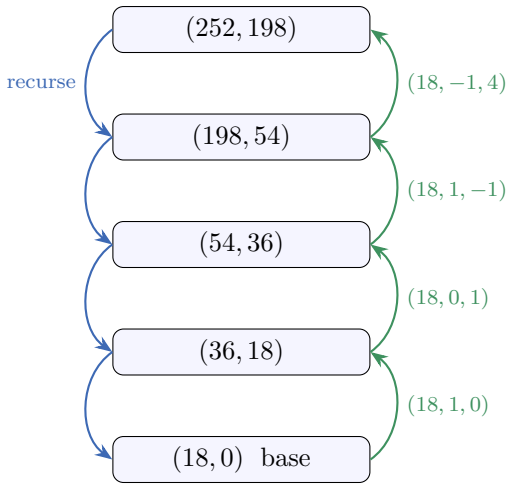

Focus

The extended algorithm gives you, for free, an integer x such that $ax \equiv \gcd(a, b)$. When $\gcd(a, b) = 1$, that x is the *multiplicative inverse* of a modulo b. Almost everything else in this chapter – solving modular equations, the Chinese Remainder Theorem, RSA decryption – is just this one observation, dressed up. If you remember one algorithm from this chapter, make it Extended-Euclid.

30.3 Modular Arithmetic: Computing on a Clock

A clock face shows the deep idea in miniature. Seven hours after 9 o'clock is not 16 o'clock; it is 4, because we wrap around at 12. We threw away the "how many times around" information and kept only the position on the dial. Modular arithmetic does exactly this, with n positions instead of 12. Figure 30.2 shows the wrap-around for $9 + 7 \equiv 4 \pmod{12}$.

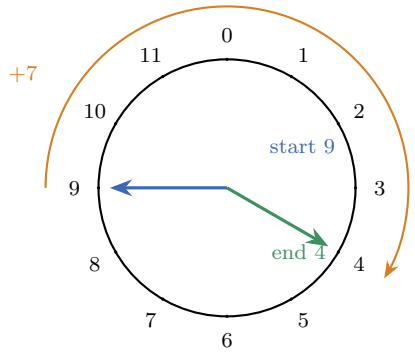


Figure 30.2: The clock $\mathbb{Z}_{12}$. Stepping 7 hours forward from 9 wraps past 12 and lands on 4: the "how many times around" is discarded and only the dial position survives.

Definition 30.3 (Congruence modulo n)**.** For a positive integer n, we say a is *congruent to b modulo n*, written $a \equiv b \pmod{n}$, if $n \mid (a-b)$; equivalently, a and b leave the same remainder when divided by n.

So $9+7 = 16 \equiv 4 \pmod{12}$. Congruence is an *equivalence relation* – reflexive, symmetric, transitive – and it carves the integers into n buckets called *residue classes*. The class of a is written $[a]_n$ and collects every integer that lands on the same dial position as a. We name the set of classes $\mathbb{Z}_n = \{[0]_n, [1]_n, \ldots, [n-1]_n\}$, and in practice we just use the representatives $\{0, 1, \ldots, n-1\}$.

The single most important property – the one that makes all our algorithms legal – is that congruence *respects* addition and multiplication.

Theorem 30.5 (Arithmetic respects congruence)**.** *If $a \equiv a' \pmod{n}$ and $b \equiv b' \pmod{n}$, then*

$$a + b \equiv a' + b' \pmod{n} \qquad \text{and} \qquad a\,b \equiv a'\,b' \pmod{n}.$$

The practical payoff is enormous: *you may reduce mod n at any time.* To compute $(123 \cdot 456) \bmod 7$ you do not need the product 56088. Reduce first: $123 \equiv 4$ and $456 \equiv 1 \pmod{7}$, so the answer is $4 \cdot 1 = 4 \bmod 7$. This "reduce early, reduce often" habit is what keeps modular algorithms from ever building giant intermediate numbers.

Common trap

Addition and multiplication carry over to the clock perfectly. *Division does not.* You cannot in general "cancel" a common factor: from $6 \equiv 0 \pmod{6}$ you cannot conclude $2 \equiv 0 \pmod{6}$. Cancelling a from both sides of a congruence is legal only when $\gcd(a, n) = 1$. Getting this wrong is the classic modular-arithmetic blunder, and untangling exactly when division *is* allowed is the subject of the next section.

30.3.1 Units and inverses

On the clock $\mathbb{Z}_n$, the element 1 acts as a multiplicative identity. An element a has a *multiplicative inverse* if there is some a^{-1} with $a \cdot a^{-1} \equiv 1 \pmod{n}$. When such an inverse exists we call a a *unit*. Inverses are what let us "divide": dividing by a means multiplying by a^{-1}.

Theorem 30.6 (Existence of inverses)**.** *The element a has a multiplicative inverse modulo n if and only if* $\gcd(a, n) = 1$*. When it exists, the inverse is unique modulo n.*

Intuition

This is just Bézout's identity wearing a different hat. If $\gcd(a, n) = 1$, the extended Euclidean algorithm hands you integers x, y with $ax + ny = 1$. Read that equation modulo n: the ny term vanishes (it is a multiple of n), leaving $ax \equiv 1 \pmod{n}$. So $x \bmod n$ *is* the inverse. The algorithm you already have for GCD is, secretly, an algorithm for computing inverses. Conversely, if $\gcd(a, n) = g > 1$, then every multiple of a is a multiple of g, so ax can never be $\equiv 1$; no inverse exists.

The set of units modulo n is written $\mathbb{Z}_n^* = \{a : 1 \le a \le n-1,\ \gcd(a, n) = 1\}$, and its size has a name: $\phi(n)$, *Euler's totient*. For a prime p, every nonzero element is a unit, so $\phi(p) = p - 1$. For a product of two distinct primes, $\phi(pq) = (p-1)(q-1)$ – a fact we will lean on hard when we build RSA.

Example 30.3 (Inverting 5 modulo 12)**.** Since $\gcd(5, 12) = 1$, an inverse exists. Run extended Euclid on $(5, 12)$ or $(12, 5)$: we find $5 \cdot 5 + 12 \cdot (-2) = 25 - 24 = 1$, so $5^{-1} \equiv 5 \pmod{12}$. Check: $5 \cdot 5 = 25 \equiv 1 \pmod{12}$. (Some elements are their own inverse; 5 here is one of them.) By contrast 6 has *no* inverse mod 12 because $\gcd(6, 12) = 6 \neq 1$: $6 \cdot k$ runs through $6, 0, 6, 0, \ldots$ and never hits 1.

30.4 Solving Modular Linear Equations

We can now solve the cleanest equation in town: find all x with

$$ax \equiv b \pmod{n}.$$

This is the modular cousin of the line $ax = b$. The number of solutions is governed entirely by $\gcd(a, n)$.

Theorem 30.7 (Solutions of $ax \equiv b \pmod{n}$)**.** *Let $g = \gcd(a, n)$. The congruence $ax \equiv b \pmod{n}$ has a solution if and only if $g \mid b$. When $g \mid b$, there are exactly g solutions modulo n, and they are evenly spaced n/g apart.*

Intuition

Why $g \mid b$? As x ranges over all integers, $ax \bmod n$ only ever lands on multiples of g – that is exactly what Bézout told us, that $ax + ny$ can only produce multiples of g. So if b is not a multiple of g, the target is simply unreachable, like trying to land on an odd number while only ever taking even-sized steps. When b *is* reachable, the symmetry of the clock means the solutions repeat in a regular pattern, and there turn out to be exactly g of them.

The recipe to find them: use extended Euclid to get x', y' with $ax' + ny' = g$. Scale by b/g to get one solution $x_0 = x' \cdot (b/g) \bmod n$. The full solution set is then $x_0 + k\,(n/g)$ for $k = 0, 1, \ldots, g - 1$.

Algorithm 128: MODULAR-LINEAR-SOLVER(a, b, n)

Input: Integers a, b and modulus $n > 0$.
Output: All solutions of $ax \equiv b \pmod{n}$, or report none.

```
(g, x', y') ← EXTENDED-EUCLID(a mod n, n);
if g ∤ b then
    return "no solution";
x_0 ← x' · (b/g) mod n;
for k ← 0 to g − 1 do
    output (x_0 + k · (n/g)) mod n;
```

Example 30.4 (Solving $14x \equiv 30 \pmod{100}$)**.** Here $g = \gcd(14, 100) = 2$, and $2 \mid 30$, so solutions exist – exactly 2 of them. Extended Euclid gives $14 \cdot (-7) + 100 \cdot 1 = 2$, so $x' = -7$. Scale by $b/g = 15$: $x_0 = (-7) \cdot 15 \bmod 100 = -105 \bmod 100 = 95$. The two solutions, spaced $n/g = 50$ apart, are

$$x \equiv 95 \quad \text{and} \quad x \equiv 95 + 50 = 145 \equiv 45 \pmod{100}.$$

Check $x = 45$: $14 \cdot 45 = 630 = 6 \cdot 100 + 30 \equiv 30 \pmod{100}$. And $x = 95$: $14 \cdot 95 = 1330 = 13 \cdot 100 + 30 \equiv 30$. Both land.

When $\gcd(a, n) = 1$ there is a single solution, $x \equiv a^{-1}b$, and this special case – one equation, one answer – is the one we use most often.

30.5 The Chinese Remainder Theorem

Now a beautiful structural result with a great origin story. A 3rd-century Chinese text asks: *there is a number which leaves remainder* 2 *when divided by* 3*, remainder* 3 *when divided by* 5*, and remainder* 2 *when divided by* 7 *– what is it?* The Chinese Remainder Theorem (CRT) says such a number always exists, is unique modulo $3 \cdot 5 \cdot 7 = 105$, and tells you how to find it.

Theorem 30.8 (Chinese Remainder Theorem)**.** *Let $n_1, n_2, \ldots, n_k$ be* pairwise coprime *positive integers and let $N = n_1 n_2 \cdots n_k$. Then for any target remainders $a_1, \ldots, a_k$ the system*

$$x \equiv a_1 \pmod{n_1}, \quad x \equiv a_2 \pmod{n_2}, \quad \ldots, \quad x \equiv a_k \pmod{n_k}$$

has a unique solution x modulo N.

Intuition

The cleanest way to feel CRT is as a *change of coordinates*. A single number x in the range $0 \le x < N$ can be described in two completely equivalent ways: by its ordinary value, or by the tuple of its remainders $(x \bmod n_1, \ldots, x \bmod n_k)$. CRT says this tuple is a perfect ID badge: no two numbers in $[0, N)$ share a badge, and every possible badge belongs to exactly one number. So computing with big numbers mod N is the same as computing with several small numbers in parallel, one per coordinate – and addition and multiplication act coordinate by coordinate. It is the integer version of breaking a vector into its components.

Figure 30.3 draws the bijection for the small case $N = 3 \cdot 5 = 15$: each of the 15 numbers gets a unique two-coordinate badge $(x \bmod 3, x \bmod 5)$, and every cell of the 3×5 grid is filled exactly once.

$x \bmod 3$ \ $x \bmod 5$	0	1	2	3	4
0	0	6	12	3	9
1	10	1	7	13	4
2	5	11	2	8	14

Figure 30.3: CRT as a change of coordinates, $N = 15$. Row $= x \bmod 3$, column $= x \bmod 5$. Every number $0 \le x < 15$ lands in a distinct cell, and every cell is occupied: the map $x \mapsto (x \bmod 3,\ x \bmod 5)$ is a bijection. The highlighted cell $(2, 3)$ holds the unique $x = 8$.

30.5.1 Constructing the solution

The construction is a clever piece of bookkeeping. For each i, let $M_i = N/n_i$ – the product of *all the other* moduli. The point of M_i is that it is divisible by every n_j except n_i, so it is invisible (zero) in every coordinate but the i-th. Because the moduli are pairwise coprime, $\gcd(M_i, n_i) = 1$, so M_i has an inverse $M_i^{-1} \pmod{n_i}$. Define $c_i = M_i \cdot (M_i^{-1} \bmod n_i)$. Then $c_i \equiv 1 \pmod{n_i}$ and $c_i \equiv 0 \pmod{n_j}$ for $j \neq i$ – a perfect "indicator" for coordinate i. The answer is the weighted sum

$$x \equiv \sum_{i=1}^{k} a_i \, c_i \pmod{N}.$$

Each term contributes a_i to its own coordinate and 0 to every other, so the whole sum has exactly the remainders we ordered.

Algorithm 129: CRT$(a_1, \ldots, a_k;\ n_1, \ldots, n_k)$

Input: Remainders a_i and pairwise-coprime moduli n_i.
Output: The unique $x \in [0, N)$ solving all congruences, $N = \prod n_i$.

```
N ← n_1 n_2 ··· n_k;
x ← 0;
for i ← 1 to k do
    M_i ← N / n_i;
    (g, s, t) ← Extended-Euclid(M_i mod n_i, n_i);
    // s is M_i^{-1} mod n_i since g = 1
    x ← (x + a_i · M_i · s) mod N;
return x;
```

Example 30.5 (The ancient puzzle)**.** Solve $x \equiv 2 \pmod 3$, $x \equiv 3 \pmod 5$, $x \equiv 2 \pmod 7$. Here $N = 105$.

i	n_i	a_i	$M_i = N/n_i$	$M_i \bmod n_i$	$M_i^{-1} \bmod n_i$
1	3	2	35	2	2
2	5	3	21	1	1
3	7	2	15	1	1

Now sum the weighted terms:

$$x \equiv 2 \cdot 35 \cdot 2 \ + \ 3 \cdot 21 \cdot 1 \ + \ 2 \cdot 15 \cdot 1 = 140 + 63 + 30 = 233 \equiv 233 - 2 \cdot 105 = 23 \pmod{105}.$$

So $x = 23$. Verify: $23 = 7 \cdot 3 + 2 \equiv 2 \pmod 3$; $23 = 4 \cdot 5 + 3 \equiv 3 \pmod 5$; $23 = 3 \cdot 7 + 2 \equiv 2 \pmod 7$. All three hold.

Why this matters

CRT is not a museum piece. It speeds up RSA decryption by a factor of roughly four: instead of one exponentiation modulo the big number $N = pq$, you do two exponentiations modulo the half-size primes p and q and recombine with CRT. Since modular exponentiation cost grows faster than linearly in the bit length, two half-size jobs beat one full-size job. CRT also underlies fast big-integer arithmetic, error-correcting codes, and hash-table tricks. The "compute in parallel coordinates" idea is everywhere once you learn to see it.

30.6 Modular Exponentiation

RSA needs to compute things like $a^b \bmod n$ where a, b, and n are all hundreds of digits long. Two naive ideas both fail spectacularly. Multiplying a by itself b times takes b multiplications – but b might be 2^{1024}, more multiplications than there are atoms in the universe. And computing the full a^b first and reducing at the end is worse still: a^b has astronomically many digits and would never fit in memory. We need an algorithm that is fast in the number of multiplications *and* keeps every intermediate value small.

Both problems are solved by one idea: *repeated squaring*, also called *binary exponentiation*.

Intuition

To compute a^{13}, do not multiply thirteen copies of a. Instead notice that 13 in binary is 1101, i.e. $13 = 8 + 4 + 1$, so $a^{13} = a^8 \cdot a^4 \cdot a^1$. And the powers a^1, a^2, a^4, a^8 form a chain where each is the *square* of the previous: $a^2 = (a^1)^2$, $a^4 = (a^2)^2$, $a^8 = (a^4)^2$. So you compute the chain by repeated squaring – just a handful of multiplications – and multiply in the ones that correspond to a 1-bit of the exponent. The bits of the exponent are a recipe, read one at a time. An exponent with β bits needs only about β squarings, not 2^β multiplications.

The clean way to implement this scans the bits of b from the *most* significant down to the least. Maintain a running result r, initially 1. For each bit, square r (this "shifts" the partial exponent left by one binary place); if the current bit is 1, also multiply by a. Reduce mod n after every operation, so nothing ever exceeds n^2 in size.

Algorithm 130: MODULAR-POWER(a, b, n) – computes $a^b \bmod n$

Input: Base a, exponent $b \geq 0$ with bits $b_{t-1}b_{t-2}\cdots b_1 b_0$, modulus $n > 1$.
Output: $a^b \bmod n$.

```
r ← 1;
for i ← t − 1 downto 0 do
    r ← (r · r) mod n;
    if b_i = 1 then
        r ← (r · a) mod n;
return r;
```

Example 30.6 (Computing $7^{13} \bmod 11$)**.** The exponent $13 = 1101_2$, so we scan bits $1, 1, 0, 1$ from the top. Start $r = 1$.

bit b_i	operation	r after square	r after multiply
1	sq, mul	$1^2 = 1$	$1 \cdot 7 = 7$
1	sq, mul	$7^2 = 49 \equiv 5$	$5 \cdot 7 = 35 \equiv 2$
0	sq	$2^2 = 4$	(skip) 4
1	sq, mul	$4^2 = 16 \equiv 5$	$5 \cdot 7 = 35 \equiv 2$

Figure 30.4 shows how the bits of the exponent drive the square/multiply chain: every bit triggers a square, and a 1-bit triggers an extra multiply by the base.




Figure 30.4: Bits of the exponent $13 = 1101_2$ as a recipe for $7^{13} \bmod 11$, read left to right. Each bit squares the running value r; each shaded 1-bit also multiplies by the base 7. The final $r = 2$ is the answer.

All reductions are mod 11. The result is $7^{13} \equiv 2 \pmod{11}$. (Sanity check by Fermat, coming next: $7^{10} \equiv 1$, so $7^{13} \equiv 7^3 = 343 = 31 \cdot 11 + 2 \equiv 2$. Agreed.) Notice every intermediate value stayed below $121 = 11^2$; we never built a giant number.

Cost summary

Modular exponentiation. For a β-bit exponent b and modulus n:

- *Multiplications:* between β and 2β modular multiplications (one square per bit, plus one multiply per 1-bit).
- *Intermediate size:* every value stays in $[0, n)$, so each multiply is of β-bit numbers, costing $O(\beta^2)$ bit operations naively.
- *Total bit cost:* $O(\beta^3)$ with schoolbook multiplication.

Contrast the naive b multiplications, which is $\Theta(2^\beta)$ – the difference between a microsecond and the heat death of the universe.

Walking question

Take MODULAR-POWER on a walk. Convince yourself of its loop invariant: just before processing bit b_i, the value of r equals $a^{(\text{bits seen so far})} \bmod n$, where "bits seen so far" is the number formed by the high-order bits $b_{t-1} \cdots b_{i+1}$ already consumed. Squaring doubles that prefix value (appends a 0 bit); a conditional multiply by a turns the new last bit into a 1. When the loop ends, every bit has been folded in, and $r = a^b \bmod n$. Why is squaring exactly "append a zero bit" to the exponent?

30.6.1 Two theorems that power everything

Two classical facts about exponents underpin both the primality test and RSA.

Theorem 30.9 (Fermat's little theorem)**.** *If p is prime and $\gcd(a, p) = 1$, then $a^{p-1} \equiv 1 \pmod{p}$.*

Theorem 30.10 (Euler's theorem)**.** *If $\gcd(a, n) = 1$, then $a^{\phi(n)} \equiv 1 \pmod{n}$, where ϕ is Euler's totient.*

Euler's theorem generalizes Fermat's (take $n = p$ prime, so $\phi(p) = p - 1$). The intuition for both: the units mod n form a finite group under multiplication, and in any finite group, raising any element to the size of the group lands you back at the identity. We will use Euler's theorem directly to prove RSA decryption inverts encryption.

30.7 The RSA Public-Key Cryptosystem

Everything so far has been preparation for this. RSA, named for Rivest, Shamir, and Adleman, lets two strangers who have never met exchange a secret over an open channel. The astonishing trick is that the encryption key can be published for all the world to see, while only the holder of a separate private key can decrypt. This is *public-key* cryptography, and before 1977 most people thought it was impossible.

Intuition

Think of a padlock that anyone can snap shut but only you have the key to open. You manufacture thousands of these open padlocks and scatter them everywhere – a mailbox at every street corner. Anyone can grab one, lock a box with it, and send you the box; nobody but you can reopen it, because only you hold the key. The public key is the open padlock; the private key is the key in your pocket. The mathematical question is: how do you build a "lock" that is easy to snap shut (encrypt) but, without the secret, ruinously hard to open (decrypt)? RSA's answer is the gap between multiplying primes (easy) and factoring their product (hard).

30.7.1 Setting up the keys

1. Pick two large random primes p and q (in practice, each several hundred digits). Compute $n = pq$.
2. Compute $\phi(n) = (p - 1)(q - 1)$.
3. Choose a public exponent e with $1 < e < \phi(n)$ and $\gcd(e, \phi(n)) = 1$. A common choice is $e = 65537$.
4. Compute the private exponent $d = e^{-1} \bmod \phi(n)$ using extended Euclid – this is the one step that needs the secret factorization.

The *public key* is the pair (e, n). The *private key* is d (and implicitly the factors p, q). The primes p and q, and $\phi(n)$, are destroyed or hidden after setup.

30.7.2 Encrypting and decrypting

A message is encoded as a number m with $0 \le m < n$. Then:

$$\text{encrypt:} \quad c = m^e \bmod n, \qquad\qquad \text{decrypt:} \quad m = c^d \bmod n.$$

Figure 30.5 traces a single message across the channel.

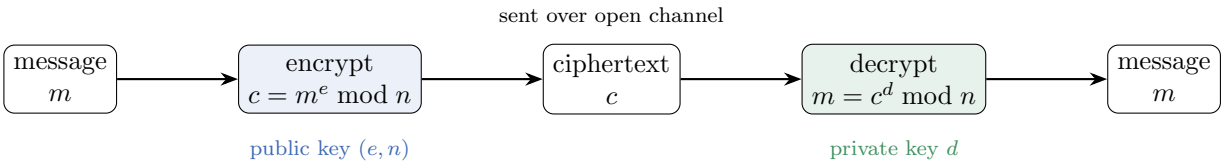


Figure 30.5: The RSA round trip. Anyone can encrypt with the published (e, n); only the holder of the private d can turn the ciphertext back into m. Both arrows are a single call to Modular-Power.

Both are just Modular-Power. Encryption uses only the public (e, n); decryption needs the private d. The whole security rests on this asymmetry: to recover d from the public (e, n) you would need $\phi(n) = (p-1)(q-1)$, which requires knowing p and q – that is, factoring n. For large n, nobody knows how to do that in any reasonable time.

Theorem 30.11 (RSA correctness)**.** *With keys set up as above, decryption inverts encryption:* $(m^e)^d \equiv m \pmod n$ *for every* m *with* $0 \le m < n$.

Formal

Proof sketch. By construction $ed \equiv 1 \pmod{\phi(n)}$, so $ed = 1 + k\,\phi(n)$ for some integer k. Hence

$$m^{ed} = m^{1+k\phi(n)} = m \cdot \left(m^{\phi(n)}\right)^k.$$

When $\gcd(m, n) = 1$, Euler's theorem (Theorem 30.10) gives $m^{\phi(n)} \equiv 1 \pmod n$, so the whole second factor is 1 and $m^{ed} \equiv m \pmod n$. The remaining cases, where m shares a factor with n, are handled by applying Fermat's little theorem modulo p and modulo q separately and stitching the two results back together with the Chinese Remainder Theorem; the congruence $m^{ed} \equiv m$ holds modulo both primes, hence modulo their product n. □

Example 30.7 (A toy RSA, end to end)**.** Use tiny primes so we can do everything by hand. Let $p = 5$, $q = 11$, so $n = 55$ and $\phi(n) = 4 \cdot 10 = 40$. Pick $e = 3$; check $\gcd(3, 40) = 1$, good. Find $d = 3^{-1} \bmod 40$: extended Euclid gives $3 \cdot 27 = 81 = 2 \cdot 40 + 1$, so $d = 27$.

Encrypt the message $m = 7$:

$$c = 7^3 \bmod 55 = 343 \bmod 55 = 343 - 6 \cdot 55 = 13.$$

Decrypt $c = 13$ with $d = 27$:

$$m = 13^{27} \bmod 55.$$

Compute by repeated squaring mod 55: $13^2 = 169 \equiv 4$, $13^4 \equiv 16$, $13^8 \equiv 256 \equiv 36$, $13^{16} \equiv 36^2 = 1296 \equiv 31$. Since $27 = 16 + 8 + 2 + 1$,

$$13^{27} \equiv 31 \cdot 36 \cdot 4 \cdot 13 \pmod{55}.$$

Multiply step by step mod 55: $31 \cdot 36 = 1116 \equiv 1116 - 20 \cdot 55 = 16$; $16 \cdot 4 = 64 \equiv 9$; $9 \cdot 13 = 117 \equiv 117 - 2 \cdot 55 = 7$. We recover $m = 7$. The round trip worked.

Why this matters

This toy is breakable in a blink – anyone can factor $55 = 5 \cdot 11$. Real RSA uses n with around 2048 to 4096 bits, where the best known factoring algorithms would run for longer than the age of the universe. Every time your browser shows a padlock icon, a key exchange related to ideas in this chapter just happened. The astonishing thing is that the entire scheme is built from the elementary tools we developed by hand: GCD, modular inverses, modular exponentiation, and Euler's theorem. Nothing exotic – just old ideas composed with care.

Common trap

Textbook RSA, exactly as described, is *not* safe to deploy. It is deterministic (the same message always encrypts to the same ciphertext, leaking information), it is malleable, and small messages with small e can be attacked directly. Real systems add randomized padding (OAEP) and use RSA only to wrap a symmetric key. Learn the math here; never ship the textbook version.

30.8 Primality Testing

RSA needs large primes, hundreds of digits each. So we need to answer, quickly: *is this 300-digit number prime?* Trial division – checking every divisor up to $\sqrt{n}$ – would require about 10^{150} operations for a 300-digit number. Useless. We need something exponentially better, and the path runs through Fermat's little theorem run *in reverse*.

30.8.1 The Fermat test and its flaw

Fermat's little theorem says: if p is prime and $\gcd(a, p) = 1$, then $a^{p-1} \equiv 1 \pmod{p}$. Turn it into a test. To check whether n is prime, pick a random "witness" a and compute $a^{n-1} \bmod n$ by repeated squaring. If the result is *not* 1, then n is *definitely composite* – we have caught it red-handed violating a law all primes obey. If the result *is* 1, then n is *probably prime*, and we gain confidence by trying more witnesses.

Common trap

"Probably" is doing real work here. Some composites are sneaky: the *Carmichael numbers* (the smallest is $561 = 3 \cdot 11 \cdot 17$) satisfy $a^{n-1} \equiv 1 \pmod{n}$ for *every* a coprime to n, so the plain Fermat test is fooled no matter which witness you pick. These rare liars are why we need a stronger test.

30.8.2 Miller–Rabin: a better witness

Miller–Rabin patches the hole with one extra observation. If n is an odd prime, then in $\mathbb{Z}_n$ the only square roots of 1 are $+1$ and -1. (In a field, $x^2 - 1 = (x - 1)(x + 1) = 0$ forces $x = \pm 1$; composites

can have *extra* square roots of 1, and those extras betray them.) Miller–Rabin watches the squaring chain for an illegal square root of 1.

Here is the mechanism. Write $n-1 = 2^s \cdot u$ with u odd – just pull out all the factors of two. Now look at the sequence

$$a^u,\ \ a^{2u},\ \ a^{4u},\ \ \ldots,\ \ a^{2^s u} = a^{n-1} \pmod{n},$$

each term the square of the one before it. If n is prime, this sequence must either start at 1, or hit -1 at some point before the end (and stay 1 thereafter). If instead the sequence reaches 1 *without* the step just before it being -1, then we found a nontrivial square root of 1 – a smoking gun that n is composite. We call such a witness a a *witness to compositeness*.

Algorithm 131: MILLER–RABIN-WITNESS(a, n) – does a prove n composite?

Input: Base a with $2 \le a \le n-2$; odd $n > 2$.
Output: TRUE if a proves n composite; FALSE if n passes for a.

```
write n − 1 = 2^s · u with u odd;
x ← MODULAR-POWER(a, u, n);
if x = 1 or x = n − 1 then
    return FALSE;
for j ← 1 to s − 1 do
    x ← (x · x) mod n;
    if x = n − 1 then
        return FALSE;
return TRUE;
```

To test n, run this witness check for several random bases a. If any base returns TRUE, n is composite, with certainty. If all of them return FALSE, declare n "probably prime."

Theorem 30.12 (Miller–Rabin error bound)**.** *If n is an odd composite, then at least $3/4$ of the bases $a \in \{2, \ldots, n-2\}$ are witnesses to its compositeness. Hence a single random base fails to detect a composite with probability at most $1/4$, and k independent random bases reduce the failure probability to at most 4^{-k}.*

Intuition

The 4^{-k} decay is what makes this practical. With $k = 50$ random bases the chance of wrongly calling a composite "prime" is below $4^{-50} \approx 10^{-30}$ – vastly smaller than the chance of a cosmic ray flipping a bit in your computer mid-calculation. For all engineering purposes that is certainty. And unlike the Fermat test, no composite – not even a Carmichael number – can fool a $3/4$ fraction of bases, because the square-root-of-one check has no blind spot. We trade a sliver of probability for a colossal speedup.

Example 30.8 (Catching $n = 561$, the smallest Carmichael number)**.** The Fermat test fails on 561, so let us watch Miller–Rabin succeed. Here $n - 1 = 560 = 2^4 \cdot 35$, so $s = 4$ and $u = 35$. Take base $a = 2$. First $2^{35} \bmod 561$. By repeated squaring one finds $2^{35} \equiv 263 \pmod{561}$. That is neither 1 nor 560, so we begin squaring:

$$263^2 \equiv 166, \quad 166^2 \equiv 67, \quad 67^2 \equiv 1 \pmod{561}.$$

The sequence hit 1, but the term just before it was 67, *not* $560 \equiv -1$. We have caught a nontrivial square root of 1: $67^2 \equiv 1$ yet $67 \neq \pm 1$. So $a = 2$ is a witness, and 561 is declared composite –

correctly, since $561 = 3 \cdot 11 \cdot 17$. The extra square-root check is exactly what the plain Fermat test was missing.

Figure 30.6 contrasts the two endings of the squaring chain. A prime is allowed to reach 1 only by passing through -1 first; the composite 561 slams into 1 straight from 67, an illegal square root that exposes it.

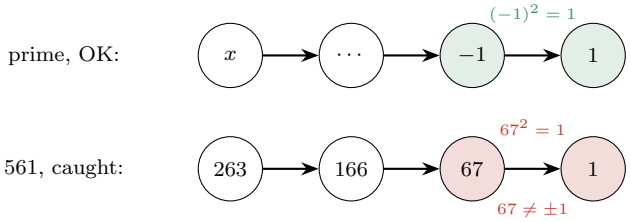


Figure 30.6: Miller–Rabin's square-root check. Each arrow squares (mod n). A prime can only arrive at 1 from -1 (top). The composite 561 reaches 1 from 67, a nontrivial square root of 1 – the smoking gun (bottom).

Cost summary

Miller–Rabin primality test. For an n with $\beta = \log_2 n$ bits, using k random bases:

- Each base runs one modular exponentiation plus up to $s \le \beta$ squarings: $O(\beta)$ modular multiplications, i.e. $O(\beta^3)$ bit operations naively.
- Total: $O(k\,\beta^3)$ bit operations.
- *Error:* at most 4^{-k} of declaring a composite prime; never errs on a true prime.

This is fast enough to generate 2048-bit primes in milliseconds: pick a random odd number, run Miller–Rabin, repeat until one passes. The prime number theorem guarantees primes are dense enough that you do not wait long.

History and connection

This material is CLRS Chapter 31, "Number-Theoretic Algorithms." Euclid's algorithm appears in Book VII of the *Elements* (c. 300 BCE), making it plausibly the oldest nontrivial algorithm still in everyday use. The Chinese Remainder Theorem traces to Sunzi's *Mathematical Classic* (3rd–5th century CE). Fermat stated his little theorem in 1640; Euler proved and generalized it a century later. Miller's deterministic test (1976, conditional on a deep unproved hypothesis) was made unconditional and randomized by Rabin in 1980. RSA was published by Rivest, Shamir, and Adleman in 1978 – though we now know the British cryptographer Clifford Cocks discovered an equivalent scheme in 1973, kept classified by GCHQ for decades. In 2002, Agrawal, Kayal, and Saxena stunned the field with AKS, the first *deterministic* polynomial-time primality test; in practice the randomized Miller–Rabin remains faster and is what real systems use. CLRS develops all of this with more group theory than we have; read it next for the rigorous treatment of $\mathbb{Z}_n^*$ as a group and a full proof of the Miller–Rabin error bound.

Algorithm lab

Trace it yourself. Pick up paper and do these by hand before moving on.

1. Run EUCLID$(89, 55)$ – consecutive Fibonacci numbers – and count the divisions. You should see the maximum number of steps for inputs this size, every quotient equal to 1 until the very last.
2. Run EXTENDED-EUCLID$(17, 23)$ and confirm the coefficients give $17x + 23y = 1$. Then read off $17^{-1} \bmod 23$ from your x.
3. Compute $3^{20} \bmod 100$ with MODULAR-POWER, scanning the bits of $20 = 10100_2$. Keep every intermediate value below 100^2.
4. Solve the system $x \equiv 1 \pmod 4$, $x \equiv 2 \pmod 9$, $x \equiv 3 \pmod{25}$ with CRT. (The moduli are pairwise coprime; $N = 900$.)
5. Run MILLER–RABIN-WITNESS on $n = 221 = 13 \cdot 17$ with base $a = 5$ and watch it return TRUE.

30.9 Putting It Together

Step back and admire the tower we built. At the bottom sits one lemma – $\gcd(a, b) = \gcd(b, a \bmod b)$ – and from it grows Euclid's algorithm. Bolt on a little bookkeeping and you get Bézout coefficients, hence modular inverses. Inverses let you solve modular linear equations and run the Chinese Remainder Theorem. Repeated squaring gives cheap modular exponentiation, and Euler's theorem tells you when exponents cancel. Compose all of these and RSA falls out; add the square-root-of-one observation and you get Miller–Rabin. Each layer is elementary; the height of the tower is what is astonishing.

Focus

The single thread running through this entire chapter is *the extended Euclidean algorithm.* Inverses, modular equations, CRT, RSA key generation – all of them are that one routine wearing different costumes. Master EXTENDED-EUCLID and MODULAR-POWER, understand why each is fast, and you understand the computational core of classical cryptography.

Exercises

Exercise 30.1 (Warmup: trace Euclid)**.** Compute $\gcd(1071, 462)$ by hand using EUCLID, writing out the quotient and remainder at each step. How many divisions did it take? Then state gcd as a product of shared prime factors to double-check.

Exercise 30.2 (Bézout by hand)**.** Run EXTENDED-EUCLID$(240, 46)$. Report the triple (d, x, y) and verify $240x + 46y = d$. Is the solution (x, y) unique? If not, describe the full family of integer solutions.

Exercise 30.3 (Inverses exist or do not)**.** For each pair, decide whether a has an inverse modulo n, and compute it when it exists: (a) $a = 7, n = 26$; (b) $a = 8, n = 12$; (c) $a = 10, n = 21$. Explain each answer in terms of $\gcd(a, n)$.

Exercise 30.4 (Solving congruences)**.** Find all solutions modulo n, or explain why none exist: (a) $6x \equiv 9 \pmod{15}$; (b) $6x \equiv 8 \pmod{15}$; (c) $35x \equiv 14 \pmod{84}$. For each, first compute $g = \gcd(a, n)$ and use the divisibility test before hunting for solutions.

Exercise 30.5 (Chinese Remainder reconstruction)**.** A basket of eggs breaks into groups with 1 left over when counted by 3, 2 left over by 5, and 6 left over by 7. What is the smallest possible number of eggs? Use the CRT construction and show your M_i and inverses.

Exercise 30.6 (Fast exponentiation)**.** Compute $5^{117} \bmod 19$ using MODULAR-POWER. Write 117 in binary, list the squaring/multiplying steps, and keep every intermediate value reduced mod 19. Then verify your answer using Fermat's little theorem to shrink the exponent first.

Exercise 30.7 (RSA round trip)**.** Let $p = 7$, $q = 13$, so $n = 91$ and $\phi(n) = 72$. Choose $e = 5$. (a) Confirm $\gcd(5, 72) = 1$ and compute the private exponent $d = 5^{-1} \bmod 72$. (b) Encrypt $m = 10$. (c) Decrypt your ciphertext and confirm you recover 10.

Exercise 30.8 (Why the square-root test matters)**.** The number $341 = 11 \cdot 31$ passes the Fermat test for base $a = 2$ (indeed $2^{340} \equiv 1 \pmod{341}$), so the Fermat test calls it "probably prime." Run MILLER–RABIN-WITNESS$(2, 341)$ instead. Does base 2 expose 341 as composite, or does 341 slip past base 2 as well? (You will need $n - 1 = 340 = 2^2 \cdot 85$.)

Exercise 30.9 (Worst case of Euclid)**.** Prove that EUCLID(F_{k+1}, F_k) performs exactly $k - 1$ division steps, where F_i is the i-th Fibonacci number. (Hint: show by induction that each reduction turns the pair (F_{i+1}, F_i) into (F_i, F_{i-1}) because the quotient is always 1.)

Exercise 30.10 (Challenge: CRT speedup for RSA)**.** Explain, with a rough operation count, why decrypting $c^d \bmod n$ by computing $c^{d \bmod (p-1)} \bmod p$ and $c^{d \bmod (q-1)} \bmod q$ separately and recombining with CRT is about four times faster than the direct computation modulo $n = pq$. (Hint: modular multiplication of β-bit numbers costs $\Theta(\beta^2)$ naively, and p, q each have about half the bits of n.)

Exercise 30.11 (Challenge: a flawed inverse routine)**.** A student computes modular inverses by the formula $a^{-1} \equiv a^{n-2} \pmod{n}$, citing Fermat. (a) For which n is this formula valid? (b) Give a specific a, n where it produces a wrong answer, and explain which hypothesis of Fermat's little theorem fails. (c) State the correct generalization using Euler's theorem, and say why EXTENDED-EUCLID is preferable in practice anyway.

Chapter 31

String Matching

Open any document on your computer and press the keys that mean "find." Type a word. In a heartbeat, every occurrence lights up. You have just asked a machine the oldest question in text processing: *where, inside this long string, does that short string appear?* It feels instant, but underneath there is an algorithm, and the obvious way of doing it is not the way your editor actually does it. The obvious way can be made to crawl. The clever ways – there are several, and they are gorgeous – never crawl.

This chapter is about that question and its answers. We have a long *text*, and a short *pattern*, and we want every place the pattern sits inside the text. We will start with the method you would invent in thirty seconds, watch exactly where it wastes its effort, and then meet three escapes from that waste, each more cunning than the last: a method built on *hashing* (Rabin–Karp), a method built on a little *machine* you compile from the pattern (finite automata), and finally the famous Knuth–Morris–Pratt algorithm, whose secret – the *prefix function* – is one of those ideas that feels like magic until you see it, and then feels inevitable. By the end you will understand not just how each works, but why it runs as fast as it does, counted character by character.

31.1 Setting the stage

Let us fix notation once, carefully, because string matching is a place where sloppy indexing causes real pain.

We are given a *text* T, an array of n characters $T[1\,..\,n]$, and a *pattern* P, an array of m characters $P[1\,..\,m]$, with $m \le n$. The characters are drawn from a finite *alphabet* Σ. For English text Σ might be the 26 letters plus punctuation and a space; for DNA it is just $\{\texttt{A}, \texttt{C}, \texttt{G}, \texttt{T}\}$; for raw bytes it is the 256 values 0 through 255. We write $|\Sigma|$ for the alphabet size.

Definition 31.1 (Valid shift)**.** We say the pattern P *occurs with shift* s in the text T if $0 \le s \le n-m$ and

$$T[s+1\,..\,s+m] = P[1\,..\,m],$$

that is, $T[s+j] = P[j]$ for every $j = 1, 2, \ldots, m$. When this holds we call s a *valid shift*; otherwise s is an *invalid shift*. The *string-matching problem* is to find all valid shifts.

The shift s is best read as "how far the pattern has slid to the right before it lines up." Shift 0 means

the pattern sits at the very front of the text. If `abcab` is the text and `ab` is the pattern, then $s = 0$ and $s = 3$ are valid, because the pattern lines up at positions 1 and 4.

Intuition

Picture two strips of paper. The long one is the text, laid flat on the table. The short one is the pattern, sitting on top of it. You slide the pattern strip to the right, one notch at a time, and at each resting place you peer down through the layers and check: do all m characters underneath match the m characters on top? Each resting place is a *shift*. There are exactly $n - m + 1$ of them, from $s = 0$ (flush left) to $s = n - m$ (flush right). String matching is the discipline of checking those resting places *without doing more peering than you have to*.

Figure 31.1 draws the strips for a tiny example: the pattern sliding across the text, one shift at a time.

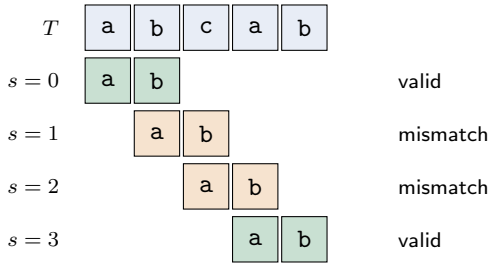


Figure 31.1: The pattern P = `ab` slid across T = `abcab`. Each row is one shift s. There are $n - m + 1 = 4$ candidate shifts; the green rows ($s = 0$ and $s = 3$) line up exactly, the orange ones do not. String matching is the art of checking these rows without re-reading the text underneath.

Focus

Two numbers will haunt every analysis in this chapter: n, the text length, and m, the pattern length. There are $n - m + 1$ candidate shifts. The whole game is how much work you spend per shift, and – the deeper trick – how much work you can *avoid* by remembering what you already learned at earlier shifts.

A word on strings as a tool. We use Σ^* for the set of all finite strings over Σ, including the empty string ε. If w is a string, $|w|$ is its length. The *concatenation* of x and y, written xy, is x followed by y, of length $|x| + |y|$. A string w is a *prefix* of x, written $w \sqsubset x$, if $x = wy$ for some string y – w is a chunk off the front. It is a *suffix*, written $w \sqsupset x$, if $x = yw$ for some y – a chunk off the back. Thus `ab` $\sqsubset$ `abcab` and `cab` $\sqsupset$ `abcab`. These two relations, prefix and suffix, are the entire vocabulary we need for the deepest algorithm in the chapter, so let them settle in.

31.2 The naive matcher: just try every shift

Here is the algorithm you would write without thinking. Slide the pattern to each of the $n - m + 1$ shifts. At each one, compare characters left to right until either they all match (report the shift) or one of them disagrees (give up, slide one notch right, start over).

Algorithm 132: NAIVE-STRING-MATCHER

Input: Text $T[1\,..\,n]$, pattern $P[1\,..\,m]$.
Output: Every valid shift s.

```
1 for s ← 0 to n − m do
2     j ← 1;
3     while j ≤ m and T[s + j] = P[j] do
4         j ← j + 1;
5     if j = m + 1 then
6         report "P occurs with shift s";
```

The inner **while** marches j forward as long as characters agree. If it makes it all the way to $j = m+1$, every one of the m characters matched, so s is valid. Otherwise it bailed early.

Algorithm lab

Let us trace it. Text $T =$ `a b a b a b c a` (so $n = 8$) and pattern $P =$ `a b a b c` (so $m = 5$). The candidate shifts run from 0 to 3.
Shift $s = 0$: compare $T[1] =$ `a` vs $P[1] =$ `a` (ok), $T[2] =$ `b` vs $P[2] =$ `b` (ok), $T[3] =$ `a` vs $P[3] =$ `a` (ok), $T[4] =$ `b` vs $P[4] =$ `b` (ok), $T[5] =$ `a` vs $P[5] =$ `c` – *mismatch*. Four comparisons matched, the fifth failed.
Shift $s = 1$: compare $T[2] =$ `b` vs $P[1] =$ `a` – *mismatch* on the very first character. One comparison.
Shift $s = 2$: $T[3] =$ `a` vs `a` (ok), $T[4] =$ `b` vs `b` (ok), $T[5] =$ `a` vs `a` (ok), $T[6] =$ `b` vs `b` (ok), $T[7] =$ `c` vs `c` (ok). All five match! Report shift $s = 2$.
Shift $s = 3$: $T[4] =$ `b` vs $P[1] =$ `a` – mismatch.
The only valid shift is $s = 2$, and indeed $T[3\,..\,7] =$ `ababc` $= P$. Go back and notice the painful part: at shift 0 we worked through four matching characters before the fifth betrayed us, and then at shift 1 we threw that knowledge away and started from scratch. Hold that thought – it is the whole reason the rest of this chapter exists.

31.2.1 How slow can the naive matcher be?

Each shift costs at most m comparisons in the inner loop, and there are $n - m + 1$ shifts, so the total is at most $(n - m + 1)\,m$ comparisons. In the worst case this bound is tight. Take a text of n copies of the letter `a` and a pattern of m `a`'s followed by one `b`, e.g. $T =$ `aaaaaa` and $P =$ `aab`. At every shift the inner loop matches all the leading `a`'s and only fails on the final `b`, so each of the $n - m + 1$ shifts burns the full m comparisons.

Cost summary

Naive string matching uses $O((n - m + 1)\,m)$ character comparisons, which is $O(nm)$ in the worst case. It uses $O(1)$ extra space and needs no preprocessing of the pattern. Its average case on random text is actually decent – close to $O(n)$ – because mismatches usually come fast. But the worst case is genuinely quadratic, and that is what we are out to beat.

Common trap

The naive matcher's flaw is not that it checks every shift – in the worst case every shift really might be valid, so you cannot avoid *looking* at each. The flaw is that it re-reads text characters it has already examined. At shift 0 it read $T[1\,..\,5]$; at shift 1 it re-read $T[2]$; and so on. A single text character can be inspected up to m times. The fast algorithms all share one promise: *look at each text character a bounded number of times* – ideally just once.

Why this matters

Why care about beating $O(nm)$? Because n is often colossal. A genome is three billion characters. A web-scale text index runs to terabytes. A log file you are grepping might be gigabytes. If your pattern is a few dozen characters and your matcher is quadratic in the bad case, an adversary – or just unlucky data – can turn a one-second search into an hour. Linear-time matching is not a luxury; at that scale it is the difference between a tool that works and one that hangs.

31.3 Rabin–Karp: matching by fingerprint

Here is a completely different angle, and it starts with a question that sounds unrelated. Comparing two strings of length m takes up to m character comparisons. But comparing two *numbers* takes one operation. What if we could turn each length-m window of text into a single number, and turn the pattern into a single number, and just compare numbers?

That is the Rabin–Karp idea. We assign to every string a numeric *fingerprint*, computed so that equal strings always get equal fingerprints. Then, instead of comparing the pattern against each text window character by character, we compare fingerprints – one cheap integer comparison per window.

31.3.1 Treating a string as a number

Suppose for a moment the alphabet is the ten digits $\{0, 1, \ldots, 9\}$, so $|\Sigma| = 10$. Then a string *is* a number written in base 10. The pattern $P = \texttt{31415}$ has the value

$$p = 3 \cdot 10^4 + 1 \cdot 10^3 + 4 \cdot 10^2 + 1 \cdot 10^1 + 5 \cdot 10^0 = 31415.$$

For a general alphabet, treat each character as a "digit" in base $d = |\Sigma|$, and the same construction gives every length-m string a value between 0 and $d^m - 1$. Let t_s denote the value of the length-m text window starting after shift s, i.e. of $T[s+1\,..\,s+m]$. Then s is a valid shift exactly when $t_s = p$ – provided we computed both values correctly.

There are two problems, and Rabin–Karp solves both with one stroke each.

Problem one: the numbers are astronomically large. A pattern of length $m = 20$ over bytes has a value up to 256^{20}, a 48-digit number. Arithmetic on such numbers is not $O(1)$ – it is exactly the per-character work we were trying to escape. *Fix:* do all arithmetic modulo a prime q. Choose q small enough that dq fits in one machine word, so every operation is genuinely $O(1)$. Now p and each t_s are reduced mod q to a small number we call a *fingerprint*.

Problem two: computing each t_s from scratch costs m operations, which buys us nothing. *Fix:* compute t_{s+1} from t_s in *constant* time with a *rolling* update. Slide the window one step right: you drop the high-order character $T[s+1]$ and append the new low-order character $T[s+m+1]$. In base d that is

$$t_{s+1} = d\left(t_s - T[s+1]\cdot d^{m-1}\right) + T[s+m+1].$$

Read it left to right: subtract off the contribution of the leaving character ($T[s+1]$, which sat in the top place worth d^{m-1}), shift everything up one place by multiplying by d, then add the entering character in the ones place. This is the same trick a car odometer uses, and it is the heart of the method. Figure 31.2 shows one such step on the decimal example.

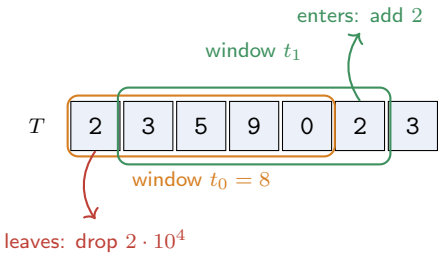


Figure 31.2: One rolling step on $T = 235902\ldots$ with $m = 5$, $d = 10$, $q = 13$. The window slides from $T[1\,..\,5]$ (orange) to $T[2\,..\,6]$ (green): the high digit $T[1] = 2$ leaves the top place (worth 10^4) and the new digit $T[6] = 2$ enters the ones place. The new fingerprint $t_1 = \big(10(t_0 - T[1]\cdot h) + T[6]\big) \bmod 13$ costs $O(1)$, not $O(m)$.

Intuition

A fingerprint is a tiny summary of a long string – like the last few digits of a credit card number, or a checksum. If two strings are equal, their fingerprints are equal, guaranteed. The converse is *not* guaranteed: two different strings can collide on the same fingerprint, the way two people can share a birthday. So a fingerprint match is a *strong hint*, not a proof. Rabin–Karp uses fingerprints to skip the expensive character-by-character check almost everywhere, and only does the real check on the rare windows whose fingerprints actually match the pattern's.

31.3.2 Modular arithmetic and the spurious-hit check

Working modulo q means t_s is really $t_s \bmod q$. The valid-shift test becomes: if $t_s \equiv p \pmod q$, the window is a *candidate*. But congruence mod q does not imply equality of the underlying strings – two different windows can be congruent mod q by coincidence. We call such a window a *spurious hit*. So whenever the fingerprints match, we must *verify* by comparing the actual characters $T[s+1\,..\,s+m]$ against $P[1\,..\,m]$. If they truly match, report s; if not, it was a spurious hit and we move on.

Algorithm 133: RABIN-KARP-MATCHER

Input: Text $T[1\,..\,n]$, pattern $P[1\,..\,m]$, radix $d = |\Sigma|$, prime q.
Output: Every valid shift s.

```
1  h ← d^{m−1} mod q ;                                   // value of the top place
2  p ← 0;   t ← 0;
3  for i ← 1 to m do
4  |  p ← (d · p + P[i]) mod q ;                         // Horner: fingerprint of P
5  |  t ← (d · t + T[i]) mod q ;                         // fingerprint of T[1..m]
6  for s ← 0 to n − m do
7  |  if p = t then
8  |  |  if P[1..m] = T[s + 1..s + m] then
9  |  |  |  report "P occurs with shift s";
10 |  if s < n − m then
11 |  |  t ← (d (t − T[s + 1] · h) + T[s + m + 1]) mod q;
```

The first loop is *Horner's rule*: building a number digit by digit, each step multiplying the running total by the base and adding the next digit, all mod q. The second loop walks the windows, comparing fingerprints, verifying hits, and rolling the window forward. (In real code, after subtracting $T[s+1]\cdot h$ the value can go negative; add q before taking the mod to keep it in range.)

Algorithm lab

Let us do the classic decimal example. Text $T =$ `2 3 5 9 0 2 3 1 4 1 5 2 6 7 3 9 9 2 1` ($n = 19$), pattern $P =$ `3 1 4 1 5` ($m = 5$), radix $d = 10$, prime $q = 13$.
First the pattern's fingerprint. By Horner mod 13: $31415 \bmod 13$. Compute $31415 = 13 \cdot 2416 + 7$, so $p = 7$.
Now the first window $T[1\,..\,5] =$ `23590`: $23590 = 13 \cdot 1814 + 8$, so $t_0 = 8$. Since $8 \neq 7$, no candidate.
Roll forward. The high digit leaving is $T[1] = 2$, the place value $h = 10^4 \bmod 13$. Since $10^4 = 10000 = 13{\cdot}769{+}3$, we have $h = 3$. Each roll: $t' = (10\,(t - T[\text{leave}]\cdot 3) + T[\text{enter}]) \bmod 13$.
The window `31415` appears as $T[7\,..\,11]$, i.e. at shift $s = 6$. Its true value $31415 \bmod 13 = 7 = p$, so the fingerprints match: a candidate. We verify $T[7\,..\,11] =$ `31415` $= P$ – a real hit. Report $s = 6$.
Watch for a spurious hit. The window `67399` has value $67399 = 13 \cdot 5184 + 7$, so its fingerprint is also $7 = p$! The fingerprints match, but `67399` $\neq$ `31415`. The verification step catches the lie and we correctly do *not* report it. That window was a spurious hit – two strings sharing a fingerprint by coincidence, exactly the collision the intuition box warned about.

31.3.3 Why it is usually fast, and why it can be slow

Preprocessing – computing p, t_0, and h – is $\Theta(m)$. The main loop runs $n-m+1$ times; each iteration does $O(1)$ fingerprint work plus, only on a hit, an $O(m)$ verification. So the running time hinges entirely on how often fingerprints match.

In the worst case fingerprints match every time. The cruel input is T all `a`'s, P all `a`'s: every window equals the pattern, every shift is a real hit, and we pay $\Theta(m)$ to verify each, for $\Theta((n - m + 1)m)$ –

right back to naive's quadratic. But that input is degenerate. On "ordinary" data, with a well-chosen prime q, spurious hits are rare. If we model the fingerprints as roughly uniform over the q residues, the chance a given invalid shift looks like a hit is about $1/q$. With at most n shifts, the expected number of spurious hits is about n/q, and the expected verification work is $O((n/q)\,m)$. If q is chosen larger than m (easy, since q can be nearly word-sized), this is $O(n)$, and the whole algorithm runs in expected

$$O(n) + O(v \cdot m),$$

where v is the number of valid shifts – linear, plus the unavoidable cost of confirming the real occurrences.

Cost summary

Rabin–Karp. Preprocessing $\Theta(m)$. Worst-case matching $\Theta((n-m+1)m)$ – no better than naive, attained when fingerprints collide constantly. Expected matching $O(n+vm)$ on data where collisions are rare and q is large, which for a small fixed number of occurrences is $O(n)$. Extra space $O(1)$.

History and connection

Michael Rabin and Richard Karp introduced this fingerprinting matcher in 1987. Its real power shows up beyond single-pattern search: because a fingerprint is just a number, you can keep a *set* of pattern fingerprints in a hash table and search for many patterns at once, or extend the rolling-hash idea to two dimensions to find a small image inside a big one. CLRS covers Rabin–Karp in Section 32.2. The same rolling hash powers modern tools like `rsync` and content-defined chunking.

Walking question

Rabin–Karp gets its speed from a probabilistic gamble: it bets that fingerprints rarely collide. But an adversary who *knows your prime* q can craft a text where every window collides, dragging you back to $O(nm)$. How would you defend against such an adversary? (Hint: what if q, or the radix, were chosen at random and kept secret – how does that change the analysis, and what does it cost you?) This is the same randomization idea that rescued quicksort and hashing.

31.4 String matching with finite automata

The next idea throws away probability entirely and returns to a guarantee. It also delivers the dream from the trap box: *read each text character exactly once, never backing up.* The price is some upfront cleverness – we compile the pattern into a little machine.

31.4.1 What a string-matching automaton is

A *finite automaton* is a tiny processor with a finite set of *states*. It starts in a designated start state, then reads the text one character at a time, and each character makes it jump to a new state according to a fixed *transition function* δ. Some states are marked *accepting*. For string matching

we build the machine so that, after reading $T[1\,..\,i]$, its current state is precisely *how much of the pattern we have matched so far* – a number from 0 to m. State m is accepting: reaching it means the last m characters we read were exactly the pattern, so we have just found an occurrence ending at position i.

Definition 31.2 (String-matching automaton)**.** For a pattern $P[1\,..\,m]$ the matching automaton has state set $Q = \{0, 1, \ldots, m\}$, start state 0, single accepting state m, and transition function $\delta(q, a)$ defined for a state q and a character $a \in \Sigma$ by

$$\delta(q, a) = \text{the length of the longest prefix of } P \text{ that is also a suffix of } P_q\, a,$$

where $P_q = P[1\,..\,q]$ is the length-q prefix of the pattern and $P_q\, a$ means P_q with the character a appended.

That definition is doing a lot of work, so let us unpack it slowly. The state q means "the last q characters I read were $P[1\,..\,q]$." Now a new character a arrives. The string I have matched, with a stuck on the end, is $P_q\, a$. The new state must answer: *after seeing a, what is the longest prefix of P I can still claim to have just matched at the end?* That is the longest prefix of P that is a suffix of $P_q\, a$. If a happened to be exactly $P[q+1]$, then $P_q\, a = P[1\,..\,q+1]$ is itself a prefix of P, and we advance to state $q+1$. If a was wrong, we cannot advance – but we might not have to fall all the way to 0, because a shorter prefix of P might still match at the tail. The automaton precomputes the exactly right landing state for every (q, a) pair.

Intuition

Think of climbing a ladder with m rungs, where rung q means "I have matched the first q characters of the pattern." Each text character you read either moves you up one rung (you read the character the pattern wanted next) or knocks you down to some lower rung (you read something else). The brilliance is in exactly *how far down* a wrong character knocks you. It does not necessarily send you back to the ground, because the characters you just read might form the start of a fresh match. The transition function δ has memorized the right landing rung for every situation, so the machine never hesitates.

Once δ is built, scanning is breathtakingly simple.

Algorithm 134: FINITE-AUTOMATON-MATCHER

Input: Text $T[1\,..\,n]$, transition function δ, pattern length m.
Output: Every valid shift s.

```
1 q ← 0 ;                                   // start state:  nothing matched yet
2 for i ← 1 to n do
3 |   q ← δ(q, T[i]) ;                      // one table lookup, no backtracking
4 |   if q = m then
5 |   |   report "P occurs with shift s = i − m";
```

Look at how little it does: one lookup per text character, and a check for the accepting state. There is no inner loop. The pointer i never moves backward. This is the structure of `grep` on a fixed string, and of the lexical analyzer in every compiler.

31.4.2 A worked machine

Let $P = \texttt{ababaca}$, so $m = 7$, over the alphabet $\Sigma = \{\texttt{a}, \texttt{b}, \texttt{c}\}$. The states are 0 through 7. We compute $\delta(q, a)$ for each by the definition: the longest prefix of P that is a suffix of $P_q a$.


Take $\delta(5, \texttt{b})$. State 5 means we have matched $P_5 = \texttt{ababa}$. Append `b`: we get `ababab`. What is the longest prefix of `ababaca` that is a suffix of `ababab`? Check suffixes longest-first: `ababab`? not a prefix of P. `babab`? no. `abab`? yes – `abab` is a prefix of P (it is P_4). So $\delta(5, \texttt{b}) = 4$. We read a wrong character and only slipped from rung 5 to rung 4, not to the ground.

Take $\delta(5, \texttt{a})$. Append `a` to `ababa`: get `ababaa`. Longest prefix of P that is a suffix? `a` works (P_1); `aa` is not a prefix of P. So $\delta(5, \texttt{a}) = 1$.

And the happy case $\delta(5, \texttt{c})$. Append `c`: `ababac`, which is P_6 itself – a prefix of P. So $\delta(5, \texttt{c}) = 6$: we advance. Here is the full table:

state q	$\delta(q, \texttt{a})$	$\delta(q, \texttt{b})$	$\delta(q, \texttt{c})$
0	1	0	0
1	1	2	0
2	3	0	0
3	1	4	0
4	5	0	0
5	1	4	6
6	7	0	0
7	1	2	0

Here is the same machine as a picture, showing only the "spine" of forward transitions (the ones that climb toward the accepting state) for clarity.



Algorithm lab

Let us run the machine on $T = \texttt{a b a b a b a c a b a}$ ($n = 11$). Start in state $q = 0$. Read each character and look up δ.

i	$T[i]$	new state $q = \delta(q, T[i])$	note
1	a	$\delta(0, a) = 1$	
2	b	$\delta(1, b) = 2$	
3	a	$\delta(2, a) = 3$	
4	b	$\delta(3, b) = 4$	
5	a	$\delta(4, a) = 5$	
6	b	$\delta(5, b) = 4$	wrong char, slip to 4
7	a	$\delta(4, a) = 5$	
8	c	$\delta(5, c) = 6$	
9	a	$\delta(6, a) = 7$	**accept!** shift $s = 9 - 7 = 2$
10	b	$\delta(7, b) = 2$	
11	a	$\delta(2, a) = 3$	

At $i = 9$ the machine entered state $7 = m$, so the pattern `ababaca` occurs with shift 2 – check: $T[3\,..\,9] =$ `ababaca` $= P$. Notice especially row $i = 6$: a stray `b` where the pattern wanted `c`. The naive matcher would have restarted; the automaton simply slipped from state 5 to state 4 and kept reading T forward, never re-examining a single character.

31.4.3 Cost, and the one catch

Scanning is gloriously cheap: the loop runs n times with one table lookup each, so matching is $\Theta(n)$ – guaranteed, no probability, no backtracking. The catch is building δ. The table has $m + 1$ states times $|\Sigma|$ characters $= (m + 1)|\Sigma|$ entries, and the straightforward way to compute each entry tests prefixes against suffixes, costing up to $O(m)$ per entry, for $O(m^2|\Sigma|)$ preprocessing. (A cleverer construction, closely related to the prefix function of the next section, brings this down to $O(m|\Sigma|)$.)

Cost summary

Finite-automaton matcher. Matching $\Theta(n)$ – and this is the worst case, not just the average. Preprocessing $O(m^2|\Sigma|)$ by the direct construction, $O(m|\Sigma|)$ by the slicker one. Extra space $O(m|\Sigma|)$ for the transition table. The matching phase reads each text character exactly once and never backtracks.

Common trap

The automaton's transition table is $\Theta(m|\Sigma|)$ in size. For DNA ($|\Sigma| = 4$) or text that is a delight. But for Unicode, where $|\Sigma|$ can be over a million, the table is a monster – it can dwarf the text you are searching. This dependence on $|\Sigma|$ is the automaton's real weakness, and it is exactly the weakness KMP, our final algorithm, was designed to remove.

31.5 The Knuth–Morris–Pratt algorithm

We now reach the crown jewel. KMP achieves the same $\Theta(n)$ scan as the automaton, with the same no-backtracking guarantee, but its preprocessing is $\Theta(m)$ and – crucially – *independent of the*

alphabet size. It needs no transition table at all. Instead it carries one small array, the *prefix function*, that captures the pattern's internal self-similarity. The prefix function is, in a sense, the automaton's table compressed down to its essence.

31.5.1 The insight: a mismatch already tells you a lot

Return one final time to the painful moment in the naive matcher. We were matching P against the text, we had successfully matched q characters, and then character $q+1$ disagreed. The naive matcher slides the pattern one step and restarts from the beginning. But think about what we *know*. We know the last q text characters were exactly $P[1\,..\,q]$. That is hard-won information about the text, paid for with q comparisons. KMP refuses to throw it away.

Here is the question KMP asks. We matched $P[1\,..\,q]$ and then failed. We must slide the pattern forward – but how far can we slide it without missing a possible match? A match cannot start anywhere that would contradict the q characters we already verified. The pattern, after sliding, must agree with the tail of $P[1\,..\,q]$ wherever they now overlap. In other words: we want the longest *proper* prefix of $P[1\,..\,q]$ that is also a suffix of $P[1\,..\,q]$. That length tells us the new state to drop to – *and it depends only on the pattern, not on the text at all.*

Definition 31.3 (Prefix function)**.** The *prefix function* of a pattern $P[1\,..\,m]$ is the array $\pi[1\,..\,m]$ where

$$\pi[q] = \text{the length of the longest proper prefix of } P[1\,..\,q] \text{ that is also a suffix of } P[1\,..\,q].$$

"Proper" means strictly shorter than $P[1\,..\,q]$ itself (so we never pick the whole thing). When no proper prefix is also a suffix, $\pi[q] = 0$.

Intuition

The prefix function measures how much the pattern *repeats its own beginning* inside itself. Suppose you have matched the first q characters and then hit a wall. Those q characters are $P[1\,..\,q]$. If the *end* of that chunk happens to re-spell the *beginning* of the pattern – say the last 3 characters of what you matched are also the first 3 characters of P – then you have effectively already matched 3 characters of a *fresh* attempt, for free, without re-reading any text. So you do not restart from zero; you restart from 3. The prefix function precomputes, for every q, exactly how big that free head start is. It is the pattern looking in a mirror.

31.5.2 Computing the prefix function by hand

Let $P =$ `ababaca` again, $m = 7$. We fill $\pi[q]$ for $q = 1, \ldots, 7$.

- $\pi[1]$: $P[1\,..\,1] =$ `a`. A proper prefix is strictly shorter, so the only candidate is the empty string. $\pi[1] = 0$.
- $\pi[2]$: $P[1\,..\,2] =$ `ab`. Proper prefixes: `a`. Is `a` a suffix of `ab`? No (the suffix of length 1 is `b`). $\pi[2] = 0$.
- $\pi[3]$: `aba`. Proper prefixes `ab`, `a`. Is `ab` a suffix? The length-2 suffix is `ba`; no. Is `a` a suffix? The length-1 suffix is `a`; yes. $\pi[3] = 1$.

- $\pi[4]$: `abab`. Is `aba` a suffix? Length-3 suffix is `bab`; no. Is `ab` a suffix? Length-2 suffix is `ab`; yes. $\pi[4] = 2$.

- $\pi[5]$: `ababa`. Is `abab` a suffix? Length-4 suffix is `baba`; no. Is `aba` a suffix? Length-3 suffix `aba`; yes. $\pi[5] = 3$.

- $\pi[6]$: `ababac`. Length-5 suffix `babac`? no. Length-4 `abac`? no. Length-3 `bac`? no. Length-2 `ac`? no. Length-1 `c`? no. $\pi[6] = 0$.

- $\pi[7]$: `abababa`. Down the suffixes... only `a` (length 1) is a prefix and a suffix. $\pi[7] = 1$.

q	1	2	3	4	5	6	7
$P[q]$	a	b	a	b	a	c	a
$\pi[q]$	0	0	1	2	3	0	1

Read $\pi[5] = 3$ aloud: "if I have matched `ababa` and then fail, the last 3 characters `aba` are also the first 3, so I restart from a head start of 3." That single number is what the automaton needed a whole table column to express. Figure 31.3 draws this overlap: the longest proper prefix of `ababa` that is also a suffix.




Figure 31.3: Why $\pi[5] = 3$ for $P =$ `abababa`. Inside $P[1..5] =$ `ababa`, the prefix `aba` (blue, positions 1–3) equals the suffix `aba` (green, positions 3–5); they even overlap at position 3. That length-3 agreement is the free head start KMP keeps after a mismatch at state 5.

31.5.3 Computing the prefix function cleverly

Filling π by brute force, as above, costs $O(m^2)$. There is a beautiful linear way, and it uses the prefix function to compute *itself*. Process q from 2 upward, carrying a variable $k = \pi[q-1]$, the length matched so far. To extend to position q, we want to match $P[q]$ against $P[k+1]$. If they agree, the matched length grows: $k \leftarrow k+1$. If they disagree, we fall back to the next-shorter candidate, which is precisely $\pi[k]$ – the prefix function calling on itself – and try again, until either we match or k hits 0.

Algorithm 135: COMPUTE-PREFIX-FUNCTION

Input: Pattern $P[1\,..\,m]$.
Output: The prefix-function array $\pi[1\,..\,m]$.

```
1 π[1] ← 0;
2 k ← 0 ;                                  // length of the current longest prefix-suffix
3 for q ← 2 to m do
4     while k > 0 and P[k + 1] ≠ P[q] do
5         k ← π[k] ;                       // fall back to the next-best candidate
6     if P[k + 1] = P[q] then
7         k ← k + 1 ;                      // extend the match by one
8     π[q] ← k;
9 return π;
```

31.5.4 KMP itself

With π in hand, matching is the automaton's spirit without the automaton's table. We scan the text with a pointer i that never retreats, and a state q counting how much of the pattern is currently matched. On a mismatch we do not restart – we consult $\pi[q]$ to find the right fallback state, exactly as COMPUTE-PREFIX-FUNCTION fell back on itself.

Algorithm 136: KMP-MATCHER

Input: Text $T[1\,..\,n]$, pattern $P[1\,..\,m]$.
Output: Every valid shift s.

```
1 π ← Compute-Prefix-Function(P);
2 q ← 0 ;                                  // number of pattern characters matched so far
3 for i ← 1 to n do
4     while q > 0 and P[q + 1] ≠ T[i] do
5         q ← π[q] ;                       // mismatch:  slide using the prefix function
6     if P[q + 1] = T[i] then
7         q ← q + 1 ;                      // match:  advance the state
8     if q = m then
9         report "P occurs with shift s = i − m";
10        q ← π[q] ;                       // look for the next, possibly overlapping, match
```

The two loops are siblings. COMPUTE-PREFIX-FUNCTION matches the pattern against *itself*; KMP-MATCHER matches the pattern against the *text*. Both advance on agreement and both consult π on disagreement. After a full match we set $q \leftarrow \pi[m]$ so that overlapping occurrences (think of pattern `aa` in text `aaa`) are not missed.

Algorithm lab

Run KMP with P = `ababaca` (and $\pi = [0, 0, 1, 2, 3, 0, 1]$ from above) on T = `a b a b a b a c a b a` ($n = 11$). Start $q = 0$.

i	$T[i]$	action	q after
1	a	$P[1]$ =a matches; advance	1
2	b	$P[2]$ =b matches; advance	2
3	a	$P[3]$ =a matches; advance	3
4	b	$P[4]$ =b matches; advance	4
5	a	$P[5]$ =a matches; advance	5
6	b	$P[6]$ =c $\neq$ b: fall back $q \leftarrow \pi[5] = 3$; now $P[4]$ =b matches; advance	4
7	a	$P[5]$ =a matches; advance	5
8	c	$P[6]$ =c matches; advance	6
9	a	$P[7]$ =a matches; advance $\to 7 = m$: **report** $s = 2$; set $q \leftarrow \pi[7] = 1$	1
10	b	$P[2]$ =b matches; advance	2
11	a	$P[3]$ =a matches; advance	3

Study row $i = 6$. We had matched 5 characters (`ababa`) and the text gave us `b` where the pattern wanted `c`. Instead of crawling back, KMP consulted $\pi[5] = 3$: the prefix `aba` of what we matched is also its suffix, so we keep a head start of 3 and immediately try $P[4] =$ `b` against the same $T[6] =$ `b` – it matches, and we are at state 4 without having moved i backward at all. That is the whole magic, in one row.

31.5.5 Why KMP is linear: an amortized argument

The scary part of KMP is the inner **while** loop. Could it spin many times per character and blow up the cost? The answer is a clean amortized argument, and it rests on watching the state q as a kind of bank balance.

Focus

Watch the value of q across the whole run. Each iteration of the outer **for** loop increases q by *at most* 1 (the single "advance" line). Each iteration of the inner **while** loop *strictly decreases* q (since $\pi[q] < q$ always – the prefix is *proper*). And q never goes below 0. So q is a counter that rises by at most 1 per text character and can never fall below zero.

Formal

Use the *potential method*. Let the potential be the current value of q, which starts at 0 and is always ≥ 0. Across the n iterations of the outer loop, the total *increase* in q is at most n (at most 1 per iteration). Every inner-**while** iteration decreases q by at least 1. Since total decrease cannot exceed total increase plus the starting value, the inner loop executes at most n times *over the entire algorithm* – not per character, but in total. Hence the matching phase does $O(n)$ work. Computing π is the same argument over P, giving $O(m)$. Together, KMP runs in $\Theta(n + m) = \Theta(n)$ time.

This is the same accounting trick that tames the dynamic array and the union-find structure: a single operation may be expensive, but expensive steps must be "paid for" by cheap ones that came before, so the average over the whole run is small. Here, every fall-back must have been earned by an earlier advance.

Figure 31.4 plots q across the trace from the lab above. Every up-step is one advance; every down-step is a fall-back. Because q can only fall as far as it has previously climbed, the total descent over the whole run is bounded by the total ascent, which is at most n.

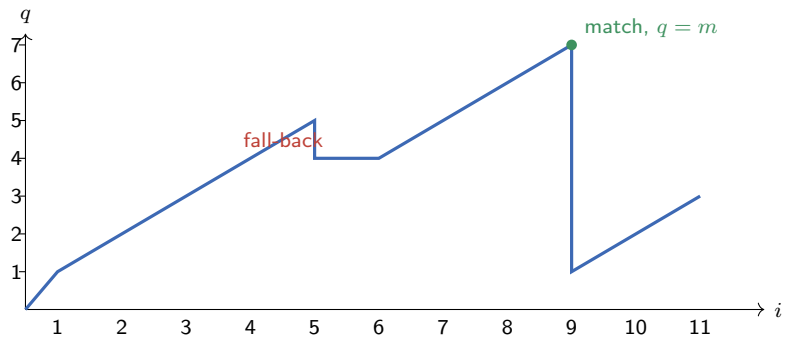


Figure 31.4: The state q during the KMP run on $T =$ `abababacaba` with $P =$ `ababaca`. Diagonal rises are advances (at most one per text character); vertical drops are fall-backs through π (at $i = 6$, and the reset to $\pi[7] = 1$ after the match at $i = 9$). Total drop $\leq$ total rise $\leq n$, so the inner loop fires $O(n)$ times in all.

Cost summary

Knuth–Morris–Pratt. Preprocessing $\Theta(m)$, and – unlike the automaton – *independent of* $|\Sigma|$. Matching $\Theta(n)$ in the worst case. Total $\Theta(n + m)$. Extra space $\Theta(m)$ for the array π. Each text character is examined a small *amortized* constant number of times; the pointer i never moves backward.

History and connection

Donald Knuth, James Morris, and Vaughan Pratt published this algorithm in 1977. The story is charming: Knuth and Pratt derived it by analyzing what an automaton-based matcher really needed, while Morris had invented essentially the same thing while building a text editor and was annoyed by the naive matcher's re-reading. It was among the first algorithms whose worst-case linearity was proved rather than hoped for. CLRS treats finite-automaton matching in Section 32.3 and KMP in Section 32.4; the prefix function there is named exactly as we have it. KMP also relates to the *failure function* idea reused in Aho–Corasick multi-pattern matching.

Common trap

A common confusion: people think the inner **while** loop makes KMP quadratic because "it has a loop inside a loop." It does not. The number of nested-loop iterations is bounded *globally*, not per outer step, by the potential argument. Counting loops by their nesting depth, rather than by how many times they truly run, is one of the most frequent analysis errors in all of algorithms – and KMP is the classic cautionary tale.

31.6 Putting the four side by side

We have climbed from the obvious to the optimal. Here is the whole landscape.

Algorithm	Preprocessing	Matching	Notes
Naive	0	$O((n-m+1)m)$	no extra space; re-reads text
Rabin–Karp	$\Theta(m)$	$O(n+vm)$ expected	worst case $O((n-m+1)m)$
Finite automaton	$O(m\|\Sigma\|)$	$\Theta(n)$	big table; $\|\Sigma\|$-dependent
KMP	$\Theta(m)$	$\Theta(n)$	small array; $\|\Sigma\|$-independent

Here v is the number of valid shifts. Notice the arc of the chapter. Naive is simplest but re-reads text. Rabin–Karp escapes re-reading on *average* by gambling on fingerprints. The automaton escapes it *always* but pays in a fat, alphabet-sized table. KMP keeps the automaton's iron-clad linear guarantee while shrinking the table down to a single m-element array that does not care how big the alphabet is. That progression – obvious, then probabilistic, then guaranteed-but-heavy, then guaranteed-and-light – is the shape of progress in algorithm design itself.

Why this matters

String matching is not a museum piece. KMP and its relatives run inside `grep`, inside your editor's find, inside DNA aligners scanning genomes, inside network intrusion detectors comparing packets against attack signatures at line rate, and inside the tokenizers of compilers. The automaton view is the backbone of regular-expression engines. And Rabin–Karp's rolling hash is the engine of file-syncing and deduplication tools that decide which blocks of a multi-gigabyte file actually changed. The ideas in this short chapter quietly run a large fraction of the text the world processes.

Pause

If only one sentence survives from this chapter, let it be this: the fast string matchers all win by *never re-reading the text* – they invest a little preprocessing of the pattern so that, when a match breaks down, they already know exactly how far to slide without going back. Rabin–Karp buys that with a fingerprint; the automaton with a table; KMP with the prefix function. Same goal, three trades.

31.7 Exercises

Exercise 31.1 (Warmup: trace the naive matcher)**.** Run NAIVE-STRING-MATCHER on $T =$ `aaabaaaab` and $P =$ `aaab`. List every shift, the number of character comparisons it makes at that shift, and which shifts are valid. What is the total comparison count?

Exercise 31.2 (The quadratic worst case)**.** Exhibit a text and pattern, each parameterized by n and m, on which the naive matcher makes exactly $(n-m+1)\,m$ character comparisons. Argue briefly why no shift can be skipped on your input.

Exercise 31.3 (Rolling hash by hand)**.** With radix $d = 10$ and prime $q = 11$, compute the Rabin–Karp fingerprint of the pattern $P =$ `2718` (so $m = 4$), and the fingerprint of the first length-4 window

`9271` of $T =$ `927183`. Then use the rolling update to obtain the fingerprint of the second window `2718` and the third window `7183`. Show every modular step, and say which window is a real match for P.

Exercise 31.4 (Spurious hits)**.** For $d = 10$ and $q = 13$, find two distinct 3-digit strings that have the same Rabin–Karp fingerprint. Explain why the verification step in RABIN-KARP-MATCHER is not optional, using your example.

Exercise 31.5 (Choosing the prime)**.** Suppose your text has length $n = 10^6$ and you want the *expected* number of spurious hits to be at most 1. Using the estimate that the expected number of spurious hits is about n/q, what is the smallest prime q that suffices? How large does the machine word need to be so that $d \cdot q$ fits, for byte data ($d = 256$)?

Exercise 31.6 (Compute a prefix function)**.** Compute the prefix function π for $P =$ `aabaabaaa` by hand, showing the longest prefix-that-is-a-suffix at each position. Then verify your answer by running COMPUTE-PREFIX-FUNCTION and listing the value of k at the end of each iteration of the outer loop.

Exercise 31.7 (KMP trace)**.** Using the pattern $P =$ `ababaca` and its prefix function $\pi = [0, 0, 1, 2, 3, 0, 1]$, trace KMP-MATCHER on $T =$ `abacababacaba`. Make a table with columns i, $T[i]$, the value of q before, any fall-backs taken, and q after. Report all valid shifts.

Exercise 31.8 (Building one automaton transition)**.** For the pattern $P =$ `aabab`, compute $\delta(4, \texttt{a})$ and $\delta(4, \texttt{b})$ from the definition (longest prefix of P that is a suffix of $P_4\,a$). Recall $P_4 =$ `aaba`. Show the suffixes you test.

Exercise 31.9 (Why q never overshoots)**.** Prove the invariant that drives KMP's correctness: at the top of the outer **for** loop in KMP-MATCHER, q equals the length of the longest prefix of P that is a suffix of $T[1\,..\,i-1]$. (Hint: induct on i, using the definition of the prefix function for the mismatch case.)

Exercise 31.10 (Amortized counting)**.** Consider the pattern $P =$ `aaaaab` ($m = 6$) and the text of n `a`'s. Trace how the state q rises and how the inner **while** loop fires across the scan. Confirm by direct count that the *total* number of inner-loop iterations over the whole text is at most n, matching the potential argument, even though some individual characters trigger several fall-backs.

Exercise 31.11 (Challenge: two-dimensional matching)**.** You are given an $n \times n$ grid of characters and an $m \times m$ pattern grid, and you want every position where the small grid sits inside the big one. Describe how to combine the row-wise rolling hash of Rabin–Karp with a second rolling hash down the columns to solve this in expected $O(n^2)$ time after $O(m^2)$ preprocessing. What is the analogue of a spurious hit here?

Exercise 31.12 (Challenge: shrinking the automaton table)**.** The direct automaton construction costs $O(m^2|\Sigma|)$. Explain how the prefix function π lets you compute the transition $\delta(q, a)$ for any state q and character a on the fly in amortized $O(1)$, so that you never store the full $\Theta(m|\Sigma|)$ table. (Hint: $\delta(q, a)$ either advances to $q+1$ when $P[q+1] = a$, or behaves like $\delta(\pi[q], a)$ otherwise – which is exactly the inner loop of KMP.)

Chapter 32

Computational Geometry

Up to now, the objects our algorithms have chewed on were numbers, characters, keys in a tree. Comparisons were cheap: is $5 < 8$? is the letter `a` before `b`? But the world is not made of numbers in a line. It is made of *places* – pixels on a screen, cities on a map, atoms in a protein, robots on a factory floor. Each of those is a point in space, and the questions we want to ask about them are geometric: which two points are closest? does this road cross that river? what is the smallest fence that encloses this herd?

These questions *feel* obvious to a human eye. You can glance at a scatter of dots and instantly see the two that are nearest, or trace the outline that wraps them all. Your eye is doing something an algorithm cannot do for free: it is processing the whole picture at once. Our job in this chapter is to teach a machine – which sees only a list of coordinate pairs, one at a time – to answer the same questions, and to do it *fast*. The recurring miracle will be that a tiny algebraic gadget, the *cross product*, replaces all that visual intuition with a single arithmetic sign.

We will build four classic results from the ground up:

- the *orientation test* – given three points, do they turn left, turn right, or lie on a line? This is the atom from which everything else is built.
- *segment intersection* – do two line segments cross, using only orientation tests and no division at all.
- the *convex hull* – the smallest convex polygon enclosing a set of points – via two beautiful algorithms, *Graham's scan* and *Jarvis's march*.
- the *closest pair of points* – found in $\Theta(n \log n)$ by a divide-and-conquer trick that looks, at first, like it cannot possibly work.

History and connection

This chapter maps to CLRS Chapter 33, "Computational Geometry." Section 33.1 is line-segment properties (our orientation test and segment intersection), 33.2 is the sweep for "do any segments intersect," 33.3 is convex hull (Graham's scan and Jarvis's march), and 33.4 is the closest pair. The field itself was crystallized in the 1970s and 1980s – Graham's scan dates to a 1972 paper by Ronald Graham motivated, charmingly, by a problem at Bell Labs; the closest-pair divide-and-conquer is due to Shamos and Hoey. If you ever take a dedicated

course, the canonical text is de Berg, Cheong, van Kreveld, and Overmars, *Computational Geometry: Algorithms and Applications*.

32.1 The cross product: the only tool you really need

Everything starts with one question about *three* points. Let us name them p_0, p_1, p_2. Imagine you walk from p_0 straight to p_1, then you must turn to head toward p_2. Do you turn *left*, do you turn *right*, or do you keep going *straight*? That single yes/no/no answer – which way you turned – is the seed of this entire chapter.

Intuition

You are driving. You reach p_1 and you want to get to p_2. If the steering wheel goes counterclockwise (left), the three points make a left turn. If it goes clockwise (right), a right turn. If you do not touch the wheel at all, the three points are *collinear* – they sit on one straight line. "Left, right, or straight" is the whole vocabulary. Astonishingly, almost every geometric algorithm in this chapter is built by asking this question over and over.

How do we compute the turn direction from raw coordinates, without a steering wheel? We use *vectors* and the *cross product*. Treat each point as a pair $p = (p_x, p_y)$. From p_0 form two arrows:

$$\vec{u} = p_1 - p_0 = (p_{1x} - p_{0x},\ p_{1y} - p_{0y}), \qquad \vec{v} = p_2 - p_0 = (p_{2x} - p_{0x},\ p_{2y} - p_{0y}).$$

The *two-dimensional cross product* of $\vec{u}$ and $\vec{v}$ is the single number

$$\vec{u} \times \vec{v} \ = \ u_x v_y - u_y v_x.$$

That is it – two multiplications and a subtraction. The magic is in its *sign*.

Formal

Let $\vec{u} = (u_x, u_y)$ and $\vec{v} = (v_x, v_y)$. Define $\vec{u} \times \vec{v} = u_x v_y - u_y v_x$. Then:

- if $\vec{u} \times \vec{v} > 0$, then $\vec{v}$ is counterclockwise from $\vec{u}$ (a left turn);
- if $\vec{u} \times \vec{v} < 0$, then $\vec{v}$ is clockwise from $\vec{u}$ (a right turn);
- if $\vec{u} \times \vec{v} = 0$, then $\vec{u}$ and $\vec{v}$ are *parallel* (collinear through p_0).

The magnitude $|\vec{u} \times \vec{v}|$ equals the area of the parallelogram spanned by $\vec{u}$ and $\vec{v}$, so half of it is the area of the triangle $p_0 p_1 p_2$.

Why does the sign encode the turn? Here is the gentle version. The cross product $u_x v_y - u_y v_x$ is a *signed area*. If you sweep the arrow $\vec{u}$ counterclockwise toward $\vec{v}$, the swept region has positive area; sweep it clockwise and you get negative area; if there is nothing to sweep because they point the same way, the area is zero. The sign of an area tells you the *direction of rotation*. That is the entire trick, and we never needed trigonometry, angles, or square roots – just multiply and subtract.

Focus

The cross product replaces "looking at the picture." Where your eye sees a left turn, the machine computes a positive number. Hold this equivalence in your head:

$$\text{sign of } (u_x v_y - u_y v_x) \quad \longleftrightarrow \quad \text{left / straight / right.}$$

Everything else in this chapter is built by asking this question, sometimes thousands of times.

32.1.1 The Orientation primitive

Let us bottle this up as a reusable function. Given three points it returns one of three labels. We will encode them as $+1$ (counterclockwise / left), -1 (clockwise / right), and 0 (collinear).

Algorithm 137: ORIENTATION(p_0, p_1, p_2)

Input: Three points p_0, p_1, p_2 in the plane.
Output: $+1$ if $p_0 p_1 p_2$ make a counterclockwise (left) turn, -1 if clockwise (right), 0 if collinear.


```
c ← (p1x − p0x)(p2y − p0y) − (p1y − p0y)(p2x − p0x);
if c > 0 then
    return +1
if c < 0 then
    return −1
return 0;
```

Let us trace it on real numbers. Take $p_0 = (0, 0)$, $p_1 = (4, 0)$, and three candidates for p_2.

Example 32.1. With $p_0 = (0, 0)$ and $p_1 = (4, 0)$ (so $\vec{u} = (4, 0)$, pointing east):

- $p_2 = (2, 3)$ (north of the line): $c = (4)(3) - (0)(2) = 12 > 0$, a **left turn**. Yes – to get from heading east to pointing at a spot above the line, you turn left. ✓
- $p_2 = (2, -3)$ (south of the line): $c = (4)(-3) - (0)(2) = -12 < 0$, a **right turn**. ✓
- $p_2 = (7, 0)$ (straight ahead): $c = (4)(0) - (0)(7) = 0$, **collinear**. ✓

Here is the picture the algebra of Example 32.1 is describing.

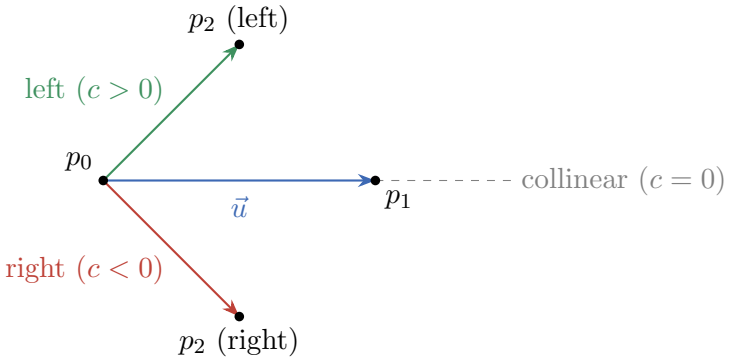

Common trap

Two traps bite beginners here. First, **do not compute the slope** $(p_{1y} - p_{0y})/(p_{1x} - p_{0x})$ to compare directions. Division invites division-by-zero (vertical lines!) and floating-point noise. The cross product uses only $\times$ and $-$, so on *integer* inputs it is *exact* – no rounding, ever. Second, **order matters**: $\textsc{Orientation}(p_0, p_1, p_2)$ and $\textsc{Orientation}(p_0, p_2, p_1)$ have opposite signs. Swapping the last two arguments flips left and right, because you are now asking about the reverse turn.

Why this matters

This one sign computation is everywhere. A GPS deciding which side of a road you are on, a CAD program checking whether you clicked inside a polygon, a video game testing whether a bullet's path crosses a wall, a chip-design tool checking that wires do not overlap – all of them lean on the orientation test. It is the "<" of the geometric world. Master it once and you have the keystone.

32.2 Do two segments intersect?

Now a real question. You have two line segments, $\overline{p_1p_2}$ and $\overline{p_3p_4}$. Do they cross? Not the infinite lines through them – the finite segments, with their endpoints. This is the test a game engine runs to see if your character walked through a wall.

The naive approach is to solve for the intersection point of the two lines with algebra, then check whether that point falls inside both segments. It works, but it needs division, it stumbles on parallel and vertical lines, and floating-point error makes the "is the point inside?" check shaky. We will do something cleaner that uses *only orientation tests* – exact integer arithmetic, no division.

Intuition


Here is the key idea, and it is lovely. Segment $\overline{p_1p_2}$ crosses segment $\overline{p_3p_4}$ exactly when each segment "straddles" the line through the other. "Straddle" means the two endpoints sit on *opposite sides*. Look at p_3 and p_4: if one is to the left of the line p_1p_2 and the other is to the right, then $\overline{p_3p_4}$ pokes across that line. If *both* segments straddle each other's lines, they must cross. If either one fails to straddle, they miss.

"Which side of the line p_1p_2 is the point p_3 on?" is precisely $\textsc{Orientation}(p_1, p_2, p_3)$. So the whole test is four orientation calls. Let us define


$$d_1 = \textsc{Orientation}(p_3, p_4, p_1), \quad d_2 = \textsc{Orientation}(p_3, p_4, p_2),$$

$$d_3 = \textsc{Orientation}(p_1, p_2, p_3), \quad d_4 = \textsc{Orientation}(p_1, p_2, p_4).$$

The points p_1 and p_2 are on opposite sides of line p_3p_4 exactly when d_1 and d_2 have *opposite signs*; symmetrically for d_3, d_4 and the line p_1p_2.



they cross



no crossing: p_3, p_4 same side

There is one subtlety: what if an endpoint lands *exactly* on the other segment? Then some $d_i = 0$, and we must check whether that collinear point actually lies *within* the bounds of the segment (not out on the extension). A tiny helper, OnSegment, handles it: assuming p_i is known collinear with $\overline{p_j p_k}$, it just checks that p_i's coordinates fall inside the bounding box of that segment.

Algorithm 138: SegmentsIntersect(p_1, p_2, p_3, p_4)

Input: Four points defining segments $\overline{p_1 p_2}$ and $\overline{p_3 p_4}$.
Output: TRUE if the segments intersect (including touching), else FALSE.

```
d1 ← Orientation(p3, p4, p1);
d2 ← Orientation(p3, p4, p2);
d3 ← Orientation(p1, p2, p3);
d4 ← Orientation(p1, p2, p4);
if d1·d2 < 0 and d3·d4 < 0 then
    return TRUE ;                                   // proper crossing
if d1 = 0 and OnSegment(p3, p4, p1) then
    return TRUE
if d2 = 0 and OnSegment(p3, p4, p2) then
    return TRUE
if d3 = 0 and OnSegment(p1, p2, p3) then
    return TRUE
if d4 = 0 and OnSegment(p1, p2, p4) then
    return TRUE
return FALSE;
```

Example 32.2 works the four orientation calls end to end. Here the products $d_1 d_2 < 0$ and $d_3 d_4 < 0$ are a slick way to say "the two signs differ." If they differ *and* neither is zero, the segments straddle properly and cross. The remaining four lines handle the boundary cases where an endpoint touches.

Example 32.2. Take $\overline{p_1 p_2}$ with $p_1 = (0, 0)$, $p_2 = (4, 1)$, and $\overline{p_3 p_4}$ with $p_3 = (1, 2)$, $p_4 = (3, -1)$ (the crossing picture above). Compute:

- $d_1 = \text{Orientation}(p_3, p_4, p_1)$: $\vec{u} = p_4 - p_3 = (2, -3)$, $\vec{v} = p_1 - p_3 = (-1, -2)$, $c = (2)(-2) - (-3)(-1) = -4 - 3 = -7 < 0$, so $d_1 = -1$.
- $d_2 = \text{Orientation}(p_3, p_4, p_2)$: $\vec{v} = p_2 - p_3 = (3, -1)$, $c = (2)(-1) - (-3)(3) = -2 + 9 = 7 > 0$, so $d_2 = +1$.
- $d_1 d_2 = -1 < 0$: p_1, p_2 straddle line $p_3 p_4$. ✓

$d_3 = \textsc{Orientation}(p_1, p_2, p_3)$: $\vec{u} = (4, 1)$, $\vec{v} = (1, 2)$, $c = 8 - 1 = 7 > 0$, so $d_3 = +1$. And d_4: $\vec{v} = p_4 - p_1 = (3, -1)$, $c = (4)(-1) - (1)(3) = -7 < 0$, so $d_4 = -1$. Then $d_3 d_4 = -1 < 0$. Both straddles hold, so the segments **intersect**. ✓

Cost summary


SegmentsIntersect runs in $\Theta(1)$ time: a fixed number of orientation tests, each $\Theta(1)$. On integer coordinates it is *exact* – it never rounds. Now suppose instead you have n segments and ask "do *any* two of them intersect?" Checking all pairs is $\Theta(n^2)$. CLRS 33.2 shows a *sweep-line* algorithm that answers this yes/no question in $\Theta(n \log n)$ by sweeping a vertical line left to right and keeping the segments it currently crosses in a balanced BST ordered by height – two segments can only cross if they are ever *adjacent* in that order, so you only test neighbors.

32.3 The convex hull

Now the headline problem. You are given n points scattered in the plane. The *convex hull* is the smallest convex polygon that contains all of them.

Intuition

Hammer a nail into the table at each point. Stretch a rubber band wide open around the whole cluster and let go. It snaps tight and clings to the outermost nails, ignoring everything tucked inside. The taut rubber band is the convex hull. "No dents": between any two band-nails the band goes perfectly straight, never caving inward. Equivalently, the hull is convex – the segment between any two points of the polygon stays inside it.



The hull points are exactly the "extreme" ones; every other point is interior and irrelevant to the boundary. We will see two algorithms. Both lean entirely on the orientation test.

Why this matters

Convex hulls are everywhere a "smallest enclosing shape" is useful: collision detection in physics engines and games (it is cheap to test convex shapes), finding the diameter of a point set, path planning for robots (hug the hull to avoid obstacles), pattern recognition, and as a preprocessing step for dozens of other geometric algorithms. When you ask a phone to crop to "the region with all the faces," a hull is lurking nearby.

32.3.1 Graham's scan

Graham's scan sorts the points by angle around an anchor, then walks through them keeping a "stack" of hull vertices, popping any point that would create a right turn (a dent). It runs in $\Theta(n \log n)$, dominated by the sort.

Step 1 – pick the anchor. Choose p_0, the point with the lowest y-coordinate (break ties by lowest x). This point is *guaranteed* to be on the hull – nothing sits below it, so the rubber band must touch it.

Step 2 – sort by polar angle. Sort the remaining points by the angle the ray $p_0 \to p$ makes with the positive x-axis, increasing. Here is the elegant part: you do *not* compute any angles. To decide whether p_a comes before p_b, just ask Orientation(p_0, p_a, p_b). If it is $+1$ (counterclockwise), p_a has the smaller angle. The cross product sorts by angle *without ever calling a trig function.* (Ties at equal angle: keep the farther point, or handle collinear points with a small rule.)

Step 3 – the scan. Now walk the sorted points, maintaining a stack of the hull-so-far. Push p_0 and the first two sorted points. Then for each subsequent point p_i: while the top two stack entries together with p_i make a *non-left* turn (right turn or collinear), *pop* the top – it was a dent, a mistake we now correct. Then push p_i. When you have consumed every point, the stack *is* the hull, in counterclockwise order.

Algorithm 139: GrahamScan(P)

Input: A set P of $n \geq 3$ points.
Output: The vertices of the convex hull of P in counterclockwise order.

```
p_0 ← point of P with lowest y (ties: lowest x);
sort the other points by polar angle around p_0, using Orientation as the comparator; call
  them p_1, ..., p_m;
S ← empty stack;
Push(S, p_0);;
Push(S, p_1);;
Push(S, p_2);
for i ← 3 to m do
    while |S| ≥ 2 and Orientation(NextToTop(S), Top(S), p_i) ≤ 0 do
        Pop(S) ;                          // the turn is not left:  pop the dent
    Push(S, p_i);
return S;
```

Algorithm lab

Let us run it on a small set. Anchor $p_0 = (0, 0)$, and after sorting by angle suppose the points are

$$p_1 = (3, 1),\ p_2 = (5, 3),\ p_3 = (2, 2),\ p_4 = (0, 4).$$

Start the stack as $[\,p_0, p_1, p_2\,]$ (bottom to top).

- **Consider $p_3 = (2, 2)$.** Check the turn $p_1 \to p_2 \to p_3$: $\vec{u} = p_2 - p_1 = (2, 2)$, $\vec{v} = p_3 - p_1 = (-1, 1)$, $c = (2)(1) - (2)(-1) = 4 > 0$, a *left* turn. Left is good – no pop. Push p_3. Stack: $[p_0, p_1, p_2, p_3]$. (At this moment p_3 looks like a hull vertex; the next point will reveal that it is not.)

- **Consider $p_4 = (0, 4)$.** Check $p_2 \to p_3 \to p_4$: $\vec{u} = p_3 - p_2 = (-3, -1)$, $\vec{v} = p_4 - p_2 = (-5, 1)$, $c = (-3)(1) - (-1)(-5) = -3 - 5 = -8 < 0$, a *right* turn. Right is a dent – *pop* p_3. Stack: $[p_0, p_1, p_2]$.
- Re-check $p_1 \to p_2 \to p_4$: $\vec{u} = p_2 - p_1 = (2, 2)$, $\vec{v} = p_4 - p_1 = (-3, 3)$, $c = (2)(3) - (2)(-3) = 6 + 6 = 12 > 0$, a left turn. Good – push p_4. Stack: $[p_0, p_1, p_2, p_4]$.

The hull is $p_0, p_1, p_2, p_4 = (0, 0), (3, 1), (5, 3), (0, 4)$, and $p_3 = (2, 2)$ was correctly discarded as interior. Trace this on a walk and watch the dent get popped.

Why does popping on a non-left turn give the right answer? Here is the invariant.

Focus

Loop invariant (Graham's scan). At the top of each `for` iteration, the stack S holds, from bottom to top, the vertices of the convex hull of the points considered so far, in counterclockwise order, with every consecutive triple making a left turn.

Initialization. Three points are trivially their own (degenerate) hull. *Maintenance.* When we add p_i, the `while` loop pops every vertex that would create a right or straight turn – exactly the vertices that p_i now "hides" from the boundary, the dents. After popping, the top triple turns left, so the invariant is restored when we push p_i. The points sit in angle order, so p_i is the next counterclockwise vertex. *Termination.* After the last point, S is the hull of all of P. A clean induction, and the engine of the proof is, again, the orientation sign.

Cost summary

Graham's scan. The sort costs $\Theta(n \log n)$. The scan looks like it could be $\Theta(n^2)$ because of the inner `while`, but each point is *pushed once and popped at most once* over the whole run – an amortized argument (Chapter 17). So the scan itself is $\Theta(n)$, and the total is

$$T(n) = \underbrace{\Theta(n \log n)}_{\text{sort}} + \underbrace{\Theta(n)}_{\text{scan}} = \Theta(n \log n).$$

The sort dominates. This is asymptotically optimal for comparison-based hull algorithms.

Common trap

Two classic mistakes. (1) Forgetting to pop in a `while` loop – one pop is not enough; adding a far-out point can invalidate *several* previous vertices, so you must keep popping until the turn is left. (2) Mishandling collinear points. With ≤ 0 in the test, collinear points ($c = 0$) get popped, which usually you want (a vertex in the middle of a straight edge is not a true corner). If your application needs them *kept*, change the test to < 0. Be deliberate about which you mean.


32.3.2 Jarvis's march (gift wrapping)

There is a second algorithm that is slower in the worst case but irresistibly intuitive, and faster when the hull has few vertices. It is called *Jarvis's march*, or *gift wrapping*, and it does exactly what your

hand does when you wrap a present: it walks around the outside, always turning as little as possible.

Intuition

Start at the lowest point – definitely on the hull. Now imagine sweeping a ray counterclockwise until it bumps into the very first point. That point is the next hull vertex; the ray "wrapped" onto it. Stand there and sweep again, and again, each time pivoting to the next point, until you come all the way back to the start. You have wrapped a string around the outside of the point cloud.

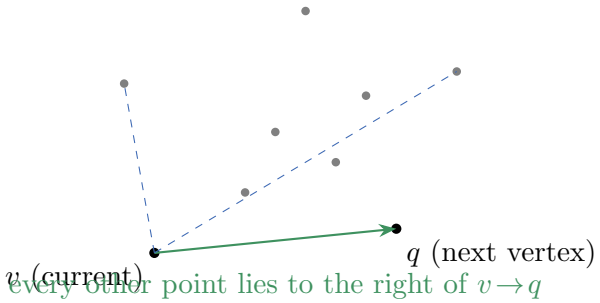

The dashed rays in the figure show v "seeing" the rest of the cloud; the solid green ray $v \to q$ is the most clockwise of all of them, so q is the next hull vertex.

How do you find "the next point" without sweeping a physical ray? With – you guessed it – the orientation test. From the current hull vertex v, you want the point q such that *every other point* lies to the right of the ray $v \to q$. Equivalently, q is the most clockwise point as seen from v. You find it by a linear scan: start with any candidate and replace it whenever $\textsc{Orientation}(v, \text{candidate}, r) = -1$ (point r is even more clockwise).

Algorithm 140: JarvisMarch(P)

Input: A set P of $n \geq 3$ points.
Output: The convex hull of P in counterclockwise order.

```
start ← leftmost point of P (ties: lowest y) ;          // guaranteed on the hull
v ← start;
H ← empty list;
repeat
    append v to H;
    q ← any point of P with q ≠ v;
    for each point r ∈ P do
        if Orientation(v, q, r) = −1 then
            q ← r ;                          // r is more clockwise; better next vertex
    v ← q;
until v = start;
return H;
```

Cost summary

Jarvis's march. Each pass around the inner `for` loop is $\Theta(n)$ and produces exactly one hull vertex. If the hull has h vertices, the total cost is $\Theta(nh)$ – this is an *output-sensitive* bound. If only a handful of points are on the hull (h small, say a constant), Jarvis runs in $\Theta(n)$, beating Graham. But in the worst case *all* n points lie on the hull (think of points on a circle), so $h = n$ and Jarvis degrades to $\Theta(n^2)$. Graham's $\Theta(n \log n)$ is the safer default; Jarvis shines when you know the hull is small.

Walking question

Take a coin out of your pocket and put points only on its rim – a perfect circle. How many points are on the convex hull? *All of them.* Now you understand why Jarvis's march hits its $\Theta(n^2)$ worst case here: $h = n$. Next, scatter n points uniformly inside a square. Roughly how many end up on the hull? (The answer grows like $\log n$, which is why Jarvis is often surprisingly fast in practice.)

32.4 The closest pair of points

Final problem, and the prettiest. Given n points, find the two whose Euclidean distance is smallest. A radar system might run this to spot the two aircraft in greatest danger of colliding.

The brute force is obvious: compute all $\binom{n}{2}$ pairwise distances and keep the minimum. That is $\Theta(n^2)$. Can we do better? Sorting was $\Theta(n \log n)$; surely distances are harder... and yet, with divide and conquer (Chapter 4), we will hit $\Theta(n \log n)$. The first time you see how, it feels like a magic trick.


Intuition

Split the points into a left half and a right half with a vertical line. Find the closest pair on the left (recursively) and the closest pair on the right (recursively). Let δ be the smaller of those two distances. The true closest pair is either entirely on the left, entirely on the right, *or* it straddles the line – one point on each side. The first two cases are already covered by δ. The whole difficulty, and the whole cleverness, is the third: checking straddling pairs *fast*.

32.4.1 The setup and the strip

First, presort: make a copy of the points sorted by x (call it X) and another sorted by y (call it Y). We do this *once*, up front, in $\Theta(n \log n)$, and then keep the sorted orders consistent through the recursion. Now the recursion. Draw a vertical line at the median x, splitting the points into left half L and right half R of size $n/2$ each. Recurse to get δ_L and δ_R, and set $\delta = \min(\delta_L, \delta_R)$.

Now for straddling pairs. A straddling pair closer than δ must have both points within horizontal distance δ of the dividing line – otherwise they are already more than δ apart in x alone. So we only care about points in a vertical *strip* of width 2δ centered on the line.

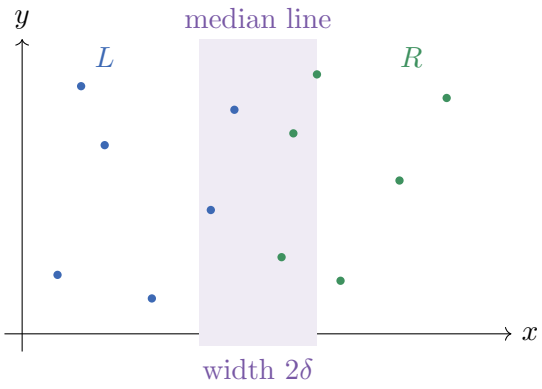

Here is the worry. The strip could contain *all* n points (if they all cluster near the line). Comparing every pair inside the strip would be $\Theta(n^2)$ again, and the whole scheme collapses. We need the strip to be cheap.


32.4.2 The seven-neighbors miracle

This is the heart of the algorithm, and it is genuinely beautiful.

Focus

The key geometric fact. Sort the strip points by their y-coordinate. Then for any point in the strip, you only need to compare it against the next 7 points in that y-order. Any straddling pair closer than δ must appear within 7 positions of each other in the y-sorted strip.

Why 7? Picture the strip as a 2δ-wide vertical band. Take any point p in it. Any point that could be within δ of p must lie in a $2\delta \times \delta$ rectangle just above p (within δ in y, and at most 2δ across in x, with the median line running down its middle). Now split that rectangle into a grid of squares of side $\delta/2$: it fits exactly $4 \times 2 = 8$ such squares, four entirely on the left side of the line and four entirely on the right. And here is the punchline: *each little square can hold at most one point.* Why? Because the two recursive calls already guarantee that any two points on the *same* side are at least δ apart, each square sits wholly on one side, and the diagonal of a $\delta/2$-square is only $\delta/\sqrt{2} < \delta$ – two points in one square would be closer than δ, a contradiction. So at most 8 points sit in the rectangle, one of which is p itself, leaving at most 7 others to check.



Formal

Claim. Let p and q be points in the strip with q above p in y-order and $\text{dist}(p, q) < \delta$. Then q is among the next 7 points after p in the y-sorted strip.

Proof sketch. Such a q lies in the $2\delta \times \delta$ rectangle above p, which straddles the median line: its left half is a $\delta \times \delta$ square sitting on the left side, its right half a $\delta \times \delta$ square on the right side. Tile each half with four $\frac{\delta}{2} \times \frac{\delta}{2}$ squares, eight in all. Each little square has diameter $\frac{\delta}{\sqrt{2}} < \delta$, and every square lies entirely on one side of the line, so any two points inside the same square are on the same side and would be closer than δ – contradicting that the per-side minimum is exactly δ. Hence each square holds at most one input point, so at most 8 points occupy the rectangle, p included, leaving at most 7 candidates after p. □

A constant – 7 – comparisons per point. That converts the strip step from $\Theta(n^2)$ into $\Theta(n)$. *That* is the trick.

32.4.3 The algorithm and its recurrence

Algorithm 141: ClosestPair(X, Y)

Input: Points sorted by x in array X and by y in array Y (same set).
Output: The smallest distance between any two of the points.

```
1  if |X| ≤ 3 then
2      return brute-force minimum distance
3  split X at the median x into left half X_L and right half X_R;
4  let ℓ be the median x-coordinate;
5  partition Y into Y_L, Y_R preserving y-order (one linear pass);
6  δ_L ← ClosestPair(X_L, Y_L);
7  δ_R ← ClosestPair(X_R, Y_R);
8  δ ← min(δ_L, δ_R);
9  build S ← points of Y with |x − ℓ| < δ ;          // strip, still y-sorted
10 for i ← 1 to |S| do
11     for j ← i + 1 to min(i + 7, |S|) do
12         δ ← min(δ, dist(S[i], S[j]));
13 return δ;
```

The one subtlety that makes this $\Theta(n \log n)$ rather than $\Theta(n \log^2 n)$: we must *not* re-sort by y inside each recursive call. Instead, we pass the already-y-sorted array Y down and split it into Y_L, Y_R in a single linear pass each level (just like the merge step of merge sort, run in reverse). With that care, each level of recursion does $\Theta(n)$ non-recursive work.

Cost summary


The recurrence. One presort costs $\Theta(n \log n)$. Inside the recursion, each call splits ($\Theta(n)$), recurses on two halves, and does the strip scan with its at-most-7 comparisons ($\Theta(n)$). So

$$T(n) = 2\,T(n/2) + \Theta(n).$$

By the master theorem (Chapter 4), case 2, this solves to $T(n) = \Theta(n \log n)$. Add the one-time

presort – also $\Theta(n \log n)$ – and the total stays $\Theta(n \log n)$. We beat the $\Theta(n^2)$ brute force, and we did it with the *same* recurrence as merge sort.

The recursion tree makes the $\Theta(n \log n)$ visible: every level does $\Theta(n)$ total work (the split plus the at-most-7 strip scan), and there are $\Theta(\log n)$ levels.

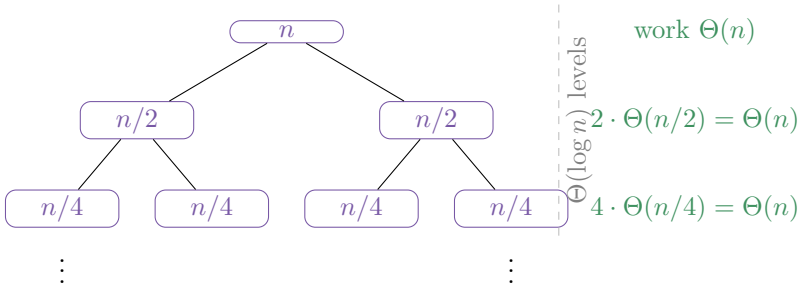

Summing $\Theta(n)$ across $\Theta(\log n)$ levels gives $\Theta(n \log n)$ – precisely the shape of the merge-sort tree.

Common trap

The number-one bug in closest-pair implementations is re-sorting the strip (or the whole set) by y *inside* every recursive call. That sneaks an extra $\log n$ factor in and gives $\Theta(n \log^2 n)$ – still better than n^2, but not optimal, and on an exam it loses points. The fix is to thread the y-sorted order through the recursion by splitting, never re-sorting. A second subtle point: use the strip's δ *from the recursive calls*, and keep shrinking it as you find closer straddling pairs – but always loop the at-most-7 window, not a window that depends on the shrinking δ.

Walking question

Convince yourself the constant really is bounded. Take the $2\delta \times \delta$ rectangle and try to cram in more than 8 points such that no two on the same side are closer than δ. You will fail – the squares simply run out of room. This "packing" style of argument, where geometry forces a constant, recurs all over computational geometry. Where else have you seen "the space can only hold so many"? (Hint: hashing, and the pigeonhole principle.)

32.5 Looking back

Step back and notice what carried the whole chapter: a single arithmetic sign.

Focus

What to carry forward.

- The *cross product* $u_x v_y - u_y v_x$ turns "which way did we turn?" into the sign of one number – exact on integers, no trig, no division. It is the "<" of geometry.
- *Segment intersection* is four orientation tests: each segment must straddle the other's line.

- *Convex hull*: Graham's scan sorts then walks, popping right turns, in $\Theta(n \log n)$. Jarvis's march gift-wraps in $\Theta(nh)$ – great when the hull is small, quadratic when it is not.
- *Closest pair*: divide by a vertical line, recurse, and patch the middle strip using the seven-neighbors fact, for $\Theta(n \log n)$.
- The deepest lesson: *geometry yields to algebra.* Translate the picture into signs and packing arguments, and the algorithms write themselves.

History and connection

For the rigorous versions of all four, read CLRS Chapter 33 next: 33.1 (line-segment properties), 33.2 (the sweep-line "any segments intersect"), 33.3 (Graham's scan and Jarvis's march), 33.4 (closest pair). CLRS proves the seven-neighbors bound carefully and handles every degenerate case (collinear points, coincident points, vertical lines) that we have waved past. Having built the intuition here, those proofs should now read as confirmations of pictures you already hold in your head.

Exercises

Exercise 32.1. Compute $\textsc{Orientation}(p_0, p_1, p_2)$ by hand for $p_0 = (1, 1)$, $p_1 = (4, 3)$, $p_2 = (2, 5)$. Is the turn left, right, or straight? Then swap p_1 and p_2 and recompute; explain why the sign flipped.

Exercise 32.2. The magnitude of the cross product is twice the area of triangle $p_0p_1p_2$. Use this to find the area of the triangle with vertices $(0, 0)$, $(5, 0)$, $(2, 4)$. Check against the schoolbook formula $\frac{1}{2} \cdot \text{base} \cdot \text{height}$.

Exercise 32.3. Do segments $\overline{p_1p_2}$ and $\overline{p_3p_4}$ intersect for $p_1 = (0, 0), p_2 = (4, 4), p_3 = (0, 4), p_4 = (2, 2)$? Notice p_4 lies *on* the first segment. Walk through $\textsc{SegmentsIntersect}$ and identify which branch fires.

Exercise 32.4. Explain in two or three sentences why the orientation test is preferred over computing and comparing slopes. Give a concrete pair of segments where the slope approach would divide by zero but the cross product handles it cleanly.

Exercise 32.5. Run Graham's scan by hand on the points $(0, 0), (2, 0), (4, 1), (2, 2), (1, 1), (3, 1)$. Identify the anchor, the angular order, and which points get popped. Draw the final hull.

Exercise 32.6. For a set of n points in "convex position" (all on the hull, e.g. on a circle), exactly how many times does Jarvis's march execute its inner `for` loop in total? Express your answer in terms of n and confirm it gives $\Theta(n^2)$.

Exercise 32.7. In Graham's scan we pop on a non-left turn using the test $\textsc{Orientation}(\cdot, \cdot, p_i) \leq 0$. Suppose three consecutive hull candidates are exactly collinear. With ≤ 0, is the middle one kept or popped? What changes if you use < 0 instead? Describe an application that would want each behavior.

Exercise 32.8. In the closest-pair strip step we compare each point with the next 7 in y-order. Redo the packing argument with $\delta/2$-squares but suppose someone claims you only need to check the next 5 points. Construct (or argue the impossibility of) a configuration that would break the 5-bound, and conclude why 7 is the safe constant.

Exercise 32.9. The closest-pair recurrence is $T(n) = 2T(n/2) + \Theta(n)$. Solve it from scratch with a recursion tree: how many levels, how much work per level, and what is the total? Then explain precisely where an accidental re-sort would change the $\Theta(n)$ term and what the new solution would be.

Exercise 32.10. *(Challenge.)* The cross product of two 3D vectors is itself a vector, not a scalar. Look up the formula and explain how, in 3D, you would test whether four points are coplanar (the analogue of three points being collinear). Which arithmetic operation plays the role of our 2D sign test? *(Hint: the scalar triple product, a* 3×3 *determinant.)*

Chapter 33

NP-Completeness

Almost every chapter of this book has been a success story. You wanted to sort a list, and we found a way to do it in $\Theta(n \log n)$. You wanted the shortest path through a city, and Dijkstra delivered it in near-linear time. You wanted to match jobs to machines, route flow through a network, multiply two huge integers quickly – and each time, after some cleverness, we walked away with an algorithm whose running time grew like a polynomial in the input size: n, or n^2, or n^3. Polynomials are the comfortable middle class of running times. Double the input and an n^2 algorithm slows down by a factor of four. Annoying, but survivable.

This chapter is about the other side of the world. It is about problems for which *nobody has ever found* a polynomial-time algorithm – and, more remarkably, problems that are all secretly the *same problem in disguise*, so that a fast algorithm for any one of them would instantly give fast algorithms for thousands of others. These are the *NP-complete* problems. They are not exotic curiosities. They are the scheduling problem your airline cannot quite solve, the layout problem your chip designer wrestles with, the protein-folding question, the puzzle on the back of the cereal box. They are everywhere, and they are hard in a very precise and very contagious way.

The goal of this chapter is to make that hardness feel *inevitable* rather than scary. We are going to build, from the ground up, three ideas:

- what it means for a problem to be *efficiently solvable* (the class P) versus merely *efficiently checkable* (the class NP);
- the idea of a *reduction* – a way of saying "problem A is no harder than problem B" by translating one into the other;
- and *NP-completeness* – the surprising discovery that a single problem can be the hardest problem in all of NP, so that everything else reduces to it.

By the end you will be able to look at a brand-new problem, smell that it might be hard, and *prove* it by reducing a known-hard problem to it. That skill – recognizing the dragon – is worth more in practice than any single algorithm, because it tells you when to stop searching for a perfect method and start looking for a clever approximation instead.

33.1 Decision problems: shrinking the question

Before we can talk about "hard," we have to agree on what kind of question we are asking. Most of the problems in this book have been *optimization* problems: find the *shortest* path, the *maximum* flow, the *largest* matching. But the theory of NP-completeness is cleanest when we ask *yes/no* questions, called *decision problems*.

That is not a real restriction; it is a convenience. Any optimization problem has a decision twin that is essentially just as hard. Instead of asking "what is the shortest path from s to t?" we ask "is there a path from s to t of length *at most* k?" and we get to pick k. If you could answer the yes/no version quickly for every k, you could binary-search on k to find the true optimum quickly too. So the decision version is no easier than the optimization version – and if we can show the *decision* version is hard, the optimization version is at least as hard.

Intuition

A decision problem is a question with only two possible answers: YES or NO. "Is this number prime?" "Does this graph have a cycle visiting every vertex?" "Can these numbers be split into two equal-sum piles?" We strip the question down to a single bit of output because that single bit is where all the difficulty lives. Finding the actual path, pile, or cycle is rarely harder than knowing whether one exists.

Formally, we encode every input as a finite string of symbols (think: the bytes in a file). A decision problem is then just a set L of strings – the strings that should answer YES. We call such a set a *language*, and we say an algorithm *decides* L if, given any string x, it halts and outputs YES exactly when $x \in L$ and NO otherwise. The word "language" is borrowed from formal logic; do not overthink it. A language is a yes/no problem.

Focus

Three things to hold onto. (1) We study *decision* problems – yes/no – but this costs us nothing, because every optimization problem has a decision twin of the same difficulty. (2) Inputs are *strings*, and the input *size* n is the length of that string. (3) "Efficient" will always mean "polynomial in n," i.e. running time $O(n^c)$ for some constant c.

A subtle point we will keep returning to: the input size n is the number of *symbols* it takes to write the input down, not the magnitude of the numbers in it. The integer one billion is a big *number* but a tiny *input* – about 30 bits. This distinction looks pedantic now but will become the whole story when we reach subset-sum.

33.2 The class P: problems you can actually solve

The class P is the home of the well-behaved problems – the ones this book has mostly been about.

Formal

The class P. A decision problem (language) L is in P if there is an algorithm and a constant c such that, on every input x of length n, the algorithm halts within $O(n^c)$ steps and correctly

outputs whether $x \in L$. In words: P is the class of problems solvable in *polynomial time*.

Sorting, shortest paths, maximum flow, primality testing, matrix multiplication, string matching, computing a minimum spanning tree – all in P. When we say a problem is "tractable" or "efficiently solvable," we mean it lives in P.

Why polynomials, and not, say, "running time under a million steps"? Because polynomials are *robust*. They are closed under addition, multiplication, and composition: if you call a polynomial-time subroutine a polynomial number of times, the whole thing is still polynomial. This is the magic that lets us snap algorithms together like Lego without worrying that the pieces will explode. A polynomial of a polynomial is a polynomial. An exponential of anything is a catastrophe.

Why this matters

The line between polynomial and exponential is not a mathematician's vanity; it is the difference between *possible* and *impossible* at scale. Suppose each "step" takes a nanosecond. An n^2 algorithm on a million-element input finishes in about a millisecond. A 2^n algorithm on a mere 70-element input would run for longer than the age of the universe. There is no faster computer, no cleverer engineer, no amount of money that closes a gap like that. When a problem is genuinely exponential, you do not optimize your way out – you change the question.

33.3 The class NP: problems you can check

Here is the pivotal idea of the entire chapter, and it is one you already know from everyday life. *Solving* a puzzle is hard. *Checking* a solved puzzle is easy.

Think of a finished Sudoku grid. Filling it in might have taken you an hour of agonizing. But if I hand you a completed grid and ask "is this a valid solution?", you can verify it in seconds: scan each row, each column, each box, confirm 1 through 9 appear once. The *checking* is fast even though the *solving* was slow.

The class NP captures exactly this phenomenon: problems where, if the answer is YES, there is a short piece of evidence – a *certificate*, or *witness* – that lets you *verify* the YES quickly.

Intuition

NP is the class of problems where a lucky guess can be checked fast. Imagine an oracle who, whenever the true answer is YES, whispers a hint in your ear – the filled-in Sudoku, the satisfying assignment, the actual route. You do not have to trust the oracle. You just have to be able to *check* its hint in polynomial time. If every YES instance has such a checkable hint, the problem is in NP.

Formal

The class NP. A language L is in NP if there is a polynomial-time *verifier* algorithm V and a constant c such that for every string x:

$$x \in L \iff \text{there exists a certificate } y \text{ with } |y| \le |x|^c \text{ and } V(x, y) = \text{YES}.$$

The verifier runs in time polynomial in $|x|$. Note the asymmetry: a YES answer must have *some* certificate that convinces V; a NO answer must have *no* certificate that fools V.

The name NP stands for *nondeterministic polynomial time*, which is the older, equivalent definition: a hypothetical machine that is allowed to "guess" the certificate y in one magical nondeterministic step and then verify it. The verifier view is friendlier, so we will use it throughout, but the "N" is a fossil of that machine.

Common trap

NP does *not* stand for "non-polynomial." This is the single most common misunderstanding in the subject. NP is the class of *checkable* problems, and – crucially – it *contains* P. If you can *solve* a problem in polynomial time, you can certainly *check* a claimed answer in polynomial time (just ignore the certificate and solve it yourself). So $\mathrm{P} \subseteq \mathrm{NP}$. The mystery is whether the containment is strict.

Let us make the certificate idea concrete on the problem that will anchor the whole chapter.

Example 33.1 (Hamiltonian Cycle is in NP)**.** A *Hamiltonian cycle* in a graph is a closed tour that visits every vertex *exactly once*. The decision problem Ham-Cycle asks: "does this graph G have a Hamiltonian cycle?" Finding one seems to require searching through up to $(n-1)!$ possible vertex orderings – astronomically many. But *checking* is trivial. The certificate is just a list of the vertices in tour order, say $v_1, v_2, \ldots, v_n, v_1$. To verify: confirm the list contains each vertex once (a sort, $O(n \log n)$), and confirm each consecutive pair is joined by an edge ($O(n)$ lookups). Polynomial. So Ham-Cycle $\in$ NP, even though we know no polynomial *solver*.

Walking question

Take a walk and turn this over: why is the certificate asymmetry so important? For a YES instance, one good tour is all you need to show. But to be *sure* a graph has *no* Hamiltonian cycle, what would you hand someone as proof? There is no obvious short certificate of a NO – you would seemingly have to rule out all $(n-1)!$ tours. That nagging asymmetry between "easy to confirm a yes" and "hard to confirm a no" is the beating heart of the P versus NP question.

33.3.1 The million-dollar question

We have $\mathrm{P} \subseteq \mathrm{NP}$. The question that has hung over computer science since 1971 is whether they are actually *equal*:

$$\mathrm{P} \stackrel{?}{=} \mathrm{NP}.$$

Is every problem whose solutions can be *checked* quickly also a problem that can be *solved* quickly? Intuition screams *no* – surely solving is harder than checking, surely there is no shortcut around the factorial search for a Hamiltonian cycle. But nobody has proved it. A proof either way is worth a million-dollar Clay Millennium Prize and would reshape mathematics, cryptography, and our understanding of creativity itself. The overwhelming consensus is $\mathrm{P} \neq \mathrm{NP}$, and this chapter is, in a sense, a guided tour of *why* that belief is so robust: thousands of important problems have been shown to stand or fall together.

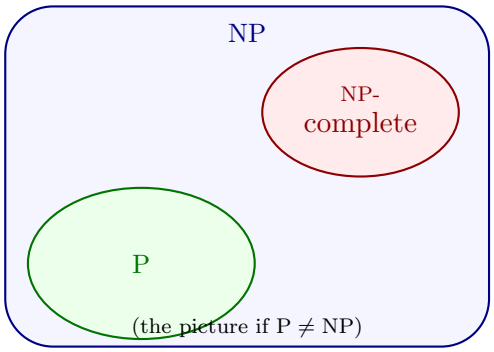


Figure 33.1: The conjectured landscape. P sits inside NP. The NP-complete problems are the "hardest" members of NP, pushed up against the far wall. If P = NP, the whole picture collapses to a single blob.

History and connection

The framework of this chapter was born in 1971 when Stephen Cook proved that *satisfiability* is NP-complete, with Leonid Levin reaching the same idea independently in the USSR. The next year Richard Karp published his celebrated list of 21 NP-complete problems, showing the phenomenon was pervasive, not isolated. This material is CLRS Chapter 34. Cook's theorem is CLRS §34.3, the reductions we build below mirror CLRS §34.4–34.5, and the formal definitions of P, NP, and verification are CLRS §34.1–34.2.

33.4 Reductions: "no harder than"

We now need a way to *compare* the difficulty of two problems without solving either of them. The tool is a *reduction*: a way of transforming one problem into another so cleanly that a solver for the second hands you a solver for the first.

Intuition

A reduction is a translator. Suppose you face problem A but you only own a machine that solves problem B. If you can rephrase any instance of A as an equivalent instance of B – preserving the yes/no answer – then you can solve A by translating and feeding it to your B-machine. The translation says: "A is *no harder than* B, give or take the cost of translating." If the translation itself is cheap (polynomial), then A piggybacks on B entirely.

Formal

Polynomial-time reduction. A language A *reduces in polynomial time* to a language B, written $A \leq_{\mathrm{P}} B$, if there is a polynomial-time computable function f (the reduction) such that for every input x:

$$x \in A \iff f(x) \in B.$$

That is, f maps YES-instances of A to YES-instances of B, and NO to NO, and f runs in polynomial time.

The direction of the inequality trips everyone up at first, so let us nail it down with the two facts that make reductions useful.

Lemma 33.1 (Reductions transfer easiness and hardness)**.** *Suppose $A \leq_{\mathrm{P}} B$. Then:*

1. *If $B \in \mathrm{P}$, then $A \in \mathrm{P}$.* *(Easiness flows* backward*: if the target is easy, so is the source.)*
2. *If $A \notin \mathrm{P}$, then $B \notin \mathrm{P}$.* *(Hardness flows* forward*: if the source is hard, so is the target.)*

Proof. For (1): to decide whether $x \in A$, compute $f(x)$ in polynomial time, then run the polynomial-time decider for B on $f(x)$. Because $x \in A \iff f(x) \in B$, this answers correctly. The total time is polynomial (translate) plus polynomial (decide B), composed on an input that has grown only polynomially – still polynomial. So $A \in \mathrm{P}$.

Statement (2) is just the contrapositive of (1): if $A \notin \mathrm{P}$ then B cannot be in P, for if it were, (1) would force $A \in \mathrm{P}$. □

Common trap

Reductions point "uphill toward hardness." To prove a *new* problem B is hard, you reduce a *known-hard* problem A *into* B: $A \leq_{\mathrm{P}} B$. Students constantly do it backward – reducing the new problem into a known one – which proves the new problem is *easy*, the opposite of what they wanted. Memorize the slogan: *to show B is hard, turn a hard A into B.* The hard problem you already trust is the *source*; the new suspect is the *target*.

33.5 NP-completeness: the hardest problems in NP

We can now state the central definition. An NP-complete problem is a problem in NP that is *at least as hard as every other problem in* NP – everything reduces to it.

Formal

NP-completeness. A language L is *NP-complete* if:

1. $L \in \mathrm{NP}$ (it is checkable), and
2. for *every* language $A \in \mathrm{NP}$, we have $A \leq_{\mathrm{P}} L$ (everything in NP reduces to L).

A problem satisfying only condition (2) – hard for all of NP, but not necessarily in NP itself – is called *NP-hard*.

This is an astonishing kind of object. Condition (2) says L is a universal target: *any* checkable problem in the universe can be encoded as an instance of L. If you had a polynomial algorithm for one NP-complete problem, you would have one for *all* of NP, and P would equal NP.

Focus

The headline consequence, worth tattooing on your forearm:

$$\text{If any NP-complete problem is in P, then } \mathrm{P} = \mathrm{NP}.$$

The NP-complete problems live or die together. Crack one and you crack them all; conversely, the widespread failure to crack *any* of them, despite decades of effort by brilliant people, is

the strongest practical evidence that P $\neq$ NP.

But condition (2) quantifies over *every* problem in NP – an infinite, open-ended collection. How could you ever prove such a thing for even a single L? That is exactly the miracle Cook and Levin pulled off, and once they did it *once*, a chain reaction made it easy forever after.

33.5.1 The first domino: Cook–Levin

Theorem 33.1 (Cook–Levin, 1971)**.** *The problem* SAT – *"is this Boolean formula satisfiable?" – is NP-complete.*

We will not grind through the full proof (it is technical, and CLRS §34.3 does it carefully), but the *idea* is gorgeous and worth understanding. A SAT instance is a logical formula built from Boolean variables $x_1, \ldots, x_n$ using AND ($\wedge$), OR ($\vee$), and NOT ($\neg$). The formula is *satisfiable* if there is some assignment of TRUE/FALSE to the variables that makes the whole thing evaluate to TRUE.

Why is *every* NP problem reducible to SAT? Because a Boolean formula is, in a deep sense, the most general thing a computer *is*. Take any problem $A \in$ NP with its polynomial-time verifier V. The verifier is ultimately a circuit of logic gates churning through the input x and a guessed certificate y. Cook's reduction builds, from V and x, a giant Boolean formula whose variables encode "the certificate y" and "the entire step-by- step computation of V on (x, y)." Clauses of the formula enforce that the computation is *legal* (each step follows the verifier's rules) and that it *accepts*. The formula is satisfiable precisely when there exists a certificate y that makes V accept – i.e. precisely when $x \in A$. Because V runs in polynomial time, the formula has polynomial size, so the translation is polynomial.

Intuition

Think of SAT as the assembly language of NP. Any verification procedure, no matter how it is described, can be "compiled down" into a Boolean formula that simulates it. Satisfiability of that formula *is* the existence of a valid certificate. That is why SAT can stand in for every other problem in NP at once: logic is universal enough to mimic any computation.

33.5.2 The chain reaction: how to prove a problem NP-complete

Cook–Levin gives us our *first* NP-complete problem the hard way – by arguing about all of NP directly. Every problem after that is proved NP-complete the *easy* way, by a single reduction from a problem we already trust. Here is the recipe, and you will use it for the rest of the chapter.

Focus

To prove a new problem L is NP-complete:

1. Show $L \in$ NP: describe a short certificate and a polynomial-time check for it.
2. Pick a problem K *already known* to be NP-complete.
3. Give a polynomial-time reduction $K \leq_P L$: a translation turning any instance of K into an instance of L with the *same* yes/no answer.

Step 3 is the creative one. The translation only *transfers* hardness; it relies on K being a previously established NP-complete problem.

Why does this work? Because reductions *compose*. If K is NP-complete then every $A \in \text{NP}$ satisfies $A \leq_{\text{P}} K$. If we also show $K \leq_{\text{P}} L$, then for every $A \in \text{NP}$ we can chain the translations, $A \leq_{\text{P}} K \leq_{\text{P}} L$, so $A \leq_{\text{P}} L$. Combined with $L \in \text{NP}$, that is exactly the definition of NP-complete. One new reduction inherits the entire infinite cone of hardness below K.

Lemma 33.2 (Reductions compose)**.** *If $A \leq_{\text{P}} B$ and $B \leq_{\text{P}} C$, then $A \leq_{\text{P}} C$.*

Proof. Let f reduce A to B and g reduce B to C. Then $x \in A \iff f(x) \in B \iff g(f(x)) \in C$, so $g \circ f$ reduces A to C. Both f and g are polynomial-time and $f(x)$ has polynomial length, so computing $g(f(x))$ is polynomial-time. Hence $g \circ f$ is a valid polynomial-time reduction. □

The rest of the chapter walks the historical tree of reductions. Each arrow below is a single proof we will either sketch or do in full.

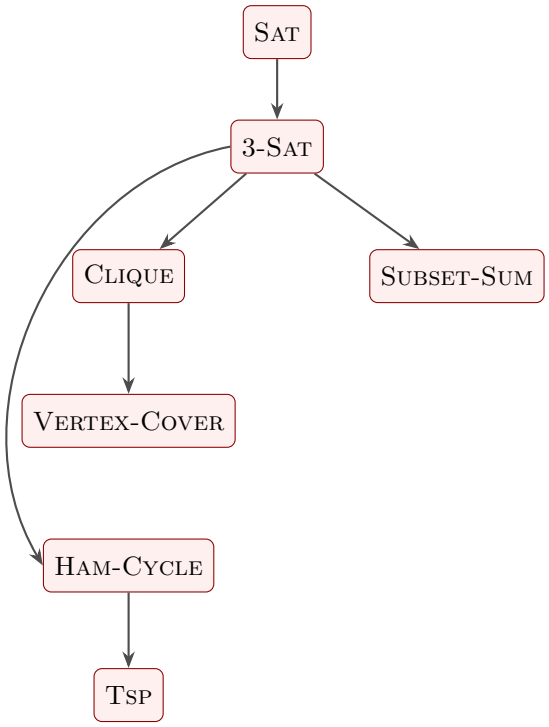


Figure 33.2: The reduction tree of this chapter. An arrow $X \to Y$ means "we reduce X to Y," proving Y NP-complete given that X already is. Everything ultimately roots at SAT via Cook–Levin.

33.6 From SAT to 3-SAT: taming the formula

Our first reduction tidies SAT into a rigid, regular shape that is far easier to build other reductions *from*. A formula is in *conjunctive normal form* (CNF) if it is an AND of *clauses*, each clause an OR

of *literals*, where a literal is a variable or its negation. The problem 3-SAT restricts every clause to *exactly three* literals:

$$(x_1 \vee \neg x_2 \vee x_3) \ \wedge \ (\neg x_1 \vee x_3 \vee x_4) \ \wedge \ (x_2 \vee \neg x_3 \vee \neg x_4).$$

3-SAT asks whether such a 3-clause formula has a satisfying assignment.

Theorem 33.2. 3-SAT *is NP-complete.*

Membership in NP is immediate: a satisfying assignment is a certificate of length n, and evaluating the formula on it takes time linear in the formula's size. *Hardness* follows from SAT $\leq_{\mathrm{P}}$ 3-SAT. We convert an arbitrary formula into an equisatisfiable 3-CNF formula in three mechanical steps: push negations inward, distribute to reach CNF, then *split long clauses* and *pad short ones* so every clause has exactly three literals.

The clever move is splitting a long clause. A clause like $(\ell_1 \vee \ell_2 \vee \ell_3 \vee \ell_4 \vee \ell_5)$ becomes a *chain* of 3-clauses linked by fresh "connector" variables y_i:

$$(\ell_1 \vee \ell_2 \vee y_1) \ \wedge \ (\neg y_1 \vee \ell_3 \vee y_2) \ \wedge \ (\neg y_2 \vee \ell_4 \vee \ell_5).$$




Figure 33.3: Splitting the long clause $(\ell_1 \vee \cdots \vee \ell_5)$ into a chain of 3-clauses. The fresh connector variables y_1, y_2 (orange) thread the clauses together. If every ℓ_j is false, satisfying the first clause forces y_1 true, which forces y_2 true, which leaves the last clause unsatisfiable – so the chain is satisfiable exactly when some original ℓ_j is true.

Stare at this. If some original ℓ_j is true, you can set the connectors so every new clause is satisfied. If *every* ℓ_j is false, then to satisfy the first clause you must set y_1 true, which forces (via $\neg y_1$) the second to need y_2 true, which forces the last clause to fail – there is no escape (Figure 33.3). So the chain is satisfiable exactly when the original long clause was. Short clauses (one or two literals) are padded by duplicating a literal or adding dummy variables. The whole conversion is polynomial in size, so SAT $\leq_{\mathrm{P}}$ 3-SAT. □

Why this matters

3-SAT is the workhorse of NP-completeness proofs. Its structure – a fixed pile of variables, a fixed pile of three-literal clauses – is just rigid enough to "wire up" into other problems, like building a circuit out of a uniform stock of components. Almost every hardness proof in this chapter and the literature beyond starts from 3-SAT, not raw SAT. When you want to show your scheduling, layout, or game problem is hard, 3-SAT is the hammer you reach for first.

33.7 Clique: hardness becomes a graph

Now we leave logic and enter graph theory – and watch the hardness make the jump. A *clique* in an undirected graph is a set of vertices that are *all* pairwise adjacent: a little island of total connection. The problem Clique asks: "does graph G contain a clique of size at least k?"

Theorem 33.3. CLIQUE *is NP-complete.*

In NP*:* the certificate is the set of k vertices; checking that all $\binom{k}{2}$ pairs are edges takes $O(k^2)$ time. For hardness we show 3-SAT $\leq_{\mathrm{P}}$ CLIQUE, a beautiful reduction that turns "can I satisfy this formula?" into "can I find a clique?"

The construction. Take a 3-CNF formula ϕ with m clauses $C_1, \ldots, C_m$. Build a graph G as follows. For each clause, create one vertex per literal – so $3m$ vertices total, arranged in m groups of three. Now add an edge between two literal-vertices ℓ (in clause C_i) and ℓ' (in clause C_j) *if and only if*:

- they are in *different* clauses ($i \neq j$), and
- they are *not contradictory*, i.e. ℓ' is not the negation of ℓ.

We deliberately put *no* edges inside a clause. Set the target $k = m$, the number of clauses.

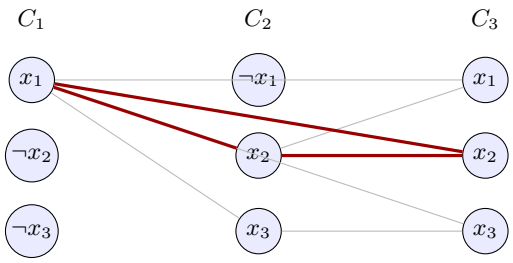


Figure 33.4: The 3-SAT-to-CLIQUE gadget for $\phi = (x_1 \vee \neg x_2 \vee \neg x_3) \wedge (\neg x_1 \vee x_2 \vee x_3) \wedge (x_1 \vee x_2 \vee x_3)$. Edges join non-contradictory literals in different clauses (only a few are drawn, to keep the picture readable). The thick triangle uses the vertices x_1 (from C_1), x_2 (from C_2), and x_2 (from C_3): a 3-clique corresponding to the satisfying assignment $x_1 = x_2 =$ TRUE – one true literal picked per clause, all mutually consistent.

Why it works. Suppose ϕ is satisfiable. Pick a satisfying assignment, and in each clause select *one* literal that the assignment makes true. That gives m literal-vertices, one per clause. Any two of them are in different clauses (so eligible for an edge) and are both true under the same assignment (so they cannot be a variable and its negation – that would be contradictory). Hence every pair is joined: these m vertices form a clique of size $m = k$.

Conversely, suppose G has a clique of size m. Since there are no edges inside a clause, the clique can include at most one vertex per clause – and to reach size m it must include *exactly* one from each. Because clique-vertices are pairwise non-contradictory, we can consistently set every chosen literal to TRUE (no variable is asked to be both true and false). That assignment makes one literal true in every clause, satisfying ϕ.

So ϕ is satisfiable $\iff$ G has an m-clique. The graph has $3m$ vertices and is built in time polynomial in $|\phi|$. That completes 3-SAT $\leq_{\mathrm{P}}$ CLIQUE, and CLIQUE is NP-complete. □

Intuition

The reduction is a *translation of meaning.* "Pick one true literal in each clause" became "pick one vertex in each group." "The picks must be logically consistent" became "the picks must be pairwise connected." The geometry of the graph is engineered so that the only large cliques are

exactly the consistent literal-selections. This pattern – encode the constraints of one problem as the adjacency structure of another – is the soul of every reduction in this chapter.

33.8 Vertex Cover: the same coin, flipped

A *vertex cover* of a graph is a set of vertices that *touches every edge*: every edge has at least one endpoint in the set. Vertex-Cover asks: "is there a vertex cover of size at most k?" Note the flip in direction – we want a *small* cover, whereas Clique wanted a *large* clique.

Theorem 33.4. Vertex-Cover *is NP-complete.*

In NP*:* the cover is the certificate; scan every edge and check an endpoint is included, in $O(|E|)$ time. For hardness we reduce from Clique – and the reduction is almost embarrassingly simple, resting on a single structural fact.

Lemma 33.3 (Clique–cover duality)**.** *Let G have n vertices, and let $\bar{G}$ be its* complement *(same vertices; an edge in $\bar{G}$ exactly where G has none). Then S is a clique of size k in G if and only if $V \setminus S$ is a vertex cover of size $n - k$ in $\bar{G}$.*

Proof. S is a clique in G means every pair inside S is an edge of G, i.e. no pair inside S is an edge of $\bar{G}$. So in $\bar{G}$, every edge has at least one endpoint *outside* S – that is, in $V \setminus S$. Thus $V \setminus S$ covers all edges of $\bar{G}$. Each step is an "if and only if," so the equivalence holds, and $|V \setminus S| = n - k$. □

The reduction. Given a Clique instance (G, k), output the Vertex-Cover instance $(\bar{G}, n - k)$. Computing the complement is $O(n^2)$, certainly polynomial. By the lemma, G has a k-clique $\iff$ $\bar{G}$ has a vertex cover of size $n - k$. So Clique $\leq_P$ Vertex -Cover, and Vertex-Cover is NP-complete. □


Example 33.2 (A traced instance)**.** Let G be the 5-cycle on vertices $\{1, 2, 3, 4, 5\}$ with edges $12, 23, 34, 45, 51$, and ask for a clique of size $k = 2$. The complement $\bar{G}$ is the *other* 5-cycle, with edges $13, 24, 35, 41, 52$. The duality predicts a vertex cover of size $n - k = 5 - 2 = 3$ in $\bar{G}$. Indeed $\{1, 2, 3\}$ covers $\bar{G}$: edge 13 hits 1, 24 hits 2, 35 hits 3, 41 hits 1, 52 hits 2. And $\{4, 5\}$ – the complement of that cover – is a clique in G (the edge 45). The bookkeeping matches perfectly (Figure 33.5).

Common trap

Do not confuse *small* and *large*. Clique and Independent-Set look for the *largest* possible structure; Vertex-Cover looks for the *smallest*. The duality lemma shows they are the same problem viewed from opposite ends – maximizing a clique is minimizing the leftover cover. When you read a hardness claim, always note whether the target wants a max or a min; a careless flip turns a correct reduction into nonsense.

33.9 Hamiltonian Cycle and the Traveling Salesman

We met Ham-Cycle in Example 33.1: does a graph have a closed tour visiting every vertex exactly once? It too is NP-complete; the reduction (from 3-SAT, via intricate "gadgets" that simulate

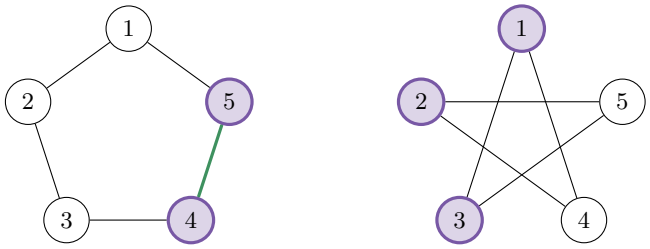

$G = C_5$: clique $\{4, 5\}$ $\bar{G}$: cover $\{1, 2, 3\}$

Figure 33.5: Clique–cover duality on the 5-cycle of Example 33.2. The size-2 clique $\{4, 5\}$ in G (left, green edge) is exactly the complement of the size-3 vertex cover $\{1, 2, 3\}$ in $\bar{G}$ (right, shaded). Every edge of $\bar{G}$ touches a shaded vertex; the two unshaded vertices $4, 5$ are mutually adjacent in G.

variables and clauses with little chains of vertices) is genuinely involved, so we will state the result and instead spend our energy on its famous corollary.

Theorem 33.5. HAM-CYCLE *is NP-complete.*

The reduction's flavor is worth a sentence. One builds, for each variable, a long two-way "ladder" that any Hamiltonian cycle must traverse either left-to-right or right-to-left – and that binary choice *is* the variable's truth value. Small clause-gadgets are wired into the ladders so that the cycle can complete its tour if and only if every clause is satisfied by the chosen traversal directions. The variables' two-way streets encode TRUE/FALSE; the clauses act as gates that the tour can only pass through when satisfied. It is fiddly, but it is the same idea as the CLIQUE reduction – encode logic as structure – scaled up.

33.9.1 TSP: putting numbers on the edges

Now for one of the most famous problems in all of computing. The *traveling salesman* must visit a set of cities and return home, and wants the *cheapest* possible round trip. As a decision problem, TSP asks: given cities, pairwise distances, and a budget B, is there a tour visiting all cities exactly once with total length at most B?

Theorem 33.6. TSP *is NP-complete.*

In NP*:* a tour is the certificate; sum its edge lengths and compare to B in $O(n)$ time. For hardness we reduce from HAM-CYCLE, and this reduction is short and elegant – a perfect closing example because it shows hardness leaping from a purely structural problem to a numeric optimization one.

The reduction. Given a graph G on n vertices, build a TSP instance whose "cities" are the vertices of G, with the *complete* distance matrix

$$d(u, v) = \begin{cases} 1 & \text{if } (u, v) \text{ is an edge of } G, \\ 2 & \text{if } (u, v) \text{ is } \textit{not} \text{ an edge of } G, \end{cases}$$

and set the budget $B = n$. The matrix is built in $O(n^2)$ time.

Why it works (Figure 33.6)**.** A TSP tour visits all n cities and uses exactly n edges (it is a cycle). Each edge costs 1 or 2, so the cheapest conceivable tour costs n – achieved *only* if every single edge




Figure 33.6: The Ham-Cycle-to-TSP reduction. Real edges of G get distance 1 (solid green); every non-edge gets distance 2 (dashed red, one shown). A tour of $n = 5$ cities uses 5 edges, so the only way to hit the budget $B = 5$ is to ride entirely on cost-1 edges – that is, on a Hamiltonian cycle of G. A single cost-2 edge would push the total to $6 > B$.

it uses costs 1, i.e. every consecutive pair of cities is a genuine edge of G. But a tour visiting every vertex once using only real edges of G is precisely a Hamiltonian cycle! So:

$$G \text{ has a Hamiltonian cycle} \iff \text{there is a tour of length} \leq n = B.$$

If G has a Hamiltonian cycle, follow it: cost exactly $n \leq B$. If the TSP instance has a tour of length $\leq n$, every edge it uses must cost 1 (any cost-2 edge would push the total above n), so the tour rides only on edges of G – a Hamiltonian cycle. Hence Ham-Cycle $\leq_P$ TSP, and TSP is NP-complete. □

Why this matters

TSP is the public face of NP-completeness: delivery routing, circuit- board drilling, DNA sequencing, telescope scheduling all wear its shape. Its NP-completeness does *not* mean it is hopeless – real solvers route thousands of cities daily. It means there is (almost certainly) no algorithm that is fast *and* exact *and* general all at once. In practice you give up one of those: settle for "almost optimal" (approximation, Chapter 34), or exploit special structure (cities in the plane behave better), or let a solver grind on a particular instance. NP-completeness is not a death sentence; it is a signpost telling you which of those roads to take.

33.10 Subset-Sum: when small numbers hide big inputs

We close the gallery with a problem that looks utterly unlike a graph and teaches the subtlest lesson of the chapter. Subset-Sum: given a multiset of positive integers $\{a_1, \ldots, a_n\}$ and a target t, is there a subset that sums *exactly* to t?

Theorem 33.7. Subset-Sum *is NP-complete.*

In NP*:* the certificate is the subset; add up its elements and compare to t, in $O(n)$ additions. Hardness follows from 3-SAT $\leq_P$ Subset-Sum via a clever number-encoding: each variable and each clause gets its own "decimal column," and we craft numbers so that hitting the target requires choosing one truth value per variable while filling every clause's column to a fixed amount – forcing each clause to be satisfied. The arithmetic of carries is rigged to never interfere across columns. (CLRS §34.5.5 builds it digit by digit; the construction is a small marvel and well worth reading once you trust the pattern.)

Common trap

"But Subset-Sum has an easy dynamic program!" – a fair objection, and exactly the trap this section exists to spring. In Chapter 15 you built a table of size $n \times t$ and filled it in $O(nt)$ time. So is Subset-Sum in P? *No.* The catch is that t is a *number*, but the input *size* is the number of *bits* needed to write everything down, and t takes only about $\log_2 t$ bits. So $O(nt)$ is $O(n \cdot 2^{\log_2 t})$ – *exponential* in the input length (Figure 33.7). Writing t in binary is cheap; counting up to t is not.

This is the moment to cash in the warning from the very first section: input size counts *symbols*, not magnitudes. An algorithm whose running time is polynomial in the numeric *value* of the inputs (here, in t) – but exponential in their bit-length – is called *pseudo-polynomial*. It can be genuinely useful when the numbers are small, but it does *not* place the problem in P, and it does not threaten P $\neq$ NP.




Figure 33.7: Why the $O(nt)$ table is not polynomial. The work is proportional to the *value* t (long red bar), but the input is only the *bits* of t (short blue bar), about $\log_2 t$ of them. Each extra bit roughly *doubles* t, so the running time is exponential in the input length even though it looks linear in t.

Formal

Pseudo-polynomial vs. polynomial. An algorithm is *polynomial-time* if its running time is bounded by a polynomial in the input *length* (the number of bits/symbols). It is merely *pseudo-polynomial* if its running time is polynomial in the input length *and* in the largest numeric value appearing in the input. The $O(nt)$ table for Subset-Sum is pseudo-polynomial: polynomial in n and in the *value* t, but exponential in the *bits* of t.

Walking question

On your next walk, chew on this: why does the bit-length convention feel right? Imagine an "algorithm" that solves a problem by counting from 1 up to the input number N. Its running time is $O(N)$ – linear in the value, surely "fast"? But to make N a hundred times bigger you add only about seven bits to the input, while the running time grows a hundredfold. An honest measure of efficiency must punish that. Charging by bits, not by magnitude, is what makes "polynomial time" line up with our gut sense of "scales gracefully."

33.11 A worked reduction, end to end

Reductions are a skill, and skills come from doing. Let us run one all the way through on a tiny instance, gluing together the pieces above to feel the hardness travel. We start from a concrete 3-SAT formula and reduce it to Clique, then read the answer back.

Algorithm lab

Take the formula

$$\phi = (x_1 \vee x_2 \vee \neg x_3) \ \wedge \ (\neg x_1 \vee \neg x_2 \vee x_3) \ \wedge \ (x_1 \vee \neg x_2 \vee x_3).$$

Step 1 – build the graph. It has 3 clauses, so 9 vertices in 3 groups:

$$C_1 : \{x_1, x_2, \neg x_3\}, \quad C_2 : \{\neg x_1, \neg x_2, x_3\}, \quad C_3 : \{x_1, \neg x_2, x_3\}.$$

Connect every pair from *different* groups unless they contradict (one is the negation of the other). For instance $x_1 \in C_1$ connects to $\neg x_2, x_3 \in C_2$ but *not* to $\neg x_1 \in C_2$.
Step 2 – hunt for a 3-clique. Try the trio $\{x_1(C_1), x_3(C_2), x_1(C_3)\}$. Different groups? Yes. Pairwise non-contradictory? x_1 vs. x_3: fine. x_1 vs. x_1: same literal, not a contradiction, fine. x_3 vs. x_1: fine. All three pairs are edges – a 3-clique!
Step 3 – read off the assignment. The clique used the literals x_1, x_3, x_1, so set $x_1 = \text{TRUE}$ and $x_3 = \text{TRUE}$; x_2 is unconstrained, say FALSE. Check ϕ: clause 1 has x_1 true; clause 2 has x_3 true; clause 3 has x_1 true. All satisfied. The clique we found *is* a satisfying assignment, exactly as the reduction promised.

Algorithm 142: Generic NP-completeness proof template

Input: A decision problem L you suspect is NP-complete
Output: A proof that L is NP-complete (or a discovery that it is easy)

Step A (membership). Exhibit a certificate y for YES-instances and a polynomial-time verifier $V(x, y)$;
if *no short, checkable certificate exists* **then**
    L may be harder than NP; stop and reconsider;
Step B (choose a source). Select a known NP-complete problem K whose structure resembles L (often 3-SAT);
Step C (reduce). Design f mapping each instance w of K to an instance $f(w)$ of L;
Step D (correctness). Prove $w \in K \iff f(w) \in L$ (both directions);
Step E (efficiency). Verify f runs in time polynomial in $|w|$;
return "L is NP-complete" (Steps A and C–E together);

33.12 What to do when your problem is NP-complete

Suppose you have just proved – or found in a textbook – that the problem on your desk is NP-complete. What now? You do *not* give up, and you do *not* keep hunting for a fast exact general algorithm (that search is, by consensus, doomed). Instead you bend one of the three rigid requirements "fast, exact, general."

- **Drop exactness – approximate.** Accept a provably near-optimal answer. A good VERTEX-COVER heuristic gets within a factor of 2 of optimal in linear time. This is the subject of the next chapter.
- **Drop generality – exploit structure.** Real instances are not adversarial. TSP on points in the plane, 2-SAT (clauses of size two – actually in P!), trees instead of general graphs: special

cases routinely escape the hardness.

- **Drop speed in the worst case – search smartly.** Branch-and-bound, SAT solvers, and integer-programming engines often crush real instances with thousands of variables, even though some adversarial input could in principle make them crawl.

- **Drop determinism – randomize or use heuristics.** Simulated annealing, genetic algorithms, and local search give no guarantees but often deliver excellent answers fast.

Focus

The practical payoff of this whole chapter is a single reflex: *before you pour months into a perfect algorithm, check whether the problem is NP-complete.* If it is, you have just saved yourself a hopeless search and redirected your energy toward approximation, special-casing, or smart search – the strategies that actually ship. Recognizing the dragon is more valuable than any one spell for slaying it.

Cost summary

A compact map of the chapter.

- P: solvable in time $O(n^c)$. "Tractable."
- NP: YES-instances have a polynomial-size certificate checkable in polynomial time. Contains P.
- $A \leq_{\mathrm{P}} B$: a polynomial-time f with $x \in A \iff f(x) \in B$. Hardness flows forward, easiness backward.
- NP-complete: in NP *and* every NP problem reduces to it. One in P $\Rightarrow$ all of NP in P.
- Cook–Levin: SAT is the first NP-complete problem. All others follow by single reductions: SAT $\leq$ 3-SAT $\leq$ {CLIQUE, SUBSET-SUM}, CLIQUE $\leq$ VERTEX-COVER, 3-SAT $\leq$ HAM-CYCLE $\leq$ TSP.
- Pseudo-polynomial: polynomial in input *value*, not input *length*. SUBSET-SUM's $O(nt)$ table is this – not a proof that the problem is in P.

A closing thought

NP-completeness is, oddly, a hopeful idea. It says that thousands of stubborn problems across logic, graphs, scheduling, biology, and number theory are not a ragged collection of unrelated nuisances – they are *one* problem wearing a thousand masks. Solve the salesman and you solve them all; fail on one and you have likely failed on all. That unity is a gift. It means our ignorance is organized. And it sharpens the greatest open question in the field to a single crisp line – $\mathrm{P} \stackrel{?}{=} \mathrm{NP}$ – whose answer, whichever way it falls, will be one of the deepest truths we ever learn about computation.

33.13 Exercises

Exercise 33.1 (Certificates, warmup)**.** For each problem, state a short certificate for YES-instances and the polynomial-time check that verifies it: (a) COMPOSITE ("is N not prime?"); (b) GRAPH-3-COLORING ("can G be properly colored with 3 colors?"); (c) SUBSET-SUM.

Exercise 33.2 (The direction of reductions)**.** Your classmate proves NEW-PROBLEM $\leq_{\mathrm{P}}$ 3-SAT and concludes NEW-PROBLEM is NP-complete. Explain precisely what is wrong, and state what this reduction *does* legitimately tell you about NEW-PROBLEM.

Exercise 33.3 (Optimization to decision)**.** Describe carefully how a polynomial-time decider for the *decision* version of TSP ("is there a tour of length $\leq B$?") could be used to find the exact length of the *optimal* tour in polynomial time. (Hint: binary search on B.) Why does this argument show the decision and optimization versions are equally hard?

Exercise 33.4 (Tracing 3-SAT to Clique)**.** Apply the 3-SAT-to-CLIQUE reduction to $\phi = (x_1 \vee x_2 \vee x_3) \wedge (\neg x_1 \vee \neg x_2 \vee \neg x_3)$. Draw the 6-vertex graph, list its edges, find a 2-clique, and read off a satisfying assignment. Is there any 3-clique? Explain why or why not.

Exercise 33.5 (Clique–cover duality by hand)**.** Let G be the complete graph K_4 (every pair of 4 vertices adjacent). What is the largest clique in G? Using Lemma 33.3, what does that say about the smallest vertex cover of $\bar{G}$? Verify directly by describing $\bar{G}$.

Exercise 33.6 (Independent sets)**.** An *independent set* is a set of vertices with *no* edges between them. Prove that S is an independent set of G if and only if $V \setminus S$ is a vertex cover of G. Conclude that INDEPENDENT-SET is NP-complete by a one-line reduction from VERTEX-COVER.

Exercise 33.7 (Hamiltonian path vs. cycle)**.** The HAM-PATH problem asks for a path (not necessarily closed) visiting every vertex exactly once. Give a polynomial-time reduction HAM-CYCLE $\leq_{\mathrm{P}}$ HAM-PATH. (Hint: pick an edge of the cycle to "cut," or add a gadget vertex. Think about what turns a path into a cycle.)

Exercise 33.8 (Why exactly three?)**.** We reduced SAT to 3-SAT. Suppose instead you restrict to 2-SAT: every clause has exactly two literals. It turns out 2-SAT is in P. Where in the long-clause-splitting argument of Theorem 33.2 would a "split into 2-clauses" attempt break down? (You need not solve 2-SAT; just locate the obstruction.)

Exercise 33.9 (Pseudo-polynomial, concretely)**.** The SUBSET-SUM table runs in $O(nt)$ time. (a) For $n = 100$ numbers each around 10^{18}, estimate t and the table size; is this practical? (b) Explain in one sentence why this does not contradict NP-completeness. (c) Give an instance family where the $O(nt)$ algorithm *is* fast, and say what is special about it.

Exercise 33.10 (Build your own reduction – challenge)**.** The SET-COVER problem: given a universe U of elements, a collection of subsets $S_1, \ldots, S_m \subseteq U$, and a number k, can k of the subsets cover all of U? Prove SET-COVER is NP-complete by reducing VERTEX-COVER to it. (Hint: let the universe be the edges of the graph, and let each vertex contribute the set of edges it touches.)

Exercise 33.11 (A reduction that secretly proves P, not hardness – challenge)**.** Consider 2-COLORING ("can G be properly 2-colored?"). A student tries to prove it NP-complete by reducing 3-COLORING to it. Without doing the reduction, argue why any such attempt must fail, assuming P $\neq$ NP. (Hint: 2-COLORING is exactly the bipartiteness test from Chapter 22 – what complexity class is it in?)

Chapter 34

Approximation Algorithms

The previous chapter delivered some hard news. A whole zoo of natural, useful, important problems – vertex cover, the traveling salesman, set cover, satisfiability – are *NP-hard*. If anybody ever finds a polynomial-time algorithm that solves one of them exactly on every input, they will have solved all of them, collected a million-dollar prize, and rewritten computer science. Most experts bet that no such algorithm exists.

So where does that leave you, the engineer who actually has to route the delivery trucks tomorrow morning? You cannot wait for 2^n steps. You cannot tell your boss "this problem is NP-hard, so I am going home." The trucks still need a route.

This chapter is about the most honest and most beautiful response to that predicament. Instead of demanding the *best* answer, you settle – deliberately, with your eyes open, and with a *guarantee* – for an answer that is provably *close* to the best. An algorithm that does this is an *approximation algorithm*. The magic word is "provably." We are not going to wave our hands and say "this heuristic usually works well." We are going to prove statements like: *this fast algorithm never returns a vertex cover more than twice the size of the smallest possible one*, on any input, forever. That word "never" is what separates an approximation algorithm from a mere heuristic.

We will build the central idea – the *approximation ratio* – from scratch, and then spend the chapter collecting a gallery of gorgeous techniques: a vertex cover that is never worse than double, a salesman tour that is never worse than double (and the trick that gets it to 1.5), a greedy set cover whose error grows only *logarithmically*, a coin-flip that satisfies 7/8 of any clause set in expectation, and – the crown jewel – a scheme that gets you within any ε you like of optimal for subset-sum, in time that stays polynomial. Each one teaches a different way to argue "close enough."

34.1 The one number that matters: the approximation ratio

Let us pin down what "close to optimal" even means, because vagueness here is the enemy.

Fix an optimization problem – say, find the *smallest* vertex cover, or the *shortest* tour. Every input instance I has some true optimal cost, which we will write $\mathrm{OPT}(I)$, or just C^* when the instance is clear. We do not know C^*; if we could compute it quickly the problem would not be NP-hard. Our algorithm, run on I, produces some feasible solution of cost C. The whole question of this chapter

is: *how far can C be from C^*?*

Definition 34.1 (Approximation ratio)**.** An algorithm A is a *ρ-approximation algorithm* (or "achieves approximation ratio ρ") if for *every* input I the solution it returns, of cost C, satisfies

$$\max\left(\frac{C}{C^*},\ \frac{C^*}{C}\right) \le \rho.$$

We always have $\rho \ge 1$. For a minimization problem this reduces to $C \le \rho\, C^*$; for a maximization problem it reduces to $C \ge C^*/\rho$.

The two-sided max in the definition is just a clever way to write one formula that works for both kinds of problem. For *minimization* you worry about C being too *big*, so $C^*/C \le 1$ and the binding term is C/C^*. For *maximization* you worry about C being too *small*, so $C/C^* \le 1$ and the binding term is C^*/C. Either way ρ measures the worst-case blow-up, and $\rho = 1$ would mean "always exactly optimal."

Intuition

Think of ρ as a *warranty*. A 2-approximation for vertex cover is a promise stamped on the box: "whatever graph you feed me, the cover I hand back is at most twice the size of the perfect cover – guaranteed, no matter how adversarial your input." You do not get the best answer. You get a hard ceiling on how bad the answer can be. For a problem nobody can solve exactly in reasonable time, a hard ceiling is gold.

There is something slippery here that trips up everyone the first time, so let us face it head-on.

Common trap

To prove $C \le 2\,C^*$ you seem to need to know C^* – but C^* is exactly the thing you *cannot* compute! How can you bound your distance to a number you will never see?
The resolution is the soul of the entire field: you never compute C^*. Instead you find a quantity L that you *can* compute or reason about, prove that $L \le C^*$ (so L is a *lower bound* on the optimum), and separately prove that your answer satisfies $C \le 2L$. Chaining these,

$$C \ \le\ 2L \ \le\ 2\,C^*,$$

and you have your guarantee *without ever knowing C^**. Almost every proof in this chapter has exactly this shape: *find a lower bound the optimum cannot beat, then relate your output to that lower bound.* Burn that sentence into your memory.

Figure 34.1 draws this sandwich on a number line, and it is worth fixing in your mind: it is the skeleton of nearly every proof to come.

Focus

Hold onto three things:

- ρ is a worst-case guarantee over *all* inputs, not an average.
- Smaller ρ is better; $\rho = 1$ means exact.
- The trick to proving a ratio is to sandwich the optimum between a computable lower

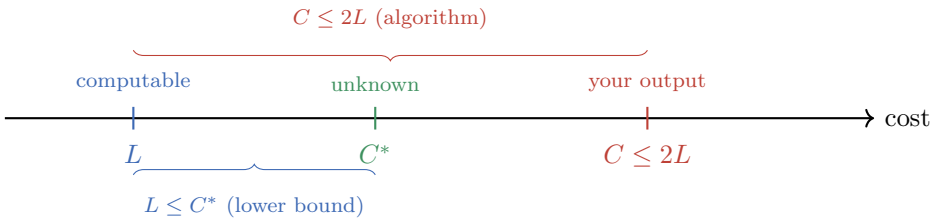


Figure 34.1: The lower-bound sandwich for a minimization problem. You never see C^* (green). You compute a lower bound L (blue) that the optimum cannot fall below, and you prove your output C (red) is at most $2L$. The two brackets together force $C \le 2L \le 2C^*$ without ever measuring the gap to C^* directly.

> bound and your output. You bound your distance to C^* *through* a proxy you can actually touch.

A few problems are so friendly that you can drive ρ as close to 1 as you are willing to pay for. A family of algorithms A_ε, one for each $\varepsilon > 0$, where A_ε is a $(1+\varepsilon)$-approximation, is called a *polynomial-time approximation scheme* (PTAS) if each A_ε runs in time polynomial in the input size n. If the running time is *also* polynomial in $1/\varepsilon$, it is a *fully polynomial-time approximation scheme* (FPTAS) – the gold standard. We will build one for subset-sum at the end of the chapter. Other problems are so hostile that, unless P = NP, no constant ratio is possible at all – general TSP without the triangle inequality is the classic example, as we will see.

History and connection

This material is CLRS Chapter 35, "Approximation Algorithms." The vertex-cover, TSP, set-cover, MAX-3-CNF, and subset-sum results here line up with sections 35.1 through 35.5 respectively. The field exploded in the 1990s once researchers connected approximation *hardness* to the theory of probabilistically checkable proofs (the PCP theorem), which lets one prove that certain ratios are the best achievable unless P = NP. Vazirani's *Approximation Algorithms* and Williamson–Shmoys' *The Design of Approximation Algorithms* are the standard next steps after CLRS.

34.2 Vertex cover: a 2-approximation from a silly idea

A *vertex cover* of an undirected graph $G = (V, E)$ is a set of vertices $S \subseteq V$ such that every edge has at least one endpoint in S. Think of vertices as guards and edges as corridors; a vertex cover is a placement of guards so that every corridor is watched from at least one end. The *minimum vertex cover problem* asks for the smallest such S. It is NP-hard, so an exact polynomial algorithm is (almost certainly) out of reach.

Now, here is a heuristic so naive it sounds like a beginner's mistake, and yet it carries an ironclad guarantee. Repeat the following: pick *any* edge that is not yet covered, throw *both* of its endpoints into your cover, and cross off every edge touching either endpoint. Keep going until no uncovered edges remain.

Algorithm 143: APPROX-VERTEX-COVER(G)

Input: An undirected graph $G = (V, E)$.
Output: A vertex cover S with $|S| \le 2\,|S^*|$.

```
S ← ∅;
E' ← E ;                                   // the still-uncovered edges
while E' ≠ ∅ do
    pick any edge (u, v) ∈ E';
    S ← S ∪ {u, v};
    remove from E' every edge incident to u or to v;
return S;
```

That is the whole algorithm. It is greedy, it is blind – it does not even try to be clever about *which* edge to grab – and it runs in linear time $O(V + E)$ with the right adjacency structures. Let us watch it work.

Example 34.1 (A traced run)**.** Take the graph on six vertices $\{a, b, c, d, e, f\}$ with edges

$$\{a\text{–}b,\ b\text{–}c,\ c\text{–}d,\ c\text{–}e,\ d\text{–}e,\ d\text{–}f,\ e\text{–}f\}.$$

Suppose the algorithm grabs edges in this order.

- Pick b–c. Add b, c to S. This covers a–b, b–c, c–d, c–e. Remaining: d–e, d–f, e–f.
- Pick d–e. Add d, e to S. This covers d–e, d–f, e–f. Remaining: none.

Output $S = \{b, c, d, e\}$, of size 4. What is the true minimum here? It is $\{b, d, e\}$, of size 3, and you can check each edge against it: a–b hits b; b–c hits b; c–d hits d; c–e hits e; d–e hits both; d–f hits d; e–f hits e. Every edge is covered, so $\{b, d, e\}$ is a valid cover, and a short search confirms no cover of size 2 exists (in fact $\{b, d, e\}$ is the *only* cover of size 3). So the algorithm returned 4, the optimum is 3, and $4 \le 2 \cdot 3$ – comfortably inside the warranty.

Let me draw the key idea, because the proof is genuinely a one-liner once you see the picture.




Figure 34.2: The two *purple* edges are the ones the algorithm picked. They share no endpoint – a *matching*. Any cover must spend at least one vertex on each of them, so $|S^*| \ge 2$, while the algorithm spends exactly 2 vertices per picked edge.

Theorem 34.1 (Vertex cover 2-approximation)**.** APPROX-VERTEX-COVER *returns a vertex cover S with $|S| \le 2\,|S^*|$, where S^* is a minimum vertex cover. So it is a 2-approximation algorithm.*

Proof. First, S *is* a vertex cover: the loop only stops when E' is empty, and an edge leaves E' exactly when one of its endpoints enters S. So every edge has an endpoint in S. Good – the output is feasible.

Now the ratio. Let A be the *set of edges* the algorithm picked in the "pick any edge" line (one per iteration). Here is the crucial observation: *no two edges in A share an endpoint.* Why? When

we pick (u, v), we immediately delete every edge touching u or v from E', so no future pick can be incident to u or v. A set of edges with no shared endpoints is called a *matching*. So A is a matching.

Two consequences fall out. First, since each picked edge contributes its two fresh endpoints, $|S| = 2|A|$ exactly. Second – and this is the lower bound from the trap box – *any* vertex cover, including the optimal S^*, must contain at least one endpoint of every edge in A. Because the edges of A are disjoint, those endpoints are all distinct, so S^* needs at least $|A|$ vertices just to cover the matching:

$$|S^*| \;\geq\; |A|.$$

That is our lower bound $L = |A| \leq C^*$. Chain it:

$$|S| \;=\; 2|A| \;\leq\; 2\,|S^*|. \qquad \square$$

Look at how perfectly that followed the recipe. We never computed $|S^*|$. We found a computable quantity ($|A|$, the matching size) that the optimum cannot undercut, and we showed our output is exactly twice it.

Common trap

A tempting "improvement": instead of grabbing both endpoints of an edge, greedily grab the single vertex of *highest degree*, remove its edges, and repeat. It sounds smarter – and on most graphs it does better! But its worst-case ratio is *not* 2; it degrades like $\Theta(\log n)$. Cleverness can cost you your warranty. The "silly" both-endpoints rule is the one with the clean constant guarantee. Provable beats plausible.

Walking question

The factor of 2 comes from spending *two* vertices to cover edges the optimum might cover with *one*. Can you cook up a graph where the algorithm genuinely returns a cover of size $2|S^*|$ – where the bound is *tight*, not just satisfied? (Hint: a single edge already gives a ratio of 2 if the optimum is 1. Now chain many disjoint edges together.) On your walk, decide whether *any* algorithm could beat ratio 2 here. It is a famous open question whether $2 - \delta$ is possible.

34.3 The traveling salesman with a triangle inequality

A salesman must visit n cities and return home, minimizing total travel. Formally: given a complete graph with a cost $c(u, v) \geq 0$ on each edge, find the cheapest *Hamiltonian cycle* – a tour visiting every vertex exactly once. This is the *traveling salesman problem* (TSP), and it is the poster child of NP-hardness.

In full generality TSP is hopeless to approximate: unless P = NP, no polynomial algorithm achieves *any* constant ratio. (The reason: a good approximation could be used to detect Hamiltonian cycles exactly, which is NP-hard.) So we add one mild, extremely common assumption.

Definition 34.2 (Triangle inequality)**.** The costs satisfy the *triangle inequality* if for all vertices u, v, w,

$$c(u, w) \;\leq\; c(u, v) + c(v, w).$$

In words: a direct trip never costs more than a detour through some other city. Any cost that comes from actual distances in a map – Euclidean, driving time, anything "metric" – obeys this automatically. It is the gentlest possible assumption and it changes everything: now a clean 2-approximation appears, and it comes from an object you already know well.

Intuition

A *minimum spanning tree* (MST) is the cheapest way to wire all the cities together so they are connected – no cycle, just a skeleton. It is a shameless under-spender: it connects everyone for as little as possible. So its total cost is a *lower bound* on any tour, because a tour with one edge deleted is itself a spanning tree. Then we turn that cheap skeleton into an actual tour by *walking around it*, and the triangle inequality keeps the shortcuts from costing too much. MST under-spends; we pay at most double to fix it into a legal tour.

Algorithm 144: APPROX-TSP-TOUR(G, c)

Input: Complete graph G with metric costs c; a root vertex r.
Output: A Hamiltonian cycle of cost $\leq 2\,C^*$.

```
1 compute a minimum spanning tree T of G rooted at r (e.g. Prim);
2 let H = ⟨v_1, v_2, ..., v_n⟩ be the order in which a preorder walk of T first visits the vertices;
3 return the cycle that visits the vertices in the order H and returns to v_1;
```

The idea in three beats. (1) Build the MST T. (2) Imagine walking around the outside of T – a "full walk" that goes down each branch and back up, traversing every tree edge exactly *twice*, costing $2\,c(T)$. (3) That walk repeats vertices, which is illegal for a tour. So *shortcut*: list the vertices in the order the walk *first* meets them (preorder) and go directly between consecutive ones. Shortcutting can only help, thanks to the triangle inequality.




Figure 34.3: The green MST T. A full walk is $a, b, d, b, e, b, a, c, a$ (every green edge twice). The preorder *first-visit* order is a, b, d, e, c, and we close it back to a. The purple arrow from e straight to c is a shortcut the full walk would have taken the long way – the triangle inequality guarantees it is no more expensive.

Theorem 34.2 (Metric TSP 2-approximation)**.** *If c satisfies the triangle inequality,* APPROX-TSP-TOUR *returns a tour of cost at most $2\,C^*$, where C^* is the cost of an optimal tour.*

Proof. Step 1 – the MST is a lower bound. Let H^* be an optimal tour, of cost C^*. Delete any single edge from H^* and you are left with a path through all n vertices, which is a spanning tree. Since T is a *minimum* spanning tree and edge costs are nonnegative,

$$c(T) \;\leq\; c(H^* \text{ minus one edge}) \;\leq\; c(H^*) \;=\; C^*.$$

There is our lower bound: $c(T) \le C^*$.

Step 2 – the full walk costs $2\,c(T)$. Walking down into every branch of T and back up traverses each of the $n-1$ tree edges exactly twice, for a total of $2\,c(T)$. Call this multiset of moves W.

Step 3 – shortcutting does not increase cost. The walk W visits some vertices more than once. Our tour follows the *first-visit* (preorder) order, so wherever W would revisit an already-seen vertex, our tour skips straight to the next *new* vertex. Each such skip replaces a path $v \rightsquigarrow w$ in W by the direct edge (v, w); by the triangle inequality applied repeatedly, the direct edge costs no more than the path it replaces. Hence the tour's cost is at most the walk's cost.

Chaining the three steps:

$$\text{tour cost} \;\le\; c(W) \;=\; 2\,c(T) \;\le\; 2\,C^*. \qquad \square$$

Same recipe, third verse: a computable lower bound ($c(T)$, the MST) beneath the optimum, and an output bounded by twice it.

Why this matters

Metric TSP is not a toy. It is the beating heart of vehicle routing, circuit board drilling, DNA fragment assembly, warehouse pick-paths, and the order in which a telescope slews between targets. A guaranteed-within-double tour you can compute in $O(E \log V)$ (the cost of an MST) is the kind of thing that quietly runs inside logistics software shipping millions of packages a day. And the better 1.5-approximation below is more than academic – variants of it are what real solvers warm-start from.

34.3.1 Christofides: squeezing the ratio down to 1.5

The factor of 2 came entirely from *doubling* the tree edges. That was crude. The point of doubling was to make every vertex have *even* degree, because a connected graph where every vertex has even degree contains an *Eulerian circuit* – a closed walk using each edge exactly once – which we can then shortcut into a tour. But doubling *all* edges is overkill; we only need to fix the vertices whose degree in T is currently *odd*.

Christofides' insight (1976): there is always an even number of odd-degree vertices in T. Add a minimum-weight *perfect matching* M on just those odd-degree vertices. Now $T \cup M$ has all even degrees, admits an Eulerian circuit, and shortcuts to a tour. The clever part is bounding $c(M)$: the odd vertices lie on the optimal tour in some cyclic order, which splits into two alternating matchings; the cheaper of the two costs at most $C^*/2$, and M is the minimum, so $c(M) \le C^*/2$. Therefore

$$\text{tour cost} \;\le\; c(T) + c(M) \;\le\; C^* + \tfrac{1}{2}C^* \;=\; \tfrac{3}{2}\,C^*.$$

Figure 34.4 contrasts the two repairs. Doubling (left) copies *every* tree edge to make all degrees even – safe but wasteful. Christofides (right) only adds a matching on the odd-degree vertices, a much cheaper way to reach the same "all degrees even" state that admits an Eulerian circuit.

A 1.5-approximation. It stood as the best known for metric TSP from 1976 until a microscopic improvement to $1.5 - 10^{-36}$ in 2020 – a measure of how hard the last sliver of ratio is to win.



doubling: every edge twice matching on odd vertices $\{c, d\}$

Figure 34.4: Two ways to make every degree even so an Eulerian circuit exists. Left: double all green tree edges (cost $2\,c(T)$). Right (Christofides): the only odd-degree vertices of this tree are the leaves c and d; add the one red matching edge c–d, costing at most $C^*/2$. Both reach all-even degrees, but the matching is far cheaper, dropping the ratio from 2 to 3/2.

Cost summary

Approx-TSP-Tour: build MST in $O(E \log V)$, preorder walk in $O(V)$; overall $O(E \log V)$, ratio 2. Christofides: dominated by the minimum-weight perfect matching, $O(V^3)$, ratio 3/2. General (non-metric) TSP: no constant-ratio polynomial algorithm exists unless P = NP.

34.4 Set cover: when the best you can do is logarithmic

Now a problem where no constant ratio is known to be achievable, and where the natural greedy algorithm's error grows – gently – with the input.

You are given a universe X of n elements and a family $\mathcal{F} = \{S_1, \ldots, S_m\}$ of subsets of X whose union is all of X. A *set cover* is a subfamily $\mathcal{C} \subseteq \mathcal{F}$ whose union is still all of X. You want the *fewest* sets. Vertex cover is the special case where each element is an edge and each set is "the edges touching one vertex," so set cover is at least as hard – NP-hard.

The greedy algorithm is exactly what your gut suggests: repeatedly grab the set that covers the most *still-uncovered* elements.

Algorithm 145: Greedy-Set-Cover$(X, \mathcal{F})$

Input: Universe X, family $\mathcal{F}$ covering X.
Output: A cover $\mathcal{C}$.

$U \leftarrow X$; `// the still-uncovered elements`
$\mathcal{C} \leftarrow \emptyset$;
while $U \neq \emptyset$ **do**
  pick $S \in \mathcal{F}$ maximizing $|S \cap U|$;
  $U \leftarrow U \setminus S$;
  $\mathcal{C} \leftarrow \mathcal{C} \cup \{S\}$;
return $\mathcal{C}$;

Example 34.2 (A traced run)**.** Let $X = \{1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12\}$ and

$$S_1 = \{1, 2, 3, 4, 5, 6\}, \quad S_2 = \{5, 6, 7, 8, 9\}, \quad S_3 = \{1, 4, 7, 10\},$$
$$S_4 = \{2, 5, 8, 11\}, \quad S_5 = \{3, 6, 9, 12\}.$$

Greedy picks S_1 first (6 new elements – the most). Uncovered now $\{7, 8, 9, 10, 11, 12\}$. Next S_2 covers $\{7, 8, 9\}$, three new; S_3 covers $\{7, 10\}$, two; S_4 covers $\{8, 11\}$; S_5 covers $\{9, 12\}$. Greedy takes S_2. Uncovered $\{10, 11, 12\}$. Now S_3, S_4, S_5 each cover exactly one remaining element, so greedy needs all three. Result: $\{S_1, S_2, S_3, S_4, S_5\}$, size 5.

But the *optimal* cover is $\{S_3, S_4, S_5\}$ of size 3 – those three sets partition all twelve elements! Greedy was seduced by the fat sets S_1, S_2 early and paid for it. This instance, generalized, is the classic near-worst case showing the $\ln n$ factor is real, not an artifact of loose analysis.

Figure 34.5 lays the twelve elements out as a grid so you can *see* the trap. The optimal cover $\{S_3, S_4, S_5\}$ is the three green *rows*, which tile the grid perfectly. Greedy ignores that structure and grabs the two fat sets S_1, S_2 (the shaded left-hand columns) first, after which it is stuck mopping up the leftovers one fragment at a time.




Figure 34.5: Set-cover trap as a grid. The optimum is the three green rows $S_3 = \{1, 4, 7, 10\}$, $S_4 = \{2, 5, 8, 11\}$, $S_5 = \{3, 6, 9, 12\}$, which partition all twelve elements into a clean 3-set cover. Greedy instead seizes the fat sets $S_1 = \{1, \ldots, 6\}$ and $S_2 = \{5, \ldots, 9\}$ (concentrated in the shaded left-hand columns) because they cover the most at first, then must clean up with all of S_3, S_4, S_5 anyway – five sets where three would do.

Theorem 34.3 (Greedy set cover ratio)**.** Greedy-Set-Cover *returns a cover of size at most* $H(d) \cdot |\mathcal{C}^*|$*, where* $d = \max_i |S_i|$ *is the size of the largest set,* $\mathcal{C}^*$ *is an optimal cover, and* $H(d) = \sum_{k=1}^{d} 1/k \le \ln d + 1$ *is the* d*-th harmonic number. In particular it is an* $(\ln n + 1)$*-approximation.*

Proof idea (the charging argument). This proof uses a different and lovely device: *charging*. When greedy picks a set S that newly covers t elements, it pays a cost of 1 (one set). Spread that cost evenly over the newly covered elements: charge each of those t elements a cost of $1/t$. Then the total number of sets greedy picks equals the total charge over all elements: $|\mathcal{C}| = \sum_{x \in X} \text{cost}(x)$.

Now bound the total charge by looking through the lens of the *optimal* cover. Take any optimal set $S^* \in \mathcal{C}^*$ with its elements ordered by when greedy covered them. When greedy was about to cover the k-th element of S^*, that set S^* still had at least $|S^*| - k + 1$ uncovered elements available to greedy – so the set greedy actually chose covered *at least* that many, meaning the per-element charge was at most $1/(|S^*| - k + 1)$. Summing over the elements of S^* telescopes into a harmonic number $H(|S^*|) \le H(d)$. Since the optimal sets cover all of X, summing over $\mathcal{C}^*$ gives

$$|\mathcal{C}| \;=\; \sum_{x} \text{cost}(x) \;\le\; \sum_{S^* \in \mathcal{C}^*} H(d) \;=\; H(d)\,|\mathcal{C}^*|. \qquad \square$$

Focus

Set cover teaches two new lessons. First, not every problem admits a constant ratio; sometimes the honest answer is $\Theta(\log n)$, and – by a deep result built on the PCP theorem – that is provably the *best possible* unless P = NP. Second, the *charging argument* is a reusable proof weapon: distribute the algorithm's cost onto the elements, then re-collect it through the optimum's structure.

34.5 MAX-3-CNF: how a coin flip guarantees 7/8

Time for the most startling idea in the chapter. Sometimes the smartest algorithm is to think for zero seconds and *flip a coin*.

A *3-CNF formula* is an AND of *clauses*, each clause an OR of exactly three *literals*, where a literal is a variable or its negation, and – to keep things clean – the three literals in a clause involve three *distinct* variables. Example:

$$(x_1 \vee \neg x_2 \vee x_3) \ \wedge \ (\neg x_1 \vee x_2 \vee x_4) \ \wedge \ (x_2 \vee \neg x_3 \vee \neg x_4).$$

Deciding whether *all* clauses can be satisfied at once is 3-SAT, the canonical NP-complete problem. The optimization cousin, *MAX-3-CNF*, asks: over all truth assignments, what is the maximum number of clauses you can make true? This is a *maximization* problem, so our ratio guarantee will read $C \geq C^*/\rho$.

Here is the algorithm in its entirety: set each variable to `true` or `false` independently with probability $1/2$ each. That's it. No reading the formula, no strategy. Flip n coins.

Theorem 34.4 (Randomized MAX-3-CNF)**.** *Given a 3-CNF formula with m clauses (each over three distinct variables), the random assignment satisfies,* in expectation, $\frac{7}{8}m$ *clauses. Since the optimum can satisfy at most m, this is a randomized $8/7$-approximation.*

Proof. Fix a clause C_j, say $(\ell_1 \vee \ell_2 \vee \ell_3)$ on three distinct variables. The only way the clause comes out *false* is if all three literals are false simultaneously. Each literal is false with probability $1/2$, and because the three variables are distinct, the three events are *independent*, so

$$\Pr[C_j \text{ unsatisfied}] = \left(\tfrac{1}{2}\right)^3 = \tfrac{1}{8}, \qquad \Pr[C_j \text{ satisfied}] = 1 - \tfrac{1}{8} = \tfrac{7}{8}.$$

Define an indicator $Y_j = 1$ if C_j is satisfied, else 0. Then $\mathbb{E}[Y_j] = \Pr[C_j \text{ satisfied}] = 7/8$. Let $Y = \sum_j Y_j$ be the number of satisfied clauses. By *linearity of expectation* – which needs no independence between clauses at all –

$$\mathbb{E}[Y] = \sum_{j=1}^{m} \mathbb{E}[Y_j] = \tfrac{7}{8}m.$$

The optimum $C^* \leq m$, so $\mathbb{E}[Y] = \frac{7}{8}m \geq \frac{7}{8}C^*$, i.e. $C^*/\mathbb{E}[Y] \leq 8/7$. □

Intuition

Why does blind luck do so well? Each clause is hard to falsify: you must get *all three* of its literals wrong at once, a $1/8$ event. Eight times out of eight you would have to be specifically

unlucky to miss it. Linearity of expectation is the quiet hero – it lets us add up the per-clause 7/8 probabilities even though the clauses overlap in messy, dependent ways. We never untangle the dependence; we just sum expectations.

Remark 34.1 (From expectation to certainty). "In expectation" might feel like a dodge – what if your particular coin flips land badly? Two fixes. (1) Run it a few times and keep the best; since the average is $\frac{7}{8}m$, some run hits at least $\frac{7}{8}m$, and the probability of repeatedly falling short shrinks geometrically. (2) More elegantly, *derandomize* by the *method of conditional expectations*: fix the variables one at a time, each time choosing the value that keeps the conditional expected number of satisfied clauses at least $\frac{7}{8}m$. This is always possible (one of the two choices must be at least the average) and yields a *deterministic* assignment satisfying at least $\frac{7}{8}m$ clauses, no luck required.

Walking question

The 7/8 is not just good – Håstad proved in 2001 that for MAX-3-SAT no polynomial algorithm beats $7/8 + \delta$ unless P = NP. So a literal coin flip is, up to a vanishing sliver, the *best possible* algorithm. Sit with that on your walk: the optimal strategy for a deep NP-hard problem is to not think at all. When is randomness a feature rather than a fallback?

34.6 Subset-sum: an FPTAS, the gold standard

We close with the most refined possibility: a single dial ε you can turn to make the answer as close to optimal as you wish – 1%, 0.01%, anything – with the running time growing only *polynomially* in $1/\varepsilon$. That is a *fully polynomial-time approximation scheme*, and subset-sum is the cleanest place to meet one.

The problem. Given positive integers $x_1, \ldots, x_n$ and a target t, find a subset whose sum is as large as possible *without exceeding* t. (Think: a knapsack where every item's value equals its weight, and the sack holds t.) NP-hard in general.

The exact-but-slow core. Build the set P_i of *all* subset sums achievable using the first i items and not exceeding t. Start with $P_0 = \{0\}$; to get P_i, take every sum s in P_{i-1} and also offer $s + x_i$, keeping only values $\leq t$. The answer is the largest element of P_n. Correct – but $|P_i|$ can double each step, blowing up to 2^n sums. Exponential.

The fix: trimming. The lists explode because they hold many sums that are nearly equal. So after each step, *trim*: walk the sorted list and delete any value that is within a factor $(1 + \delta)$ of a value you are keeping. Formally, you keep a sparse "representative" list where consecutive kept values differ by more than a factor $1 + \delta$. Trimming loses a little accuracy but keeps the lists short, because there are only so many powers of $(1 + \delta)$ between 1 and t.

Algorithm 146: APPROX-SUBSET-SUM$(x_1, \dots, x_n, t, \varepsilon)$

Input: Positive integers x_i, target t, accuracy $\varepsilon \in (0, 1)$.
Output: A sum $z^* \le t$ with $z^* \ge (1 - \varepsilon)\, C^*$.

$L_0 \leftarrow \langle 0 \rangle$;
$\delta \leftarrow \varepsilon/(2n)$;
for $i \leftarrow 1$ **to** n **do**
  $L_i \leftarrow \text{MERGE}(L_{i-1},\ L_{i-1} + x_i)$; `// add` x_i `to each, merge sorted`
  $L_i \leftarrow \text{TRIM}(L_i,\ \delta)$; `// drop near-duplicates within` $1 + \delta$
  remove from L_i every element $> t$;
return the largest element z^* of L_n;

TRIM(L, δ) scans the sorted L keeping a running "last kept" value last; it keeps the next element y only if $y > \text{last} \cdot (1 + \delta)$, then updates last $\leftarrow y$. So every dropped element sits within a $(1 + \delta)$ factor of a kept one.

Example 34.3 (Trimming in action)**.** Suppose after a merge the sorted list is

$$\langle 10,\ 11,\ 12,\ 15,\ 20,\ 21,\ 22,\ 23,\ 24,\ 29 \rangle, \qquad \delta = 0.1.$$

Trim keeps 10, then checks 11: since $10 \cdot 1.1 = 11$ and $11 \not> 11$, drop 11; check 12: $12 > 11$, keep it; $12 \cdot 1.1 = 13.2$, so 15 is kept; $15 \cdot 1.1 = 16.5$, so 20 is kept; $20 \cdot 1.1 = 22$, so 21 and 22 are dropped, 23 kept; $23 \cdot 1.1 = 25.3$, so 24 is dropped, 29 kept. Result: $\langle 10, 12, 15, 20, 23, 29 \rangle$. The ten-element list became six, and every deleted value is within 10% of a survivor. Over many steps this is what stops exponential blow-up. Figure 34.6 shows the same trim on a number line.

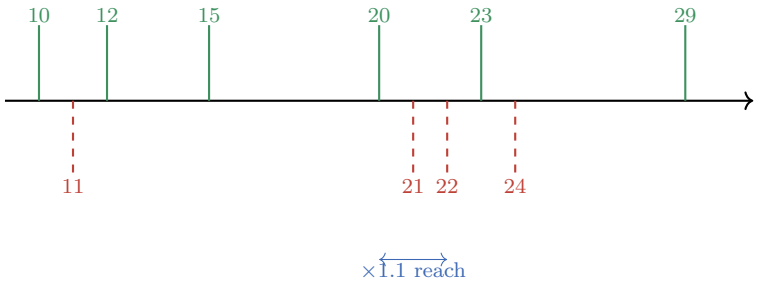


Figure 34.6: Trimming with $\delta = 0.1$. Green ticks (above) are kept; red dashed ticks (below) are dropped because each lies within a factor $1 + \delta = 1.1$ of the previous kept value. For instance, keeping 20 shadows out everything up to $20 \cdot 1.1 = 22$, so 21 and 22 vanish and the next survivor is 23. The kept values are spread by more than a factor 1.1 apart, which is what keeps the list short.

Theorem 34.5 (Subset-sum FPTAS)**.** *With $\delta = \varepsilon/(2n)$,* APPROX-SUBSET-SUM *returns z^* with $(1 - \varepsilon)\, C^* \le z^* \le C^*$, and runs in time polynomial in both n and $1/\varepsilon$. Hence it is an FPTAS.*

Why it is accurate. The key invariant: *for every achievable sum $y \le t$ that the exact algorithm would have in P_i, the trimmed list L_i contains some representative y' with*

$$\frac{y}{(1 + \delta)^i} \ \le\ y' \ \le\ y.$$

Each trim can shrink a value's nearest representative by at most a factor $1 + \delta$, and we trim once per item, so after n items the accumulated loss is at most $(1 + \delta)^n$. Apply the invariant to $y = C^*$,

the true optimum: the returned z^* satisfies $z^* \geq C^*/(1+\delta)^n$. Now bound the denominator using $1+\delta \leq e^\delta$:

$$(1+\delta)^n \leq e^{\delta n} = e^{\varepsilon/2} \leq 1+\varepsilon,$$

where the last step holds for $\varepsilon \in (0,1]$ (since $e^u \leq 1+2u$ for $u \in [0,1/2]$). Therefore

$$z^* \;\geq\; \frac{C^*}{1+\varepsilon} \;\geq\; (1-\varepsilon)\,C^*.$$

And $z^* \leq C^*$ because every value in every list is a genuine subset sum that never exceeds t. So the answer is sandwiched as claimed. □

Why it is fast. After trimming, consecutive kept values in L_i differ by more than a factor $1+\delta$. All positive values lie in $[1,t]$, so the number of kept values (plus the element 0) is at most

$$\log_{1+\delta} t + 2 \;=\; \frac{\ln t}{\ln(1+\delta)} + 2 \;\leq\; \frac{2\ln t}{\delta} + 2,$$

using $\ln(1+\delta) \geq \delta/2$ for small δ. Substituting $\delta = \varepsilon/(2n)$ makes each list length $O\big(\frac{n \ln t}{\varepsilon}\big)$. Each of the n iterations does work proportional to the list length, so the total is $O\big(\frac{n^2 \ln t}{\varepsilon}\big)$ – polynomial in n, in $\log t$ (the *number of bits* of the input), and in $1/\varepsilon$. That triple "poly" is exactly the FPTAS promise. □

Cost summary

Approx-Subset-Sum: each list has $O\big(\frac{n}{\varepsilon}\ln t\big)$ entries; total time $O\big(\frac{n^2}{\varepsilon}\ln t\big)$. Turning ε down from 0.1 to 0.001 costs a factor of 100 in time – expensive, but *polynomial*, never exponential. That is the entire point of "fully" in FPTAS: $1/\varepsilon$ lives in the polynomial, not the exponent.

Algorithm lab

Trace Approx-Subset-Sum by hand on $x = \langle 1,4,5\rangle$, $t = 10$, $\varepsilon = 0.4$ (so $\delta = 0.4/6 \approx 0.0667$).

1. $L_0 = \langle 0\rangle$.
2. Item 1: merge gives $\langle 0,1\rangle$; trim and cap at 10 keep both. $L_1 = \langle 0,1\rangle$.
3. Item 4: merge $\langle 0,1\rangle$ with $\langle 4,5\rangle$ gives $\langle 0,1,4,5\rangle$; trimming changes nothing ($5/4 > 1.0667$). $L_2 = \langle 0,1,4,5\rangle$.
4. Item 5: merge with $\langle 5,6,9,10\rangle$ gives $\langle 0,1,4,5,6,9,10\rangle$; the two copies of 5 collapse; trim and cap keep the spread-out values. L_3 contains 10.

The true optimum is $1+4+5 = 10 = t$, and the algorithm returns 10. Now redo it with $t = 9$: the optimum is $5+4 = 9$, and watch whether trimming ever costs you the exact answer. Convince yourself the returned value never drops below $(1-\varepsilon)\,C^*$.

34.7 Stepping back: a field of guarantees

Five problems, five different ways to prove "close enough." Look at the unity beneath the variety.

- **Vertex cover** and **metric TSP**: a *constant* ratio of 2, each proved by sandwiching the optimum against a structure you can compute – a maximal matching, an MST.
- **Set cover**: only a *logarithmic* ratio $\Theta(\log n)$ is possible, proved by a charging argument, and that logarithm is provably the floor.
- **MAX-3-CNF**: a *coin flip* achieves a 7/8 fraction in expectation, via linearity of expectation, and 7/8 is essentially optimal.
- **Subset-sum**: a *tunable* $(1+\varepsilon)$ ratio via an FPTAS, proved by tracking accumulated rounding error against the optimum.

Every single proof obeyed the rule from the very first trap box: *find a quantity you can compute that the optimum cannot beat, then relate your output to that quantity.* Matching size, MST cost, harmonic charges, expected satisfied clauses, accumulated trim error – all proxies for the unreachable C^*. That is the one idea to carry out of this chapter and into CLRS Chapter 35.

Why this matters

The deepest modern lesson is that these ratios are not accidents of cleverness – they are often *laws of nature for computation.* The PCP theorem and its descendants prove that $\ln n$ for set cover, 7/8 for MAX-3-SAT, and $2-\delta$-hardness for vertex cover are walls you cannot climb unless P = NP. Approximation algorithms thus map the exact boundary of what efficient computation can and cannot achieve – a boundary as fundamental as the speed of light is to physics.

34.8 Exercises

Exercise 34.1 (Tight vertex cover)**.** Construct a graph on which Approx-Vertex-Cover returns a cover of size *exactly* $2\,|S^*|$. (Hint: k disjoint edges. What is the minimum cover? What does the algorithm pick?) Then argue that on a star graph $K_{1,k}$ – one center joined to k leaves – the algorithm can return a cover of size 2 while the optimum is 1, so the ratio is 2 even here.

Exercise 34.2 (Order matters?)**.** Approx-Vertex-Cover says "pick any edge." Show that two different choices of edge order can yield covers of *different* sizes on the same graph, yet both still satisfy $|S| \le 2|S^*|$. Find a small graph exhibiting this.

Exercise 34.3 (Why metric matters)**.** Give a four-city instance of TSP that *violates* the triangle inequality and on which Approx-TSP-Tour returns a tour far worse than twice optimal. (You only need one edge that is wildly cheaper than the detour implies.) Explain in one sentence why the proof of Theorem 34.2 breaks.

Exercise 34.4 (Preorder cost)**.** For the MST in Figure 34.3, write out the full walk and the preorder tour explicitly. Assuming unit-cost tree edges and a metric, give a concrete upper bound on the tour cost in terms of $c(T)$, and check it against the theorem.

Exercise 34.5 (Greedy set cover lower bound)**.** Generalize Example 34.2: design an instance on n elements where the optimum is small (say 2 sets) but greedy is forced to take $\Theta(\log n)$ sets. Describe the construction; you do not need to write out every set.

Exercise 34.6 (MAX-2-CNF coin flip)**.** Repeat the MAX-3-CNF analysis for clauses of exactly *two* distinct literals. What fraction of clauses does a uniformly random assignment satisfy in expectation? State the resulting approximation ratio.

Exercise 34.7 (Conditional expectations)**.** On the three-clause formula in the MAX-3-CNF section, run the method of conditional expectations by hand: decide x_1, then x_2, then x_3, x_4, each time choosing the value that keeps the conditional expected number of satisfied clauses highest. Verify your final assignment satisfies all three clauses (so this formula is fully satisfiable).

Exercise 34.8 (FPTAS error tracking)**.** In Approx-Subset-Sum we set $\delta = \varepsilon/(2n)$. Suppose instead a careless implementer sets $\delta = \varepsilon$ (no division by n). Show that the accuracy guarantee can fail: bound the worst-case loss factor $(1+\varepsilon)^n$ and explain why it is *not* within $(1-\varepsilon)$ of optimal for large n.

Exercise 34.9 (Trim invariant)**.** Prove the invariant used in Theorem 34.5: after i rounds, for every exact achievable sum $y \le t$ there is a kept value $y' \in L_i$ with $y/(1+\delta)^i \le y' \le y$. Use induction on i; the inductive step combines "merging preserves representatives" with "one trim loses at most a factor $1+\delta$."

Exercise 34.10 (Scaling instead of trimming, challenge)**.** There is an alternate FPTAS for the 0/1 knapsack that *scales item values* down by a common factor and then solves exactly by dynamic programming. Look up or reconstruct the idea: if values are divided by $K = \varepsilon\, v_{\max}/n$ and rounded down, argue that the DP runs in time polynomial in n and $1/\varepsilon$ and loses at most an ε fraction of value. Compare its spirit to the trimming approach here.

Chapter 35

Parallel and Multithreaded Algorithms

Every algorithm you have studied so far has lived a lonely life. It does one thing at a time. Step follows step follows step, a single thread of attention crawling through the work like a single reader going through a book line by line. That picture matched the machines of the last century, where one processor did one operation per tick. But the machine on your desk right now is not like that. It has many cores — maybe four, maybe sixteen, maybe more — and each of them can be doing useful work at the very same instant. A phone has them. A laptop has them. A data center has hundreds of thousands of them. If your algorithm insists on doing one thing at a time, all but one of those cores sit idle, sipping electricity and accomplishing nothing.

This chapter is about teaching algorithms to use many hands at once. The good news is that you already know the most important idea. Divide-and-conquer *naturally* produces independent subproblems — "sort the left half" and "sort the right half" have nothing to say to each other until the very end — and independent work is exactly the kind of work that can be done in parallel. So much of what follows is the divide-and-conquer you already love, now allowed to run its branches side by side.

The harder news is that parallelism comes with a new bookkeeping problem. When work happens at the same time, "how long does this take?" splits into two different questions, and we will need two different cost measures to answer them. Learning to think with both numbers at once is the real content of this chapter.

Focus

By the end of this chapter you should be able to: (1) describe an algorithm in the *fork-join* model using **spawn**, **sync**, and **parallel for**; (2) compute its *work* T_1 and its *span* T_∞, and read off its *parallelism* T_1/T_∞; (3) bound how fast it runs on P processors using the work and span laws and Brent's theorem; (4) parallelize loops, matrix multiplication, and merge sort, and analyze each by solving a recurrence; and (5) avoid the classic traps — counting work as if it were time, and forgetting that a *race* can silently corrupt your answer.

35.1 Two ways for work to happen at once

Before any algorithm, fix the picture in your head. There are two flavors of "doing things at the same time," and confusing them causes endless grief.

Intuition

Parallelism is many workers doing the *same job faster* by splitting it up. Ten people painting one fence finish in a tenth of the time. This chapter is about parallelism: we have a result to compute, and we want it sooner by spreading the work across processors.
Concurrency is many independent activities that happen to be alive at once — a download, a clock, a spell-checker — coordinated so they do not step on each other. Concurrency is about *managing* simultaneity; parallelism is about *exploiting* it for speed. They share machinery, but their goals differ.

We will also make a clean simplifying assumption, the one CLRS makes, that keeps the analysis honest and beautiful: we imagine a friendly scheduler that we never have to program. We describe *what may run in parallel*, and an unseen runtime system decides *which core runs what, and when*. This separation is a gift. It lets us reason about an algorithm's potential speed without drowning in the details of any particular machine.

History and connection

This material is CLRS (4th edition) Chapter 26, "Parallel Algorithms." The fork-join / work-span model presented there grew out of the *Cilk* project at MIT in the 1990s (Blumofe, Leiserson, and others), whose runtime first made **spawn** and **sync** both practical and provably efficient. The work–span style of analysis traces back further, to the *circuit* model of parallel computation and to Richard Brent's 1974 theorem, which we meet at the end of this chapter. If you continue to CLRS, you will find the same notation (T_1, T_∞, parallelism) used there, so the vocabulary you build here transfers directly.

35.2 The fork-join model

We need a way to *write down* an algorithm that says "these two pieces may run at the same time." We use three keywords. They are deliberately few.

Focus

spawn — placed before a procedure call, it says: "you *may* run this call in parallel with the statements that come after it." The caller does *not* wait; it keeps going. (It is permission, not a command — the scheduler is free to run it serially if no core is free.)
sync — "wait here until every call I have spawned so far has finished." This is the join. After a sync, all the spawned results are safely available.
parallel for — a loop whose iterations may all run at the same time because they do not depend on one another.

The name *fork-join* is the shape these make. At a **spawn** the thread of control *forks* into two strands; at a **sync** the strands *join* back into one. Crucially there is an implicit sync at the end of every

procedure: a procedure never returns until all the work it spawned has completed. That single rule keeps the model sane — you can never accidentally use a result before the worker that produced it is done.

Here is the canonical first example, computed two ways. Recall the Fibonacci numbers $F_0 = 0$, $F_1 = 1$, $F_n = F_{n-1} + F_{n-2}$. The doubly-recursive program below is a *terrible* way to compute Fibonacci (it does exponential work), but it is the perfect specimen for studying parallel structure, because its two recursive calls are independent.

Algorithm 147: P-FIB(n)

Input: A nonnegative integer n.
Output: The nth Fibonacci number F_n.

```
1 if n ≤ 1 then
2     return n
3 x ← spawn P-FIB(n − 1);          // may run in parallel
4 y ← P-FIB(n − 2);                // the caller does this meanwhile
5 sync;                            // wait for the spawned call
6 return x + y;
```

Read it slowly. We **spawn** the computation of F_{n-1} and store its eventual result in x. We do *not* wait. The caller immediately marches on and computes F_{n-2} into y itself. Only at the **sync** do we pause to let the spawned strand catch up. After the sync, both x and y hold genuine values, and we may add them. If we forgot the sync, we might read x before it was written — a bug we will name and dread shortly.

Common trap

spawn does not mean "start a thread now and run it." It means "it is *permitted* to run this in parallel." On a one-core machine, or when every core is busy, the scheduler may simply run the spawned call serially, exactly as an ordinary call. This is why a correct fork-join program must produce the same answer whether or not anything actually runs in parallel. If your answer depends on parallelism happening, you have written a bug, not an algorithm.

35.2.1 The computation as a graph

The cleanest way to think about a fork-join computation is as a directed graph that the execution traces out. Each vertex is a *strand*: a maximal run of instructions with no spawn, sync, or return in the middle. An edge $u \to v$ means "u must finish before v may begin." A spawn creates a vertex with two out-edges (the spawned strand and the continuation); a sync creates a vertex with several in-edges that all must arrive before it fires. Because work cannot depend on itself, this graph is a *directed acyclic graph* (a DAG); Figure 35.1 shows the smallest interesting one.

This graph is the object we measure. Everything in the analysis below is a statement about it. Two numbers describe it completely for our purposes, and we turn to them now.




Figure 35.1: One spawn-and-sync as a DAG. Strand a forks into the spawned strand b and the continuation c; both must finish before the join strand d may run. The graph encodes *dependencies*, not a schedule.

35.3 Work and span: the two numbers that matter

Here is the heart of the chapter. There are exactly two questions you can ask about a parallel computation that do not depend on the messy details of a real machine, and each gives a number.

Intuition

Work T_1: how much *total* computation is there? Equivalently, how long would it take on *one* processor, which must do every strand one after another. It is the sum of the running times of all the strands — the total area of the job, ignoring that some of it could overlap.
Span T_∞: how long is the *longest chain of dependencies*? Equivalently, how long would it take on *infinitely many* processors, where the only thing that can ever slow you down is waiting for something that genuinely had to happen first. It is the length of the longest path through the DAG — the "critical path."

The subscripts are a memory aid: T_1 is the time on 1 processor, and T_∞ is the time on ∞ processors. The work is the *area*; the span is the *depth*. Hold both pictures: a wide, shallow computation has lots of work but a short span (very parallelizable); a tall, skinny one has a long span no matter how many processors you throw at it.

Walking question

Picture a relay race versus a choir. In a relay, runner two cannot start until runner one finishes: the work (total distance) equals the span (longest chain), so extra runners standing around do not help — the dependencies are a single line. In a choir, a hundred singers all sing at once: the work is a hundred voice-parts, but the span is just the length of *one* song. As you walk, classify everyday tasks as "relay-shaped" or "choir-shaped." Which kind benefits from more hands? That intuition *is* the work–span distinction.

35.3.1 The two laws

These two numbers immediately bound the running time on a real machine with P processors, which we write T_P. Two laws, both obvious once stated.

Formal

The work law. P processors can do at most P units of work per time step, so to finish T_1 work takes at least T_1/P steps:

$$T_P \geq \frac{T_1}{P}.$$

The span law. Adding processors can never make you faster than the critical path, which must be walked one strand after another no matter what:

$$T_P \geq T_\infty.$$

Read the work law as "you cannot finish faster than sharing the total work perfectly," and the span law as "you cannot finish faster than the longest unavoidable wait." The actual time T_P is squeezed from below by both. A good parallel algorithm is one where these two lower bounds are also roughly achievable — which is exactly what Brent's theorem, coming up, will promise.

35.3.2 Speedup and parallelism

Now we can finally define what we have been after.

Definition 35.1 (Speedup and parallelism)**.** The *speedup* of a computation on P processors is the ratio T_1/T_P — how many times faster the P-processor run is than the serial run. The *parallelism* of the computation is

$$\frac{T_1}{T_\infty},$$

the work divided by the span. It is a single number attached to the algorithm itself, with no P in it.

By the work law, $T_1/T_P \leq P$: with P processors you can never go more than P times faster. When the speedup equals P we call it *perfect* (or *linear*) speedup. By the span law, $T_1/T_P \leq T_1/T_\infty$: the speedup can never exceed the parallelism, no matter how many processors you buy. So parallelism is a ceiling. If an algorithm has parallelism 1000, then putting more than about 1000 processors on it is pouring water into a full glass — the extra cores cannot help, because there is not enough independent work to feed them. We say a computation has *slack* when $P \ll T_1/T_\infty$, meaning there is comfortably more parallelism available than processors to use it, and in that happy regime good schedulers achieve near-perfect speedup.

Focus

Three slogans to carry forever:

- **Work** is total area; you minimize it to avoid *wasting* computation.
- **Span** is critical-path depth; you minimize it to avoid *serializing* computation.
- **Parallelism** = work / span is the most processors you can ever usefully employ.

The art is keeping work low (so you are not slower than the serial program) while *also* keeping span low (so the parallelism is high). These two goals can fight, and resolving the fight is what algorithm design in this chapter is about.

35.3.3 Worked example: the work and span of P-Fib

Let us actually compute the two numbers for P-FIB(n). Spawn, sync, and the bookkeeping cost only constant time, so the recurrences look just like the serial ones — except that *span* gets to take the longer of the two recursive branches instead of their sum, because those branches run in parallel.

Work $T_1(n)$. On one processor, spawn is just an ordinary call, so the work is exactly the serial running time of double-recursive Fibonacci:

$$T_1(n) = T_1(n-1) + T_1(n-2) + \Theta(1).$$

This is the Fibonacci recurrence itself (plus constants), so $T_1(n) = \Theta(F_n) = \Theta(\phi^n)$ where $\phi = (1+\sqrt{5})/2 \approx 1.618$. The work is exponential. (Again: this is a bad way to compute Fibonacci; we are using it only to study structure.)

Span $T_\infty(n)$. The two recursive calls run *in parallel*, so the critical path goes through whichever one is longer, not through their sum. Since $T_\infty(n-1) \geq T_\infty(n-2)$, the longer branch is the $(n-1)$ one:

$$T_\infty(n) = \max\big(T_\infty(n-1),\, T_\infty(n-2)\big) + \Theta(1) = T_\infty(n-1) + \Theta(1) = \Theta(n).$$

So the span is merely *linear*. The critical path is the chain $n \to n-1 \to n-2 \to \cdots \to 1$, one step per level.

Parallelism.

$$\frac{T_1(n)}{T_\infty(n)} = \frac{\Theta(\phi^n)}{\Theta(n)} = \Theta\left(\frac{\phi^n}{n}\right).$$

This grows enormously with n. For $n = 30$ it is already in the millions. There is a vast amount of independent work here — which is the silver lining of all that wasteful recomputation. The lesson is sharp: high parallelism and low total work are *different* virtues, and an algorithm can have one without the other.

Algorithm lab

Trace P-FIB(4) by hand and build its DAG. The call $P(4)$ spawns $P(3)$ and runs $P(2)$; $P(3)$ spawns $P(2)$ and runs $P(1)$; each $P(2)$ spawns $P(1)$ and runs $P(0)$. Count the calls (that is your work, up to constants): the number of calls is $2F_{n+1} - 1$, which for $n = 4$ is $2 \cdot 5 - 1 = 9$ calls. Now find the longest dependency chain from the top call down to a leaf and back up through the adds: it has length proportional to $n = 4$, not to 9. Seeing "9 calls but a depth-4 critical path" in front of you (Figure 35.2) makes the work–span gap concrete in a way no formula can.

35.4 Scheduling: turning the two numbers into a real running time

We have lower bounds ($T_P \geq T_1/P$ and $T_P \geq T_\infty$). But can we *achieve* something close to them on a real machine, with a real scheduler that does not know the future? Remarkably, yes — and a simple greedy rule is enough.

Definition 35.2 (Greedy scheduler)**.** A *greedy* scheduler, at every time step, assigns as many ready strands to processors as it can. A step is *complete* if all P processors are kept busy; it is *incomplete* if fewer than P ready strands exist and some processors idle. Greedy simply never leaves a processor idle when there is ready work for it.




Figure 35.2: The call tree of P-FIB(4): 9 calls in all (that is the work, up to constants), but the longest root-to-leaf chain $P4 \to P3 \to P2 \to P1$ has only 4 nodes. The critical path runs down this spine of left-most (largest-argument) children and back up through the additions, so the span is $\Theta(n)$ while the work is $\Theta(\phi^n)$.

Theorem 35.1 (Greedy scheduling bound)**.** *On P processors, a greedy scheduler runs any computation with work T_1 and span T_∞ in time*

$$T_P \le \frac{T_1}{P} + T_\infty.$$

Intuition

Why is this true? Classify each time step as *complete* (all P processors busy) or *incomplete* (some idle). There cannot be many complete steps, because each one chews through P units of work and there are only T_1 units total — so at most T_1/P complete steps. There cannot be many incomplete steps either: every incomplete step must make progress along the critical path (it ran every ready strand, so the next strand on the longest remaining path became ready), and the critical path has only T_∞ strands — so at most T_∞ incomplete steps. Add the two buckets: total steps $\le T_1/P + T_\infty$.

Formal

Proof sketch. Count complete steps. Each uses P work, and total work is T_1, so there are at most $\lfloor T_1/P \rfloor$ of them. Count incomplete steps. Consider the subgraph of strands not yet executed; its longest path starts with a ready strand. On an incomplete step the scheduler runs *all* ready strands (there were fewer than P), so in particular it runs the first strand of that longest path, shortening the remaining critical path by one. The remaining critical path starts at length T_∞ and cannot drop below 0, so there are at most T_∞ incomplete steps. Every step is one or the other, giving $T_P \le T_1/P + T_\infty$. ■

This bound, in this clean form, is essentially Graham's and Brent's, and it is the workhorse of the whole chapter. Read it as: *greedy gets you the work term plus the span term, and never worse.* Compare it to the lower bound $T_P \ge \max(T_1/P, T_\infty)$. The upper and lower bounds differ by at most a factor of 2, so greedy is always within a factor of 2 of optimal. We can do even better when there is slack.

Corollary 35.1 (Near-perfect speedup with slack)**.** *If $P \ll T_1/T_\infty$ (the parallelism comfortably*

exceeds the processor count), then $T_\infty \ll T_1/P$, so the span term in Theorem 35.1 is negligible and

$$T_P \approx \frac{T_1}{P}, \qquad \textit{speedup } \frac{T_1}{T_P} \approx P.$$

That is, when there is plenty of slack, a greedy scheduler delivers near-perfect linear speedup.

Why this matters

This is why the work–span model is the model real systems use. A programmer writing in Cilk, Intel TBB, Java's fork-join framework, OpenMP tasks, or Rust's Rayon does *not* schedule threads by hand. They express the spawn/sync structure and let a provably-good greedy (work-stealing) scheduler do the rest. The two numbers you compute on paper — work and span — are exactly the two numbers that predict how the program will scale when the hardware team doubles the core count next year. You are not doing abstract math; you are computing the slope of a performance graph.

35.5 Analyzing parallel loops

Most real parallel code is not double recursion; it is loops. A **parallel for** declares that all iterations are independent and may run at once. But "run all n at once" is a lie on real hardware, and even in the model it hides a cost we must account for. The trick is that the runtime does not literally fork n strands in one step; it forks them with a *recursive binary splitting* of the index range, like a balanced tournament bracket. Understanding that hidden tree is the whole game.

Consider the simplest possible parallel loop: add two vectors, $C[i] \leftarrow A[i] + B[i]$ for $i = 1 \ldots n$.

Algorithm 148: VECTOR-ADD(A, B, C, n)

Input: Arrays A, B of length n and an output array C.
Output: $C[i] = A[i] + B[i]$ for all i.

```
1 parallel for i ← 1 to n;
2     C[i] ← A[i] + B[i];
```

Work. There are n iterations, each doing $\Theta(1)$ work, plus the overhead of the splitting tree. The splitting tree that forks n iterations has $\Theta(n)$ leaves and hence $\Theta(n)$ internal nodes, so the bookkeeping is also $\Theta(n)$. Total work $T_1(n) = \Theta(n)$. Good — the same as the serial loop.

Span. Here is the subtlety. If the loop body has span $\Theta(1)$, the span of the whole loop is *not* $\Theta(1)$. To reach n independent iterations the runtime must spawn them through a balanced binary tree of depth $\Theta(\log n)$ (Figure 35.3). You walk *down* the tree (forking) and back *up* (joining), so

$$T_\infty(n) = \Theta(\log n) + \Theta(1) = \Theta(\log n).$$

The $\log n$ is the unavoidable price of distributing the work; the trailing $\Theta(1)$ is the body. If the body itself had span s, the loop's span would be $\Theta(\log n) + s$.

Parallelism. $T_1/T_\infty = \Theta(n)/\Theta(\log n) = \Theta(n/\log n)$. Huge. For a million-element vector that is on the order of 50,000 — you would need fifty thousand processors before the parallelism ran dry. Parallel loops over big arrays are about as good as parallelism gets.




Figure 35.3: How a **parallel for** over 8 iterations is really executed: a balanced splitting tree (shown two levels deep) of depth $\Theta(\log n)$. The leaves are the iterations. Walking down and back up this tree is why the span carries a $\log n$, even when each iteration is $\Theta(1)$.

Common trap

Do not write $T_\infty = \Theta(1)$ for a parallel loop just because each iteration is constant time. The *logarithmic* cost of forking the iterations is real and shows up in the span every single time. Forgetting it is the most common mistake in span analysis. The rule of thumb: *a parallel for adds* $\log$(*number of iterations*) *to the span.*

Walking question

Why a *tree* and not a single fork into n? Imagine one strand trying to spawn a million iterations by itself, one spawn at a time. That spawning loop is serial — it takes a million steps just to hand out the work, so the span would be $\Theta(n)$ and the parallelism would collapse to $\Theta(1)$. The balanced tree lets the spawning itself be parallel: each node spawns only two children, so after $\log n$ levels all n leaves exist. On your walk, convince yourself that *distributing* work is itself work that must be parallelized, or it becomes the bottleneck.

35.6 A new hazard: races

Sequential code cannot have a race. Parallel code can, and a race is the most insidious bug in this chapter because the program usually *works* — until, one run in a thousand, it silently gives a wrong answer.

Definition 35.3 (Determinacy race)**.** A *determinacy race* occurs when two strands that are *not* ordered by the dependency DAG both access the same memory location and at least one of them writes to it. Because the scheduler may interleave the two strands in either order, the result can differ from run to run.

Common trap

Here is the classic poison. Suppose you tried to sum an array in parallel by having every iteration add into a shared variable:

$$\textbf{parallel for } i \leftarrow 1 \textbf{ to } n: \quad total \leftarrow total + A[i]$$

The statement $total \leftarrow total + A[i]$ is really three steps: *read total*, *add* $A[i]$, *write total*. If two iterations read the old value *before* either writes, one of the additions is lost. Run it on $A = [1, 1, 1, 1]$ and you might get 4, or 3, or 2, depending on timing. The two writing

strands are unordered in the DAG, both touch *total*, and at least one writes — the definition of a race. The fix is to make the updates not collide: split the array, sum the halves into *separate* variables in parallel, sync, then add the two partial sums. That is a parallel *reduction* (Figure 35.4), and it has span $\Theta(\log n)$ with no race.




Figure 35.4: Race-free parallel summation (a *reduction*). Pairs of partial sums combine up a balanced tree; siblings are computed in parallel and each "+" node writes its own cell, so no two parallel strands ever touch the same location. The tree has depth $\Theta(\log n)$, giving span $\Theta(\log n)$ with work $\Theta(n)$.

The model gives us a clean way to stay safe: *a fork-join program is race-free if every pair of strands that touch the same location, one of them writing, is ordered by a spawn/sync dependency.* Put differently, never let two *parallel* strands write the same cell, or write-and-read the same cell. In all the algorithms below we are careful to give each parallel branch its *own* disjoint piece of memory to write into — the left half writes the left half of the output, the right half writes the right half — so no two parallel strands ever collide. That discipline is what makes the model's clean analysis legitimate.

35.7 Parallel matrix multiplication

Now we apply everything to a real, useful problem. Multiplying two $n \times n$ matrices, $C = A \cdot B$, is the beating heart of scientific computing, graphics, and machine learning, and it is gorgeously parallel because *every output entry can be computed independently.*

35.7.1 The straightforward version

Recall the definition $C[i][j] = \sum_{k=1}^{n} A[i][k]\, B[k][j]$. The n^2 output entries do not depend on each other, so compute them all in parallel.

Algorithm 149: P-MATRIX-MULTIPLY(A, B, C, n)

Input: $n \times n$ matrices A, B; output matrix C.
Output: $C = A \cdot B$.

```
1 parallel for i ← 1 to n;
2     parallel for j ← 1 to n;
3         C[i][j] ← 0;
4         for k ← 1 to n do
5             C[i][j] ← C[i][j] + A[i][k] · B[k][j]
```

Notice the inner k-loop is an *ordinary* (serial) for, not a parallel one. That is deliberate: it accumulates into the single cell $C[i][j]$, so making it parallel would create exactly the summation race

from the last section. Each (i, j) pair owns its own output cell, so the two outer parallel loops are perfectly safe.

Work. Every cell does $\Theta(n)$ multiply-adds, and there are n^2 cells, so $T_1(n) = \Theta(n^3)$ — identical to the serial algorithm. We waste nothing.

Span. The outer parallel-for contributes $\Theta(\log n)$; the nested parallel-for inside it contributes another $\Theta(\log n)$; and the serial inner loop is a chain of length $\Theta(n)$. The span is the sum of these along the critical path:

$$T_\infty(n) = \Theta(\log n) + \Theta(\log n) + \Theta(n) = \Theta(n).$$

The serial k-loop dominates — its length-n chain is the critical path.

Parallelism. $T_1/T_\infty = \Theta(n^3)/\Theta(n) = \Theta(n^2)$. For $n = 1000$ that is a parallelism of a million. This simple algorithm already scales superbly. Its only blemish is the $\Theta(n)$ span coming from the serial dot product. Can we do better? Yes — by parallelizing the summation too, with a divide-and-conquer multiply.

35.7.2 Divide-and-conquer multiply, for a shorter span

Split each $n \times n$ matrix into four $n/2 \times n/2$ blocks:

$$A = \begin{pmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{pmatrix}, \quad B = \begin{pmatrix} B_{11} & B_{12} \\ B_{21} & B_{22} \end{pmatrix}, \quad C = \begin{pmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{pmatrix}.$$

Block matrix multiplication gives eight smaller products:

$$\begin{aligned} C_{11} &= A_{11}B_{11} + A_{12}B_{21}, \quad C_{12} = A_{11}B_{12} + A_{12}B_{22}, \\ C_{21} &= A_{21}B_{11} + A_{22}B_{21}, \quad C_{22} = A_{21}B_{12} + A_{22}B_{22}. \end{aligned}$$

The eight recursive multiplies are independent (each writes into a scratch area), so spawn all eight; sync; then add the pairs in parallel.

Work. Eight recursive multiplies of size $n/2$, plus $\Theta(n^2)$ for the four matrix additions:

$$T_1(n) = 8\,T_1(n/2) + \Theta(n^2).$$

By the master theorem, $a = 8$, $b = 2$, $\log_b a = 3$, and $n^{\log_b a} = n^3$ dominates n^2, so $T_1(n) = \Theta(n^3)$ — still cubic, as expected.

Span. The eight multiplies run in parallel, so the span takes *one* recursive call's span, not eight. The block additions can be done with parallel fors over n^2 entries, contributing $\Theta(\log n)$:

$$T_\infty(n) = T_\infty(n/2) + \Theta(\log n).$$

Unrolling: $\Theta(\log n) + \Theta(\log(n/2)) + \cdots$ over $\log n$ levels, each level's term at most $\Theta(\log n)$, giving $T_\infty(n) = \Theta(\log^2 n)$.

Parallelism. $T_1/T_\infty = \Theta(n^3)/\Theta(\log^2 n) = \Theta(n^3/\log^2 n)$. This is enormously larger than the $\Theta(n^2)$ of the simple version — the span dropped from $\Theta(n)$ all the way to $\Theta(\log^2 n)$ by refusing to do that one serial summation. Same work, dramatically shorter span: a textbook illustration of the design goal.

Cost summary

Parallel matrix multiply, $n \times n$.

Method	Work T_1	Span T_∞	Parallelism
Triple-loop (serial k)	$\Theta(n^3)$	$\Theta(n)$	$\Theta(n^2)$
Divide-and-conquer (8-way)	$\Theta(n^3)$	$\Theta(\log^2 n)$	$\Theta(n^3/\log^2 n)$

Both do the same total work. The divide-and-conquer version trades nothing in work for a vastly shorter critical path, hence far more parallelism.

35.8 Parallel merge sort

Sorting is the chapter's most satisfying case study, because the obvious parallelization is good but not great, and fixing it teaches the deepest lesson in the chapter: *sometimes you must parallelize the combine step too.*

35.8.1 The naive parallelization, and its disappointing span

Merge sort divides, sorts the two halves, and merges. The two halves are independent — spawn them.

Algorithm 150: P-MERGE-SORT(A, lo, hi)

Input: Array A and bounds $lo \le hi$.
Output: $A[lo \ldots hi]$ sorted in place.

```
1 if lo ≥ hi then
2     return
3 mid ← ⌊(lo + hi)/2⌋;
4 spawn P-MERGE-SORT(A, lo, mid);          // sort left half in parallel
5 P-MERGE-SORT(A, mid + 1, hi);            // sort right half here
6 sync;
7 MERGE(A, lo, mid, hi);                   // serial merge:  the bottleneck
```

Work. Two recursive sorts of size $n/2$ plus a serial merge of $\Theta(n)$:

$$T_1(n) = 2\,T_1(n/2) + \Theta(n) = \Theta(n \log n),$$

by the master theorem ($a = b = 2$, $\log_b a = 1$, the n^1 and the merge tie, so a log factor appears). Same as serial merge sort — no work wasted.

Span. The two recursive sorts run in parallel, so the span uses one of them; but the MERGE is serial, contributing $\Theta(n)$:

$$T_\infty(n) = T_\infty(n/2) + \Theta(n) = \Theta(n).$$

That last recurrence solves to $\Theta(n)$ because the $\Theta(n)$ merge at the *top* level dominates: $n + n/2 + n/4 + \cdots = \Theta(n)$.

Parallelism. $T_1/T_\infty = \Theta(n \log n)/\Theta(n) = \Theta(\log n)$. That is *terrible.* A parallelism of only $\log n$ means even for a billion elements you can usefully employ only about 30 processors. The villain is

plain: the serial MERGE, with its $\Theta(n)$ span, single-handedly drags the whole algorithm down. We sorted in parallel but then merged in a long serial line. To get real parallelism, we must learn to *merge in parallel*.

35.8.2 Merging two sorted arrays in parallel

How do you merge $X[1 \ldots n_1]$ and $Y[1 \ldots n_2]$ (both sorted) using many hands? The serial merge walks a single pointer down the output, which is inherently a chain of length n. We need a divide-and-conquer merge instead.

Intuition

The pivot trick. Take the *median* element of the larger array, say $X[q]$ where q is the middle index of X. Everything in the merged output that is less than $X[q]$ comes from the front of X *and* the front of Y; we find where $X[q]$ belongs in Y by *binary search*, splitting Y at some position q'. Now we have two completely independent merge problems — merge X's left part with Y's left part, and X's right part with Y's right part — and we know exactly where each result goes in the output. Spawn both. No race: the left merge writes the left output, the right merge writes the right output. Figure 35.5 shows the split.

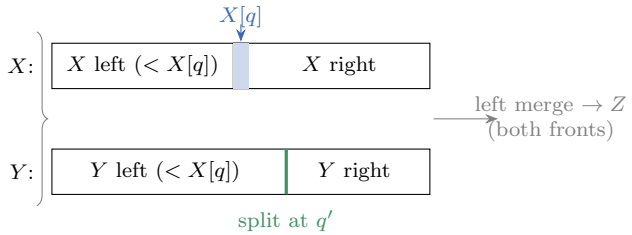


Figure 35.5: The P-MERGE pivot trick. The median $X[q]$ of the longer array X is located inside Y by binary search (position q'). Everything to the left of both splits (less than $X[q]$) becomes one independent merge subproblem; the two right parts become the other. The two subproblems write into disjoint output regions, so they may be spawned without a race.

Algorithm 151: P-MERGE$(X, p_1, r_1, Y, p_2, r_2, Z, p_3)$

Input: Sorted ranges $X[p_1 \ldots r_1]$, $Y[p_2 \ldots r_2]$; output array Z starting at index p_3.
Output: The merged sorted sequence written into $Z[p_3 \ldots]$.

```
1  n1 ← r1 − p1 + 1;   n2 ← r2 − p2 + 1;
2  if n1 < n2 then
3      swap the two input ranges so that X is the longer one;
4  if n1 = 0 then
5      return ;                                              // both ranges empty
6  q ← ⌊(p1 + r1)/2⌋;                                  // median of the longer range X
7  q' ← BINARY-SEARCH(X[q], Y, p2, r2);   // first index in [p2, r2 + 1] with Y[q'] ≥ X[q]
8  q3 ← p3 + (q − p1) + (q' − p2);                       // output position for X[q]
9  Z[q3] ← X[q];
10 spawn P-MERGE(X, p1, q − 1, Y, p2, q' − 1, Z, p3);                    // left halves
11 P-MERGE(X, q + 1, r1, Y, q', r2, Z, q3 + 1);                         // right halves
12 sync;
```

Here BINARY-SEARCH(x, Y, p_2, r_2) returns the first index q' in the range $[p_2, r_2 + 1]$ with $Y[q'] \geq x$; if no such element exists it returns $r_2 + 1$. The elements $Y[p_2 \ldots q' - 1]$ are exactly those strictly below $X[q]$, so $q' - p_2$ of Y's elements precede $X[q]$ in the output. Adding the $q - p_1$ elements of X that precede $X[q]$ gives its output slot q_3. The left recursive call then merges everything below $X[q]$ (the front of both ranges), the right call merges everything at or above it, and the two write into disjoint output regions $Z[p_3 \ldots q_3 - 1]$ and $Z[q_3 + 1 \ldots]$ — so they cannot race.

Span of P-Merge. Each call does a binary search ($\Theta(\log n)$) and then recurses on two independent subproblems in parallel. By always pivoting on the median of the *larger* array, we guarantee each recursive call handles at most $3/4$ of the total elements. Here is why: let X be the longer range, so $|X| \geq n/2$ and $|Y| \leq n/2$. Splitting X at its median sends at most $|X|/2$ of its elements to either side, and the worst case dumps *all* of Y onto one side. So a recursive call gets at most $|X|/2 + |Y| = (n - |Y|)/2 + |Y| = n/2 + |Y|/2 \leq n/2 + n/4 = 3n/4$. So

$$T_\infty^{\text{merge}}(n) = T_\infty^{\text{merge}}(3n/4) + \Theta(\log n) = \Theta(\log^2 n).$$

The recursion has depth $\log_{4/3} n = \Theta(\log n)$, and each level costs $\Theta(\log n)$ for its binary search, multiplying to $\Theta(\log^2 n)$.

Work of P-Merge. One can show (it takes a little care because the split is uneven) that the work is still $T_1^{\text{merge}}(n) = \Theta(n)$ — the binary searches sum to only $\Theta(n)$ across the whole recursion, the same as the serial merge up to constants.

35.8.3 Putting it together: a genuinely parallel merge sort

Now replace the serial MERGE in P-MERGE-SORT with P-MERGE. (A clean implementation sorts into an auxiliary array so the parallel merge has separate input and output regions and stays race-free.) The recurrences become:

Work. Same shape, $T_1(n) = 2\,T_1(n/2) + \Theta(n) = \Theta(n \log n)$. The parallel merge does the same total work as the serial one, so the work is unchanged. Good — we are not paying for the speedup in wasted computation.

Span. Now the merge contributes only $\Theta(\log^2 n)$, not $\Theta(n)$:

$$T_\infty(n) = T_\infty(n/2) + \Theta(\log^2 n).$$

Unrolling over $\log n$ levels, the per-level cost grows like $\log^2$ of the current size, and the sum is dominated by the top levels; it solves to $T_\infty(n) = \Theta(\log^3 n)$.

Parallelism. $T_1/T_\infty = \Theta(n \log n)/\Theta(\log^3 n) = \Theta(n/\log^2 n)$. Compare this with the naive version's $\Theta(\log n)$. We went from "about 30 useful processors for a billion elements" to "about a million" (for $n = 10^9$, $\log_2 n \approx 30$, so $n/\log^2 n \approx 10^9/900 \approx 10^6$). *Same work, span slashed from* $\Theta(n)$ *to* $\Theta(\log^3 n)$.

Cost summary

Parallel merge sort, n elements.

Version	Work T_1	Span T_∞	Parallelism
Serial merge	$\Theta(n \log n)$	$\Theta(n)$	$\Theta(\log n)$
Parallel merge	$\Theta(n \log n)$	$\Theta(\log^3 n)$	$\Theta(n/\log^2 n)$

The single change — merging in parallel instead of serially — raises the parallelism by roughly a factor of $n/\log^3 n$. It is the chapter's signature moral: *a serial combine step can be the entire bottleneck, and parallelizing it is where the real wins hide.*

Focus

The pattern you just watched, twice (matrix multiply, then merge sort):

1. Parallelize the obvious independent parts (the recursive calls). Work stays the same; span improves only if the *combine* step is cheap.
2. Discover that a leftover *serial* step (the dot product; the merge) dominates the span and chokes the parallelism.
3. Parallelize *that* step too, with its own divide-and-conquer. Span collapses; parallelism soars; work is unchanged.

Whenever a parallel algorithm disappoints, look for the serial step hiding in the combine. It is almost always there.

35.9 Brent's theorem, and the right way to think about it

We end with the result that ties the model together and tells you, before you ever run anything, roughly how fast your algorithm will go on any machine you might buy. We already proved the working form (Theorem 35.1); now we name it and extract its meaning.

Theorem 35.2 (Brent's theorem)**.** *Any computation with work T_1 and span T_∞ can be executed on P processors in time*

$$T_P \le \frac{T_1 - T_\infty}{P} + T_\infty.$$

This is a slightly sharper cousin of the greedy bound (the T_∞ work on the critical path is counted once, on the span side, rather than being divided again by P). For our purposes the looser $T_P \le T_1/P + T_\infty$ says everything important, and we will reason with it.

Intuition

Brent's theorem is a promise with two terms, and you should read it as a tug of war between them:

- The term T_1/P is the *work term*: if you had no dependencies at all, P processors would split the T_1 work perfectly and finish in T_1/P.
- The term T_∞ is the *span term*: the unavoidable serial spine that no number of processors can shorten.

For small P, the work term T_1/P is large and dominates — you are *work-bound*, and buying more processors helps a lot (speedup is nearly linear). As P grows, T_1/P shrinks until it sinks below T_∞; past that point you are *span-bound*, and buying more processors does almost nothing. The crossover happens right around $P \approx T_1/T_\infty$ — which is exactly the *parallelism*. That is the precise sense in which parallelism is "the number of processors worth buying." Figure 35.6 draws the two regimes.

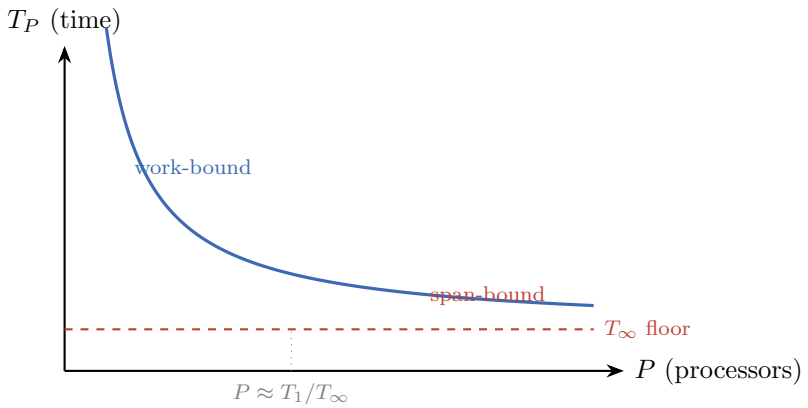


Figure 35.6: Running time T_P versus processor count P under Brent's bound. While the work term T_1/P dominates (left), time falls like $1/P$ — nearly linear speedup. Once it sinks to the span floor T_∞ (right), more processors stop helping. The knee sits at the parallelism, $P \approx T_1/T_\infty$.

Why this matters

This single picture is why every chip vendor and cloud provider cares about your algorithm's span, not just its work. Two algorithms with identical work $\Theta(n \log n)$ can have wildly different spans ($\Theta(n)$ versus $\Theta(\log^3 n)$ for our two merge sorts), and that difference *is* the difference between a program that stops scaling at 30 cores and one that keeps scaling to millions. When someone says "this code does not scale," they almost always mean its span is too large relative to its work. You now have the vocabulary to diagnose and fix exactly that.

Remark 35.1 (A reminder about what these bounds hide). The model deliberately ignores real costs that matter in practice: the time to *communicate* data between cores, the contention for shared memory and caches, and the overhead of the scheduler itself. A computation that is wonderful in work and span can still be slow if every strand fights over the same cache line, or if the spawned pieces

are so tiny that scheduling them costs more than running them (which is why real implementations stop recursing and switch to serial code below some grain size). The work–span model tells you about an algorithm's *inherent* parallelism — a necessary condition for scaling, and the right first thing to analyze — but it is the floor of the discipline, not its ceiling.

35.10 The whole chapter in one breath

You learned to describe computations with three keywords (**spawn**, **sync**, **parallel for**) and to see the result as a DAG of strands. You measure that DAG with two numbers: **work** T_1 (total area, the serial time) and **span** T_∞ (critical-path depth, the infinite-processor time). Their ratio is the **parallelism**, the most processors you can ever use. The work and span laws give lower bounds on T_P; the greedy/Brent bound $T_P \le T_1/P + T_\infty$ gives a matching upper bound, so a simple greedy scheduler is always within a factor of two of optimal and achieves near-perfect speedup when there is slack. Parallel loops cost a log in span for their splitting tree. Races are the new hazard, defeated by giving each parallel strand its own memory to write. And across matrix multiply and merge sort you saw the one big design move again and again: *parallelize the obvious parts, find the serial combine step that dominates the span, and parallelize that too.* That is how a $\Theta(n)$ span becomes $\Theta(\log^3 n)$, and how an algorithm goes from barely parallel to embarrassingly so.

35.11 Exercises

Exercise 35.1 (Warmup: read the two numbers)**.** For each, state the work, span, and parallelism in Θ notation. (a) A single **parallel for** of n iterations, each $\Theta(1)$. (b) A serial loop of n iterations, each $\Theta(1)$. (c) A balanced binary tree of n leaves where every node does $\Theta(1)$ work and a node's two children are spawned in parallel.

Exercise 35.2 (Span by inspection)**.** Consider P-Fib(5). Without computing Fibonacci, draw the dependency DAG, mark a longest path from the root to a leaf and back, and confirm its length is $\Theta(n)$ with $n = 5$. How many total calls (strands) are there? Relate your two counts to T_1 and T_∞.

Exercise 35.3 (The forgotten logarithm)**.** A student claims a **parallel for** of n constant-time iterations has span $\Theta(1)$ "because all iterations run at once." Explain precisely why the true span is $\Theta(\log n)$, referring to the splitting tree. Then give the span of two *nested* parallel fors, each of length n, with a $\Theta(1)$ body.

Exercise 35.4 (Spot the race)**.** You want the maximum of an array $A[1 \ldots n]$. A colleague writes: **parallel for** i: **if** $A[i] > m$ **then** $m \leftarrow A[i]$, where m starts at $-\infty$. Exhibit a concrete input and interleaving on two processors that returns the wrong answer. Then describe a race-free parallel algorithm for the maximum, and give its work and span.

Exercise 35.5 (Greedy bound arithmetic)**.** A computation has $T_1 = 10^9$ and $T_\infty = 10^4$. (a) What is its parallelism? (b) Use $T_P \le T_1/P + T_\infty$ to estimate T_P for $P = 100$, $P = 10^4$, and $P = 10^6$. (c) For which of these P is the speedup close to linear, and why does it stop being so?

Exercise 35.6 (Why the inner loop stays serial)**.** In P-Matrix-Multiply, explain what goes wrong if you make the inner k-loop a **parallel for**. Then propose a *race-free* way to parallelize the dot product anyway (hint: a parallel reduction / tree of partial sums) and state the span it would give the inner loop.

Exercise 35.7 (Block multiply recurrences)**.** For the divide-and-conquer matrix multiply, derive $T_1(n) = 8T_1(n/2) + \Theta(n^2)$ and $T_\infty(n) = T_\infty(n/2) + \Theta(\log n)$ from the pseudocode structure, explaining where each term comes from. Solve both (master theorem for the work, unrolling for the span) and state the parallelism.

Exercise 35.8 (The merge is the bottleneck)**.** For naive P-Merge-Sort (serial merge), solve $T_\infty(n) = T_\infty(n/2) + \Theta(n)$ carefully, showing the geometric sum $n + n/2 + n/4 + \cdots = \Theta(n)$. Then explain in one sentence why this single $\Theta(n)$ term, and not the recursion, is what caps the parallelism at $\Theta(\log n)$.

Exercise 35.9 (Why pivot on the larger array)**.** In P-Merge, we always take the median of the *longer* of the two input ranges. Prove that with this choice each recursive call receives at most $3/4$ of the total elements. Then explain why pivoting on the *shorter* array could fail to give a good span.

Exercise 35.10 (Challenge: parallel prefix sums)**.** The *prefix sums* (scan) of $A[1 \ldots n]$ is the array S with $S[i] = A[1] + A[2] + \cdots + A[i]$. The obvious serial loop has span $\Theta(n)$. Design a parallel algorithm with work $\Theta(n)$ and span $\Theta(\log n)$. (Hint: an up-sweep that builds partial sums in a tree, then a down-sweep that pushes prefixes back down. Describe both passes and give a recurrence for each measure.)

Exercise 35.11 (Challenge: when parallelism cannot help)**.** Give an example of a natural computation whose span equals its work, $T_\infty = \Theta(T_1)$, so its parallelism is $\Theta(1)$ and no number of processors speeds it up. Explain what feature of the problem forces the long dependency chain. (Think about a computation where each step truly needs the previous step's result.)

Exercise 35.12 (Challenge: grain size)**.** Real implementations stop spawning and switch to serial code once subproblems are smaller than a *grain size* g. Argue informally that coarsening a parallel loop to chunks of size g changes its span to $\Theta(g + \log(n/g))$ while keeping work $\Theta(n)$. For what range of g is the parallelism still $\Theta(n/\log n)$ up to constants, and why might a real system deliberately choose a larger g anyway?

Chapter 36

Machine-Learning Algorithms

You have spent this whole book writing algorithms that *know* what to do. You told sorting how to compare, you told Dijkstra how edges relax, you told dynamic programming exactly which subproblems to chew on. Every line of pseudocode was a rule you supplied. The machine obeyed.

This chapter is about a different posture. Here we will write algorithms that do *not* start out knowing what to do. Instead, we hand them a pile of examples and a way to measure how badly they are doing, and we let them *adjust themselves* until they do well. The rule is no longer something you write down by hand; it is something the algorithm *finds*.

That sounds mystical, and the marketing around "machine learning" often makes it sound more mystical still. It is not. By the end of this chapter you will see that the three workhorse ideas – clustering, gradient descent, and the perceptron – are ordinary algorithms in the exact sense of everything you have already read. They have inputs, outputs, loops, invariants, and running times. The only genuinely new idea is that the *objective* – the thing we are optimizing – is now a quantity defined by data, and "solving the problem" means "making that quantity small."

Focus

The single sentence to carry through the whole chapter: *learning is optimization over data.* You define a number that measures "how wrong am I" (a **loss** or **cost**), and then you run an algorithm that pushes that number down. Everything else – k-means, gradient descent, the perceptron – is a specific choice of *what* number and *how* to push it down.

History and connection

This chapter maps to **CLRS 4th edition, Chapter 20 (Machine-Learning Algorithms)**, which is itself a recent addition to CLRS. We cover the same backbone – clustering by k-means, gradient descent, and the perceptron – but we slow down to build the optimization intuition first. The ideas are old: gradient descent is essentially Cauchy's method of steepest descent (1847), the perceptron is Rosenblatt (1958), and Lloyd's algorithm for k-means dates to 1957 (published 1982). What is new is the scale of data they now run on. When you reach CLRS 20, you will find crisper convergence theorems; this chapter is the on-ramp.

36.1 Learning as optimization: the one idea

Let us make the slogan concrete before we touch any specific method.

Imagine you are given a bunch of data points and a *model*: a function f_θ with some adjustable knobs collected into a vector θ (the Greek letter "theta," our standard name for "the parameters"). Turning the knobs changes the function. For each setting of θ you can ask: how well does f_θ fit the data? You answer that with a single number, the **cost** (or **loss**) $J(\theta)$. Low cost means good fit; high cost means bad fit.

Intuition

Picture J as a landscape. The horizontal directions are the knob settings θ; the height above each point is the cost $J(\theta)$. A *good* model is a *low* place in this landscape – a valley. Learning is just *walking downhill*. You start somewhere, look around for a downward direction, take a step, and repeat until the ground is flat under your feet. That flat spot is your trained model.

Formal

A **supervised learning problem** is specified by:

- a dataset of n examples $(x^{(1)}, y^{(1)}), \dots, (x^{(n)}, y^{(n)})$, where each $x^{(i)} \in \mathbb{R}^d$ is an *input* (a vector of d *features*) and each $y^{(i)}$ is a *label*;
- a model family $\{f_\theta : \theta \in \mathbb{R}^p\}$, indexed by a parameter vector θ;
- a per-example loss $\ell(f_\theta(x), y) \geq 0$.

The training objective is the average loss over the data,

$$J(\theta) \;=\; \frac{1}{n} \sum_{i=1}^{n} \ell\big(f_\theta(x^{(i)}),\, y^{(i)}\big),$$

and *to train* means to (approximately) solve $\theta^\star = \arg\min_\theta J(\theta)$. In *unsupervised* problems (like clustering) there are no labels y; the cost is defined purely in terms of the inputs.

That is the entire conceptual scaffold. Now we just need (1) ways to write down useful costs, and (2) algorithms to minimize them. We will meet both in three flavors. Notice how much this rhymes with earlier chapters: greedy algorithms made a locally best choice each step; gradient descent makes a locally downhill choice each step. Dynamic programming reused subproblem answers; here we reuse the *current* parameters as the starting point for the next improvement. Optimization has been lurking under the whole book.

36.2 Clustering with k-means

We begin with an *unsupervised* problem because it shows the "define-a-cost-then-minimize-it" pattern at its cleanest.

You are handed n points in space and no labels at all – just the points. You suspect they fall into natural groups. Maybe they are customers and the groups are buying habits; maybe they are pixels and the groups are colors. You want to discover k groups (**clusters**) and a representative point for

each (a **centroid**).

Intuition

k-means answers two coupled questions that chase each other:

1. *If I knew the centroids*, which cluster does each point belong to? Easy: assign each point to its *nearest* centroid.
2. *If I knew the assignments*, where should each centroid sit? Easy: at the *average* (the "mean") of its assigned points.

Neither is known up front, so we guess, then alternate: re-assign, re-center, re-assign, re-center. Each round can only make things tidier. That alternation is the whole algorithm.

The two steps chase each other around the loop in Figure 36.1.

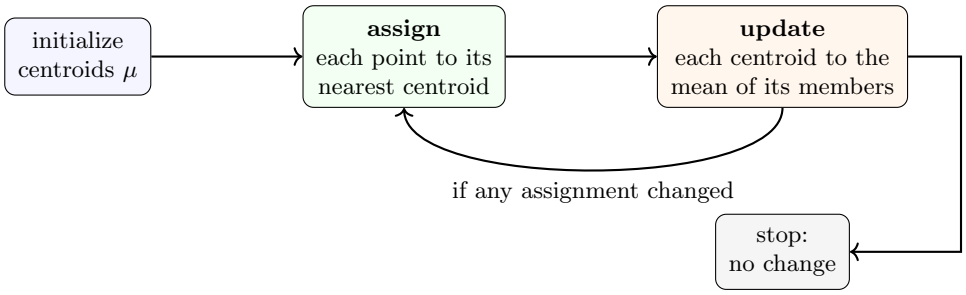


Figure 36.1: Lloyd's algorithm as a loop. The assignment step and the update step take turns; each lowers the cost J, and the loop exits the round in which no point switches clusters.

36.2.1 The cost that k-means minimizes

What does "tidier" mean precisely? We measure how spread out each cluster is. Let $\mu_1, \ldots, \mu_k$ be the centroids and let $c(i) \in \{1, \ldots, k\}$ be the cluster index assigned to point $x^{(i)}$. The cost is the total squared distance from points to their own centroid:

$$J(c, \mu) \;=\; \sum_{i=1}^{n} \left\| x^{(i)} - \mu_{c(i)} \right\|^2.$$

Here $\|v\|^2 = v_1^2 + v_2^2 + \cdots + v_d^2$ is the squared length of the vector v. This number is small exactly when every point sits close to its centroid – which is what we mean by good clusters.

Focus

k-means uses **squared** distance, not plain distance. That is not an arbitrary choice. Squared distance is what makes step 2 – "put the centroid at the mean" – exactly optimal, as we prove below. Different distance choices give different algorithms (e.g. the *k-medoids* or *k-medians* variants).

36.2.2 Lloyd's algorithm

The standard procedure is **Lloyd's algorithm**. It just alternates the two easy steps until nothing changes.

Algorithm 152: k-MEANS (Lloyd's algorithm)

Input: points $x^{(1)}, \dots, x^{(n)} \in \mathbb{R}^d$; number of clusters k
Output: centroids $\mu_1, \dots, \mu_k$ and an assignment $c : \{1..n\} \to \{1..k\}$

initialize $\mu_1, \dots, \mu_k$ (e.g. pick k distinct points at random);
repeat
  `// Assignment step: each point joins its nearest centroid`
  for $i \leftarrow 1$ **to** n **do**
    $c(i) \leftarrow \arg\min_{j \in \{1..k\}} \left\| x^{(i)} - \mu_j \right\|^2$;
  `// Update step: each centroid moves to the mean of its members`
  for $j \leftarrow 1$ **to** k **do**
    $S_j \leftarrow \{\, i : c(i) = j \,\}$;
    if $S_j \neq \emptyset$ **then** $\mu_j \leftarrow \dfrac{1}{|S_j|} \sum_{i \in S_j} x^{(i)}$;
until *no assignment changed*;
return (μ, c);

36.2.3 A fully worked numeric run

Let us cluster six points on the line ($d = 1$, so the math is light) into $k = 2$ groups. The points are

$$x = 1, \;\; 2, \;\; 4, \;\; 7, \;\; 8, \;\; 9.$$

By eye there are two clusters, $\{1, 2, 4\}$ and $\{7, 8, 9\}$. Watch the algorithm discover them.

Initialize. Suppose our random pick lands on the two centroids $\mu_1 = 2$ and $\mu_2 = 8$ (we will deliberately give it a slightly different start in the lab so you can see it is not magic).

Round 1, assignment. For each point pick the nearer centroid (distance, not squared, gives the same winner):

point	$\lvert x - 2 \rvert$	$\lvert x - 8 \rvert$	nearer	cluster
1	1	7	μ_1	1
2	0	6	μ_1	1
4	2	4	μ_1	1
7	5	1	μ_2	2
8	6	0	μ_2	2
9	7	1	μ_2	2

So $S_1 = \{1, 2, 4\}$ and $S_2 = \{7, 8, 9\}$.

Round 1, update.

$$\mu_1 = \frac{1 + 2 + 4}{3} = \frac{7}{3} \approx 2.33, \qquad \mu_2 = \frac{7 + 8 + 9}{3} = 8.$$

Round 2, assignment. Re-check every point against the new centroids 2.33 and 8. Point 4 is at distance 1.67 from μ_1 and 4 from μ_2, so it stays in cluster 1. Every point keeps its cluster: *no assignment changed*. The loop stops.

Final cost.

$$J = \underbrace{(1-\tfrac{7}{3})^2 + (2-\tfrac{7}{3})^2 + (4-\tfrac{7}{3})^2}_{\text{cluster 1}} + \underbrace{(7-8)^2 + (8-8)^2 + (9-8)^2}_{\text{cluster 2}} = \tfrac{14}{3} + 2 \approx 6.67.$$

The algorithm recovered exactly the clustering you would have drawn by hand, and it did so in two passes.



36.2.4 Why does it stop? (Correctness as a decreasing potential)

How do we know Lloyd's algorithm does not loop forever, ping-ponging between configurations? Because the cost J acts like a *potential* that can only go down, and there are only finitely many possible assignments.

Lemma 36.1 (Each step does not increase the cost)**.** *In Lloyd's algorithm, both the assignment step and the update step leave $J(c, \mu)$ unchanged or make it smaller.*

Focus

The proof rests on two "easy optimization" facts, each worth its own moment:

- **Assignment step.** With the centroids μ held *fixed*, $J = \sum_i \|x^{(i)} - \mu_{c(i)}\|^2$ is minimized over the choice of $c(i)$ by sending each point to its nearest centroid – the terms do not interact, so you minimize each one separately.
- **Update step.** With the assignment c held *fixed*, the best single point to represent a set S under *squared* distance is its mean. This is the fact below.

Lemma 36.2 (The mean minimizes squared distance)**.** *For any finite set of points $\{z_1, \dots, z_m\} \subset \mathbb{R}^d$, the function $g(\mu) = \sum_{t=1}^{m} \|z_t - \mu\|^2$ is minimized at $\mu^\star = \frac{1}{m}\sum_t z_t$, the mean.*

Proof. Work one coordinate at a time; the coordinates separate because the squared norm is a sum over coordinates. In one dimension we minimize $g(\mu) = \sum_t (z_t - \mu)^2$. This is a parabola opening upward in μ. Take the derivative and set it to zero:

$$g'(\mu) = \sum_{t=1}^{m} 2(\mu - z_t) = 2\Big(m\mu - \sum_t z_t\Big) = 0 \quad \Longrightarrow \quad \mu^\star = \frac{1}{m}\sum_t z_t.$$

Since $g''(\mu) = 2m > 0$, this critical point is the unique minimum. Doing this in every coordinate gives the vector mean. □

Proof of Lemma 36.1. The assignment step minimizes J over c with μ fixed, so it cannot raise J. The update step replaces each centroid by the mean of its cluster, which by Lemma 36.2 minimizes that cluster's contribution to J with c fixed, so it cannot raise J either. □

Theorem 36.1 (Lloyd's algorithm terminates)**.** *Lloyd's algorithm halts after finitely many rounds.*

Proof. There are at most k^n distinct assignments c. Each round either changes the assignment – in which case, by Lemma 36.1, the cost strictly drops (an assignment changes only when a point finds a strictly closer centroid) – or it does not, in which case the loop stops. Because the cost strictly decreases on every productive round and the cost is determined by the assignment, no assignment can ever recur. With finitely many assignments, the process must reach a round where nothing changes. □

Common trap

Termination is *not* the same as optimality. Lloyd's algorithm finds a *local* minimum – a configuration no single re-assignment or re-centering can improve – but possibly not the *global* best clustering. A bad random start can strand it in a poor local minimum. In fact, finding the globally optimal k-means clustering is NP-hard. This is exactly the greedy/local-search limitation you saw in earlier chapters, reappearing.

Algorithm lab

Trace a bad start. Re-run the six-point example but initialize $\mu_1 = 1$, $\mu_2 = 2$ (both centroids inside the left clump). Do the assignment step (point 1 to μ_1; everything ≥ 2 to μ_2, since it is closer to 2 than to 1), recompute the means, and keep going. Where does it settle? Compare its final cost to the 6.67 we got above. Then try $\mu_1 = 2$, $\mu_2 = 4$. You will feel viscerally why practitioners run k-means several times from different starts and keep the lowest-cost result. This restart trick, when the starts are chosen cleverly, is called **k-means++**.

Cost summary

Cost of one round of Lloyd's algorithm. The assignment step compares each of n points against each of k centroids, each comparison touching d coordinates: $\Theta(nkd)$. The update step sums each point into one centroid: $\Theta(nd)$. So a round is $\Theta(nkd)$, dominated by assignment. If the algorithm runs for T rounds, the total is $\Theta(Tnkd)$. In the worst case T can be exponential, but in practice T is small (often tens of rounds), so k-means is treated as a near-linear-time workhorse. Memory is $\Theta(nd + kd)$.

Why this matters

k-means is everywhere because it is cheap and intuitive: compressing an image to k colors (*color quantization*), grouping customers for marketing, summarizing documents, initializing more elaborate models, and compressing vectors for fast nearest-neighbor search. When an engineer says "let us just cluster it and see," they almost always mean run k-means.

36.3 Gradient descent: walking downhill on purpose

k-means minimized its cost by a clever alternation that happened to have a closed-form best move at each step. Most learning problems are not so lucky: there is no formula for the best θ, only a cost surface $J(\theta)$ we can evaluate and, crucially, *differentiate*. For those, the universal tool is **gradient descent**.

36.3.1 The gradient is the uphill arrow

Recall from calculus that the derivative $J'(\theta)$ of a one-variable function tells you its slope: if $J'(\theta) > 0$ the function is rising as θ increases, so to go *down* you should *decrease* θ. To descend, step *against* the sign of the derivative.

In many variables the derivative becomes the **gradient**, written $\nabla J(\theta)$ – the vector of partial derivatives, one per knob:

$$\nabla J(\theta) = \left(\frac{\partial J}{\partial \theta_1}, \frac{\partial J}{\partial \theta_2}, \ldots, \frac{\partial J}{\partial \theta_p} \right).$$

Intuition

At any point on the cost landscape, the gradient $\nabla J(\theta)$ points in the direction of *steepest ascent* – the compass bearing that climbs fastest. You want to go down, so you step in the *opposite* direction, $-\nabla J(\theta)$. That is the entire idea. "Gradient descent" literally means "repeatedly step a little bit in the most-downhill direction."

36.3.2 The update rule and the learning rate

You take steps of size controlled by a number $\eta > 0$ (Greek "eta"), the **learning rate** or **step size**:

$$\theta \leftarrow \theta - \eta \nabla J(\theta).$$

You repeat this until the gradient is nearly zero (the ground is flat) or you run out of patience.

Algorithm 153: Gradient-Descent

Input: differentiable cost $J : \mathbb{R}^p \to \mathbb{R}$; learning rate $\eta > 0$; iterations T
Output: a parameter vector θ with (we hope) small $J(\theta)$

initialize θ (e.g. all zeros or small random values);
for $t \leftarrow 1$ **to** T **do**
  compute the gradient $g \leftarrow \nabla J(\theta)$;
  $\theta \leftarrow \theta - \eta\, g$;
  if $\|g\|$ *is tiny* **then break** `// ground is flat: stop;`
return θ;

Common trap

The learning rate η is the temperament knob, and it is the number beginners get wrong most often.

- Too **small**: you inch downhill and it takes forever (and may stall before reaching the valley within your iteration budget).
- Too **large**: you overshoot the valley, land on the far slope *higher* than you started, overshoot back, and *diverge* – the cost explodes to infinity.

There is a Goldilocks middle. We will see the divergence concretely below.

36.3.3 A fully worked one-variable run


Take the simplest non-trivial cost, a parabola:

$$J(\theta) = (\theta - 3)^2, \qquad J'(\theta) = 2(\theta - 3).$$

The minimum is obviously at $\theta = 3$ where $J = 0$. Let us pretend we do not know that and let gradient descent find it. Start at $\theta_0 = 0$ with $\eta = 0.1$. The update is $\theta \leftarrow \theta - 0.1 \cdot 2(\theta - 3) = \theta - 0.2(\theta - 3) = 0.8\,\theta + 0.6$.

step t	θ_t	$J'(\theta_t) = 2(\theta_t - 3)$	$J(\theta_t)$
0	0.000	-6.000	9.000
1	0.600	-4.800	5.760
2	1.080	-3.840	3.686
3	1.464	-3.072	2.359
4	1.771	-2.458	1.510
5	2.017	-1.966	0.966
⋮	⋮	⋮	⋮
10	2.678	-0.644	0.104
20	2.965	-0.069	0.0012

Watch what happens: every step the derivative is negative (we are to the left of the minimum, slope going down-to-the-right), so the update *adds* to θ, nudging us rightward toward 3. The cost falls steadily. The steps shrink as we approach, because the gradient itself shrinks near the bottom – gradient descent automatically tiptoes as it nears a minimum. After 20 steps we are at 2.965, essentially home.

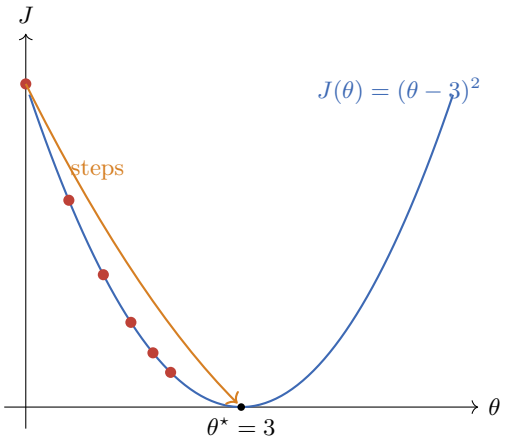

Algorithm lab

Make it diverge. Re-run the same parabola from $\theta_0 = 0$ but set $\eta = 1.1$. Now the update is $\theta \leftarrow \theta - 1.1 \cdot 2(\theta - 3) = -1.2\,\theta + 6.6$. Compute $\theta_1, \theta_2, \theta_3$. You will get 6.600, then -1.320, then 8.184 – the iterates fling *outward*, alternating sides of 3 and getting worse each time. The cost blows up. This is "η too large" with your own hands on the wheel. Find by experiment the largest η that still converges. (For $J = (\theta - 3)^2$ the boundary is $\eta = 1$; convergence needs $\eta < 1$.)

36.3.4 Convexity: when downhill is enough

Gradient descent found the bottom of the parabola because a parabola has exactly one valley. A landscape with a single bowl shape – no false valleys, no plateaus that trap you – is called **convex**. On convex costs, "keep walking downhill" is guaranteed to reach the true global minimum.

Formal

A function $J : \mathbb{R}^p \to \mathbb{R}$ is **convex** if for all θ, θ' and all $\lambda \in [0, 1]$,

$$J\big(\lambda\theta + (1-\lambda)\theta'\big) \;\le\; \lambda J(\theta) + (1-\lambda) J(\theta').$$

Geometrically: the straight line segment joining any two points on the graph never dips *below* the graph. Such a function has no local minimum that is not also global. The squared-error costs of k-means' update step and of linear models (next section) are convex in their parameters; this is why they are so friendly.

Figure 36.2 makes the contrast visible. On the left, a convex bowl: the chord between any two points stays *above* the curve, and wherever you start, downhill leads to the single global minimum. On the right, a wavy non-convex cost: the chord dips below the curve in places, and which valley you fall into now depends on where you begin.

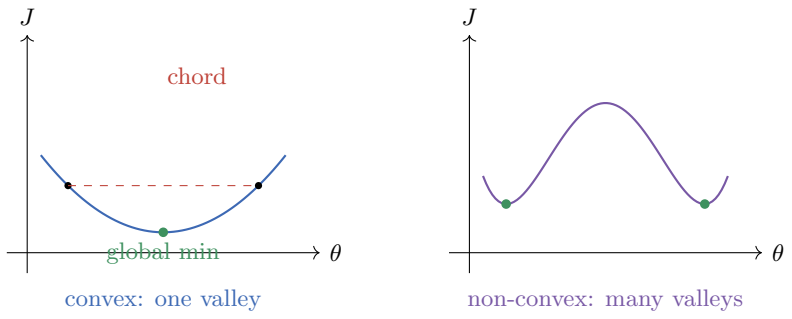


Figure 36.2: Convex versus non-convex cost landscapes. On a convex cost (left) every chord lies above the curve and downhill always reaches the single global minimum. On a non-convex cost (right) the two marked valleys are different local minima; the starting point decides which one gradient descent finds.

Walking question

Here is something to chew on while you stretch your legs. Convexity guarantees a single global valley, so gradient descent on a convex cost cannot get stuck in a bad local minimum. Yet the spectacular deep-learning models you hear about are *not* convex – their cost landscapes are wild, full of valleys. They still work astonishingly well. So: what does "learning succeeded" really mean if we never reach the global minimum? Is a "good enough" valley the honest goal? Sit with the possibility that for these problems, *finding any deep-enough valley* is the whole game, and the global minimum may not even be desirable (it might just memorize the data).

36.3.5 Batch vs. stochastic: the great speedup

When the cost is an average over n data points, $J(\theta) = \frac{1}{n}\sum_i \ell_i(\theta)$, the gradient is also an average: $\nabla J(\theta) = \frac{1}{n}\sum_i \nabla \ell_i(\theta)$. Computing it exactly means touching all n examples for *every single step*. With millions of examples that is brutal.

Intuition

You do not need the exact downhill direction – you only need a direction that is *downhill on average*. So estimate the gradient from a small random sample of the data (even a single example!) and step using that noisy estimate. Each step is now cheap, so you take many more of them. The randomness even helps you rattle out of shallow traps. This is **stochastic gradient descent (SGD)**, the engine behind essentially all modern large-scale learning.

Figure 36.3 shows the trade in one picture, looking down on the cost landscape from above (the closed curves are contours of equal cost, like a topographic map). Batch descent takes a few smooth, expensive steps straight for the minimum. SGD jitters along a noisier path – each step points only roughly downhill – but every step is so cheap that it covers far more ground per unit of work.

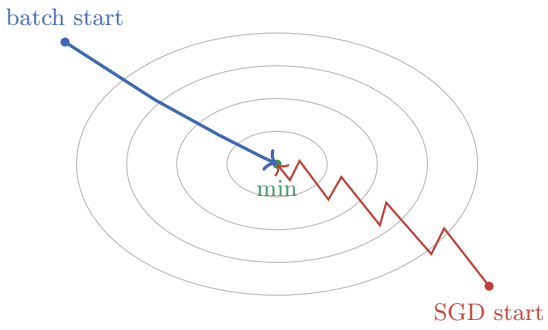


Figure 36.3: Two paths down the same bowl, drawn as a contour map. Batch gradient descent (blue) takes a few exact steps; stochastic gradient descent (red) takes many cheap, noisy steps. Per step SGD wanders, but per unit of computation it usually reaches the valley faster on large datasets.

Cost summary

Let one gradient term $\nabla \ell_i$ cost $\Theta(d)$ to evaluate.

- **Batch** gradient descent: $\Theta(nd)$ per step, T steps, $\Theta(Tnd)$ total. Each step is an *exact*

downhill move.

- **Stochastic** gradient descent with a minibatch of size b: $\Theta(bd)$ per step. With $b = 1$ that is $\Theta(d)$ per step – independent of dataset size n. The trade is noisier steps, so you usually need more of them, but each is so cheap that SGD wins decisively at scale.

36.4 The perceptron: learning a straight-line boundary

Now we put the pieces together on a genuine *supervised* problem and meet the algorithm that started it all. The **perceptron** (Rosenblatt, 1958) is a learning rule for telling two classes apart with a flat boundary. It is the ancestor of every neural network, and it is simple enough to trace by hand.

36.4.1 The setup: a linear classifier

Each example is a feature vector $x \in \mathbb{R}^d$ with a label $y \in \{-1, +1\}$ (think "cat vs. not-cat," "spam vs. not-spam"). The model is a weight vector $w \in \mathbb{R}^d$ and a bias $b \in \mathbb{R}$. It predicts

$$\hat{y}(x) = \operatorname{sign}\big(w \cdot x + b\big), \qquad w \cdot x = \sum_{j=1}^{d} w_j x_j.$$

The set of points where $w \cdot x + b = 0$ is a flat boundary – a line in 2D, a plane in 3D, a **hyperplane** in general. Points on one side get $+1$, the other side -1. Training means *finding* a (w, b) whose boundary puts the two classes on opposite sides.

Focus

A convenient trick removes the bias from the bookkeeping: glue a constant 1 onto every input, $\tilde{x} = (x_1, \ldots, x_d, 1)$, and fold b into the weights as the last coordinate, $\tilde{w} = (w_1, \ldots, w_d, b)$. Then $w \cdot x + b = \tilde{w} \cdot \tilde{x}$, and we only ever update one vector. We use this trick in the trace below.

36.4.2 The learning rule

The perceptron's update is almost comically simple. Loop through the examples. When the current weights classify an example correctly, do nothing. When they get one *wrong*, nudge the weights toward fixing that example:

$$\text{if } y^{(i)}\,(w \cdot x^{(i)}) \le 0 \;\text{ (a mistake)}, \qquad w \leftarrow w + y^{(i)}\,x^{(i)}.$$

Algorithm 154: PERCEPTRON (with the bias folded into w)

Input: examples $(x^{(1)}, y^{(1)}), \dots, (x^{(n)}, y^{(n)})$ with $y^{(i)} \in \{-1, +1\}$; max passes T
Output: weight vector w separating the classes (if one exists)

```
w ← 0;
for pass ← 1 to T do
    mistakes ← 0;
    for i ← 1 to n do
        if y^(i) (w · x^(i)) ≤ 0 then
            w ← w + y^(i) x^(i);
            mistakes ← mistakes + 1;
    if mistakes = 0 then break                    // a full clean pass: done;
return w;
```

Intuition

Why does adding $y^{(i)}x^{(i)}$ fix a mistake? Suppose the true label is $+1$ but $w \cdot x^{(i)}$ came out ≤ 0 (wrong). We add $x^{(i)}$ to w. The new score on that same point becomes $(w + x^{(i)}) \cdot x^{(i)} = w \cdot x^{(i)} + \|x^{(i)}\|^2$, which is *larger* than before – pushed in the $+$ direction, exactly where we wanted it. For a -1 example we subtract $x^{(i)}$ and the score drops. Every update moves the boundary so the offending point is "more correct."

36.4.3 A fully worked trace

Let us separate two classes in the plane. Using the bias trick, each input is $(x_1, x_2, 1)$ and $w = (w_1, w_2, w_3)$. Four examples:

i	$x^{(i)} = (x_1, x_2, 1)$	$y^{(i)}$
1	(2, 1, 1)	$+1$
2	(0, -1, 1)	-1
3	(-1, 0, 1)	-1
4	(1, 1, 1)	$+1$

Start $w = (0, 0, 0)$. With $w = \mathbf{0}$ the score is 0, and $y \cdot 0 = 0 \le 0$, so the very first point counts as a mistake.

Example 1 $(2, 1, 1)$, $y = +1$: score $w \cdot x = 0 \le 0$ – mistake. Update $w \leftarrow (0, 0, 0) + (+1)(2, 1, 1) = (2, 1, 1)$.

Example 2 $(0, -1, 1)$, $y = -1$: score $(2, 1, 1) \cdot (0, -1, 1) = 0 - 1 + 1 = 0$, and $y \cdot 0 = 0 \le 0$ – mistake. Update $w \leftarrow (2, 1, 1) + (-1)(0, -1, 1) = (2, 2, 0)$.


Example 3 $(-1, 0, 1)$, $y = -1$: score $(2, 2, 0) \cdot (-1, 0, 1) = -2 + 0 + 0 = -2$, and $y \cdot (-2) = (-1)(-2) = 2 > 0$ – correct! No update.

Example 4 $(1, 1, 1)$, $y = +1$: score $(2, 2, 0) \cdot (1, 1, 1) = 2 + 2 + 0 = 4$, and $y \cdot 4 = 4 > 0$ – correct! No update.

That ends pass 1 with $w = (2, 2, 0)$ and two mistakes. Pass 2: re-check all four.

i	$x^{(i)}$	$y^{(i)}$	score $w \cdot x$	$y \cdot$ score
1	$(2, 1, 1)$	$+1$	$4 + 2 + 0 = 6$	$6 > 0$ correct
2	$(0, -1, 1)$	-1	$0 - 2 + 0 = -2$	$2 > 0$ correct
3	$(-1, 0, 1)$	-1	$-2 + 0 + 0 = -2$	$2 > 0$ correct
4	$(1, 1, 1)$	$+1$	$2 + 2 + 0 = 4$	$4 > 0$ correct

Zero mistakes on a full pass – we stop. The final classifier is $w = (2, 2, 0)$, i.e. predict $\text{sign}(2x_1 + 2x_2)$, whose boundary is the line $x_1 + x_2 = 0$. Check it against the data: it really does put the two $+$ points on one side and the two $-$ points on the other.

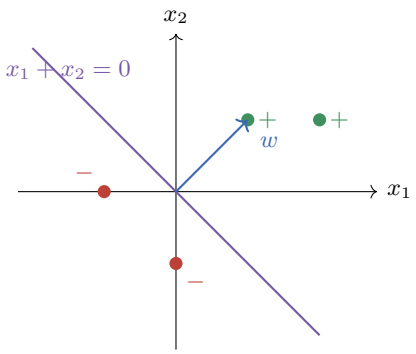

Notice the weight vector $w = (2, 2)$ (dropping the bias coordinate) points *perpendicular* to the boundary, toward the positive side. That is no accident: w is always the normal direction of the hyperplane it defines.

36.4.4 Why it works: the perceptron convergence theorem

The remarkable fact, and the reason the perceptron caused such excitement, is that if the data *can* be separated by a hyperplane at all, this dumb little update rule is *guaranteed* to find one – in a bounded number of mistakes that does not depend on how many examples there are.

Formal

The data is **linearly separable with margin** $\gamma > 0$ if there is a unit weight vector $w^\star$ ($\|w^\star\| = 1$) such that every example satisfies $y^{(i)}(w^\star \cdot x^{(i)}) \geq \gamma$. Let $R = \max_i \|x^{(i)}\|$ be the radius of the data.

Theorem 36.2 (Perceptron convergence; Novikoff, 1962)**.** *If the data is linearly separable with margin γ and radius R, the perceptron algorithm makes at most $\big(R/\gamma\big)^2$ mistakes before it classifies every example correctly (and then halts).*

Proof. We track two quantities about w as mistakes accumulate; let w_k be the weights after the k-th mistake, starting from $w_0 = \mathbf{0}$.

Lower bound (the weights line up with $w^\star$). On a mistake using example (x, y) we set $w_k = w_{k-1} + y\,x$. Dot with $w^\star$:

$$w^\star \cdot w_k = w^\star \cdot w_{k-1} + y\,(w^\star \cdot x) \;\geq\; w^\star \cdot w_{k-1} + \gamma,$$

using the margin condition. After k mistakes, $w^\star \cdot w_k \geq k\gamma$.

Upper bound (the weights cannot grow too fast). Compute the squared length after the update:

$$\|w_k\|^2 = \|w_{k-1}\|^2 + 2y\,(w_{k-1} \cdot x) + \|x\|^2.$$

Because we only update on a *mistake*, we have $y\,(w_{k-1} \cdot x) \leq 0$, and $\|x\|^2 \leq R^2$, so $\|w_k\|^2 \leq \|w_{k-1}\|^2 + R^2$. After k mistakes, $\|w_k\|^2 \leq kR^2$.

Squeeze. By the Cauchy–Schwarz inequality (and $\|w^\star\| = 1$), $w^\star \cdot w_k \leq \|w_k\|$. Combine the two bounds:

$$k\gamma \;\leq\; w^\star \cdot w_k \;\leq\; \|w_k\| \;\leq\; \sqrt{k}\,R.$$

Thus $k\gamma \leq \sqrt{k}\,R$, i.e. $\sqrt{k} \leq R/\gamma$, giving $k \leq (R/\gamma)^2$. The number of mistakes is bounded, so after finitely many the algorithm makes a clean pass and stops. □

Focus

Read the bound $(R/\gamma)^2$ slowly. It says nothing about n, the number of examples, and nothing about d, the dimension. It depends only on the *geometry*: how big the data is (R) versus how comfortably it can be split (γ). Wide margin ⇒ few mistakes ⇒ fast learning. This "margin" idea grew up to become the central quantity of *support vector machines*, the dominant classifiers of the 1990s and 2000s.

Common trap

The convergence theorem assumes the data *is* separable. If it is not – if no straight boundary can split the classes – the perceptron never makes a clean pass and loops until it hits T, weights wobbling forever. The historical shock came when Minsky and Papert (1969) pointed out that even the tiny XOR function is not linearly separable, so a single perceptron *cannot* learn it. That critique froze the field for years. The escape – stacking perceptrons into layers and training them with gradient descent – is the neural network, and it is why Section 36.3 matters so much.

36.4.5 The perceptron as gradient descent

The two halves of this chapter are not separate tricks. The perceptron update *is* a stochastic gradient step on a particular cost. Define the per-example **perceptron loss**

$$\ell(w; x, y) = \max\big(0,\; -y\,(w \cdot x)\big),$$

which is 0 when the example is classified correctly (with positive score) and grows linearly with how wrong you are otherwise. Its gradient with respect to w is 0 on a correct example and $-y\,x$ on a mistake. So a stochastic gradient *descent* step with learning rate 1, $w \leftarrow w - \eta\,\nabla\ell = w + y\,x$ on mistakes, is exactly Rosenblatt's rule. The 1958 perceptron and modern SGD are the same algorithm wearing different clothes.

Why this matters

Everything in this chapter is load-bearing in the systems you use daily. A spam filter is a linear classifier trained with SGD. The recommendation feed that clusters users and items leans on k-means-style grouping. A large language model is a colossal stack of differentiable layers whose billions of parameters are tuned by exactly the gradient-descent loop in Section 36.3 – just with a more elaborate J and a lot more hardware. You now understand the skeleton of all of it: define a cost, take the gradient, step downhill, repeat.

36.5 Connections to the rest of the book

Step back and notice how little was truly new.

- **Greedy and local search** (the chapters on greedy algorithms and on heuristics). Lloyd's algorithm is local search: each step takes the locally best move and may land in a local optimum. The "restart-from-several-seeds" fix is the same medicine you used there.
- **Loop invariants and potentials** (correctness chapters). We proved k-means halts with a strictly-decreasing potential J, the identical technique used for amortized analysis and for shortest-path relaxation. We proved perceptron convergence with a two-sided squeeze on a growing quantity – a potential argument in disguise.
- **Recurrences and cost analysis** (the analysis chapters). We derived per-round costs $\Theta(nkd)$ and $\Theta(Tnd)$ from first principles, not by decree, just as you derived $T(n) = 2T(n/2) + \Theta(n)$ for mergesort.
- **Linear algebra and geometry.** Dot products, norms, hyperplanes, and projections – the quiet machinery of the perceptron – are the same objects that power computational geometry and numerical methods.

Pause

If only one idea survives the week, let it be this loop: *(1) write a number that measures wrongness; (2) find the direction that makes it smaller; (3) take a small step; (4) repeat.* Clustering, classification, regression, and the headline-grabbing neural networks are all variations on those four lines. Algorithms that learn are still just algorithms – with a cost function in the driver's seat.

36.6 Exercises

Exercise 36.1 (Warmup: assign and update)**.** Run one full round of Lloyd's algorithm by hand on the one-dimensional points $0, 1, 10, 11, 12$ with $k = 2$ and initial centroids $\mu_1 = 0$, $\mu_2 = 1$. Show the assignment, then the updated centroids. Run a second round. Does the assignment change? Report the final clustering and its cost J.

Exercise 36.2 (The mean, again)**.** Prove that for points $z_1, \ldots, z_m$ on the real line, the value μ that minimizes $\sum_t |z_t - \mu|$ (note: *absolute* value, not squared) is a *median*, not the mean. Explain in one sentence why k-means therefore uses the mean while k-medians uses the median.

Exercise 36.3 (Gradient descent on a parabola)**.** For $J(\theta) = (\theta - 5)^2$ with start $\theta_0 = 0$ and learning rate $\eta = 0.25$, write the closed-form update $\theta_{t+1} = a\theta_t + c$ and compute $\theta_1, \theta_2, \theta_3$. Then find, by solving the recurrence, a formula for θ_t and confirm $\theta_t \to 5$.

Exercise 36.4 (The edge of stability)**.** For $J(\theta) = (\theta - c)^2$, show that the gradient-descent update can be written $\theta_{t+1} - c = (1 - 2\eta)(\theta_t - c)$. Conclude that the iterates converge to c if and only if $|1 - 2\eta| < 1$, i.e. $0 < \eta < 1$, and that $\eta = 0.5$ jumps to the exact minimum in one step. Explain the behavior at $\eta = 1$.

Exercise 36.5 (Trace the perceptron)**.** Using the bias trick (append a 1 to each input), run the perceptron from $w = \mathbf{0}$ on: $(1, 0; +1)$, $(0, 1; +1)$, $(-1, -1; -1)$ (here the semicolon separates features from label). Show every score and every update. How many mistakes occur before a clean pass? Draw the final boundary.

Exercise 36.6 (Why $y\,x$?)**.** Suppose example (x, y) with $y = +1$ is currently misclassified, so $w \cdot x \le 0$. After the update $w' = w + x$, show the new score increased by exactly $\|x\|^2$. Then show that for a $y = -1$ mistake the update $w' = w - x$ *decreases* the score by $\|x\|^2$. Why does this not guarantee the point is now correctly classified after a single update?

Exercise 36.7 (Margin and mistakes)**.** Two datasets are each linearly separable. Dataset A has radius $R = 2$ and margin $\gamma = 1$; dataset B has radius $R = 10$ and margin $\gamma = 0.5$. Use Theorem 36.2 to bound the number of perceptron mistakes on each. Which dataset is "harder" for the perceptron, and by what factor?

Exercise 36.8 (XOR is not linearly separable)**.** The XOR data is $(0, 0; -1)$, $(1, 1; -1)$, $(1, 0; +1)$, $(0, 1; +1)$. Suppose a separating $w = (w_1, w_2)$ and bias b existed. Write the four inequalities $y^{(i)}(w \cdot x^{(i)} + b) > 0$ and derive a contradiction. Conclude that no single perceptron can learn XOR.

Exercise 36.9 (Batch vs. stochastic cost)**.** A dataset has $n = 10^6$ examples in $d = 100$ dimensions. Estimate the number of multiply-add operations for one *batch* gradient step versus one *stochastic* step with minibatch size $b = 32$. If a fixed compute budget allows 10^9 multiply-adds, roughly how many steps of each can you afford?

Exercise 36.10 (Challenge: a non-convex trap)**.** Consider $J(\theta) = \theta^4 - 4\theta^2 + \theta$. Find $J'(\theta)$ and argue (by examining sign changes) that J has two local minima. Pick two starting points for gradient descent that you predict will converge to *different* minima, and explain your reasoning geometrically. This is the simplest taste of why neural-network training depends on initialization.

Exercise 36.11 (Challenge: k-means is a coordinate descent)**.** Explain why Lloyd's algorithm can be viewed as *alternating minimization*: it minimizes $J(c, \mu)$ over c with μ fixed, then over μ with c fixed, forever alternating. Using this view, give a one-paragraph argument for why the cost sequence $J_0 \ge J_1 \ge J_2 \ge \cdots$ is monotone and bounded below by 0, hence convergent. Why does convergence of the *cost* not by itself prove the *assignment* stops changing?

Part VIII

Mathematical Background

Chapter 37

Appendix: Summations

You have already met summations everywhere in this book. Every time you wrote "the loop runs once per element, and the i-th pass costs about i steps," and then asked "so how much in total?", you were really asking for a *summation*. The analysis of almost every algorithm bottoms out in adding a list of numbers together and asking how big the answer is.

This appendix is a toolbox. It collects the handful of sums that show up again and again — arithmetic, geometric, harmonic — proves the formulas you have been quoting, and then teaches you the three reliable *techniques* for sums you do not have a formula for: telescoping, splitting, and bounding by an integral. By the end you should be able to look at any of the recurrences in this book, expand it into a sum, and squeeze a clean Θ out of it.

Focus

A summation is just repeated addition with a name. The skill is not adding — it is recognizing the *shape* of a sum so you can replace a loop's worth of work with a single closed-form expression or a tight bound.

37.1 Notation: what $\sum$ actually says

Let us be very explicit, because sloppy reading of $\sum$ causes more grief than the arithmetic itself. The expression

$$\sum_{k=1}^{n} a_k \;=\; a_1 + a_2 + a_3 + \cdots + a_n$$

means: "start the counter k at 1; for each integer value of k up to and including n, compute the *term* a_k; add all those terms together." The letter k is the *index of summation*, 1 is the *lower limit*, n is the *upper limit*, and a_k is the term, sometimes called the *summand*.

Three things trip people up, so pin them down now.

- **The index is a dummy.** $\sum_{k=1}^{n} a_k$ and $\sum_{i=1}^{n} a_i$ and $\sum_{j=1}^{n} a_j$ are the *same number*. The index name vanishes after you add; it never escapes the sum.
- **An empty sum is 0.** If the upper limit is below the lower limit, for example $\sum_{k=1}^{0} a_k$, there

are no terms, and the convention is that the total is 0. (Likewise an empty *product* is 1.) This is not a special case to fear; it is the choice that makes formulas keep working at the boundary.

- **Count the terms.** The sum $\sum_{k=m}^{n}$ has exactly $n - m + 1$ terms, *not* $n - m$. From $k = 3$ to $k = 7$ inclusive is $7 - 3 + 1 = 5$ terms: $3, 4, 5, 6, 7$. Off-by-one errors in term-counting are the number-one source of wrong constants.

Common trap

"$\sum_{k=1}^{n} 1 = 1$." No. The summand happens to be the constant 1, but you still add it once per value of k, so $\sum_{k=1}^{n} 1 = n$. A constant summand c gives $\sum_{k=1}^{n} c = c\,n$. Always ask "how many terms?" before you ask "what is each term?".

37.1.1 Two properties you will use constantly

Summation is *linear*, which is a fancy way of saying you can pull constants out and split sums apart. For any constant c and any terms a_k, b_k,

$$\sum_{k=1}^{n}(c\,a_k + b_k) \;=\; c\sum_{k=1}^{n} a_k \;+\; \sum_{k=1}^{n} b_k.$$

That is the whole rule. Both halves follow from the commutativity and associativity of ordinary addition — you are allowed to reorder and regroup a finite list of numbers however you like. Linearity is what lets you turn a messy summand into a combination of sums you already know.

A second move, *re-indexing* (also called shifting), changes which value the counter starts at without changing the total. If you substitute $j = k - 1$, then when k runs from 1 to n, the new index j runs from 0 to $n - 1$:

$$\sum_{k=1}^{n} a_k \;=\; \sum_{j=0}^{n-1} a_{j+1}.$$

Same terms, relabelled. Re-indexing is the trick that makes telescoping and geometric-series manipulations work; we will lean on it below.

Example 37.1 (Linearity in action)**.** Suppose you need $\sum_{k=1}^{n}(3k + 2)$. Do not panic and do not expand by hand. Split it:

$$\sum_{k=1}^{n}(3k+2) = 3\sum_{k=1}^{n} k + \sum_{k=1}^{n} 2 = 3 \cdot \frac{n(n+1)}{2} + 2n,$$

using the arithmetic-series formula we prove next. For $n = 4$ this is $3 \cdot 10 + 8 = 38$, and indeed $5 + 8 + 11 + 14 = 38$. The structure did the work.

37.2 The arithmetic series

The most fundamental sum in algorithm analysis is $1 + 2 + 3 + \cdots + n$. It is what you get when a loop's inner work grows by one each pass — selection sort, insertion sort's worst case, the nested loops of a naive comparison routine. Its closed form is the one formula in this appendix you should be able to write in your sleep.

Intuition

Picture the numbers 1 through n written left to right, then the *same* numbers written right to left underneath:

$$\begin{array}{cccccc} 1 & 2 & 3 & \cdots & n-1 & n \\ n & n-1 & n-2 & \cdots & 2 & 1 \end{array}$$

Each *column* adds to $n+1$. There are n columns, so both rows together total $n(n+1)$. But the two rows are the same sum, so one row is half of that. That is the legendary "fold the list in half" trick, attributed to a young Gauss, and it *is* the proof.

Theorem 37.1 (Sum of the first n integers)**.** *For every integer $n \geq 0$,*

$$\sum_{k=1}^{n} k \;=\; \frac{n(n+1)}{2}.$$

Proof. We argue by induction on n, which mirrors the way a loop builds the sum one term at a time. *Base case:* for $n = 0$ the sum is empty, equal to 0, and the formula gives $\frac{0\cdot 1}{2} = 0$. They agree.

Inductive step: assume $\sum_{k=1}^{n} k = \frac{n(n+1)}{2}$ for some $n \geq 0$. Then add the next term $n+1$:

$$\sum_{k=1}^{n+1} k = \Big(\sum_{k=1}^{n} k\Big) + (n+1) = \frac{n(n+1)}{2} + (n+1) = (n+1)\cdot\frac{n+2}{2} = \frac{(n+1)\big((n+1)+1\big)}{2}.$$

That is exactly the formula with n replaced by $n+1$, so by induction it holds for all $n \geq 0$. □

The same fold-in-half idea works for *any* arithmetic series — one whose terms step up by a constant difference d. If the first term is a and there are m terms, the last term is $a + (m-1)d$, and

$$\sum_{k=0}^{m-1} (a + kd) \;=\; m \cdot \underbrace{\frac{(\text{first}) + (\text{last})}{2}}_{\text{average term}} \;=\; \frac{m\big(2a + (m-1)d\big)}{2}.$$

Read it as "number of terms times the average of the first and last." That sentence is worth more than the formula, because it survives even when you have forgotten the algebra.

Example 37.2 (Tracing a nested loop)**.** Consider this fragment, the heart of selection sort:

```
for i = 1 to n:
    for j = i to n:
        do one unit of work
```

The inner loop runs $n - i + 1$ times when the outer index is i. Total work:

$$\sum_{i=1}^{n} (n - i + 1) = \sum_{t=1}^{n} t = \frac{n(n+1)}{2},$$

where we re-indexed with $t = n - i + 1$ (as i goes $1 \to n$, t goes $n \to 1$, the same set of values). So the running time is $\Theta(n^2)$ — and now you know the leading constant is $\frac{1}{2}$, not 1.

Why this matters

Why care about the $\frac{1}{2}$? Because constants decide real races. Two $\Theta(n^2)$ sorts can differ by $2\times$ in wall-clock time purely from whether the inner loop is $\sum i$ or $\sum 2i$. Asymptotics tell you which algorithms to throw away; summation constants tell you which of the survivors to ship.

37.2.1 Sums of squares and higher powers

One step up in difficulty is the sum of squares, which appears whenever the inner cost itself grows quadratically (think of summing the comparison counts in some divide-and-combine routines):

$$\sum_{k=1}^{n} k^2 \;=\; \frac{n(n+1)(2n+1)}{6}.$$

You can prove it by the same induction; the bookkeeping is heavier but the idea is identical. The pattern continues: $\sum_{k=1}^{n} k^p$ is a polynomial in n of degree $p+1$ with leading term $\frac{n^{p+1}}{p+1}$. That single fact —

$$\sum_{k=1}^{n} k^p \;=\; \Theta\big(n^{p+1}\big) \quad \text{for any fixed } p \geq 0$$

— is usually all an algorithm analysis needs, and in Section 37.5 we will see *why* the $\frac{1}{p+1}$ leading constant has to be there, using nothing but the area under a curve.

37.3 The geometric series

The second pillar is the geometric series, where each term is a fixed ratio x times the one before: $1, x, x^2, x^3, \ldots$. This is the sum behind binary representations, doubling arrays, balanced-tree level counts, and the "merge" levels of merge sort. It behaves *completely differently* depending on whether $x < 1$ or $x > 1$, and understanding that split is the single most useful thing in this appendix.

Theorem 37.2 (Finite geometric series)**.** *For any real $x \neq 1$ and integer $n \geq 0$,*

$$\sum_{k=0}^{n} x^k \;=\; 1 + x + x^2 + \cdots + x^n \;=\; \frac{x^{n+1} - 1}{x - 1}.$$

Proof. This is the prettiest *telescoping* argument in the book, so savour it. Call the sum $S = \sum_{k=0}^{n} x^k$. Multiply both sides by x and re-index:

$$xS = \sum_{k=0}^{n} x^{k+1} = \sum_{j=1}^{n+1} x^j = x + x^2 + \cdots + x^{n+1}.$$

Now subtract. Almost every term cancels — the $x, x^2, \ldots, x^n$ appear in both S and xS:

$$xS - S = x^{n+1} - x^0 = x^{n+1} - 1, \qquad \text{so} \qquad S(x-1) = x^{n+1} - 1.$$

Divide by $x - 1$ (legal because $x \neq 1$) to finish. The trick was to create a *shifted copy* of the sum so that subtracting collapses it. □

Focus

Memorize the proof move, not just the answer: *multiply by the ratio, shift, subtract, watch the middle cancel.* You will reuse it for sums like $\sum k\,x^k$ that have no formula on the tip of your tongue.

37.3.1 The two regimes: shrinking vs. growing

Everything interesting about geometric series lives in one question: is the ratio x less than 1 or greater than 1?

Shrinking ($0 < x < 1$). The terms get smaller and the sum *converges* even if you let $n \to \infty$. Take the limit of the formula: since $x^{n+1} \to 0$,


$$\sum_{k=0}^{\infty} x^k \;=\; \frac{1}{1-x}.$$

The headline consequence for algorithms: a shrinking geometric sum is *dominated by its first term.* For instance $\sum_{k=0}^{\infty}(1/2)^k = 2$, and the very first term is 1 — the entire infinite tail only adds another 1. So when costs halve at each level, the *top* level pays for everything, up to a constant factor.

Growing ($x > 1$). Now the terms blow up and the sum is *dominated by its last term.* From the formula,

$$\sum_{k=0}^{n} x^k = \frac{x^{n+1}-1}{x-1} \le \frac{x^{n+1}}{x-1} = x^n \cdot \frac{x}{x-1} = \Theta\big(x^n\big).$$

The last term x^n already is $\Theta(x^n)$, and everything below it adds only a constant multiple. So when costs double at each level, the *bottom* level pays for everything, up to a constant factor.

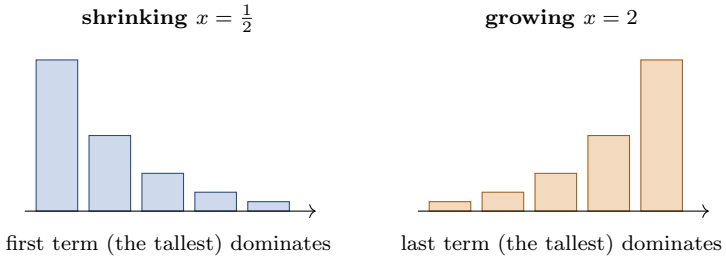

Each bar is one term x^k, drawn left to right as k increases. When $x < 1$ the bars shrink and the leftmost (first) bar towers over the rest; when $x > 1$ they grow and the rightmost (last) bar does. In both cases the tallest bar alone is a constant fraction of the whole sum — that is exactly what "dominated by one term, up to a constant factor" means.

Intuition

This "first term wins" / "last term wins" dichotomy is the secret engine of the Master Theorem. A recursion tree has geometric per-level costs; whether the root or the leaves dominate is *exactly* the question of whether the ratio is below or above 1. If the per-level cost shrinks, the root wins (case akin to $\Theta(f(n))$); if it grows, the leaves win (case akin to $\Theta(n^{\log_b a})$); if it stays

flat ($x = 1$), every level costs the same and you pay an extra factor of the number of levels, $\Theta(\log n)$.

Example 37.3 (Building a dynamic array)**.** A growable array that *doubles* its capacity copies $1, 2, 4, \ldots, n$ elements over its lifetime as it grows to size n. The total copy work is a *growing* geometric series:

$$1 + 2 + 4 + \cdots + n = \sum_{k=0}^{\log_2 n} 2^k = 2^{\log_2 n + 1} - 1 = 2n - 1.$$

Last term wins: the grand total is just under $2n$, even though you resized $\log_2 n$ times. Spread over n insertions, that is $O(1)$ *amortized* cost per insertion. The doubling strategy is cheap precisely because the geometric series is dominated by its final, biggest copy.

37.4 The harmonic series

The third pillar is subtler and, frankly, surprising the first time you meet it. The *harmonic series* is

$$H_n = \sum_{k=1}^{n} \frac{1}{k} = 1 + \frac{1}{2} + \frac{1}{3} + \cdots + \frac{1}{n}.$$

Each term shrinks toward 0, so you might guess — as with a shrinking geometric series — that the total settles to a finite limit. It does not. H_n grows without bound, just *very* slowly, like $\ln n$.

Intuition

Group the terms in blocks whose sizes double: $\{1\}$, $\{\frac{1}{2}\}$, $\{\frac{1}{3}, \frac{1}{4}\}$, $\{\frac{1}{5}, \ldots, \frac{1}{8}\}$, and so on. In the block ending at $\frac{1}{2^m}$ there are 2^{m-1} terms, each at least $\frac{1}{2^m}$, so the block sums to at least $2^{m-1} \cdot \frac{1}{2^m} = \frac{1}{2}$. Every doubling block contributes at least another $\frac{1}{2}$. To get a total of T you need about $2T$ doubling blocks, i.e. about 2^{2T} terms. The sum grows, but you must go exponentially far to gain a constant — that is logarithmic growth, seen from the inside.

Theorem 37.3 (Harmonic growth)**.** $H_n = \ln n + \Theta(1)$. *More precisely,* $\ln n < H_n \le \ln n + 1$, *and in fact* $H_n = \ln n + \gamma + o(1)$ *where* $\gamma \approx 0.5772$ *is the Euler–Mascheroni constant. For algorithm analysis the headline is simply*

$$H_n = \Theta(\log n).$$


We will prove the $\ln n < H_n \le \ln n + 1$ bounds cleanly in the next section using integrals — it is the cleanest possible illustration of the integral-bounding technique.

Why this matters

The harmonic series is the running time of the *average case* of quicksort and of building a randomized binary search tree, and it governs the "coupon collector" problem (how many random draws to see all n coupons: about $nH_n \approx n \ln n$). Whenever a cost looks like "$1 + \frac{1}{2} + \frac{1}{3} + \cdots$," you should immediately think $\Theta(\log n)$ and move on.

37.5 Bounding a sum by an integral

Here is the most *general* tool in the appendix, the one that rescues you when no closed form exists. The idea is geometric and you should carry the picture in your head forever: a sum $\sum f(k)$ is a row of rectangles, each of width 1 and height $f(k)$, and the integral $\int f(x)\,dx$ is the smooth area under the curve f. If you nest the rectangles against the curve correctly, the integral *traps* the sum from above and below.

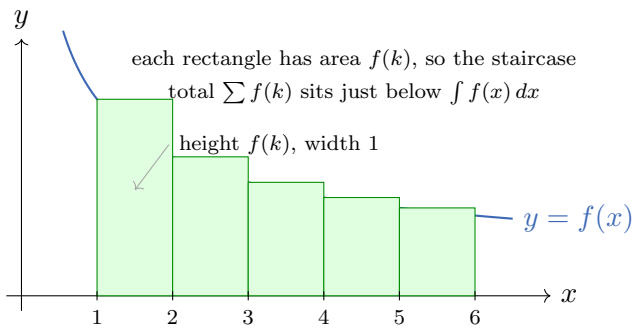

The picture above shows the easy half for a decreasing f: each rectangle of height $f(k)$ tucks completely *under* the curve, so the staircase area $\sum f(k)$ can never exceed the smooth area $\int f(x)\,dx$ that covers it. Slide the same rectangles one step the other way and they poke *above* the curve, giving the matching bound from the other side. That single picture — rectangles trapped between two slices of the curve — is the whole technique.

The rule has two halves, one for increasing functions and one for decreasing functions. State it once and you never have to rederive it.

Formal

Integral bounds. Let f be *monotone* on the relevant range.

- If f is *increasing*, then

$$\int_{m-1}^{n} f(x)\,dx \;\le\; \sum_{k=m}^{n} f(k) \;\le\; \int_{m}^{n+1} f(x)\,dx.$$

- If f is *decreasing*, then

$$\int_{m}^{n+1} f(x)\,dx \;\le\; \sum_{k=m}^{n} f(k) \;\le\; \int_{m-1}^{n} f(x)\,dx.$$

The mantra: *the rectangle of height $f(k)$ sits between the lower and upper slices of curve next to it.* You rarely need to remember which inequality is which — just draw the rectangles against the curve and read off the picture.

Example 37.4 (Why $\sum k^p = \Theta(n^{p+1})$)**.** Let $f(x) = x^p$ for a fixed $p \ge 0$; it is increasing, so

$$\int_{0}^{n} x^p\,dx \;\le\; \sum_{k=1}^{n} k^p \;\le\; \int_{1}^{n+1} x^p\,dx.$$

The left integral is $\frac{n^{p+1}}{p+1}$ and the right is $\frac{(n+1)^{p+1}-1}{p+1}$. Both are $\Theta(n^{p+1})$ with leading constant $\frac{1}{p+1}$, so

$$\sum_{k=1}^{n} k^p = \frac{n^{p+1}}{p+1} + \Theta(n^p) = \Theta\big(n^{p+1}\big).$$

No clever induction, no guessing the polynomial — the area under x^p *is* the answer.

Example 37.5 (Pinning down the harmonic series)**.** Now take $f(x) = 1/x$, which is decreasing. The decreasing rule gives

$$\int_1^{n+1} \frac{dx}{x} \;\le\; \sum_{k=1}^{n} \frac{1}{k} \;\le\; 1 + \int_1^{n} \frac{dx}{x}.$$

(The extra "1" on the right is the first term $f(1) = 1$, peeled off so the remaining terms line up under the decreasing curve from 1 to n.) Since $\int_1^t \frac{dx}{x} = \ln t$, we get

$$\ln(n+1) \;\le\; H_n \;\le\; 1 + \ln n.$$

So H_n is squeezed between $\ln n$ and $\ln n + 1$: it is $\ln n$ plus a number that never escapes the interval $[0, 1]$. That is the promised proof of Theorem 37.3, and it is genuinely just "the staircase hugs the logarithm."

Walking question

Take $f(x) = \ln x$ on a walk. Use the integral bounds to show that $\sum_{k=1}^{n} \ln k$ — which is $\ln(n!)$ — is $\Theta(n \ln n)$. You have just derived the asymptotic heart of *Stirling's formula*, the reason comparison sorting cannot beat $n \log n$. (Hint: $\int \ln x \, dx = x \ln x - x$.)

37.6 Telescoping: when the middle cancels

A *telescoping* sum is one whose terms are built as a difference $a_k - a_{k-1}$ (or $a_{k+1} - a_k$), so that consecutive pieces annihilate and only the two endpoints survive — like a collapsing spyglass. Formally,

$$\sum_{k=1}^{n} \big(a_k - a_{k-1}\big) \;=\; a_n - a_0.$$

You already saw a disguised telescope: the geometric-series proof subtracted S from xS and watched the middle collapse. Telescoping is your friend whenever the summand looks like a difference, and your goal whenever you can engineer one.


Example 37.6 (A partial-fractions telescope)**.** Evaluate $\displaystyle\sum_{k=1}^{n} \frac{1}{k(k+1)}$. The key observation is the partial-fraction split

$$\frac{1}{k(k+1)} = \frac{1}{k} - \frac{1}{k+1}.$$

So the sum telescopes:

$$\sum_{k=1}^{n} \left(\frac{1}{k} - \frac{1}{k+1}\right) = \left(1 - \tfrac{1}{2}\right) + \left(\tfrac{1}{2} - \tfrac{1}{3}\right) + \cdots + \left(\tfrac{1}{n} - \tfrac{1}{n+1}\right) = 1 - \frac{1}{n+1}.$$

Every interior fraction is created once with a $+$ and destroyed once with a $-$. The diagram below shows the bookkeeping: each $-\frac{1}{k+1}$ from one term pairs off against the $+\frac{1}{k+1}$ from the next, leaving only the very first $+1$ and the very last $-\frac{1}{n+1}$ unmatched.



The closed form $1 - \frac{1}{n+1}$ is exact, and it tends to 1 as $n \to \infty$. For $n = 3$: $\frac{1}{2} + \frac{1}{6} + \frac{1}{12} = \frac{9}{12} = \frac{3}{4}$, and the formula gives $1 - \frac{1}{4} = \frac{3}{4}$.

Common trap

Telescoping fails the moment a term does *not* have a matching opposite. If your summand is $a_{k+1} - a_{k-1}$ (a gap of two), the cancellation leaves *two* terms at each end, not one. Always write out the first three and last three terms before declaring victory — the surviving terms are exactly those that lack a partner.

37.7 A field guide to the recurrences in this book

Every technique above earns its keep when you unroll a recurrence into a sum. Here is the workflow, then the catalogue.

Algorithm lab

The unroll-and-sum recipe.

1. Write $T(n)$ in terms of smaller inputs.
2. Substitute the recurrence into itself a few times until you see the pattern of per-level costs.
3. Express the total as a *sum over levels* (or over i).
4. Identify the sum's shape — arithmetic, geometric, or harmonic — and apply the matching formula or bound.

Almost every analysis in this book is an instance of this recipe.

37.7.1 Subtract-a-constant recurrences → arithmetic sums

A recurrence like $T(n) = T(n-1) + n$ (the cost of inserting into the back of a sorted list, summed over a build) unrolls into the arithmetic series:

$$T(n) = T(0) + \sum_{k=1}^{n} k = \frac{n(n+1)}{2} = \Theta(n^2).$$


More generally $T(n) = T(n-1) + f(n)$ telescopes to $T(0) + \sum_{k=1}^{n} f(k)$, and you finish with the integral bound on $\sum f(k)$. Notice this is literally telescoping (Section 37.6) followed by a sum.

37.7.2 Halve-the-input recurrences → geometric sums

A recurrence like $T(n) = 2\,T(n/2) + n$ (merge sort) unrolls into a recursion tree with $\log_2 n$ levels, and the per-level cost is n at *every* level because the doubling number of subproblems exactly cancels their halving size. This is the flat case $x = 1$:

$$T(n) = \sum_{\text{level } i=0}^{\log_2 n} n = n\,(\log_2 n + 1) = \Theta(n \log n).$$

Change the combine cost and the per-level sum becomes a genuine geometric series. With $T(n) = 2\,T(n/2) + n^2$ the per-level cost *shrinks* geometrically ($x = \frac{1}{2}$): the root's n^2 dominates and $T(n) = \Theta(n^2)$. With $T(n) = 4\,T(n/2) + n$ it *grows* ($x = 2$): the leaves dominate and $T(n) = \Theta(n^2)$. First-term-wins versus last-term-wins, exactly as in Section 37.3.1.

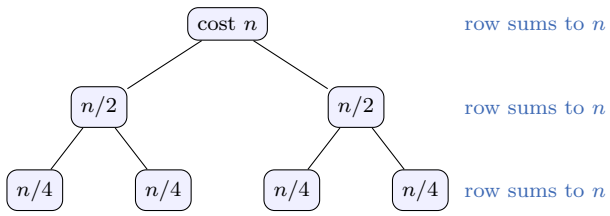

The picture makes the flat case obvious: each row of the merge-sort recursion tree costs n, there are about $\log_2 n$ rows, so the sum is the constant n added $\log_2 n$ times.

37.7.3 Random-pivot and tree-build recurrences → harmonic sums

The expected number of comparisons in randomized quicksort satisfies a recurrence whose solution is governed by $\sum 1/k$. The clean way to see it: the elements of rank i and rank j (with $i < j$) are compared with probability $\frac{2}{j-i+1}$, and summing those probabilities over all pairs gives the expected total. Fix the smaller rank i and let the gap $g = j - i$ run from 1 up to at most $n-1$; the inner sum over gaps is then a harmonic series:

$$\sum_{i<j} \frac{2}{j-i+1} \;=\; \sum_{i=1}^{n} \sum_{j=i+1}^{n} \frac{2}{j-i+1} \;\le\; \sum_{i=1}^{n} 2\,H_n \;=\; 2n\,H_n \;=\; \Theta(n \log n),$$

using $H_n = \Theta(\log n)$ from Section 37.4. (The middle step replaces the inner sum $\sum_{g=1}^{n-i} \frac{2}{g+1}$, which is at most $2(H_n - 1) < 2H_n$, by the larger constant $2H_n$ to keep the bookkeeping simple.) Whenever a recurrence averages over a uniformly random split point, expect a harmonic series and therefore a $\log n$ factor.

Cost summary

The three shapes and their verdicts, all in one place:

Sum	Closed form / bound	Asymptotic
$\sum_{k=1}^{n} k$	$n(n+1)/2$	$\Theta(n^2)$
$\sum_{k=1}^{n} k^p$	$\approx n^{p+1}/(p+1)$	$\Theta(n^{p+1})$
$\sum_{k=0}^{n} x^k,\ x<1$	$\leq 1/(1-x)$	$\Theta(1)$ (first term wins)
$\sum_{k=0}^{n} x^k,\ x=1$	$n+1$	$\Theta(n)$
$\sum_{k=0}^{n} x^k,\ x>1$	$(x^{n+1}-1)/(x-1)$	$\Theta(x^n)$ (last term wins)
$\sum_{k=1}^{n} 1/k$	$\ln n + \Theta(1)$	$\Theta(\log n)$
$\sum_{k=1}^{n} \ln k$	$n \ln n - n + \Theta(\ln n)$	$\Theta(n \log n)$

History and connection

This appendix corresponds to **CLRS, Appendix A ("Summations")**. CLRS states the same formulas and the integral bounds (their equations for arithmetic, geometric, and harmonic series, and "approximation by integrals"), but very tersely — it assumes you already believe them. The recursion-tree connections here preview **CLRS Chapter 4 ("Divide-and-Conquer")** and the Master Theorem. Gauss's fold-in-half trick is a piece of mathematical folklore; the integral-bound technique is the discrete cousin of the integral test from calculus, which is exactly how mathematicians decide whether an infinite series converges.

37.8 Putting it together: a fully worked analysis


Let us close by analyzing a small algorithm from scratch, using nothing but the tools above, to show the workflow end to end. Consider:

Algorithm 155: TriangleSums

Input: An integer $n \geq 1$.
Output: The value $\sum_{i=1}^{n} \sum_{j=1}^{i} j$.

```
1 total ← 0;
2 for i ← 1 to n do
3 |   for j ← 1 to i do
4 |   |   total ← total + j;
5 return total;
```

Counting the work. The body $total \leftarrow total + j$ runs once for each pair (i, j) with $1 \leq j \leq i \leq n$. Those pairs form a triangle: one cell in row $i = 1$, two in row $i = 2$, and so on, as the picture shows.



For a fixed i the inner loop runs i times, so the total number of additions is the number of cells in the triangle:

$$\sum_{i=1}^{n} i = \frac{n(n+1)}{2} = \Theta(n^2),$$

an arithmetic series (Section 37.2). So the running time is $\Theta(n^2)$.

Computing the output. The returned value is a *nested* sum, and we peel it from the inside out. The inner sum is itself arithmetic:

$$\sum_{j=1}^{i} j = \frac{i(i+1)}{2}.$$

Substitute and use linearity plus the sum-of-squares formula (Section 37.2.1):

$$\sum_{i=1}^{n} \frac{i(i+1)}{2} = \frac{1}{2}\sum_{i=1}^{n}(i^2+i) = \frac{1}{2}\left(\frac{n(n+1)(2n+1)}{6} + \frac{n(n+1)}{2}\right) = \frac{n(n+1)(n+2)}{6}.$$

A sanity check. For $n = 3$ the algorithm computes $(1) + (1{+}2) + (1{+}2{+}3) = 1 + 3 + 6 = 10$, and the formula gives $\frac{3\cdot4\cdot5}{6} = 10$. The output is $\Theta(n^3)$ while the running time is only $\Theta(n^2)$ — a reminder that the *size of a number* and the *time to compute it* are different sums, and you must do both.

Pause

If the worked example felt like a lot, that is fine — it deliberately stacks three techniques (term-counting, the arithmetic formula, and the sum-of-squares formula) in one place. In real analysis you will usually need only one of them at a time. The meta-skill is the recipe: *name the shape, then apply the tool.*

37.9 Exercises

Exercise 37.1 (Term counting warmup)**.** How many terms are in $\sum_{k=7}^{30} k$? Evaluate the sum two ways: directly with the arithmetic formula on the shifted range, and as $\sum_{k=1}^{30} k - \sum_{k=1}^{6} k$. Confirm the answers agree.

Exercise 37.2 (Constant summands)**.** Evaluate $\sum_{k=1}^{n} 5$ and $\sum_{k=3}^{n} 5$ as closed forms in n. Then explain in one sentence why $\sum_{k=1}^{n} c \neq c$ for $n > 1$.

Exercise 37.3 (Linearity practice)**.** Find a closed form for $\sum_{k=1}^{n}(4k-3)$. Check your formula at $n = 1$ and $n = 4$ by direct addition.

Exercise 37.4 (Geometric regimes)**.** Compute $\sum_{k=0}^{10} 3^k$ exactly using the finite geometric formula, and $\sum_{k=0}^{\infty}(1/3)^k$ exactly using the infinite formula. For each, state whether the first or the last term dominates.

Exercise 37.5 (Engineer a telescope)**.** Show that $\dfrac{1}{k(k+2)} = \dfrac{1}{2}\left(\dfrac{1}{k} - \dfrac{1}{k+2}\right)$, then evaluate $\sum_{k=1}^{n} \dfrac{1}{k(k+2)}$ in closed form. (Caution: the gap is two, so *two* terms survive at each end — write out the first and last few terms.)

Exercise 37.6 (Integral bound from scratch)**.** Using the integral bounds with $f(x) = \sqrt{x}$, prove that $\sum_{k=1}^{n} \sqrt{k} = \Theta(n^{3/2})$ and identify the leading constant.

Exercise 37.7 (Harmonic in disguise)**.** A program does $\sum_{k=1}^{n} \frac{n}{k}$ units of work (each pass does n/k work). Show this is $\Theta(n \log n)$, and explain which series from this appendix you used.

Exercise 37.8 (Recurrence to sum)**.** Solve $T(n) = T(n-1) + 2n - 1$ with $T(0) = 0$ by unrolling into a sum. (Hint: the answer is a familiar perfect square — recognize the sum of the first n odd numbers.)

Exercise 37.9 (Which level wins?)**.** For each recurrence, decide whether the recursion tree's per-level cost shrinks, stays flat, or grows, and give the resulting Θ: (a) $T(n) = 2T(n/2) + 1$, (b) $T(n) = 2T(n/2) + n$, (c) $T(n) = 3T(n/2) + n$. Tie each answer back to the geometric-series regime that decides it.

Exercise 37.10 (Stirling on a walk, written up)**.** Carry out the Walking-question prompt rigorously: use the integral bounds on $f(x) = \ln x$ to prove $n \ln n - n < \ln(n!) \leq (n+1)\ln(n+1) - n$, and conclude $\ln(n!) = \Theta(n \log n)$. State one consequence for sorting lower bounds.

Exercise 37.11 (Challenge: an arithmetic–geometric sum)**.** Evaluate $\sum_{k=1}^{n} k\, 2^k$ in closed form by adapting the "multiply-by-the-ratio-and-subtract" telescoping trick from the geometric-series proof. (Hint: let S be the sum, consider $2S - S$, and you will be left with a plain geometric series to finish.)

Exercise 37.12 (Challenge: bounding without a formula)**.** There is no elementary closed form for $\sum_{k=1}^{n} \frac{1}{k^2}$, yet it *converges*. Use the telescoping bound $\frac{1}{k^2} \leq \frac{1}{k(k-1)} = \frac{1}{k-1} - \frac{1}{k}$ (for $k \geq 2$) to prove that $\sum_{k=1}^{n} \frac{1}{k^2} < 2$ for every n. Why does this confirm the sum is $\Theta(1)$, unlike the harmonic series?

Chapter 38

Appendix: Sets, Counting, and Probability

This is a toolbox chapter. The rest of the book leans on it constantly — every time we say "there are $n!$ orderings," "the expected running time is $O(n \log n)$," or "the probability of a bad pivot is small," we are quietly using the language built here. CLRS folds this material into its appendices and expects you to already be comfortable with it. We are not going to assume that. We are going to build it slowly, in plain words, and then make it precise.

You can read this chapter front to back, or you can keep it open beside you as a reference and dip in when a later chapter says "recall expectation" or "by linearity." Either way, the goal is the same: by the end you should be able to *count* the things an algorithm does and *reason about chance* when an algorithm flips coins. Those two skills — counting and probability — are the mathematical heart of algorithm analysis.

38.1 Sets: the language everything is written in

Intuition

A *set* is just a collection of distinct things, with no order and no repetition. Think of it as a bag where you only care *which* items are inside, not how many copies there are or what order you pulled them out. The bag $\{3, 1, 2\}$ is the very same bag as $\{1, 2, 3\}$ and as $\{1, 1, 2, 3\}$ — the duplicate and the reordering simply do not register.

We write $x \in A$ to say "x is an element of A" and $x \notin A$ for the negation. The set with nothing in it is the *empty set*, written $\emptyset$ or $\{\}$. Some sets you already know:

$$\mathbb{N} = \{0, 1, 2, 3, \dots\}, \qquad \mathbb{Z} = \{\dots, -2, -1, 0, 1, 2, \dots\}, \qquad \mathbb{R} = \text{the real numbers.}$$

(We follow the convention that $\mathbb{N}$ includes 0; some authors start at 1. When it matters, we will say so.)

A set can be described by *listing* its elements, $\{2, 4, 6, 8\}$, or by giving a *rule*, the set-builder notation

$$\{\, x \in \mathbb{N} : x \text{ is even and } x \leq 8 \,\}.$$

Read the colon as "such that." Both descriptions name the same four-element set.

38.1.1 Size, subsets, and the empty set

The number of elements in a finite set A is its *cardinality*, written $|A|$. So $|\{2,4,6,8\}| = 4$ and $|\emptyset| = 0$. Cardinality is the single most important thing this chapter teaches you to compute, because the running time of an algorithm is almost always "do a fixed amount of work for each element of some set," and so the time is "|that set| times a constant."

We say A is a *subset* of B, written $A \subseteq B$, when every element of A is also an element of B. The empty set is a subset of *every* set (there is no element of $\emptyset$ to check, so the condition holds vacuously), and every set is a subset of itself. If $A \subseteq B$ but $A \neq B$ we call A a *proper* subset and write $A \subset B$.


Common trap

Do not confuse $\in$ with $\subseteq$. The number 3 is an *element* of $\{1,2,3\}$, so $3 \in \{1,2,3\}$. The one-element set $\{3\}$ is a *subset*, so $\{3\} \subseteq \{1,2,3\}$. Writing $3 \subseteq \{1,2,3\}$ or $\{3\} \in \{1,2,3\}$ is a type error — the same kind of mistake as adding a pointer to an integer. Keep "is one of the things inside" ($\in$) separate from "is a smaller bag inside" ($\subseteq$).

38.1.2 Operations on sets

Given two sets A and B, we combine them in four standard ways. Picture two overlapping circles — a Venn diagram — as you read each one.

- **Union** $A \cup B$: everything in A, or in B, or in both.
- **Intersection** $A \cap B$: only the things in *both*.
- **Difference** $A \setminus B$: the things in A that are *not* in B.
- **Complement** $\overline{A}$: everything (in some agreed-upon universe U) that is *not* in A. So $\overline{A} = U \setminus A$.



Two sets with empty intersection, $A \cap B = \emptyset$, are called *disjoint*: their circles do not overlap. Disjointness is the key that unlocks clean counting, as we are about to see.

Formal

De Morgan's laws. For any sets in a universe U,

$$\overline{A \cup B} = \overline{A} \cap \overline{B}, \qquad \overline{A \cap B} = \overline{A} \cup \overline{B}.$$

In words: "not (in A or B)" means "not in A and not in B," and "not (in both)" means "missing from at least one." These mirror the logic laws $\neg(p \vee q) = \neg p \wedge \neg q$ exactly, because

a set is just a predicate in disguise.

38.1.3 Ordered pairs, tuples, and the Cartesian product

Sets forget order. But algorithms care about order all the time — a coordinate (x, y) is not the same point as (y, x). So we also need *ordered* structure.

An *ordered pair* (a, b) remembers which came first. Two pairs are equal only when both slots match: $(a, b) = (c, d)$ exactly when $a = c$ and $b = d$. More generally an *n-tuple* $(a_1, a_2, \ldots, a_n)$ is an ordered list of n slots.


The *Cartesian product* $A \times B$ is the set of *all* ordered pairs with first slot from A and second from B:

$$A \times B = \{\, (a, b) : a \in A,\ b \in B \,\}.$$

Example 38.1 (A small product)**.** Let $A = \{1, 2\}$ and $B = \{x, y, z\}$. Then

$$A \times B = \{(1, x), (1, y), (1, z), (2, x), (2, y), (2, z)\},$$

which has $2 \times 3 = 6$ elements. The grid you would draw to list them — 2 rows, 3 columns — is exactly why $|A \times B| = |A| \cdot |B|$. Hold onto that picture; it is the seed of the entire counting section.



The $|A| = 2$ rows times the $|B| = 3$ columns give one cell per pair: a $2 \times 3 = 6$ rectangle of outcomes.

38.2 Relations and functions

38.2.1 Relations

A *relation* from A to B is any subset $R \subseteq A \times B$. That sounds abstract, so unpack it: a relation is a rule that, for each pair (a, b), says either "yes, these are related" (the pair is in R) or "no" (it is not). When $(a, b) \in R$ we often write $a\,R\,b$. The familiar $\leq$ on numbers is a relation: the pair $(3, 5)$ is in it because $3 \leq 5$; the pair $(5, 3)$ is not.

A relation R on a single set A (meaning $R \subseteq A \times A$) can have nice properties:

- **Reflexive**: $a\,R\,a$ for every a. (Everything relates to itself.)
- **Symmetric**: whenever $a\,R\,b$, also $b\,R\,a$.
- **Transitive**: whenever $a\,R\,b$ and $b\,R\,c$, also $a\,R\,c$.

A relation that is reflexive, symmetric, and transitive all at once is an *equivalence relation*. It carves A into disjoint clumps — *equivalence classes* — where everything in a clump is related to everything else in that clump and to nothing outside it. "Has the same remainder mod 7" is an equivalence relation on $\mathbb{Z}$; it sorts the integers into 7 classes. Equivalence classes are the mathematical backbone of union-find (Chapter on disjoint sets), where the whole job is to track which clump each element belongs to.

38.2.2 Functions

Intuition

A *function* is a machine: feed it one input, it gives you back exactly one output. The crucial word is *exactly one*. A vending machine that sometimes returns chips and sometimes a soda for the same button-press is not a function; a machine that returns nothing for some buttons is not (a total) function either. One input in, one output out, every time.

Formally a function $f : A \to B$ is a special relation: for each $a \in A$ there is exactly one $b \in B$ with $(a, b) \in f$, and we write $b = f(a)$. The set A is the *domain* (allowed inputs), B is the *codomain* (the type of the outputs), and the *image* (or range) is the set of values actually hit, $\{\, f(a) : a \in A \,\}$.

Three properties matter constantly in algorithms:


- **Injective** (one-to-one): different inputs give different outputs. If $f(a_1) = f(a_2)$ then $a_1 = a_2$. No collisions.
- **Surjective** (onto): every element of the codomain is hit by something. The image equals the whole codomain.
- **Bijective**: both injective and surjective. A perfect pairing — every input matched to a unique output and vice versa.

Focus

Bijections are the secret weapon of counting. If you can build a bijection between two finite sets, you have *proved* they are the same size without counting either one. "Show $|A| = |B|$" becomes "pair them up perfectly." We will use this trick in the next section, and it appears again whenever a hash table claims a one-to-one slot assignment or a sorting argument matches inputs to outputs.

Example 38.2 (Injective but not surjective)**.** Let $f : \mathbb{N} \to \mathbb{N}$ be $f(n) = 2n$. Different inputs clearly give different outputs, so f is injective. But the image is $\{0, 2, 4, 6, \dots\}$ — the odd numbers are never produced — so f is not surjective. A function can be one without the other.

The three properties are easiest to see as pictures of arrows from domain to codomain. Injective forbids two arrows landing on the same target; surjective demands every target be hit; a bijection is both at once — a perfect pairing with no target missed and none doubled.



In the left picture a codomain dot is left untouched (not surjective); in the middle, two arrows share a target (not injective); only the right picture is both.

38.3 Counting: the art of the answer without enumeration

Counting is where set language pays off. The question is always the same shape: "how many objects of such-and-such kind are there?" If we had to list them all and tally, counting would be useless — there are often astronomically many. The whole skill is finding the answer *without* listing.

Everything rests on two rules.

Formal

Sum rule. If a set S is split into disjoint pieces $S_1, S_2, \ldots, S_k$ (no overlap, together they cover all of S), then

$$|S| = |S_1| + |S_2| + \cdots + |S_k|.$$

Product rule. If an object is built by making a sequence of k independent choices, where the i-th choice has n_i options *regardless* of the earlier choices, then the number of objects is

$$n_1 \cdot n_2 \cdots n_k.$$

The product rule is exactly the grid from Example 38.1 stretched to k dimensions. Want to count 3-letter strings over a 26-letter alphabet? Three choices, 26 options each, independent: $26^3 = 17{,}576$. Want license plates of the form letter-letter-digit-digit-digit? $26 \cdot 26 \cdot 10 \cdot 10 \cdot 10 = 676{,}000$.

Algorithm lab

Trace the product rule by hand. Count the binary strings of length 3. Choice 1: $\{0, 1\}$. Choice 2: $\{0, 1\}$. Choice 3: $\{0, 1\}$. The product rule predicts $2^3 = 8$. Now actually write them out: $000, 001, 010, 011, 100, 101, 110, 111$. Eight, as promised. Notice the structure: the first half all start with 0, the second half with 1 — that is the sum rule $(4 + 4)$ sitting inside the product rule. The two rules are always working together.

38.3.1 Permutations: counting orderings

A *permutation* is an arrangement of objects in a row, where order matters and nothing repeats. How many ways can you line up n distinct objects?

Reason with the product rule. The first slot: n choices. The second slot: $n - 1$ remaining objects. The third: $n - 2$. And so on down to the last slot with 1 choice. Multiply:

$$n \cdot (n-1) \cdot (n-2) \cdots 2 \cdot 1 = n!,$$

read "n factorial." By convention $0! = 1$ (there is exactly one way to arrange nothing: do nothing).

Example 38.3 (Three books on a shelf)**.** Three distinct books $\{A, B, C\}$ arranged in a row: $3! = 6$ ways. List them to be sure: $ABC, ACB, BAC, BCA, CAB, CBA$. Six. The first letter has 3 choices, then 2, then the last is forced — $3 \cdot 2 \cdot 1 = 6$.

Sometimes you only fill k of the n slots — arrange k objects chosen from n, order mattering. This is the *k-permutation*, and the same product-rule argument (now stopping after k factors) gives

$$P(n, k) = n \cdot (n-1) \cdots (n-k+1) = \frac{n!}{(n-k)!}.$$

For instance, the number of ways to award gold, silver, and bronze among 8 runners is $P(8, 3) = 8 \cdot 7 \cdot 6 = 336$.

Why this matters

Why does an algorithms book care about $n!$? Because $n!$ is the number of possible orderings of n items, and *sorting* is the act of finding the one correct ordering. Any comparison-based sorting algorithm must, in effect, distinguish among all $n!$ possibilities, and a decision tree that distinguishes $n!$ leaves needs depth at least $\log_2(n!) = \Theta(n \log n)$. That single counting fact is the famous $\Omega(n \log n)$ lower bound for comparison sorting. Counting orderings is not trivia; it is the floor under every sort you will ever write.

38.3.2 Combinations: counting selections

Now order does *not* matter. How many ways can you choose a k-element subset from n distinct objects? This count is written $\binom{n}{k}$, read "n choose k," and it is the most important number in this chapter.

Here is the clean derivation. First count *ordered* selections of k objects: that is $P(n, k) = \frac{n!}{(n-k)!}$. But every unordered subset of size k has been counted once for each of its $k!$ orderings. So to get the unordered count we divide out the overcounting:

$$\binom{n}{k} = \frac{P(n, k)}{k!} = \frac{n!}{k!\,(n-k)!}.$$

This "count with order, then divide by the orderings" move is the single most useful technique in combinatorics. Learn to spot the overcounting and you can count almost anything.

Example 38.4 (Choosing a committee)**.** From 5 people, choose a committee of 2 (no roles, so order is irrelevant):

$$\binom{5}{2} = \frac{5!}{2!\,3!} = \frac{120}{2 \cdot 6} = 10.$$

Sanity check against the ordered count: there are $5 \cdot 4 = 20$ ways to pick a first then a second person, but each committee $\{a, b\}$ was counted twice (as ab and as ba), so $20/2! = 10$. The two routes agree.

Common trap


The first reflex of every beginner is to use a permutation when a combination is called for, or vice versa. The deciding question is one sentence: *does rearranging the chosen items give a different outcome?* Gold/silver/bronze — yes, order matters, use $P(n,k)$. A handful of lottery numbers, a poker hand, a subset of array indices — no, order is irrelevant, use $\binom{n}{k}$. Ask the question before you reach for a formula.

38.3.3 Identities you should feel, not memorize

A few facts about $\binom{n}{k}$ come up so often that you want them in your bones.

Symmetry. $\binom{n}{k} = \binom{n}{n-k}$. Choosing the k you keep is the same act as choosing the $n-k$ you leave behind — a perfect bijection between subsets and their complements. No algebra needed.

Pascal's rule. $\binom{n}{k} = \binom{n-1}{k-1} + \binom{n-1}{k}$. Fix one special element, say the last. A k-subset either contains it ($\binom{n-1}{k-1}$ ways to fill the rest) or does not ($\binom{n-1}{k}$ ways). Those two cases are disjoint and cover everything — the sum rule in action. This is also the recurrence that builds Pascal's triangle, where each entry is the sum of the two above it:



Sum of a row. $\displaystyle\sum_{k=0}^{n} \binom{n}{k} = 2^n$. The left side counts subsets of every size; the right side counts *all* subsets directly, since each of the n elements is independently in or out (product rule, $2 \cdot 2 \cdots 2$). Two ways to count the same thing must agree.

38.3.4 The binomial theorem

All of this assembles into one beautiful formula. When you expand $(x+y)^n$, you multiply out n copies of $(x+y)$ and collect terms. Each term picks either x or y from each factor; a term with $x^k y^{n-k}$ comes from choosing x in exactly k of the n factors — and there are $\binom{n}{k}$ ways to choose which. Hence

Formal

Binomial theorem.

$$(x+y)^n = \sum_{k=0}^{n} \binom{n}{k} x^k \, y^{n-k}.$$

The numbers $\binom{n}{k}$ are exactly the coefficients — which is why they are called *binomial* coefficients.

Setting $x = y = 1$ recovers $\sum_k \binom{n}{k} = 2^n$ instantly; setting $x = 1$, $y = -1$ gives $\sum_k (-1)^{n-k}\binom{n}{k} = 0$, a handy alternating identity. One formula, many corollaries.

Walking question

On your next walk, prove this to yourself without algebra: why is the number of *lattice paths* from the bottom-left to the top-right corner of an $a \times b$ grid, moving only right or up, equal to $\binom{a+b}{a}$? Hint: every path is a sequence of a "right" steps and b "up" steps; a path is fully determined by *which* of the $a + b$ moves are the rights. Counting paths becomes counting subsets. This single idea — encode a complicated object as a string, then count strings — reappears all over algorithm design.

38.4 Probability: reasoning about chance

Randomized algorithms flip coins. Quicksort picks a random pivot; hashing scatters keys with a random function; sampling estimates a quantity from a few draws. To analyze them we need a precise language for "how likely" and "on average." That language is probability, and — happily — it is built directly on the counting you just learned.

38.4.1 Sample spaces and events

Intuition

Picture every possible outcome of a random experiment laid out as points. That collection is the *sample space* Ω. An *event* is just a subset of Ω — a question you can ask whose answer is yes or no, like "did the die show an even number?" Probability is then a way of assigning a weight to each event so the weights behave sensibly.

A *probability* is a function Pr assigning to each event $A \subseteq \Omega$ a number $\Pr(A)$, obeying three axioms.

Formal

Axioms of probability (Kolmogorov).

1. $\Pr(A) \geq 0$ for every event A. (No negative chances.)
2. $\Pr(\Omega) = 1$. (*Something* happens, with certainty.)
3. If A and B are disjoint ($A \cap B = \emptyset$), then $\Pr(A \cup B) = \Pr(A) + \Pr(B)$. (Disjoint chances add.)

From these three, useful consequences fall out with a line or two of reasoning:

$$\Pr(\overline{A}) = 1 - \Pr(A), \qquad \Pr(\emptyset) = 0, \qquad \Pr(A \cup B) = \Pr(A) + \Pr(B) - \Pr(A \cap B).$$

That last one — *inclusion–exclusion* — corrects for the overlap you would otherwise double-count, exactly mirroring the Venn diagram from Section 38.1.

When all $|\Omega|$ outcomes are *equally likely* (a fair die, a uniformly random pivot), probability reduces to counting:


$$\Pr(A) = \frac{|A|}{|\Omega|} = \frac{\text{favorable outcomes}}{\text{total outcomes}}.$$

This is why the counting section came first: in the equally-likely world, *probability is just a ratio of two counts*.

Example 38.5 (A pair of dice)**.** Roll two fair six-sided dice. The sample space is the 36 ordered pairs (i, j) with $1 \le i, j \le 6$, all equally likely. What is $\Pr(\text{sum} = 7)$? Count the favorable pairs: $(1,6), (2,5), (3,4), (4,3), (5,2), (6,1)$ — six of them. So

$$\Pr(\text{sum} = 7) = \frac{6}{36} = \frac{1}{6}.$$

And $\Pr(\text{sum} = 12)$? Only $(6,6)$ works, so $\frac{1}{36}$. The counting did all the work; the probability is a one-line division.



Each of the 36 cells is one equally-likely outcome (i, j); the six shaded cells on the anti-diagonal are exactly the rolls with $i + j = 7$, giving $6/36 = 1/6$.

38.4.2 Conditional probability

New information changes the odds. Once you learn that an event B has occurred, the sample space effectively shrinks to B, and you re-measure everything inside it.

Formal

The *conditional probability* of A given B (with $\Pr(B) > 0$) is

$$\Pr(A \mid B) = \frac{\Pr(A \cap B)}{\Pr(B)}.$$

The picture is clean: you are restricting attention to the world where B happened (divide by $\Pr(B)$ to renormalize so that world has total weight 1), and asking how much of that world also has A (the numerator $\Pr(A \cap B)$).

Example 38.6 (Dice, with a hint)**.** Roll two fair dice. Let A be "the sum is 7" and B be "the first die is 3." We have $\Pr(B) = \frac{6}{36} = \frac{1}{6}$. The pairs in $A \cap B$: only $(3, 4)$ gives both a leading 3 and a sum of 7, so $\Pr(A \cap B) = \frac{1}{36}$. Thus

$$\Pr(A \mid B) = \frac{1/36}{1/6} = \frac{1}{6}.$$

Knowing the first die showed 3 left the chance of a 7 unchanged at $\frac{1}{6}$ — a hint of the independence idea coming next.

Rearranging the definition gives the *chain rule* $\Pr(A \cap B) = \Pr(A \mid B)\,\Pr(B)$, and summing conditional pieces over a partition $B_1, \ldots, B_k$ of Ω gives the *law of total probability*

$$\Pr(A) = \sum_{i=1}^{k} \Pr(A \mid B_i)\,\Pr(B_i),$$

which is how you compute a probability by splitting into cases — the sum rule wearing a probabilistic coat. Flipping the conditioning around yields *Bayes' rule*, $\Pr(B \mid A) = \Pr(A \mid B)\,\Pr(B)/\Pr(A)$, the engine behind every "update my belief given evidence" calculation.

38.4.3 Independence

Intuition

Two events are *independent* when learning one tells you nothing about the other. Knowing the coin came up heads says nothing about tomorrow's weather; the two live in separate worlds.

Formally, A and B are *independent* when

$$\Pr(A \cap B) = \Pr(A)\,\Pr(B),$$

equivalently $\Pr(A \mid B) = \Pr(A)$ whenever $\Pr(B) > 0$ (the condition did not move the needle). In Example 38.6 the sum-is-7 event was independent of the first die's value — a small surprise, but the formula confirms it.

Common trap

Independence is a property of the *numbers*, not a feeling. "These seem unrelated" is not a proof. You must check $\Pr(A \cap B) = \Pr(A)\Pr(B)$. And beware: events can be *pairwise* independent yet not *mutually* independent — the three-way relationship can fail even when every pair checks out. When an analysis needs full independence (as in some hashing arguments), pairwise is not enough, and sloppily assuming it has sunk many a proof.

38.5 Random variables and expectation

38.5.1 What a random variable is

Intuition

A *random variable* is a number that depends on the random outcome — a measurement you read off after the experiment runs. "The number of comparisons quicksort makes" is a random variable: it has no single fixed value, because it depends on which random pivots came up.

Formally a (discrete) random variable X is a function $X : \Omega \to \mathbb{R}$. For each value v it can take, the probability $\Pr(X = v)$ is shorthand for the probability of the event $\{\, \omega \in \Omega : X(\omega) = v \,\}$. The list of these probabilities, over all values, is the *distribution* of X.

38.5.2 Expectation: the average value

The *expected value* (or mean) of X is the average of its values, each weighted by how likely it is:

$$\mathbb{E}[X] = \sum_{v} v \cdot \Pr(X = v),$$

the sum running over all values X can take. Think of it as the center of mass of the distribution — the balance point if you placed weight $\Pr(X = v)$ at position v on a ruler.

Example 38.7 (Expected value of one die)**.** For a fair die, $X \in \{1, 2, 3, 4, 5, 6\}$ each with probability $\frac{1}{6}$:

$$\mathbb{E}[X] = \frac{1}{6}(1 + 2 + 3 + 4 + 5 + 6) = \frac{21}{6} = 3.5.$$

Notice the average, 3.5, is a value the die can never actually show. That is fine: expectation is a long-run average, not a prediction of any single roll.

38.5.3 Linearity of expectation: the workhorse

Here is the single most useful fact in all of randomized algorithm analysis.

Formal

Linearity of expectation. For *any* random variables X and Y and constants a, b,

$$\mathbb{E}[aX + bY] = a\,\mathbb{E}[X] + b\,\mathbb{E}[Y].$$

This holds *whether or not X and Y are independent.* It extends to any finite sum: $\mathbb{E}[X_1 + \cdots + X_n] = \mathbb{E}[X_1] + \cdots + \mathbb{E}[X_n]$.

The "no independence required" clause is what makes linearity magical. You can break a horrendously tangled total into simple pieces, take each piece's expectation in isolation, and add — never once worrying about how the pieces interact.

Focus

The standard recipe: to find $\mathbb{E}[X]$ where X counts how many times something happens, write $X = X_1 + X_2 + \cdots + X_n$ where each X_i is an *indicator* — a 0/1 random variable that is 1 exactly when the i-th thing happens. The key identity is

$$\mathbb{E}[X_i] = 0 \cdot \Pr(X_i = 0) + 1 \cdot \Pr(X_i = 1) = \Pr(X_i = 1).$$

The expectation of an indicator is just the probability of the event it indicates. So by linearity, $\mathbb{E}[X] = \sum_i \Pr(i\text{-th event happens})$. A hard average becomes a sum of easy probabilities. This is *the* technique behind quicksort's expected-comparison count, hashing's expected chain length, and dozens more.

Example 38.8 (Expected number of fixed points)**.** Shuffle n cards uniformly at random. How many cards land in their original position on average? Let X be that count, and let $X_i = 1$ if card i stays put. Card i is equally likely to land in any of the n positions, so $\Pr(X_i = 1) = \frac{1}{n}$, hence $\mathbb{E}[X_i] = \frac{1}{n}$. The cards' fates are tangled (if one is fixed, the others are constrained), but linearity does not care:

$$\mathbb{E}[X] = \sum_{i=1}^{n} \mathbb{E}[X_i] = \sum_{i=1}^{n} \frac{1}{n} = n \cdot \frac{1}{n} = 1.$$

On average, exactly *one* card stays home, no matter how big the deck. We never touched the distribution of X — only n trivial indicators. That is the power of linearity.


Algorithm lab

Verify Example 38.8 by brute force for $n = 3$. The $3! = 6$ permutations of $(1, 2, 3)$, with their fixed-point counts:

$$123 \to 3, \quad 132 \to 1, \quad 213 \to 1,$$
$$231 \to 0, \quad 312 \to 0, \quad 321 \to 1.$$

Average $= (3 + 1 + 1 + 0 + 0 + 1)/6 = 6/6 = 1$. Exactly the predicted answer, and you can see why no shortcut would have been faster than linearity once n grows.

The indicator recipe is worth one picture. The tangled total X splits into a row of simple 0/1 flags, each easy to average on its own; linearity lets us sum those averages even though the flags are correlated.



38.5.4 Variance, briefly

Expectation tells you the center; *variance* tells you the spread. It is the expected squared distance from the mean,

$$\mathrm{Var}[X] = \mathbb{E}\big[(X - \mathbb{E}[X])^2\big] = \mathbb{E}[X^2] - (\mathbb{E}[X])^2,$$

and its square root $\sqrt{\mathrm{Var}[X]}$ is the *standard deviation*. Unlike expectation, variance is *not* linear in general — but it does add for *independent* variables: $\mathrm{Var}[X + Y] = \mathrm{Var}[X] + \mathrm{Var}[Y]$ when X, Y are independent. Variance is what you reach for when you want to argue that a randomized algorithm is not just good *on average* but good *almost always*.

38.6 Useful inequalities

Often you cannot compute a probability exactly — but you can *bound* it, and a bound is usually all an algorithm analysis needs ("the failure probability is at most $1/n^2$" is plenty). Three inequalities

do most of the heavy lifting.

38.6.1 Markov's inequality

Formal

Markov's inequality. If $X \geq 0$ and $t > 0$, then

$$\Pr(X \geq t) \leq \frac{\mathbb{E}[X]}{t}.$$

The intuition: a nonnegative quantity cannot often be far above its average, because those rare large values would, by themselves, drag the average up past where it actually sits. Equivalently, taking $t = c\,\mathbb{E}[X]$: a nonnegative random variable is at least c times its mean with probability at most $1/c$. It needs nothing but nonnegativity and the mean — which is exactly why it is so widely applicable, and so loose.

Example 38.9 (A quick Markov bound)**.** An algorithm runs in expected time $\mathbb{E}[T] = 100$ steps. What can we say about the chance it takes 1000 or more? With $t = 1000$,

$$\Pr(T \geq 1000) \leq \frac{100}{1000} = \frac{1}{10}.$$

So at most a 10% chance of being ten times over budget — derived from the mean alone, knowing nothing else about T.



Markov says the probability mass to the right of t is capped: a nonnegative variable with mean $\mathbb{E}[X]$ cannot pile too much weight far above its average without dragging the average up past where it sits.

38.6.2 Chebyshev's inequality

When you also know the variance, you can bound deviations on *both* sides of the mean, and tightly.

Formal

Chebyshev's inequality. For any random variable X with finite variance, and any $t > 0$,

$$\Pr\big(|X - \mathbb{E}[X]| \geq t\big) \leq \frac{\mathrm{Var}[X]}{t^2}.$$

It is just Markov applied to the nonnegative variable $(X - \mathbb{E}[X])^2$. The payoff: the probability of straying k standard deviations from the mean is at most $1/k^2$ — small spread means X clusters tightly around $\mathbb{E}[X]$, which is precisely the "good almost always" guarantee variance was promising.

38.6.3 The union bound

Formal

Union bound (Boole's inequality). For any events $A_1, \ldots, A_n$,

$$\Pr\Big(\bigcup_{i=1}^{n} A_i\Big) \le \sum_{i=1}^{n} \Pr(A_i).$$

Dirt simple, endlessly useful. If each of n "bad" events is individually unlikely, the chance that *any* of them happens is at most the sum of their probabilities. It is the inclusion–exclusion identity with the (subtracted) overlaps thrown away — which can only make the right side bigger, so it is always a valid upper bound.

Example 38.10 (Union bound in action)**.** Suppose a randomized data structure has n operations, and each individually fails with probability at most $1/n^2$. Then the probability that *some* operation fails is at most

$$\sum_{i=1}^{n} \frac{1}{n^2} = n \cdot \frac{1}{n^2} = \frac{1}{n}.$$

So with probability at least $1 - 1/n$ — "with high probability" — the entire run is flawless. This pattern, bound each rare event then union them, is how essentially every high-probability guarantee in the book gets proved.

History and connection

This material lines up with Appendices B and C of CLRS. **Appendix B** covers sets, relations, functions, and the basics of counting; our Sections 38.1–38.2 and the start of Section 38.3 are the gentle on-ramp to it. **Appendix C** covers counting (permutations and combinations), discrete probability, random variables, expectation, and the standard inequalities; our Sections 38.3–38.6 mirror it section for section. The historical roots run deep: the systematic study of counting and chance began with the seventeenth-century correspondence between Blaise Pascal and Pierre de Fermat over a gambling problem, and the modern axioms in Section 38.4 are due to Andrey Kolmogorov in 1933. When you reach Chapter 5 (probabilistic analysis and randomized algorithms), Chapter 7 (quicksort), and Chapter 11 (hashing) in CLRS, you will be cashing in everything assembled here.

Cost summary

The counting and probability facts you will reuse most:

Quantity	Formula
Subsets of an n-set	2^n
Orderings of n items	$n!$
Ordered k from n	$P(n,k) = n!/(n-k)!$
Unordered k from n	$\binom{n}{k} = n!\,/\,(k!\,(n-k)!)$
Equally-likely probability	$\Pr(A) = \lvert A\rvert/\lvert\Omega\rvert$
Conditional probability	$\Pr(A \mid B) = \Pr(A \cap B)/\Pr(B)$
Expectation	$\mathbb{E}[X] = \sum_v v\,\Pr(X = v)$
Linearity	$\mathbb{E}[X+Y] = \mathbb{E}[X] + \mathbb{E}[Y]$ (always)
Indicator expectation	$\mathbb{E}[X_i] = \Pr(\text{event } i)$
Markov	$\Pr(X \geq t) \leq \mathbb{E}[X]/t$
Chebyshev	$\Pr(\lvert X - \mathbb{E}[X]\rvert \geq t) \leq \mathrm{Var}[X]/t^2$
Union bound	$\Pr(\bigcup A_i) \leq \sum \Pr(A_i)$

38.7 Exercises

Exercise 38.1 (Warmup: set arithmetic)**.** Let $A = \{1,2,3,4,5\}$ and $B = \{2,4,6\}$ with universe $U = \{1,2,\ldots,8\}$. Compute $A \cup B$, $A \cap B$, $A \setminus B$, $\overline{A}$, and $\lvert A \times B\rvert$. Then verify De Morgan's law $\overline{A \cup B} = \overline{A} \cap \overline{B}$ by computing both sides.

Exercise 38.2 (Type-checking $\in$ versus $\subseteq$)**.** For the set $S = \{1, \{2\}, \{1,2\}\}$, decide whether each statement is true or false, and explain in one sentence: (a) $1 \in S$; (b) $\{2\} \in S$; (c) $2 \in S$; (d) $\{1\} \subseteq S$; (e) $\{\{2\}\} \subseteq S$.

Exercise 38.3 (Permutation versus combination)**.** A standard deck has 52 cards. (a) How many ways are there to deal a 5-card poker hand, where order does not matter? (b) How many ways to deal 5 cards in order to five seated players, one each, where who gets which card matters? Express each as a product/factorial expression and as a number, and state which is larger and why.

Exercise 38.4 (Counting strings)**.** How many strings of length 4 over the alphabet $\{a,b,c\}$ contain at least one a? (Hint: it is far easier to count the complement — strings with *no* a — and subtract from the total. This complement trick is worth internalizing.)

Exercise 38.5 (Pascal by hand)**.** Use Pascal's rule $\binom{n}{k} = \binom{n-1}{k-1} + \binom{n-1}{k}$ to build the row of $\binom{6}{k}$ for $k = 0,1,\ldots,6$, starting from the row for $n = 5$ $(1,5,10,10,5,1)$. Then check that your row sums to $2^6 = 64$.

Exercise 38.6 (Conditional dice)**.** Roll two fair dice. Given that the sum is 8, what is the probability that at least one die shows a 5? Identify the conditioning event B, list the outcomes in B, then list those that also satisfy A, and compute $\Pr(A \mid B)$ directly.

Exercise 38.7 (Independence check)**.** Roll two fair dice. Let A be "the first die is even" and B be "the sum is 7." Compute $\Pr(A)$, $\Pr(B)$, and $\Pr(A \cap B)$, and determine whether A and B are independent. Does the answer match your intuition?

Exercise 38.8 (Linearity to the rescue)**.** You roll a fair die n times. Let X be the number of times a 6 appears. Using indicator variables X_i (one per roll) and linearity of expectation, find $\mathbb{E}[X]$. Then, separately, find the expected number of times a 6 is *immediately followed by another* 6 among the $n-1$ adjacent pairs.

Exercise 38.9 (Expected maximum of two dice)**.** Roll two fair dice and let M be the larger of the two values (the maximum). Write out the distribution of M (the probability $\Pr(M = v)$ for $v = 1, \ldots, 6$) and compute $\mathbb{E}[M]$. (Hint: $\Pr(M \le v) = (v/6)^2$, since both dice must be at most v; turn that into $\Pr(M = v)$.)

Exercise 38.10 (Choosing the right inequality)**.** A randomized algorithm has expected running time $\mathbb{E}[T] = 50$ and variance $\mathrm{Var}[T] = 25$. (a) Use Markov's inequality to bound $\Pr(T \ge 200)$. (b) Use Chebyshev's inequality to bound $\Pr(|T - 50| \ge 30)$. (c) In one or two sentences, explain why Chebyshev gave a more informative bound here, and what extra information made that possible.

Exercise 38.11 (Union bound design)**.** You hash n keys into a table. For a fixed pair of distinct keys, suppose the probability they collide (land in the same slot) is exactly $1/m$, where m is the table size. Using the union bound over all pairs, show that the probability of *any* collision is at most $\binom{n}{2}/m$. Then determine how large m must be, as a function of n, to make this bound at most $1/2$. (This is the birthday-paradox threshold, and it explains why hash tables need room to breathe.)

Exercise 38.12 (Challenge: a counting bijection)**.** Prove that the number of ways to write a positive integer n as an ordered sum of positive integers (a *composition*, e.g. $4 = 1 + 3 = 3 + 1 = 2 + 2 = 1 + 1 + 2 = \cdots$) is exactly 2^{n-1}. (Hint: line up n dots in a row; between each adjacent pair of dots there is a gap, and you either "cut" there or not. Set up a bijection between compositions and subsets of the $n - 1$ gaps, then count the subsets.)

Chapter 39

Appendix: Matrices and Discrete Math

This appendix is a friendly toolbox. Throughout the book we leaned on a handful of mathematical objects – matrices, graphs, logarithms, factorials – as if you already had them in your pocket. Here we slow down and build each one from the ground up, just thoroughly enough that nothing in the main chapters has to feel like magic. You can read this front to back, or you can keep it on the shelf and flip to the piece you need.

There is nothing to be afraid of here. A matrix is just a grid of numbers with some bookkeeping rules. A graph is just dots and lines. A logarithm is just "how many times did I halve?" We will say each idea slowly, attach it to a picture, work a number example by hand, and then state it precisely so you can trust it later.

Focus

This appendix maps to CLRS Appendices C and D (and a little of A and B). When CLRS writes "recall from Appendix D that matrix multiplication is associative," this is the chapter that earns you the right to recall it.

39.1 Matrices: grids of numbers that *do* something

39.1.1 What a matrix is

A *matrix* is a rectangular grid of numbers. We describe its shape by saying "m by n," written $m \times n$, meaning m rows and n columns. Here is a 2×3 matrix (two rows, three columns):

$$A = \begin{pmatrix} 2 & 0 & -1 \\ 5 & 3 & 4 \end{pmatrix}.$$

The number in row i, column j is called the (i, j) *entry* and written A_{ij} (or a_{ij}). So $A_{11} = 2$, $A_{13} = -1$, and $A_{23} = 4$. Always read the row index first, then the column. That ordering is a convention you must keep straight, because A_{23} and A_{32} are different requests entirely (and in our example A_{32} does not even exist – there is no third row).

Intuition

Picture a spreadsheet. A matrix is exactly a spreadsheet of numbers with the column headers and row labels stripped away, leaving just the cells. Everything we do to matrices is something you could imagine doing to a spreadsheet: add two sheets cell by cell, scale every cell, or combine two sheets with a more elaborate row-meets-column rule. Hold onto the spreadsheet picture and you will rarely get lost.

A matrix with the same number of rows and columns ($m = n$) is called *square*. A matrix with a single column ($n = 1$) is a *column vector*; one with a single row ($m = 1$) is a *row vector*. We will write vectors as lowercase letters, like x, and matrices as uppercase, like A.

Focus

Three numbers fully pin down the "shape situation" of any matrix product, and keeping them visible saves you from most mistakes: the matrix is $m \times n$, the row index i runs $1 \le i \le m$, and the column index j runs $1 \le j \le n$. Write the shape next to every matrix while you are learning.

39.1.2 Adding matrices and scaling them

Two matrices of the *same shape* are added entry by entry. If A and B are both $m \times n$, then $A + B$ is the $m \times n$ matrix whose (i, j) entry is $A_{ij} + B_{ij}$. There is no cleverness here at all:

$$\begin{pmatrix} 2 & 0 \\ 5 & 3 \end{pmatrix} + \begin{pmatrix} 1 & 4 \\ -2 & 1 \end{pmatrix} = \begin{pmatrix} 2+1 & 0+4 \\ 5-2 & 3+1 \end{pmatrix} = \begin{pmatrix} 3 & 4 \\ 3 & 4 \end{pmatrix}.$$

If the shapes do not match, the sum is simply undefined – there is no row to pair with a missing row. *Scaling* (multiplying by a single number c, called a *scalar*) multiplies every entry by c:

$$3 \cdot \begin{pmatrix} 2 & 0 \\ 5 & 3 \end{pmatrix} = \begin{pmatrix} 6 & 0 \\ 15 & 9 \end{pmatrix}.$$

Addition is commutative ($A + B = B + A$) and associative ($(A + B) + C = A + (B + C)$) for the same reason ordinary number addition is: it all happens entry by entry, and the entries are just numbers.

39.1.3 The product: where matrices start pulling their weight

Matrix *multiplication* is the one rule that looks strange the first time and obvious the tenth time. To multiply A by B and form $C = AB$, the shapes must *interlock*: the number of columns of A must equal the number of rows of B. If A is $m \times n$ and B is $n \times p$, then $C = AB$ is $m \times p$, and

$$C_{ij} \;=\; \sum_{k=1}^{n} A_{ik}\, B_{kj}.$$

In words: the (i, j) entry of the product is the *dot product* of row i of A with column j of B. You march across the row and down the column in lockstep, multiply the paired numbers, and add up the results.

Intuition

The shared dimension n is the "handshake." Row i of A reaches out with n fingers; column j of B reaches back with n fingers; each finger meets its partner, they multiply, and you total the handshake. If the finger counts do not match, no handshake is possible – that is exactly why the inner dimensions must agree.

Let us do one slowly. Take

$$A = \begin{pmatrix} 1 & 2 \\ 0 & 3 \end{pmatrix} \quad (2 \times 2), \qquad B = \begin{pmatrix} 4 & 5 \\ 6 & 7 \end{pmatrix} \quad (2 \times 2).$$

The inner dimensions match ($2 = 2$), so $C = AB$ is 2×2. Compute each entry as a row-times-column handshake:

$$\begin{aligned} C_{11} &= (1)(4) + (2)(6) = 4 + 12 = 16, \\ C_{12} &= (1)(5) + (2)(7) = 5 + 14 = 19, \\ C_{21} &= (0)(4) + (3)(6) = 0 + 18 = 18, \\ C_{22} &= (0)(5) + (3)(7) = 0 + 21 = 21. \end{aligned}$$

So

$$AB = \begin{pmatrix} 16 & 19 \\ 18 & 21 \end{pmatrix}.$$

Algorithm lab


Trace it yourself. Compute BA for the same two matrices and compare it with AB above. You should get $BA = \left(\begin{smallmatrix} 4 & 23 \\ 6 & 33 \end{smallmatrix}\right)$, which is *not* equal to AB. Sit with that for a second: the order in which you multiply matrices matters. We will turn this observation into a rule below.

Common trap

The single most common matrix mistake is assuming $AB = BA$. **Matrix multiplication is not commutative.** It is also easy to forget the shape rule and try to multiply, say, a 2×3 by a 2×2: the inner dimensions (3 and 2) disagree, so the product does not exist. Always check the handshake before you compute a single entry.

39.1.4 A picture of the handshake

The diagram below shows how the highlighted row of A and the highlighted column of B produce a single entry of C.



$C_{11} = (1)(4) + (2)(6) = 16$

The blue row of A shakes hands with the green column of B: $(1)(4) + (2)(6) = 16$, which lands in the purple top-left cell of C. Every other entry is the same ritual with a different row and column.

39.1.5 The identity matrix and the transpose

The *identity matrix* I_n is the $n \times n$ square matrix with 1's down the main diagonal (the entries I_{ii}) and 0's everywhere else. For example,

$$I_3 = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix}.$$

It earns its name: for any $m \times n$ matrix A we have $I_m A = A$ and $A I_n = A$. Multiplying by I changes nothing, exactly as multiplying a number by 1 changes nothing. The identity is the "do-nothing" matrix, and it is the multiplicative anchor for everything else.

The *transpose* of A, written A^{T}, flips the matrix across its main diagonal: row i becomes column i. Formally $(A^{\mathsf{T}})_{ij} = A_{ji}$. If A is $m \times n$, then A^{T} is $n \times m$:

$$A = \begin{pmatrix} 2 & 0 & -1 \\ 5 & 3 & 4 \end{pmatrix} \implies A^{\mathsf{T}} = \begin{pmatrix} 2 & 5 \\ 0 & 3 \\ -1 & 4 \end{pmatrix}.$$

A handy fact you will meet again: the transpose of a product reverses the order, $(AB)^{\mathsf{T}} = B^{\mathsf{T}} A^{\mathsf{T}}$. A matrix equal to its own transpose ($A = A^{\mathsf{T}}$, which forces it to be square) is called *symmetric*; these show up constantly, for instance as adjacency matrices of undirected graphs later in this chapter.

39.1.6 The algebra rules, stated honestly

Here is the short list of laws you may assume in the rest of the book. They are not difficult to prove – each follows from pushing the sum $\sum_k A_{ik} B_{kj}$ around – but they are worth seeing collected in one place.

Formal

For matrices of compatible shapes and any scalar c:

- **Associative:** $(AB)C = A(BC)$.
- **Distributive:** $A(B + C) = AB + AC$ and $(A + B)C = AC + BC$.
- **Scalar slide:** $c(AB) = (cA)B = A(cB)$.
- **Identity:** $IA = A = AI$ (for square A).
- **Transpose of a product:** $(AB)^{\mathsf{T}} = B^{\mathsf{T}} A^{\mathsf{T}}$.
- **NOT commutative:** in general $AB \neq BA$.

The associative law deserves a moment, because it is doing quiet work in several chapters. It says that when you multiply a chain $A_1 A_2 \cdots A_r$, the *answer* does not depend on how you parenthesize the multiplications – only the *cost* of computing it does. That gap between "same answer, different

cost" is the entire reason the matrix-chain multiplication problem (a classic dynamic-programming example) is interesting.

Why this matters

Why carry matrices into an algorithms book at all? Because they are the language of *everything done in bulk*. A single matrix multiply applies one linear transformation to a whole batch of vectors at once; that is what powers 3D graphics pipelines, the layers of a neural network, Google's original PageRank computation, and the fast all-pairs-shortest-paths trick that reuses matrix multiplication over a funny "min-plus" arithmetic. When you can phrase a computation as a matrix product, decades of fast multiplication algorithms (and fast hardware) become available to you for free.

39.1.7 The cost of multiplying matrices

How expensive is one matrix multiply? Take the square case, A and B both $n \times n$, so $C = AB$ is also $n \times n$. The product has n^2 entries. Each entry C_{ij} is a handshake of length n: n multiplications and $n - 1$ additions. So the total arithmetic is

$$\underbrace{n^2}_{\text{entries}} \times \underbrace{(2n-1)}_{\text{ops each}} = 2n^3 - n^2 = \Theta(n^3).$$

The naive algorithm is three nested loops, and counting them gives the same answer directly.

Algorithm 156: Naive square matrix multiplication

Input: $n \times n$ matrices A and B
Output: $C = AB$

```
1 for i ← 1 to n do
2     for j ← 1 to n do
3         s ← 0;
4         for k ← 1 to n do
5             s ← s + A_ik · B_kj;
6         C_ij ← s;
7 return C;
```

The body $s \leftarrow s + A_{ik}B_{kj}$ runs exactly $n \cdot n \cdot n = n^3$ times, once for each triple (i, j, k), so the running time is $\Theta(n^3)$.

Cost summary

For two $n \times n$ matrices, the naive algorithm above costs:

- Time: $\Theta(n^3)$ arithmetic operations.
- Extra space: $\Theta(n^2)$ to store the output (or $\Theta(1)$ extra beyond the output, since each C_{ij} is computed independently).

Strassen's algorithm (CLRS Chapter 4) beats this with $\Theta(n^{\log_2 7}) \approx \Theta(n^{2.81})$ by trading some multiplications for additions via divide and conquer. The current theoretical record is below $n^{2.372}$, though nobody uses those galactic algorithms in practice.

Walking question

On your walk, picture the three nested loops as a $n \times n \times n$ cube of little "multiply-and-add" events. The naive algorithm visits every one of the n^3 cells. Strassen's insight is that those cells are not all independent – clever combinations let you skip about an eighth of the work at each level of recursion. Can you feel, intuitively, why *recursion* (splitting each matrix into four quadrants) is the natural place to look for such savings?

39.2 A pinch of linear algebra

You do not need a full linear-algebra course to read this book, but a few facts recur. We collect them here with the lightest possible touch – enough to recognize the words, not to pass a final exam.

39.2.1 Vectors, linear combinations, and independence

A *vector* in this appendix is just a column matrix of n numbers, an arrow's worth of data. Given vectors $v_1, \dots, v_k$ and scalars $c_1, \dots, c_k$, the expression

$$c_1 v_1 + c_2 v_2 + \cdots + c_k v_k$$

is called a *linear combination* of them. It is the most natural way to "mix" vectors: scale each one, then add. The set of *all* linear combinations of a fixed collection of vectors is called their *span*.

The vectors are *linearly independent* if the only way to make the zero vector as a linear combination is the boring way, with every coefficient zero. If some non-trivial combination collapses to zero, the vectors are *dependent* – one of them is redundant, expressible from the others. For example, $(1, 0)$, $(0, 1)$, and $(2, 3)$ are dependent because $2(1, 0) + 3(0, 1) - (2, 3) = (0, 0)$ with not-all-zero coefficients.

Intuition

Independence means "no freeloaders." Each vector contributes a genuinely new direction that the others cannot reproduce by mixing. Dependence means at least one vector is a freeloader – you could delete it and lose nothing, because the remaining vectors can already reach it.

39.2.2 Determinant and inverse, briefly

For a square matrix A, the *determinant* $\det(A)$ is a single number squeezed out of the whole grid that tells you, among other things, whether A is *invertible*. For the 2×2 case the formula is short and worth memorizing:

$$\det \begin{pmatrix} a & b \\ c & d \end{pmatrix} = ad - bc.$$

A square matrix A has an *inverse* A^{-1} – a matrix with $AA^{-1} = A^{-1}A = I$ – exactly when $\det(A) \neq 0$. The inverse is the matrix analogue of a reciprocal: A^{-1} undoes whatever A does. For the 2×2 case, when $ad - bc \neq 0$,

$$\begin{pmatrix} a & b \\ c & d \end{pmatrix}^{-1} = \frac{1}{ad - bc} \begin{pmatrix} d & -b \\ -c & a \end{pmatrix}.$$

Let us check one. With $A = \left(\begin{smallmatrix} 2 & 1 \\ 1 & 1 \end{smallmatrix}\right)$ we have $\det(A) = 2 \cdot 1 - 1 \cdot 1 = 1$, so $A^{-1} = \left(\begin{smallmatrix} 1 & -1 \\ -1 & 2 \end{smallmatrix}\right)$. Multiply to confirm:

$$\begin{pmatrix} 2 & 1 \\ 1 & 1 \end{pmatrix} \begin{pmatrix} 1 & -1 \\ -1 & 2 \end{pmatrix} = \begin{pmatrix} 2-1 & -2+2 \\ 1-1 & -1+2 \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} = I. \checkmark$$

Common trap

A square matrix with $\det(A) = 0$ is called *singular* and has *no* inverse at all – you cannot "divide" by it. This is the matrix world's version of dividing by zero, and the determinant is precisely the warning light. Whenever an algorithm hands you a matrix it intends to invert (solving linear systems, least-squares fitting), a zero determinant is the place where things break.

History and connection

This sliver of linear algebra is CLRS Appendix D. CLRS uses it mainly to support Chapter 28 (solving systems of linear equations via LU decomposition) and the matrix view of dynamic programming. If you want the full and beautiful story – eigenvalues, orthogonality, the spectral theorem – a dedicated linear-algebra text is the right next step; we only borrow what the algorithms need.

39.3 Graphs as formal objects

So much of this book – shortest paths, spanning trees, network flow, topological sorting – lives on *graphs*. The main chapters use graphs operationally; here we pin down the definitions precisely, so that when a theorem says "let $G = (V, E)$ be a connected, undirected graph," every word has met you before.

39.3.1 The definition

Definition 39.1 (Graph)**.** A *graph* is a pair $G = (V, E)$, where V is a finite set of *vertices* (also called *nodes*) and E is a set of *edges*. In a *directed* graph each edge is an ordered pair (u, v) with $u, v \in V$, drawn as an arrow from u to v. In an *undirected* graph each edge is an unordered pair $\{u, v\}$, drawn as a plain line between u and v.


That is the whole formal content: a set of dots and a set of connections between them. Everything else – paths, cycles, connectivity, weights – is built on top of this skeleton. We usually write $|V| = n$ for the number of vertices and $|E| = m$ for the number of edges, and inside asymptotic notation it is traditional to drop the bars and just write V and E, so that "$O(V + E)$" means "$O(|V| + |E|)$."

Intuition

An undirected edge is a two-way street: if you can walk from u to v, you can walk back. A directed edge is a one-way street: the arrow (u, v) lets you go from u to v but says nothing about going back. Almost every modeling decision in graph algorithms starts with the question, "are my relationships symmetric?" Friendship on a typical social network is undirected; "follows" on a microblog is directed.

Here is a small directed graph $G = (V, E)$ with vertex set $V = \{1, 2, 3, 4\}$ and edge set

$$E = \{(1,2),\ (1,3),\ (2,3),\ (3,4),\ (4,2)\}.$$



39.3.2 The vocabulary you actually need

A few terms come up on nearly every page of the graph chapters:

- **Adjacent / neighbor.** Vertex v is adjacent to u if the edge between them exists. In a directed graph we are careful about direction.
- **Degree.** In an undirected graph, the *degree* of a vertex is the number of edges touching it. In a directed graph we split this into *in-degree* (arrows coming in) and *out-degree* (arrows going out).
- **Path.** A *path* is a sequence of vertices $v_0, v_1, \ldots, v_\ell$ where each consecutive pair is joined by an edge. Its *length* is the number of edges, ℓ. A path is *simple* if it repeats no vertex.
- **Cycle.** A *cycle* is a path that starts and ends at the same vertex (with at least one edge). A graph with no cycles is *acyclic*; a directed acyclic graph gets the famous acronym *DAG*.
- **Connected.** An undirected graph is *connected* if there is a path between every pair of vertices. The maximal connected pieces are its *connected components*.
- **Weighted.** A *weight* function $w : E \to \mathbb{R}$ attaches a number to each edge – a distance, a cost, a capacity. Shortest-path and minimum-spanning-tree algorithms live on weighted graphs.

Formal

Handshake lemma. In any undirected graph, the sum of all vertex degrees equals twice the number of edges:

$$\sum_{v \in V} \deg(v) = 2\,|E|.$$

Why: each edge has two endpoints, so it contributes exactly 1 to the degree of each of its two vertices – 2 in total. Summing over all edges counts each edge's contribution twice, once per endpoint. A pleasant corollary: the number of vertices with *odd* degree is always even.

39.3.3 Two ways to store a graph

Algorithms do not see your hand-drawn picture; they see a data structure. There are two standard representations, and choosing between them is a recurring real-world decision.

Adjacency matrix. Number the vertices $1, \ldots, n$ and build the $n \times n$ matrix M where $M_{ij} = 1$ if the edge (i, j) exists and $M_{ij} = 0$ otherwise. (For weighted graphs, store the weight instead of 1.)

For our directed example above:

$$M = \begin{array}{c|cccc} & 1 & 2 & 3 & 4 \\ \hline 1 & 0 & 1 & 1 & 0 \\ 2 & 0 & 0 & 1 & 0 \\ 3 & 0 & 0 & 0 & 1 \\ 4 & 0 & 1 & 0 & 0 \end{array}$$

Reading row 1: vertex 1 points to 2 and 3, matching the edges $(1, 2)$ and $(1, 3)$. For an *undirected* graph the matrix is symmetric ($M = M^{\mathsf{T}}$), because the edge $\{u, v\}$ marks both M_{uv} and M_{vu}.

Adjacency list. For each vertex, store a list of its out-neighbors. Our example becomes:

$$1 \to [2, 3], \quad 2 \to [3], \quad 3 \to [4], \quad 4 \to [2].$$

Pictured as actual linked lists, one row per vertex, the structure looks like Figure 39.1: the leftmost column is the array of vertices, and each vertex points along a chain of its out-neighbors.




Figure 39.1: The adjacency list for the directed example. Each vertex (blue) heads a chain of its out-neighbors (green); "/" marks the end of a chain. Only the five edges that exist take up space – contrast the 16-cell matrix above.

Intuition

The matrix is a *grid*: instant "is there an edge from i to j?" lookups, but it always reserves n^2 cells whether the graph is dense or nearly empty. The list is a *phone book*: it stores only the edges that exist, so it is lean for sparse graphs, but answering "is i joined to j?" means scanning i's list. Dense graph, lots of edge queries: matrix. Sparse graph, lots of neighbor sweeps: list.

Cost summary

Let $n = |V|$ and $m = |E|$.

	Adjacency matrix	**Adjacency list**
Space	$\Theta(n^2)$	$\Theta(n + m)$
Test edge (u, v)?	$\Theta(1)$	$\Theta(\deg u)$
List neighbors of u	$\Theta(n)$	$\Theta(\deg u)$
Iterate all edges	$\Theta(n^2)$	$\Theta(n + m)$

Most textbook graph algorithms (BFS, DFS, Dijkstra, Prim) assume the adjacency *list*, because their running times like $O(V + E)$ only emerge when iterating neighbors is cheap.

Why this matters

A surprising bonus of the matrix view: the (i, j) entry of M^k (the adjacency matrix raised to the kth power) counts the number of distinct walks of length exactly k from vertex i to vertex j. So a question about *paths* turns into a question about *matrix powers*, and matrix exponentiation by squaring answers reachability and counting questions fast. This is the bridge connecting the first half of this appendix to the second.
Why does it work? The defining sum $(M^2)_{ij} = \sum_k M_{ik} M_{kj}$ adds a 1 for exactly those middle vertices k with both an edge $i \to k$ and an edge $k \to j$ – that is, for every two-edge route $i \to k \to j$. For our example, $(M^2)_{14} = 1$ because the single route $1 \to 3 \to 4$ exists (Figure 39.2), and you can read that very handshake off row 1 and column 4 of M.




Figure 39.2: The unique length-2 walk from 1 to 4, namely $1 \to 3 \to 4$ (highlighted), is exactly what $(M^2)_{14} = 1$ records.

39.4 Logarithms, factorials, and identities you will reuse

The last toolbox is the analytic one: the functions that show up in every running time. We treat logarithms first because they are the soul of "divide and conquer," then factorials and a few summation identities.

39.4.1 What a logarithm really is

Start with the friendly definition: $\log_b x$ is the answer to the question "*to what power must I raise b to get x?*" So

$$\log_b x = y \quad \Longleftrightarrow \quad b^y = x.$$

The number b is the *base*. Because $2^3 = 8$, we have $\log_2 8 = 3$. Because $10^2 = 100$, we have $\log_{10} 100 = 2$. That is the entire idea; the logarithm is just exponentiation read backwards.

Intuition

For base 2 – the base that dominates this book – there is an even homelier reading: $\log_2 x$ is roughly "how many times can I halve x before I reach 1?" Halve 16: you get $8, 4, 2, 1$ – four halvings (Figure 39.3), and indeed $\log_2 16 = 4$. Every time an algorithm cuts its problem in half (binary search, merge sort, balanced trees), a $\log_2 n$ slips into the running time, and that "how many halvings" picture is exactly why.

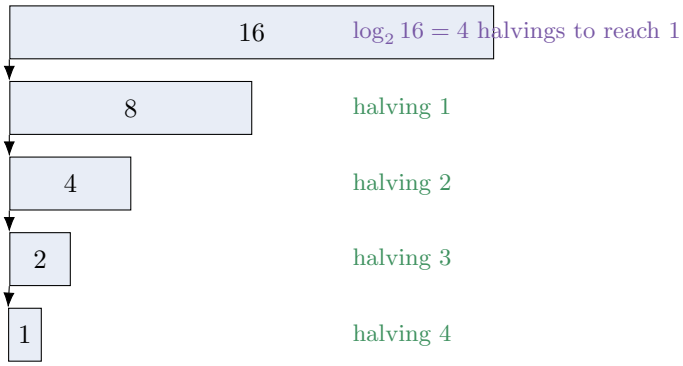


Figure 39.3: Reading $\log_2 16$ as repeated halving: $16 \to 8 \to 4 \to 2 \to 1$ is four steps, and indeed $\log_2 16 = 4$. Every "cut the problem in half" algorithm takes about this many steps.

The logarithm grows *achingly* slowly. To make $\log_2 n$ reach 10 you need $n = 1024$; to reach 20 you need $n \approx 10^6$; to reach 30 you need $n \approx 10^9$. This is the whole reason an $O(n \log n)$ sort feels almost as fast as a linear scan, and why an $O(\log n)$ search through a billion items takes about thirty comparisons.

39.4.2 The identities, with quick justifications

You will use these constantly. Each one is a direct consequence of the exponent rules, since logs and exponents are inverses.

Formal

For positive reals and a valid base $b > 0, b \neq 1$:

$$\begin{aligned}
\log_b(xy) &= \log_b x + \log_b y && \text{(a product becomes a sum)} \\
\log_b(x/y) &= \log_b x - \log_b y && \text{(a quotient becomes a difference)} \\
\log_b(x^k) &= k \log_b x && \text{(an exponent slides out front)} \\
\log_b 1 &= 0, \qquad \log_b b = 1 && \\
b^{\log_b x} &= x, \qquad \log_b(b^k) = k && \text{(inverse functions)} \\
\log_b x &= \frac{\log_a x}{\log_a b} && \text{(change of base)}
\end{aligned}$$

The product rule is the keystone, so let us see why it holds. Write $x = b^p$ and $y = b^q$, which is just saying $p = \log_b x$ and $q = \log_b y$. Then $xy = b^p \cdot b^q = b^{p+q}$, and reading that backwards gives $\log_b(xy) = p + q = \log_b x + \log_b y$. Every other identity falls out the same way, by translating to exponents and using the exponent laws.

The *change-of-base* formula deserves special love in an algorithms book. It says all logarithms are the same up to a constant multiplier, because $\log_b x = \log_a x / \log_a b$ and $\log_a b$ is a fixed constant once a and b are chosen. That is why we are cavalier and write "$O(\log n)$" without naming a base: switching from $\log_2$ to $\log_{10}$ to ln only multiplies by a constant, and big-O swallows constants whole.

Common trap

Constants matter *outside* big-O, though. "Time $= 3\log_2 n$ seconds" and "time $= 3\ln n$ seconds" are genuinely different stopwatch readings – the second is about 1.44 times longer, since $\log_2 n = \ln n / \ln 2$ and $1/\ln 2 \approx 1.4427$. The base is free to ignore only when it lives behind an O, Θ, or Ω.

39.4.3 Factorials and how fast they explode

The *factorial* of a non-negative integer n is

$$n! = n \cdot (n-1) \cdot (n-2) \cdots 2 \cdot 1, \qquad \text{with the convention } 0! = 1.$$

It counts the number of ways to arrange n distinct objects in a row: n choices for the first slot, $n-1$ for the next, and so on. Watch it run away from you:

n	1	2	3	4	5	6	7	10
$n!$	1	2	6	24	120	720	5040	3 628 800

By $n = 20$ the factorial has passed 2×10^{18}. This savage growth is exactly why brute-force "try every permutation" algorithms (the naive travelling salesman, for instance) are hopeless beyond tiny inputs: 20! arrangements would take longer to enumerate than the age of the universe.

Intuition

Factorial growth is the wall at the end of brute force. Exponential growth (2^n) is already a disaster, but factorial growth is *worse than any fixed exponential*: $n!$ eventually outruns c^n for every constant c, because each new factor n is bigger than any fixed c. When you see $n!$ in a running time, read it as "this only works for n in the low twenties, ever."

How big is $n!$ exactly? *Stirling's approximation* gives a remarkably tight handle:

$$n! \;\approx\; \sqrt{2\pi n}\,\left(\frac{n}{e}\right)^n.$$

Taking logs (which is what we usually want for complexity), it tells us

$$\log(n!) = \Theta(n \log n).$$

That single fact, $\log(n!) = \Theta(n \log n)$, is the engine behind the famous lower bound that *any* comparison-based sorting algorithm needs $\Omega(n \log n)$ comparisons: there are $n!$ possible orderings to distinguish, a decision tree distinguishing them needs $\log_2(n!)$ levels, and $\log_2(n!) = \Theta(n \log n)$.

39.4.4 Two summation identities worth memorizing

When you analyze loops, sums fall out, and two of them are everywhere.

Formal

Arithmetic series (the cost of nested loops where the inner count grows linearly):

$$1 + 2 + 3 + \cdots + n = \sum_{k=1}^{n} k = \frac{n(n+1)}{2} = \Theta(n^2).$$

Geometric series (the cost of recursion that shrinks by a factor each level), for $r \neq 1$:

$$1 + r + r^2 + \cdots + r^n = \sum_{k=0}^{n} r^k = \frac{r^{n+1} - 1}{r - 1}.$$

When $|r| < 1$ the infinite version converges: $\sum_{k=0}^{\infty} r^k = \dfrac{1}{1-r}$.

The arithmetic series has a one-line proof you can show a child, attributed (maybe apocryphally) to a young Gauss. Write the sum forwards and backwards and add column by column:

$$\begin{array}{rccccc} S = & 1 & + & 2 & +\cdots+ & n \\ S = & n & + & (n{-}1) & +\cdots+ & 1 \\ \hline 2S = & (n{+}1) & + & (n{+}1) & +\cdots+ & (n{+}1) \end{array}$$

There are n columns, each summing to $n+1$, so $2S = n(n+1)$ and $S = n(n+1)/2$. This is why a double loop where the inner loop runs $1, 2, 3, \ldots, n$ times costs $\Theta(n^2)$, the recurring fingerprint of selection sort, insertion sort's worst case, and naive nested scans.

Algorithm lab

Trace the geometric sum yourself for the case that matters most in this book, $r = 1/2$:

$$1 + \tfrac{1}{2} + \tfrac{1}{4} + \tfrac{1}{8} + \cdots = \frac{1}{1 - \frac{1}{2}} = 2.$$

Now connect it to algorithms. When a recursion does $\Theta(n)$ work at the top, $\Theta(n/2)$ across the next level, $\Theta(n/4)$ below that, and so on, the *total* work is $n(1 + \frac{1}{2} + \frac{1}{4} + \cdots) < 2n = \Theta(n)$. The geometric series is precisely why such "halving" recursions stay linear instead of blowing up. You will meet this exact computation when analyzing building a heap and several divide-and-conquer recurrences.

The geometric collapse is easiest to believe as a picture. Stack the per-level work as bars whose heights halve each time, and watch the running total creep toward $2n$ without ever reaching it (Figure 39.4).

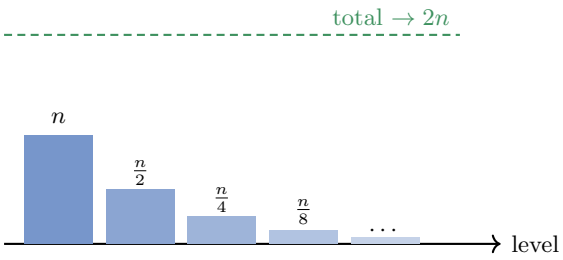


Figure 39.4: Per-level work in a "halving" recursion. Each bar is half the height of the one before, so the heights sum to $n(1 + \frac{1}{2} + \frac{1}{4} + \cdots) = 2n$. The dashed line is the ceiling the running total approaches but never crosses.

History and connection

This section maps to CLRS Appendix A (summations) and the logarithm/factorial facts scattered through Appendix C and Chapter 3 (asymptotic notation). Stirling's approximation and the $\log(n!) = \Theta(n \log n)$ consequence anchor the comparison-sort lower bound in CLRS Chapter 8, and the geometric-series collapse is the workhorse behind the master theorem in CLRS Chapter 4.

39.5 Putting the toolbox together

Step back and notice how interlocked these "separate" tools really are. The adjacency *matrix* let us turn a question about graph *paths* into a question about matrix *powers*. Computing those powers fast uses *exponentiation by squaring*, whose efficiency rests on a *logarithm* – you square $\log_2 k$ times to reach the kth power. Counting the arrangements a sorting algorithm must distinguish brought in *factorials*, and pinning down how big a factorial is brought back the *logarithm* through Stirling. The discrete and the linear-algebraic are not two worlds; they are two views of the same machinery for reasoning about structure and growth.

Focus

The four things to carry out of this appendix:

1. A matrix is a spreadsheet; multiplication is row-meets-column handshakes, costs $\Theta(n^3)$ naively, and is *not* commutative.
2. A graph is (V, E), stored as a matrix ($\Theta(n^2)$, fast edge tests) or a list ($\Theta(n + m)$, fast neighbor sweeps).
3. $\log_b x$ answers "b to what power is x?"; it grows glacially, turns products into sums, and is base-independent under big-O.
4. $n!$ explodes faster than any exponential, and $\log(n!) = \Theta(n \log n)$ is the seed of the comparison-sort lower bound.

Exercises

Exercise 39.1 (Warmup: shapes)**.** For each pair, decide whether the product AB exists and, if so, give the shape of the result: (a) A is 3×4, B is 4×2; (b) A is 2×5, B is 2×5; (c) A is $1 \times n$, B is $n \times 1$; (d) A is $n \times 1$, B is $1 \times n$. For (c) and (d), what kind of object is the result?

Exercise 39.2 (Multiply by hand)**.** Let $A = \left(\begin{smallmatrix} 2 & -1 \\ 0 & 3 \end{smallmatrix}\right)$ and $B = \left(\begin{smallmatrix} 1 & 4 \\ 2 & 1 \end{smallmatrix}\right)$. Compute both AB and BA entry by entry and confirm they differ. Then compute A^{T} and verify $(AB)^{\mathsf{T}} = B^{\mathsf{T}}A^{\mathsf{T}}$.

Exercise 39.3 (Identity and inverse)**.** Verify that $I_2 A = A$ for the matrix A of the previous exercise. Then compute $\det(B)$ and, if it is nonzero, write down B^{-1} using the 2×2 formula and check that $BB^{-1} = I_2$.

Exercise 39.4 (Degrees and the handshake)**.** Draw any undirected graph on 5 vertices with exactly 6 edges. Write down the degree of each vertex, sum them, and confirm the sum equals $2 \times 6 = 12$. Then explain in one sentence why a graph in which every one of the 5 vertices has odd degree is impossible.

Exercise 39.5 (Two representations)**.** For the directed graph with $V = \{a, b, c, d\}$ and edge set

$$E = \{(a, b),\ (b, c),\ (c, a),\ (c, d)\},$$

write both the 4×4 adjacency matrix and the adjacency lists. Which representation uses less space here, and why?

Exercise 39.6 (Walks via matrix powers)**.** Using the adjacency matrix M of the graph in the previous exercise, compute M^2 and interpret the (a, c) entry: how many length-2 walks go from a to c? Trace such a walk in the picture to confirm.

Exercise 39.7 (Log gymnastics)**.** Without a calculator, evaluate: (a) $\log_2 64$; (b) $\log_2(1/8)$; (c) $\log_2(32 \cdot 4)$ using the product rule; (d) $\log_{10} 10^7$; (e) $\log_2 1000$ to the nearest integer, given $\log_{10} 2 \approx 0.301$ and the change-of-base formula.

Exercise 39.8 (Factorial intuition)**.** (a) Compute $8!$ by hand. (b) Using $0! = 1$, explain why $n! = n \cdot (n-1)!$ is a sensible recursive definition all the way down to $n = 1$. (c) Roughly how many permutations does $13!$ give, and why does that doom a brute-force ordering of just 13 tasks?

Exercise 39.9 (Sum it up)**.** Use the arithmetic-series formula to find $1 + 2 + \cdots + 100$. Then a loop runs its body once on the first iteration, twice on the second, $\ldots$, n times on the nth. Give a closed form for the total number of body executions and its Θ class.

Exercise 39.10 (Geometric collapse)**.** Evaluate the finite sum $1 + 3 + 9 + 27 + 81$ with the geometric formula ($r = 3$), then check by direct addition. Separately, argue that $1 + \frac{1}{3} + \frac{1}{9} + \cdots$ converges and find its value.

Exercise 39.11 (Challenge: cost of a matrix chain)**.** You must compute the product $A_1 A_2 A_3$ where A_1 is 10×100, A_2 is 100×5, and A_3 is 5×50. Using the rule that multiplying a $p \times q$ matrix by a $q \times r$ matrix costs $p \cdot q \cdot r$ scalar multiplications, compute the total cost of $(A_1 A_2)A_3$ versus $A_1(A_2 A_3)$. Which parenthesization is cheaper, and by how much? (This is the seed of the matrix-chain dynamic-programming problem.)

Exercise 39.12 (Challenge: Stirling and sorting)**.** Stirling gives $\log_2(n!) = \Theta(n \log n)$. A comparison sort can be modeled as a binary decision tree whose leaves are the $n!$ possible orderings. Explain why such a tree must have height at least $\log_2(n!)$, and conclude that every comparison-based sort makes $\Omega(n \log n)$ comparisons in the worst case.